

Old architecture based on LorentzNet

x = Cartesian particle 4-momenta, ϕ . = learnable functions, $\psi(\cdot) = \text{sgn}(\cdot) \log(|\cdot| + 1)$,
 c = hyperparameter, $N = \#$ particles, $\|\cdot\|, \langle\cdot\rangle$ = Minkowski norm and inner product

LGEB ([1])

$$m_{ij}^l = \phi_e(h_i^l, h_j^l, \psi(\|x_i^l - x_j^l\|), \psi(\langle x_i^l, x_j^l \rangle))$$

$$m_{ij}^l = \phi_m(m_{ij}^l) \cdot m_{ij}^l$$

$$x_i^{l+1} = x_i^l + \frac{c}{N} \sum_{j \in [N]} \phi_x(m_{ij}^l) \cdot |x_i - x_j|$$

$$h_i^{l+1} = h_i^l + \phi_h(h_i^l, \sum_{j \in [N]} \phi_w(m_{ij}^l) m_{ij}^l)$$

Simple LE block

$$m_{ij}^l = \phi_e(\psi(\|x_i^l - x_j^l\|), \psi(\langle x_i^l, x_j^l \rangle))$$


$$m_{ij}^l = \phi_m(m_{ij}^l) \cdot m_{ij}^l$$

$$x_i^{l+1} = x_i^l + \frac{c}{N} \sum_{j \in [N]} \phi_x(m_{ij}, g) \cdot |x_j^l - x_i^l|$$

g = global feature vector (currently time embedding $\phi_t(t)$)

Performance

6 layers, 100 epochs, gluons only. 500 generated samples over 32 steps.

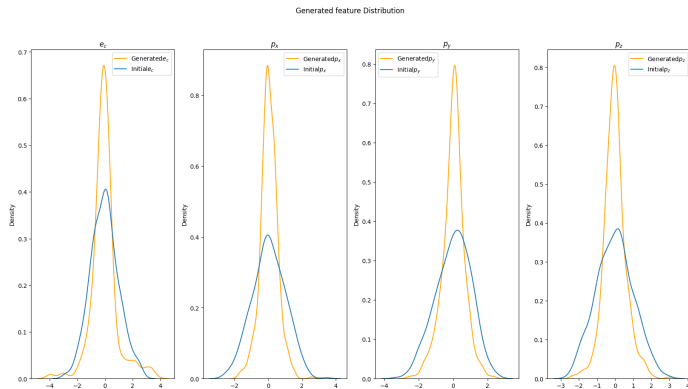

New architecture I

1. Embed scalar time value to random Fourier features through two fully connected layers with 32 and 64 nodes (following [2])
2. Concatenate time embedding with jet conditioning information, which consists of one-hot encoded type, η , mass, p_T , number of constituents
3. Pass this through a fully connected layer of size 64 to produce the initial global embeddings g^0
4. Concatenate g^0 with features $x_1^0 \dots x_N^0$ initialized from the initial distribution p_0 .
5. Now, we use L Lorentz-group equivariant layers.
 - 5.1 The input to the $l + 1$ -th layer is g^l and $x_1^l \dots x_N^l$.
 - 5.2 Calculate messages $m_{ij}^l = \phi_e^l(\psi(\|x_i^l - x_j^l\|), \psi(\langle x_i^l, x_j^l \rangle))$
 - 5.3 Update the global embedding

$$g_{l+1} = \phi_g^l(g^l, \frac{\alpha_l}{N} \sum_{i,j \in [N]} \phi_m^l(m_{ij}) m_{ij}^l, \beta_l \sum_{i,j \in [N]} \phi_m^l(m_{ij}) m_{ij}^l)$$

New architecture II

- 5.4 Feed in the updated global embedding as well as the original embedding to update the graph embeddings

$$x_i^{l+1} = x_i^l + \gamma_l \sum_{j \in N, j \neq i} \phi_x^l(g^0, g^{l+1}, m_{ij}) x_j^l$$

- 5.5 Pass the results g^{l+1} and x_i^{l+1} to the next layer

6. After the final LE layer, run the particle representations through a final round of message-passing with the final global embedding

$$x_i^{L+1} = x_i^L + \sum_{j \in N, j \neq i} \phi_x^L(g^0, g^L, m_{ij}) x_j^L$$


7. The final output $v_\theta(t, x^0)_i = x_i^L - x_i^0$

Jet conditioning implementation


- During training, use the real features corresponding to each jet.
- During inference:
 - Use the normalizing flow to generate jet attributes
 - Round the number of jet constituents and clamp to $[4, 150]$
 - Generate masks corresponding to the desired number of constituents

Preliminary results I

100 epochs, 6 layers, gluons only. 500 generated samples with 32 steps.

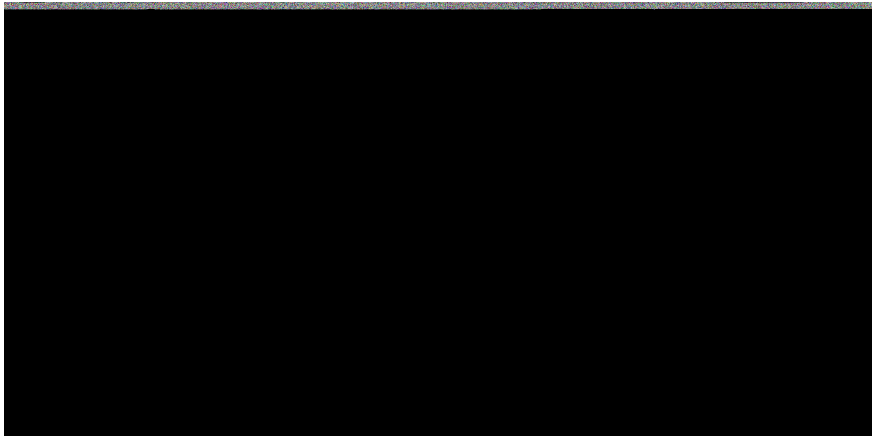

Preliminary results II

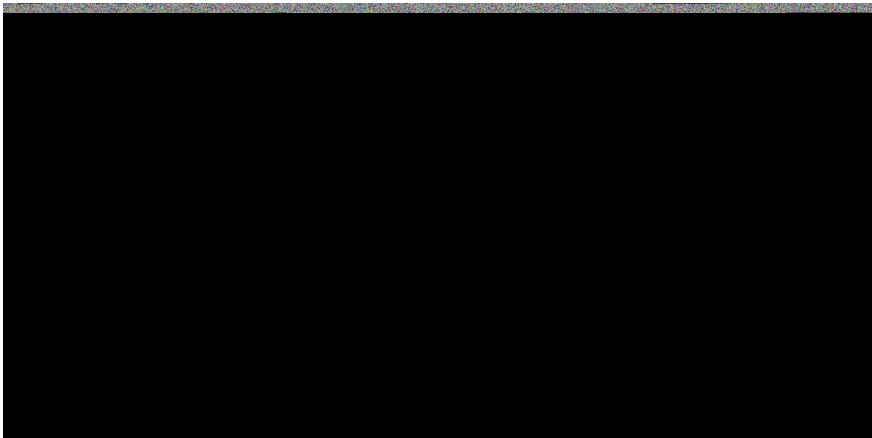

Preliminary results III

Table: Metrics relative to test set

Metric	Value	MPGAN Value
Covariance ($\uparrow$)	0.068	0.240
MMD ($\downarrow$)	2.018	0.045

Inspiration for new architecture I


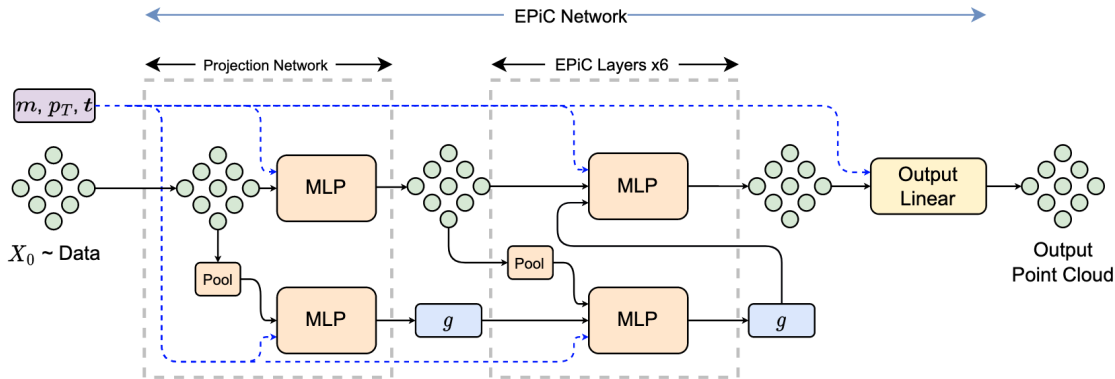


Figure: EPiC-FM [3]

Inspiration for new architecture II

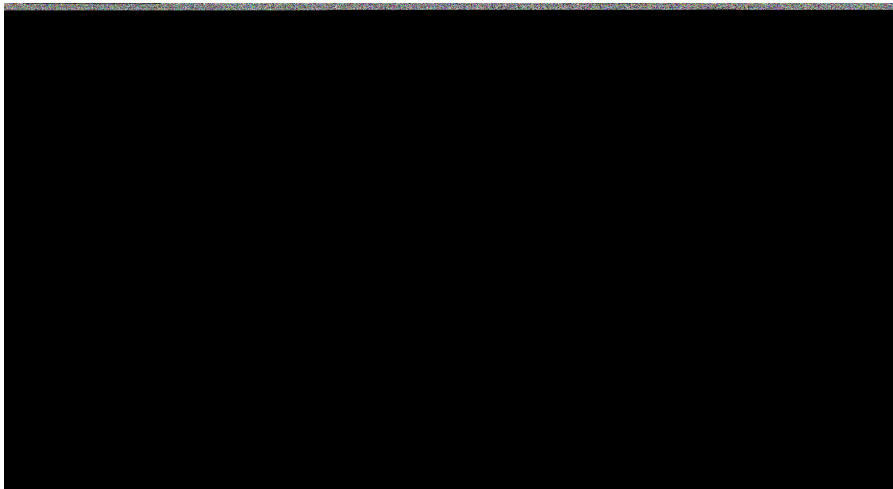

Inspiration for new architecture III

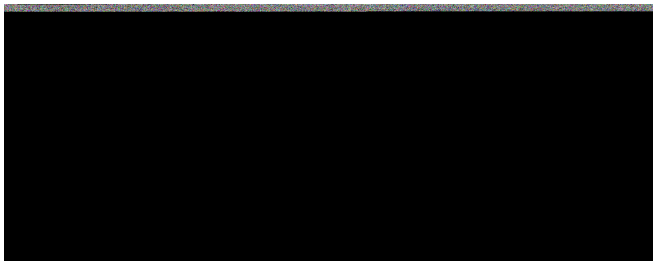


Figure: FPCD [2]

Implementation details for next training runs

- AdamW [4] optimizer
- Learning rate: linear warm-up followed by cosine annealing (same as [3])
- LeakyRELU activation (negative slope = 0.01)
- Zero padding for variable-sized particle clouds

Zero padding

In each layer:

- Calculate edge features for all particles and multiply by expanded mask
- Multiply results of $\phi_e(m_{ij})$, $\phi_x(m_{ij})$ by expanded mask
- Keep track of valid edges for average pooling
- To guarantee the mask is respected, multiply node updates and final nodes by mask before passing to next layer

Learning rate

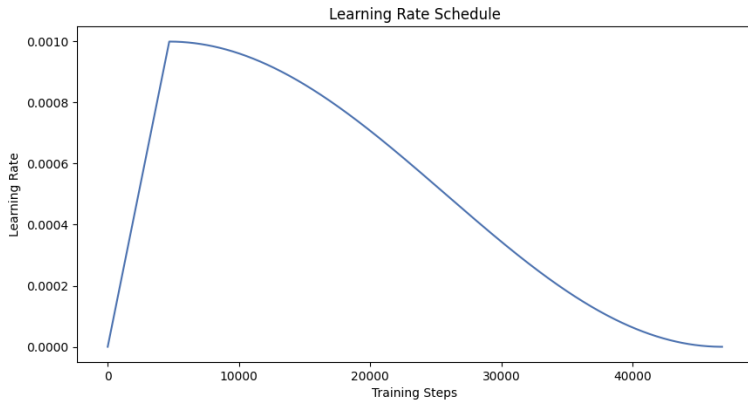


Figure: Linear warm-up followed by cosine annealing

This week I

- Run jobs today:
 - Entire dataset; ≈ 50 epochs; ≈ 8 layers
 - Entire dataset; ≈ 1000 epochs; ≈ 12 layers
- Implement parallelized training with Hugging Face Accelerate
- Set up sampling pipeline while training the model to get an indication of how performance improves over time (since FM loss tends to be meaningless after the first epoch)
- Theoretical problems with equivariance
 - Currently initializing from normal distribution
 - Go over E(3)-equivariant papers in detail and try to develop something similar to CoM trick
- Set up plots typically used in jet generation papers
- Mean flow setup (should be the first paper to use it for jets)

References I

- [1] Shiqi Gong et al. “An Efficient Lorentz Equivariant Graph Neural Network for Jet Tagging”. In: *Journal of High Energy Physics* 2022.7 (July 2022), p. 30. ISSN: 1029-8479. DOI: [10.1007/JHEP07\(2022\)030](https://doi.org/10.1007/JHEP07(2022)030). (Visited on 06/30/2025).
- [2] Lemeng Wu et al. “Fast Point Cloud Generation with Straight Flows”. In: *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. Vancouver, BC, Canada: IEEE, June 2023, pp. 9445–9454. ISBN: 979-8-3503-0129-8. DOI: [10.1109/CVPR52729.2023.00911](https://doi.org/10.1109/CVPR52729.2023.00911). (Visited on 06/23/2025).
- [3] Erik Buhmann et al. *EPiC-ly Fast Particle Cloud Generation with Flow-Matching and Diffusion*. Sept. 2023. DOI: [10.48550/arXiv.2310.00049](https://doi.org/10.48550/arXiv.2310.00049). arXiv: 2310.00049 [hep-ph]. (Visited on 03/13/2025).
- [4] Ilya Loshchilov and Frank Hutter. *Decoupled Weight Decay Regularization*. Jan. 2019. DOI: [10.48550/arXiv.1711.05101](https://doi.org/10.48550/arXiv.1711.05101). arXiv: 1711.05101 [cs]. (Visited on 07/22/2025).

Temporary page!

L^AT_EX was unable to guess the total number of pages correctly. As there was some unprocessed data that should have been added to the final page this extra page has been added to receive it.

If you rerun the document (without altering it) this surplus page will go away, because L^AT_EX now knows how many pages to expect for this document.