Angular Structure in Electromagnetic Fields

Volume I — Chapter 1

Foundations of Angular Electromagnetic Structure

Srikanta Pal

2026

Contents

1 Foundations of Angular Electromagnetic Structure **5**

1.0 Introduction and Scope 5
1.0.1 Historical lineage of field energy, momentum, and angular structure . . . 7
1.0.2 Source data, boundaries, and Maxwell consistency 8
1.0.3 Rotation and Maxwell compatibility 9
1.0.4 Assumptions, finite energy, and domain of validity 9
1.1 Maxwell Theory and Conservation Laws 10
1.1.1 Maxwell equations: differential, integral, vacuum constitutive relations . . 10
1.1.2 From inhomogeneous Helmholtz equation to outgoing Green function . . 13
1.1.3 Sources, boundary conditions, and the Maxwell boundary-value problem . 16
1.1.4 Boundary-Value Problems and Uniqueness 19
1.1.5 Energy, linear momentum, and Maxwell stress tensor 21
1.1.6 Angular momentum conservation and torque balance 26
1.2 Angular Structure of Electromagnetic Fields 29
1.2.1 Rotating source versus rotating pattern 29
1.2.2 Directional dependence and angular momentum 31
1.2.3 Helical phase structure and transport 32
1.2.4 Physical relations for angular-momentum transport 33
1.2.5 Reactive and radiative field regimes 33
1.3 Rotational covariance and reference frames 34
1.4 Gauge structure, helicity, and spin–orbit limits 36
1.4.1 Gauge-invariant observables, helicity, and dual symmetry 37
1.4.2 Limits of local spin-orbit decompositions 39
1.5 Surface flux, torque, and physical observation 39
1.5.1 Stress traction, force, and torque on matter 40
1.5.2 Power flux, stress traction, and torque 40
1.5.3 Field quantities, instrument readings, and inferred structure 41
1.5.4 Apertures, angular charts, and later radiation mappings 41
1.6 Examples and Counterexamples 42
1.6.1 Angular momentum conservation in radiation 42
1.6.2 Phase structure without angular-momentum transport 45
1.6.3 Gauge dependence of local angular-momentum densities 47
1.6.4 Radial structure of a localized radiator 47
1.7 Summary 51
1.8 Problems 52

Chapter 1

Foundations of Angular Electromagnetic Structure

1.0 Introduction and Scope

Beth's torsion experiment asks a mechanical question about light. A narrow, circularly polarized beam falls on a quartz wave plate on a fine suspension; the plate can turn even when the transverse intensity appears uniform about the beam axis [1]. The suspension does not read a phase drawing: it registers torque transmitted through the dielectric interface as a Maxwell traction integral. That distinction—between how a field is *organized* in angle and what *action* it exerts on matter—is the thread of the chapter. Three physical levels must therefore be kept apart: the *angular organization* of $(\mathbf{E}, \mathbf{H})$ on a chart or shell (not a conserved quantity by itself); angular momentum *associated with* the field in a declared volume under the balances of section 1.1; and signed angular-momentum *flux* $\mathbf{\Phi}_{J,\mathrm{out}}$ crossing a chosen closed surface when the stress integral is well posed [2, 1].

With impressed sources, constitutive response, and boundary data specified, Maxwell's equations determine the field pair $(\mathbf{E}, \mathbf{H})$ [3]. Energy transport follows the Poynting vector; linear momentum resides in the Maxwell stress; angular momentum appears as the moment of electromagnetic momentum density about a chosen origin [4, 2]. *Angular structure* describes how that pair is organized under rotation of physical space—for instance through an azimuthal phase $e^{\mathrm{j}m\phi}$ in a transverse pattern. Mechanical torque on matter is fixed by cycle-averaged traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ and by the stress-moment balances of Subsection 1.1.6, not by the index m alone [5, 2].

The same $(\mathbf{E}, \mathbf{H})$ pair supports four observables that answer different physical questions and must not be collapsed [2]: time-averaged real power $\mathrm{Re}(\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}})\, dS$ through an element of area; reactive harmonic exchange $\mathrm{Im}(\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}})\, dS$; mechanical traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ from the Maxwell stress; and outward stress-moment flux carried by $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$. On an interface, in a structured transverse mode, or on a near-zone shell where $\mathrm{Im}(\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}})$ dominates the local normal exchange, a single local reading may emphasize one observable while obscuring the others. Matching spiral isophases in $\mathbf{E}$ do not determine $\oint \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS$, because the traction integrand couples $\mathbf{E}$ to $\mathbf{H}$ through the constitutive law; two fields can share $\arg E$ yet yield different stress moments [2, 5].

Steady radiation problems in this volume are analysed in the harmonic domain. Time dependence is taken as $\exp(+\mathrm{j}\omega t)$ with ω in $\mathrm{rad\,s^{-1}}$; $\mathbf{E}(\mathbf{r})$ is the complex phasor, so $\mathrm{Re}\{\mathbf{E} e^{\mathrm{j}\omega t}\}$ is the instantaneous field. Quadratic observables—power, stress, and torque—are cycle averages of bilinear products and are therefore assembled from $\mathbf{E}$ and $\mathbf{H}^*$ [2, 6].

For such fields the *complex Poynting vector* is

$$\mathbf{S}_\mathrm{c} = \tfrac{1}{2} \mathbf{E} \times \mathbf{H}^*, \tag{1.1}$$

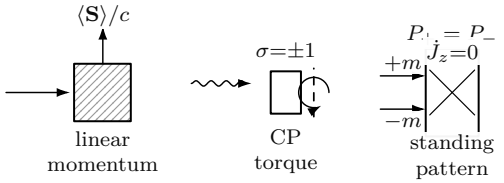


Figure 1.1: Three Maxwellian consequences of radiation: linear momentum delivered to an absorber; mechanical torque on a material interface under circular polarization (not the vanishing symmetric stress moment on a centred transverse disk for a uniform plane wave); and equal counter-rotating orbital components whose signed modal transport cancels despite a structured intensity pattern [4, 1, 5].

where $(\cdot)^*$ denotes complex conjugation [4, 2]. Time-averaged real power flux density is $\langle \mathbf{S} \rangle = \mathrm{Re}(\mathbf{S}_\mathrm{c})$; $\mathbf{S}_\mathrm{c}$ itself is *not* the cycle-averaged Poynting vector. The divergence $\nabla \cdot \mathbf{S}_\mathrm{c}$ is net outward complex power per unit volume: its real part balances impressed work on sources, and its imaginary part tracks harmonic exchange between electric and magnetic stored energy (section 1.1.5) [2]. Both $\mathbf{S}_\mathrm{c}$ and $\langle \mathbf{S} \rangle$ have dimensions $\mathrm{W\,m^{-2}}$; $\langle \mathbf{S} \rangle \cdot \hat{\mathbf{n}}\, dS$ is active power per unit area crossing a surface element with outward normal $\hat{\mathbf{n}}$.

Linear momentum is carried by the Maxwell stress tensor [3, 2]. In real time, the instantaneous tensor $\mathbf{T}^{(i)}$ enters

$$\frac{\partial \mathbf{g}_\mathrm{em}}{\partial t} + \mathbf{f}_\mathrm{src} = \nabla \cdot \mathbf{T}^{(i)}, \tag{1.2}$$

with $\mathbf{g}_\mathrm{em} = \varepsilon_0\, \mathbf{E} \times \mathbf{B}$ and $\mathbf{f}_\mathrm{src} = \rho \mathbf{E} + \mathbf{J}_\mathrm{imp} \times \mathbf{B}$ using the source pair $(\rho, \mathbf{J}_\mathrm{imp})$ of Eqs. (1.6) [3, 2]. On phasor fields, cycle-averaged traction uses $\langle \mathbf{T} \rangle$ of Eq. (1.53) and $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ [2]. Let V_m enclose the material whose force and torque are sought; $\hat{\mathbf{n}}$ is outward from V_m. At harmonic steady state, $\mathbf{F}_\mathrm{matter} = \oint_{\partial V_m} \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}\, dS$.

Angular momentum about the origin is carried by the stress-moment density $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$, with instantaneous counterpart $\mathbf{M}^{(i)} = \mathbf{r} \times \mathbf{T}^{(i)}$. Locally, source exchange contributes $\boldsymbol{\tau}_\mathrm{src} = \mathbf{r} \times \mathbf{f}_\mathrm{src}$; under Route A continuum closure (Subsection 1.1.5), $\boldsymbol{\tau}_\mathrm{matter}$ coincides with $\boldsymbol{\tau}_\mathrm{src}$ on the material support.

Integrating traction over a closed surface gives the stress moment $\boldsymbol{\mathcal{T}}_J = \oint_{\partial V_m} \mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\, dS$. Outward electromagnetic angular-momentum transport is $\boldsymbol{\Phi}_{J,\mathrm{out}} = -\boldsymbol{\mathcal{T}}_J$, as in Eqs. (1.65) and (1.66). In harmonic steady state on a source-free enclosing surface, with vanishing storage rate inside V_m, mechanical torque balances transport: $\mathbf{T}_\mathrm{matter} = \boldsymbol{\mathcal{T}}_J = -\boldsymbol{\Phi}_{J,\mathrm{out}}$ [1, 2].

A uniform plane wave in vacuum separates radiation pressure from angular transport in the simplest setting. Take $\mathbf{E} = E_0 e^{-\mathrm{j}kz} \hat{\mathbf{x}}$ and, from $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0 \mathbf{H}$, $\mathbf{H} = (E_0/\eta_0)\, e^{-\mathrm{j}kz} \hat{\mathbf{y}}$ with $\eta_0 = \sqrt{\mu_0/\varepsilon_0}$ and $k = \omega\sqrt{\varepsilon_0 \mu_0}$ [2]. Then

$$\mathbf{S}_\mathrm{c} = \tfrac{1}{2} \mathbf{E} \times \mathbf{H}^* = \tfrac{|E_0|^2}{2\eta_0}\, \hat{\mathbf{z}}, \tag{1.3}$$

so the power through a disk of radius a normal to $\hat{\mathbf{z}}$ is $P = \pi a^2 |E_0|^2/(2\eta_0)$. Let the field control volume be the vacuum region $z < 0$, so that at the plane $z = 0$ the outward unit normal is $\hat{\mathbf{n}} = +\hat{\mathbf{z}}$. Momentum conservation gives radiation pressure $p_\mathrm{abs} = \langle S_z \rangle / c = |E_0|^2/(2\eta_0 c)$ on a perfect absorber, directed along $+\hat{\mathbf{z}}$ into the material [2]. A perfect reflector at normal incidence receives $p_\mathrm{refl} = 2\langle S_z \rangle / c$. The factor two follows from momentum reversal at a perfect reflector: the mirror receives the incident normal flux plus the reversed outgoing flux, $|S|/c + |-S|/c = 2|S|/c$ [3, 2]. The vacuum slab V_f $(z < 0)$ fixes $\hat{\mathbf{n}} = +\hat{\mathbf{z}}$ at $z = 0$, whereas V_m encloses the absorber whose mechanical reaction is required [3, 2]. With Eq. (1.53), $\langle T_{zz} \rangle = -\varepsilon_0 |E_0|^2/2$ on the vacuum side. Transverse symmetry about $\hat{\mathbf{z}}$ then gives $\dot{J}_{z,\mathrm{out}} = \mathbf{0}$ even when $P > 0$ [1]: power crosses the disk while the symmetric plane wave carries no net axial angular-momentum flux. An azimuthal factor $e^{\mathrm{j}m\phi}$ reshapes the transverse pattern but does not, without the paired $\mathbf{H}$ from Maxwell's law, predetermine the stress-flux sign [5, 2].

Finite-support impressed current $\mathbf{J}_\mathrm{imp}$, constitutive laws, boundary conditions, and an outgoing branch together fix a Maxwell field $(\mathbf{E}, \mathbf{H})$ [3, 2]. On a radiative shell Γ_R, conserved




Figure 1.2: Bounded source on finite support, large net reactive power in the near zone (dashed shell), and outward power flux through enclosing surface Γ_R (solid shell). Reactive shells can carry large $|\,\mathrm{Im}(\mathbf{S}_c \cdot \hat{\mathbf{n}})|$ while radiative shells carry the conserved outward power [4, 7].

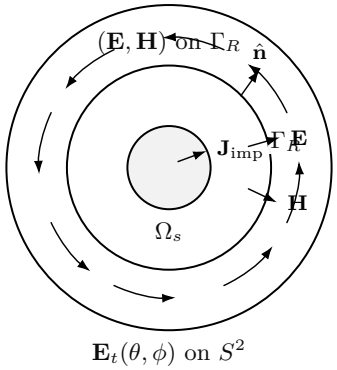


Figure 1.3: Impressed current on finite support Ω_s, Maxwell fields $(\mathbf{E}, \mathbf{H})$ on enclosing surface Γ_R, and angular variation of the tangential field in a harmonic chart on S^2. The chart lists angular organization of an already specified field pair; it is not a substitute for impressed sources and boundary closure [2].

outward power is $\oint \mathrm{Re}(\mathbf{S}_c \cdot \hat{\mathbf{n}})\, dS$ and electromagnetic angular-momentum transport is $-\oint \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS = \mathbf{\Phi}_{J,\mathrm{out}}$ under Eq. (1.66) [1]. Reactive near-zone shells may carry large $|\,\mathrm{Im}(\mathbf{S}_c \cdot \hat{\mathbf{n}})|$ while net signed angular flux on Γ_R cancels by symmetry; Subsection 1.6.2 exhibits such a pair [5, 7].

Figure 1.2 fixes the reading surface before the integrals are interpreted. Reactive exchange can dominate $\mathrm{Im}(\mathbf{S}_c \cdot \hat{\mathbf{n}})$ on a small dashed shell about the source; conserved outward power appears through $\mathrm{Re}(\mathbf{S}_c \cdot \hat{\mathbf{n}})$ on a radiative shell Γ_R. Poynting and angular-momentum balances may be written on any admissible closed surface, yet signed radiative transport is least ambiguous where the field branch is predominantly outgoing [7, 2].

Source realizability and aperture closure are developed in Subsection 1.0.2; phase organization without net transport, and shell-dependent reactive fields, appear in Subsections 1.6.2 and 1.6.4 [2, 6].

1.0.1 Historical lineage of field energy, momentum, and angular structure

Faraday's induction experiments made the field, rather than distant action, the primary agent of electromagnetic interaction [3]. Maxwell's 1865 memoir and the 1873 *Treatise* supplied the pair $(\mathbf{E}, \mathbf{H})$, completed Ampère's law with displacement current, and predicted waves propagating at the speed of light [3]. Once the field became a dynamical system in its own right, two mechanical questions followed immediately: where does electromagnetic energy reside, and how does the field exchange linear and rotational action with matter?

Maxwell answered the mechanical side within the same field picture. His stress tensor relates bilinear products of $(\mathbf{E}, \mathbf{H})$ to force and momentum density in the electromagnetic medium [3, 2]. Poynting [4] then identified energy transport with the flux $\mathbf{s} = \mathbf{E} \times \mathbf{H}$, giving a local account of power crossing a surface. Hertz's experiments (1887–1888) showed that Maxwell's

predicted waves could be generated and detected in the laboratory, converting the wave equation from theory into measurable radiation [2]. Radiation-pressure measurements on absorbing and reflecting surfaces confirmed that the same field carries directed momentum as well as energy; on a perfect absorber the pressure is $p_{\mathrm{abs}} = |\langle \mathbf{S} \rangle|/c$, on a perfect reflector $p_{\mathrm{refl}} = 2|\langle \mathbf{S} \rangle|/c$ in vacuum [2].

The early twentieth century did not *introduce* electromagnetic stress—Maxwell had already done so—but reopened the question of momentum *inside* material media. Abraham [8] and Minkowski [9] proposed different symmetric stress–energy forms for polarizable matter; their disagreement concerns how much momentum is stored in a dielectric, not whether vacuum radiation exerts pressure. In source-free exterior regions both reduce to the vacuum Maxwell stress used throughout this chapter [2].

Stratton [2], Sommerfeld [10], Harrington [6], and Jackson [11] consolidated the mathematical apparatus of boundary-value radiation problems: impressed sources, outgoing conditions, dyadic Green functions, and surface flux integrals for power and momentum. Chu [7] emphasized that finite source size and stored reactive energy bound what a compact antenna can radiate, so far-zone patterns cannot be separated from near-zone storage. Tai [12] unified dyadic Green-function methods in monochromatic media. Gauge-invariant helicity and dual rotations on $(\mathbf{E}, \mathbf{H})$ belong to the field-theoretic literature developed by Belinfante and successors [13, 12].

Rotational action entered the laboratory with Beth's measurement of the mechanical torque on a wave plate in circularly polarized light [1]. The result linked a macroscopic suspension reading to field angular momentum carried by the beam and deposited through Maxwell stress at the plate surface. Belinfante [13] clarified that canonical and kinetic momentum densities differ by the divergence of a spin current; correspondingly, local "orbital" and "spin" labels partition total angular momentum in a convention-dependent way, while closed-surface flux integrals remain anchored to $(\mathbf{E}, \mathbf{H})$ [13, 2].

Allen *et al.* [5] supplied a countable azimuthal index m for paraxial beams through $\exp(\mathrm{j}m\phi)$, which greatly eased experimental access to helical beams. The observables retained here are nonetheless the surface fluxes already named—Poynting power, Maxwell traction, and $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ on a radiative shell—whose intellectual line runs from Maxwell and Poynting through Beth to the developments cited above [4, 1, 5].

1.0.2 Source data, boundaries, and Maxwell consistency

Every flux integral in this chapter presupposes a Maxwell pair $(\mathbf{E}, \mathbf{H})$ fixed by impressed sources, constitutive laws, boundary data on Γ, and an outgoing condition whenever radiation is asserted outward [2, 3]. A tangential pattern sketched on an aperture rim, without the impressed current and closure that complete Maxwell's problem, does not define Poynting power or torque integrals tied to a realizable excitation [6].

On a PEC-backed circular aperture, a charge-continuous impressed current $\mathbf{J}_{\mathrm{imp}}$ closes Maxwell's equations and defines radiated flux on Γ_R. Prescribing a tangential field on the rim without a matching source may satisfy a local boundary relation yet leave Poynting and torque integrals detached from any synthesizable excitation [2, 6]. Figure 1.4 contrasts the two configurations.

A radiation problem is specified by the spatial domain Ω, its boundary Γ, constitutive data, impressed sources $(\mathbf{J}_{\mathrm{imp}}, \rho)$, boundary conditions, and harmonic frequency under $\exp(+\mathrm{j}\omega t)$ [2].

Given impressed current and charge, constitutive data, boundary conditions on $\Gamma = \partial\Omega$, and angular frequency $\omega > 0$ under $\exp(+\mathrm{j}\omega t)$, Maxwell's equations determine $(\mathbf{E}, \mathbf{H})$ once the radiation condition is imposed [3, 2]. Statements about angular organization inherit meaning only from that closed boundary-value problem; an expanded spherical-harmonic chart cannot repair incompatible rim traces [2, 6].

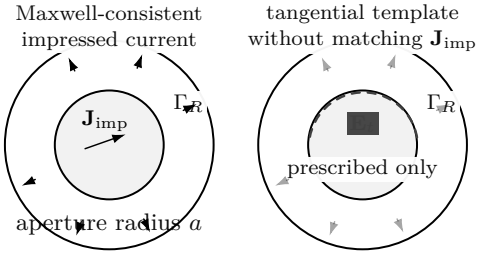


Figure 1.4: Same circular aperture and observation shell Γ_R: left, a charge-continuous impressed current $\mathbf{J}_{\text{imp}}$ launches a Maxwell field whose outward flux on Γ_R is defined; right, a tangential $\mathbf{E}_t$ pattern is prescribed on the rim without a matching source, so flux integrals need not correspond to any realizable excitation [2, 6].

1.0.3 Rotation and Maxwell compatibility

Rotating a source is not the same as rotating the coordinate chart on which its components are listed. Under a proper rotation R about axis $\hat{\mathbf{u}}$ through angle α, a vector transforms as $\mathbf{v}' = R_\alpha \mathbf{v}$ and a second-order tensor as $T'_{ij} = R_{ik} T_{kl} R_{jl}$ ($\mathbf{T}' = R\mathbf{T}R^\top$) [2]. A vector field transforms actively as $(T_R\mathbf{F})(\mathbf{r}) = R\,\mathbf{F}(R^{-1}\mathbf{r})$: the excitation moves in space rather than being relabelled [14].

Rotate the impressed current on a feed through α about the horn axis while the horn, ground plane, and surrounding medium remain axisymmetric. The radiated field rotates with the source if and only if the full Maxwell problem—sources, constitutive data, and boundaries—admits the same rotational symmetry. When that symmetry holds, solving Maxwell's equations after rotating $\mathbf{J}_{\text{imp}}$ reproduces the field obtained by rotating the unrotated solution [2, 14]. An anisotropic radome or an azimuthally graded permittivity breaks the equivalence whenever the complete boundary-value configuration lacks rotation symmetry about the axis under test [2].

1.0.4 Assumptions, finite energy, and domain of validity

A coax-fed pyramidal horn over a ground plane illustrates how an impressed current on a finite feed support, together with conducting boundaries and an outgoing radiation condition, defines a Maxwell boundary-value problem [2]. Before Poynting, stress, or angular-flux integrals are interpreted, one must know whether the underlying field pair is regular enough on the chosen control volume for those quadratic flux densities to have finite surface integrals [3, 4, 2].

Physical stored energy and mathematical field integrability are related but not identical. Under the harmonic convention $\exp(+\mathrm{j}\omega t)$, the cycle-averaged electromagnetic energy density in a *linear, isotropic, lossless* medium with real, frequency-independent ε and μ at the operating frequency is $u = \frac{1}{4}(\varepsilon|\mathbf{E}|^2 + \mu|\mathbf{H}|^2)$ [2]. In dispersive or dissipative media the same phasor magnitudes do not, by themselves, define a unique local stored-energy density; dissipation appears in $\mathrm{Im}(\varepsilon)$ and $\mathrm{Im}(\mu)$ through the complex Poynting balance of Subsection 1.1.5 [2, 6]. In vacuum, $\varepsilon = \varepsilon_0$ and $\mu = \mu_0$, so u has SI units $\mathrm{J\,m^{-3}}$. By contrast, $|\mathbf{E}|^2$ alone carries units $\mathrm{V^2 m^{-2}}$ and $|\mathbf{H}|^2$ carries $\mathrm{A^2 m^{-2}}$; adding them without constitutive weights is not a single physical density. The admissibility condition used here is therefore a *weighted* field norm on a specified *bounded* volume V: Eq. (1.4) certifies integrability of $\varepsilon_0|\mathbf{E}|^2 + \mu_0|\mathbf{H}|^2$ over V. It does not, without further trace or smoothness hypotheses, certify classical boundary values on ∂V or the finiteness of every quadratic Poynting or stress flux on ∂V [2].

Let $\Omega \subset \mathbb{R}^3$ be the analysis region with boundary $\Gamma = \partial\Omega$. For any finite control volume $V \subset \Omega$ that excludes the support of ideal point or filament singularities, require

$$\int_V (\varepsilon_0\,\mathbf{E}^* \cdot \mathbf{E} + \mu_0\,\mathbf{H}^* \cdot \mathbf{H})\; dV < \infty. \tag{1.4}$$

The integrand is the unweighted harmonic energy density $4u$ in source-free vacuum; Eq. (1.4) is therefore simultaneously a finite stored-energy test on V and an L^2-type integrability condition

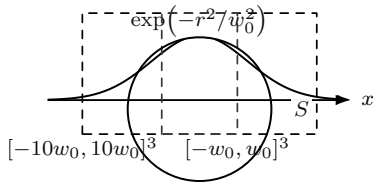


Figure 1.5: Schematic only: a Gaussian envelope illustrates why a finite analysis domain and enclosing shell S must be chosen before interpreting flux integrals; it is not, by itself, a Maxwell solution with specified sources, boundaries, and outgoing selection [5, 2].

on the weighted field pair [2]. It is imposed on the bounded volume V actually used in the calculation, not as a claim of global square-integrability over all space [2].

Outgoing $1/r$ radiation fields are generally *not* globally square-integrable on an unbounded exterior domain in the ordinary L^2 sense, because their energy density decays only as r^{-2} [2]. Nevertheless, time-averaged radiated power P_{rad}, integrated Maxwell traction $\boldsymbol{\mathcal{T}}_J$, and angular flux $\boldsymbol{\Phi}_{J,\mathrm{out}}$ on a finite enclosing shell S_R can remain well defined when the outgoing radiation condition selects the physical branch [2]. Ideal point dipoles and filaments are retained only as explicit distributional limits of finite-width, charge-continuous sources; otherwise the regular impressed-current class of Eq. (1.36) applies. Square-integrable $\mathbf{J}_{\mathrm{imp}}$ and charge continuity $\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0$ do not by themselves guarantee Eq. (1.4) in the exterior region, nor do they guarantee classical normal traces of $\mathbf{J}_{\mathrm{imp}}$ on Γ or finiteness of every quadratic stress or Poynting surface integral invoked later—boundary data, outgoing selection, and the field regularity of the actual solution control those conclusions [2]. Boundary data on Γ complete the physical problem together with the source specification [3, 2].

Before flux integrals acquire physical meaning, one must choose a domain that encloses the current support and a shell in the far-enough exterior on which the field is to be read. A Gaussian waist quoted in isolation does not specify power or angular momentum crossing that shell [5, 2]. Figure 1.5 states the geometric requirement only; it is not, by itself, a closed Maxwell solution [2].

1.1 Maxwell Theory and Conservation Laws

The opening section separated three levels of description—angular organization, volume-associated angular momentum, and signed stress-moment flux—from the four surface observables used to read them. We now develop the Maxwell theory from which those balances and integrals follow. Divergence of Ampère–Maxwell yields charge continuity; the curl structure of $(\mathbf{E}, \mathbf{H})$ yields energy and linear momentum transport; angular momentum appears as the moment of electromagnetic momentum through the symmetric Maxwell stress tensor [3, 4, 1]. Under $\exp(+\mathrm{j}\omega t)$ the local dynamics take the compact form

$$\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0\mathbf{H}, \qquad \nabla \times \mathbf{H} = \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\varepsilon_0\mathbf{E}, \tag{1.5}$$

together with the divergence constraints and boundary completion of section 1.0 [2].

Later modal and helicity labels classify radiating fields once $(\mathbf{E}, \mathbf{H})$ is already Maxwell-compatible; they are not extra dynamical degrees of freedom that can replace Faraday's and Ampère–Maxwell's coupling [3, 11]. A pattern that imprints azimuthal phase on $\mathbf{E}$ alone but leaves $\mathbf{H}$ unconstrained cannot represent a physical electromagnetic state, because $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0\mathbf{H}$ fixes the transverse magnetic response at every point [2].

1.1.1 Maxwell equations: differential, integral, vacuum constitutive relations

A time-varying electric field cannot remain an isolated scalar pattern in space. Faraday's law ties its curl to $\mathbf{H}$; Ampère–Maxwell ties the curl of $\mathbf{H}$ back to $\mathbf{E}$ and to the impressed sources




Figure 1.6: Vacuum constitutive relations linking $(\mathbf{E}, \mathbf{D})$ and $(\mathbf{H}, \mathbf{B})$ through ε_0 and μ_0, and the outgoing wave whose kinematics those constants determine.

that drive the system [3, 2]. Prescribing only the spatial phase of one Cartesian component—for example a forward $\exp(-\mathrm{j}kz)$ factor on E_x—does not yet specify an electromagnetic solution. The paired $\mathbf{H}$ must satisfy both curl equations and the divergence constraints on the same domain [2, 11]. Every later transport, flux, and angular-momentum statement in this chapter presupposes that completed Maxwell pair [2].

We work in a piecewise smooth region $\Omega \subset \mathbb{R}^3$ with boundary $\Gamma = \partial\Omega$, adopting the time factor $\exp(+\mathrm{j}\omega t)$ throughout [2]. Phasors $\mathbf{E}(\mathbf{r})$ and $\mathbf{H}(\mathbf{r})$ therefore satisfy $\partial/\partial t \to +\mathrm{j}\omega$. Impressed current $\mathbf{J}_{\mathrm{imp}}(\mathbf{r})$ and charge density $\rho(\mathbf{r})$ enter Ampère–Maxwell and Gauss's electric law; vacuum constants ε_0 and μ_0 link field intensities to flux densities in SI units [2, 6]. Maxwell's laws may be written at a point, around a finite loop or over a control volume, or completed by the vacuum relations between $(\mathbf{E}, \mathbf{H})$ and $(\mathbf{D}, \mathbf{B})$; the chapter uses whichever form makes the physical constraint visible [2].

Figure 1.6 summarizes how ε_0 and μ_0 connect $(\mathbf{E}, \mathbf{H})$ to $(\mathbf{D}, \mathbf{B})$ and how the same constants enter wave speed, impedance, and wavenumber in later formulas [3, 2]. Any update to $\mathbf{E}$ that is not propagated to $\mathbf{H}$ through Faraday's law breaks that closure and cannot represent a Maxwell field.

The differential Maxwell system on Ω reads

$$\begin{aligned} \nabla \times \mathbf{E} &= -\mathrm{j}\omega\mu_0\mathbf{H}, & \nabla \times \mathbf{H} &= \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\varepsilon_0\mathbf{E}, \\ \nabla \cdot (\varepsilon_0\mathbf{E}) &= \rho, & \nabla \cdot (\mu_0\mathbf{H}) &= 0. \end{aligned} \tag{1.6}$$

Faraday's law states that a circulating $\mathbf{E}$ requires a time-harmonic $\mathbf{H}$ proportional to $\nabla \times \mathbf{E}$. Ampère–Maxwell adds the impressed current $\mathbf{J}_{\mathrm{imp}}$ and the displacement current $\mathrm{j}\omega\varepsilon_0\mathbf{E}$ that makes the law consistent with time-varying charge [3]. Gauss's electric law, $\nabla \cdot (\varepsilon_0\mathbf{E}) = \rho$, specifies how much electric flux originates from charge at a point; it is not the same statement as charge continuity, which constrains how ρ and $\mathbf{J}_{\mathrm{imp}}$ vary together [2]. Gauss's magnetic law, $\nabla \cdot (\mu_0\mathbf{H}) = 0$, expresses the absence of magnetic monopoles in the classical model [3].

Charge continuity in harmonic form follows from the divergence of Ampère–Maxwell. Because $\nabla \cdot (\nabla \times \mathbf{H}) = 0$ identically,

$$\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0, \tag{1.7}$$

obtained by taking $\nabla\cdot$ of $\nabla \times \mathbf{H} = \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\varepsilon_0\mathbf{E}$ and substituting Gauss's law [3, 2]. The impressed sources are therefore not independent data: any ρ paired with $\mathbf{J}_{\mathrm{imp}}$ must satisfy Eq. (1.7) or the four rows of Eq. (1.6) cannot hold simultaneously [14].

Integrating Eq. (1.7) over a control volume V with boundary ∂V and outward unit normal $\hat{\mathbf{n}}$ gives

$$\int_{\partial V} \mathbf{J}_{\mathrm{imp}} \cdot \hat{\mathbf{n}}\, dS + \mathrm{j}\omega \int_V \rho\, dV = 0. \tag{1.8}$$

The surface integral is net impressed current crossing ∂V in the outward direction; the volume integral is the harmonic charge content inside V. Under $\exp(+\mathrm{j}\omega t)$, a positive imaginary contribution from $\mathrm{j}\omega\rho$ corresponds to a 90° phase relation between charge and its rate of change in the time domain; the balance in Eq. (1.8) states that current leaving the volume must be accompanied by the harmonic charge variation required by Eq. (1.7) [3, 2].

Cartesian components make the same coupling visible on a single row:

$$\begin{aligned} \partial_y E_z - \partial_z E_y &= -\mathrm{j}\omega\mu_0 H_x, \\ \partial_z H_x - \partial_x H_z &= J_{\mathrm{imp},y} + \mathrm{j}\omega\varepsilon_0 E_y, \\ \partial_x(\varepsilon_0 E_x) + \partial_y(\varepsilon_0 E_y) + \partial_z(\varepsilon_0 E_z) &= \rho. \end{aligned} \tag{1.9}$$

Each line is one scalar component of Eq. (1.6) [2]. Subscripts x, y, z label fixed Cartesian axes; $J_{\mathrm{imp},y}$ is the y-component of $\mathbf{J}_{\mathrm{imp}}$ [6]. A patch of E_z alone still demands paired H_x through Faraday's row and paired ρ through Gauss's row, so field maps that display only one component can misrepresent the underlying Maxwell state [3].

Laboratory and device questions are posed on finite volumes and surfaces: circulation of $\mathbf{E}$ or $\mathbf{H}$ around a wire loop, flux through an aperture, or enclosed charge. Stokes' and Gauss's theorems lift the differential rows to that scale on surfaces $S \subset \Omega$ with boundary ∂S and volumes $V \subset \Omega$:

$$\begin{aligned} \oint_{\partial S} \mathbf{E} \cdot d\boldsymbol{\ell} &= -\mathrm{j}\omega\mu_0 \int_S \mathbf{H} \cdot \hat{\mathbf{n}}\, dS, \\ \oint_{\partial S} \mathbf{H} \cdot d\boldsymbol{\ell} &= \int_S \mathbf{J}_{\mathrm{imp}} \cdot \hat{\mathbf{n}}\, dS + \mathrm{j}\omega\varepsilon_0 \int_S \mathbf{E} \cdot \hat{\mathbf{n}}\, dS, \\ \int_{\partial V} \varepsilon_0 \mathbf{E} \cdot \hat{\mathbf{n}}\, dS = \int_V \rho\, dV, &\qquad \int_{\partial V} \mu_0 \mathbf{H} \cdot \hat{\mathbf{n}}\, dS = 0. \end{aligned} \tag{1.10}$$

The circulations of $\mathbf{E}$ and $\mathbf{H}$ around ∂S are tied to fluxes of $\mathbf{H}$ and $\mathbf{E}$ through S; the normal flux of $\varepsilon_0\mathbf{E}$ through ∂V equals the charge in V [2]. These statements match Eq. (1.6) when $\mathbf{E}$, $\mathbf{H}$, $\mathbf{J}_{\mathrm{imp}}$, and ρ are sufficiently smooth for the classical integral theorems; singular or distributional sources require the same laws in weak or limit form [2]. Shrinking V or S to an interior point recovers the differential rows.

Vacuum constitutive relations complete the model in free space:

$$\mathbf{D} = \varepsilon_0 \mathbf{E}, \qquad \mathbf{B} = \mu_0 \mathbf{H}, \qquad c = \frac{1}{\sqrt{\varepsilon_0 \mu_0}}. \tag{1.11}$$

Here $\mathbf{D}$ is electric flux density ($\mathrm{C\,m^{-2}}$), $\mathbf{B}$ is magnetic flux density (T), and c is the speed of light in vacuum ($\mathrm{m\,s^{-1}}$) [2]. Without Eq. (1.11), the curl laws alone leave $(\mathbf{D}, \mathbf{B})$ undetermined.

Combining Eq. (1.6) with Eq. (1.11) and eliminating $\mathbf{H}$ from the curl pair yields second-order operators whose source-free solutions propagate at speed c. The intrinsic impedance, wavenumber, and wavelength used throughout the chapter are

$$\eta_0 = \sqrt{\frac{\mu_0}{\varepsilon_0}}, \qquad k_0 = \omega\sqrt{\mu_0\varepsilon_0} = \frac{\omega}{c}, \qquad \lambda_0 = \frac{2\pi}{k_0}. \tag{1.12}$$

The quantity η_0 (ohms) relates transverse $\mathbf{E}$ and $\mathbf{H}$ amplitudes in a uniform plane wave; k_0 ($\mathrm{rad\,m^{-1}}$) measures phase accumulation per unit distance at angular frequency ω; $\lambda_0 = 2\pi/k_0$ is the corresponding vacuum wavelength [2]. These definitions are not separate postulates: they follow from the same ε_0, μ_0, and ω that appear in Eq. (1.6).

To obtain the inhomogeneous wave equation for $\mathbf{E}$, use the vector identity

$$\nabla \times (\nabla \times \mathbf{E}) = \nabla(\nabla \cdot \mathbf{E}) - \nabla^2 \mathbf{E}, \tag{1.13}$$

valid for continuously differentiable fields [2]. With $\exp(+\mathrm{j}\omega t)$ phasors, $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0\mathbf{H}$ and $\nabla \times \mathbf{H} = \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\varepsilon_0\mathbf{E}$. Applying $\nabla\times$ to Faraday's law and substituting Ampère–Maxwell,

$$\nabla \times (\nabla \times \mathbf{E}) = -\mathrm{j}\omega\mu_0 \mathbf{J}_{\mathrm{imp}} + k_0^2 \mathbf{E}, \tag{1.14}$$

because $k_0^2 = \omega^2\mu_0\varepsilon_0$. Gauss's law gives $\nabla \cdot \mathbf{E} = \rho/\varepsilon_0$, so Eq. (1.13) rearranges to

$$\nabla^2 \mathbf{E} + k_0^2 \mathbf{E} = \frac{1}{\varepsilon_0} \nabla\rho + \mathrm{j}\omega\mu_0 \mathbf{J}_{\mathrm{imp}}, \qquad \nabla^2 \mathbf{H} + k_0^2 \mathbf{H} = -\nabla \times \mathbf{J}_{\mathrm{imp}}. \tag{1.15}$$

The electric equation carries both the charge-gradient forcing $\varepsilon_0^{-1}\nabla\rho$ and the impressed-current term $+\mathrm{j}\omega\mu_0\mathbf{J}_{\mathrm{imp}}$ under the $+\mathrm{j}\omega t$ convention adopted here [11, 2]. The magnetic companion is obtained independently: $\nabla\times\mathbf{H}=\mathbf{J}_{\mathrm{imp}}+\mathrm{j}\omega\varepsilon_0\mathbf{E}$ gives $\nabla\times(\nabla\times\mathbf{H})=\nabla\times\mathbf{J}_{\mathrm{imp}}+\mathrm{j}\omega\varepsilon_0\nabla\times\mathbf{E}=\nabla\times\mathbf{J}_{\mathrm{imp}}-k_0^2\mathbf{H}$, and the same curl–curl identity yields $\nabla^2\mathbf{H}+k_0^2\mathbf{H}=-\nabla\times\mathbf{J}_{\mathrm{imp}}$. Homogeneous regions with $\mathbf{J}_{\mathrm{imp}}=\mathbf{0}$ and $\rho=0$ satisfy the vector Helmholtz pair

$$\nabla^2\mathbf{E}+k_0^2\mathbf{E}=\mathbf{0},\qquad \nabla^2\mathbf{H}+k_0^2\mathbf{H}=\mathbf{0}, \tag{1.16}$$

but Eq. (1.16) alone does not select a unique physical solution: boundary data on Γ, radiation conditions at infinity, and the impressed source specification still determine which field belongs to a given antenna or scatterer problem [2].

For a uniform plane-wave ansatz $\mathbf{E}=\mathbf{E}_0e^{-\mathrm{j}\mathbf{k}\cdot\mathbf{r}}$ with $\mathbf{k}\cdot\mathbf{E}_0=0$, Eq. (1.16) requires $|\mathbf{k}|=k_0$. Faraday's law gives $\mathbf{H}=(\mathbf{k}\times\mathbf{E})/(\omega\mu_0)=\hat{\mathbf{k}}\times\mathbf{E}/\eta_0$ with $\hat{\mathbf{k}}=\mathbf{k}/|\mathbf{k}|$, and Ampère–Maxwell confirms $\mathbf{k}\cdot\mathbf{H}=0$ [2, 11]. Transverse vacuum plane waves therefore satisfy

$$\mathbf{H}=\frac{1}{\eta_0}\,\hat{\mathbf{k}}\times\mathbf{E},\qquad \hat{\mathbf{k}}\cdot\mathbf{E}=0,\qquad \hat{\mathbf{k}}\cdot\mathbf{H}=0, \tag{1.17}$$

where $\eta_0=\sqrt{\mu_0/\varepsilon_0}$ [2, 11]. This is a *local* Maxwell-compatible plane-wave sector: it does not describe, in isolation, the full field of a bounded radiator, which requires outgoing selection and source integrals developed in the next subsection [2].

Take $\mathbf{E}=E_0e^{-\mathrm{j}k_0z}\hat{\mathbf{x}}$ propagating in $+\hat{\mathbf{z}}$. Then $\nabla\times\mathbf{E}=-\mathrm{j}k_0E_0e^{-\mathrm{j}k_0z}\hat{\mathbf{y}}=-\mathrm{j}\omega\mu_0\mathbf{H}$, so $\mathbf{H}=(E_0/\eta_0)e^{-\mathrm{j}k_0z}\hat{\mathbf{y}}$. Substituting into $\nabla\times\mathbf{H}=\mathrm{j}\omega\varepsilon_0\mathbf{E}$ (source-free) closes Ampère–Maxwell with no remaining free parameters. Real-time phase surfaces satisfy $\omega t-k_0z=\text{const}$, hence $dz/dt=\omega/k_0=c>0$: the disturbance advances in $+\hat{\mathbf{z}}$, and the factor $e^{-\mathrm{j}k_0z}$ is the outgoing spatial branch for $\exp(+\mathrm{j}\omega t)$ [2, 11]. The time-average Poynting direction is $+\hat{\mathbf{z}}$ with magnitude $|E_0|^2/(2\eta_0)$ for this polarization [2].

The same source-free physics may be written in curl-curl form:

$$\nabla\times\left(\mu_0^{-1}\nabla\times\mathbf{E}\right)-\omega^2\varepsilon_0\mathbf{E}=\mathbf{0},\qquad \nabla\times\left(\varepsilon_0^{-1}\nabla\times\mathbf{H}\right)-\omega^2\mu_0\mathbf{H}=\mathbf{0}. \tag{1.18}$$

Eq. (1.18) is equivalent to Eq. (1.16) in vacuum and is often the preferred starting point for variational formulations with tangential boundary data [2].

Eqs. (1.6)–(1.17) fix how $\mathbf{E}$ and $\mathbf{H}$ must balance locally for given $\mathbf{J}_{\mathrm{imp}}$ and ρ, but they do not yet specify which source distributions, interface traces, and outer radiation conditions define a realizably fed structure on Ω. That completion—Green-function reconstruction and the Maxwell boundary-value problem—is taken up immediately below [2].

1.1.2 From inhomogeneous Helmholtz equation to outgoing Green function

The local Maxwell system of Subsection 1.1.1 fixes how $\mathbf{E}$ and $\mathbf{H}$ must balance at each point for prescribed $\mathbf{J}_{\mathrm{imp}}$ and ρ, but it does not yet supply a constructive map from a finite source distribution to the field at a distant observation point [2, 3]. That map is the classical Green-function problem: given impressed data on compact support, determine the outgoing harmonic field that satisfies the radiation condition at infinity [2, 11].

Let $\mathbf{r}$ denote the observation point and $\mathbf{r}'$ the source point (both in metres), with separation $R=|\mathbf{r}-\mathbf{r}'|$. In the time domain, causality requires the field at $\mathbf{r}$ to be driven by the source at retarded time $t-R/c$, where $c=1/\sqrt{\varepsilon_0\mu_0}$ [2, 11]. With the harmonic convention $\exp(+\mathrm{j}\omega t)$ adopted in this chapter, the delay R/c appears as the spatial phase factor $e^{-\mathrm{j}k_0R}$ in the frequency-domain response, because $e^{+\mathrm{j}\omega(t-R/c)}=e^{+\mathrm{j}\omega t}\,e^{-\mathrm{j}k_0R}$ and $k_0=\omega/c$ [2]. The minus sign in $e^{-\mathrm{j}k_0R}$ selects the outgoing spherical wave that carries energy toward increasing R under this time convention [2, 11].

In a homogeneous, source-free region, each Cartesian component of $\mathbf{E}$ or $\mathbf{H}$ satisfies the vector Helmholtz equation of Eq. (1.16). Restoring impressed sources leads to the scalar prototype

$$(\nabla^2 + k_0^2)\, U(\mathbf{r}) = -S(\mathbf{r}), \tag{1.19}$$

where U is a scalar potential or field component under reconstruction and S is the corresponding source density whose SI units match those of $(\nabla^2 + k_0^2)U$ [2, 11]. Equation (1.19) has infinitely many solutions unless boundary data and, for open domains, an outgoing radiation condition are imposed [2].

The scalar Green function $G(\mathbf{r}, \mathbf{r}')$ (units m^{-1}) is defined by

$$(\nabla^2 + k_0^2)\, G(\mathbf{r}, \mathbf{r}') = -\delta(\mathbf{r} - \mathbf{r}'), \tag{1.20}$$

where δ is the three-dimensional Dirac distribution (units m^{-3}) and ∇^2 acts on the observation coordinate $\mathbf{r}$ with $\mathbf{r}'$ fixed [2, 11]. For $R > 0$, spherical symmetry about $\mathbf{r}'$ gives $G = G(R)$. With outgoing selection, write $G(R) = g\, e^{-\mathrm{j}k_0 R}/R$. Substitution into the homogeneous Helmholtz equation for $R > 0$ yields $g = \text{const}$. Matching the strength of the singularity at $R = 0$ through the identity $\nabla^2(1/R) = -4\pi\delta(\mathbf{r} - \mathbf{r}')$ fixes $g = 1/(4\pi)$ and therefore

$$G(\mathbf{r}, \mathbf{r}') = \frac{e^{-\mathrm{j}k_0|\mathbf{r}-\mathbf{r}'|}}{4\pi|\mathbf{r} - \mathbf{r}'|}. \tag{1.21}$$

Equation (1.21) satisfies Eq. (1.20) in the distributional sense. Without the outgoing radiation condition, the incoming branch proportional to $e^{+\mathrm{j}k_0 R}/R$ would also satisfy the homogeneous equation in exterior regions and the representation would not be unique [2, 11].

Because Eq. (1.21) already carries the $1/(4\pi R)$ normalization, the retarded potentials use G directly without an additional $1/(4\pi)$ prefactor (Stratton/Jackson convention A) [2, 11]. With ϕ the scalar potential (V), $\mathbf{A}$ the vector potential ($\mathrm{T\,m}$), $\mathbf{J}_{\mathrm{imp}}$ the impressed volume current density ($\mathrm{A\,m^{-2}}$), and ρ the charge density ($\mathrm{C\,m^{-3}}$),

$$\mathbf{A}(\mathbf{r}) = \mu_0 \int \mathbf{J}_{\mathrm{imp}}(\mathbf{r}')\, G(\mathbf{r}, \mathbf{r}')\, d^3 r', \tag{1.22}$$

$$\phi(\mathbf{r}) = \frac{1}{\varepsilon_0} \int \rho(\mathbf{r}')\, G(\mathbf{r}, \mathbf{r}')\, d^3 r', \tag{1.23}$$

and, under $\exp(+\mathrm{j}\omega t)$,

$$\mathbf{E} = -\nabla\phi - \mathrm{j}\omega\mathbf{A}, \qquad \mathbf{B} = \nabla \times \mathbf{A}, \qquad \mathbf{H} = \mathbf{B}/\mu_0, \tag{1.24}$$

with Lorenz gauge $\nabla \cdot \mathbf{A} + \mathrm{j}\omega\mu_0\varepsilon_0\phi = 0$ [2, 11]. The gauge condition is a potential constraint; charge continuity $\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0$ is the physical law that makes $(\phi, \mathbf{A})$ consistent with the Maxwell curl system of Subsection 1.1.1 [3, 2].

Example 1.1 (Finite line segment, end charges, and far-zone phase)**.** Consider a straight conductor on the z-axis with phasor current I_0 (A) between $z' = -h/2$ and $z' = +h/2$. A minimal volume idealization uses uniform impressed current density

$$\mathbf{J}_{\mathrm{imp}}(\mathbf{r}') = \frac{I_0}{A_c}\, \hat{\mathbf{z}}\, \chi_{A_c}(x', y')\, \chi_{[-h/2,\, h/2]}(z'),$$

where A_c (m^2) is the conductor cross section, χ_{A_c} is unity over the transverse cross section and zero outside, and $\chi_{[-h/2,h/2]}$ restricts the axial support. Inside the open cylinder, $\partial J_z/\partial z' = 0$, so $\nabla\cdot\mathbf{J}_{\mathrm{imp}} = 0$ as an ordinary function; the idealization is not solenoidal on $\mathbb{R}^3$ because $\mathbf{J}_{\mathrm{imp}}$ vanishes outside the segment and therefore has step discontinuities at $z' = \pm h/2$. In the distributional sense,

$$\nabla \cdot \mathbf{J}_{\mathrm{imp}} = \frac{I_0}{A_c}\, \chi_{A_c}(x', y')\big[\delta(z' + h/2) - \delta(z' - h/2)\big], \tag{1.25}$$




Figure 1.7: Localized impressed current at $\mathbf{r}'$, observation point $\mathbf{r}$, separation $R = |\mathbf{r} - \mathbf{r}'|$, observation direction $\hat{\mathbf{r}}$, and outgoing Green-function phase $e^{-\mathrm{j}k_0 R}/(4\pi R)$; in the far zone $R \approx r - \hat{\mathbf{r}} \cdot \mathbf{r}'$ generates angular phase from source geometry [2, 11, 12].

where the one-dimensional deltas are combined with the transverse indicator so that Eq. (1.25) has units $\mathrm{A\,m^{-3}}$ [11, 2]. Charge continuity $\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0$ then requires

$$\rho(\mathbf{r}') = \frac{I_0}{\mathrm{j}\omega A_c}\, \chi_{A_c}(x', y')\big[\delta(z' - h/2) - \delta(z' + h/2)\big], \tag{1.26}$$

with units $\mathrm{C\,m^{-3}}$ in the distributional sense. Integrating ρ over a thin slab at $z' = +h/2$ gives end-face charge per unit area $\sigma_s = +I_0/(\mathrm{j}\omega A_c)$ ($\mathrm{C\,m^{-2}}$); at $z' = -h/2$, $\sigma_s = -I_0/(\mathrm{j}\omega A_c)$ [11, 2]. Under $\exp(+\mathrm{j}\omega t)$, the endpoint charge at $z' = +h/2$ is in quadrature with the axial impressed current (not a 180° out-of-phase relation): current along $+\hat{\mathbf{z}}$ leaves the upper face at $z' = +h/2$ in this sign convention—the Hertzian dipole bookkeeping for a finite segment, not a universal model of a practical feed, which generally spreads charge and return current over a finite terminal region [2, 11].

With Eqs. (1.22) and (1.23), the vector potential follows from the axial current alone in the limit $A_c \to 0$ as

$$A_z(\mathbf{r}) = \frac{\mu_0 I_0}{4\pi} \int_{-h/2}^{h/2} \frac{e^{-\mathrm{j}k_0|\mathbf{r} - z'\hat{\mathbf{z}}|}}{|\mathbf{r} - z'\hat{\mathbf{z}}|}\, dz', \tag{1.27}$$

which has units T m; ϕ receives equal contributions from the end charges in Eq. (1.26). The pair $(\phi, \mathbf{A})$ satisfies Lorenz gauge and Eq. (1.7) for this idealization, but Eqs. (1.24) still determine a field in all of space only together with outgoing selection at infinity (and any conducting boundaries if present). The line integral for A_z alone does not, by itself, specify a complete boundary-value problem [2].

Geometrical and phase approximations. Let $R = |\mathbf{r} - \mathbf{r}'|$ and $r = |\mathbf{r}|$. For $r \gg |\mathbf{r}'|$ the distance expands as $R \approx r - \hat{\mathbf{r}} \cdot \mathbf{r}' + \mathcal{O}(|\mathbf{r}'|^2/r)$; this is purely geometrical. Replacing $e^{-\mathrm{j}k_0 R}$ by $e^{-\mathrm{j}k_0 r}\, e^{+\mathrm{j}k_0 \hat{\mathbf{r}} \cdot \mathbf{r}'}$ additionally requires the neglected phase $k_0|\mathbf{r}'|^2/r$ to be small compared with 2π across the source—for a segment of length h, typically $k_0 h^2/r \ll 1$ (Fraunhofer-type) [2, 11]. Dominance of radiative $1/r$ fields over reactive $1/r^2$ and $1/r^3$ terms is a separate condition on $k_0 r \gg 1$ in the multipole sense [2]. When $r = |\mathbf{r}| \gg h$ and both criteria hold,

$$e^{-\mathrm{j}k_0 R} \approx e^{-\mathrm{j}k_0 r}\, e^{+\mathrm{j}k_0 \hat{\mathbf{r}} \cdot \mathbf{r}'}, \tag{1.28}$$

with $\mathbf{r}' = z'\hat{\mathbf{z}}$. The factor $e^{+\mathrm{j}k_0 \hat{\mathbf{r}} \cdot \mathbf{r}'}$ is angular *phase* in the radiation integral; net angular-momentum transport requires the stress or flux integrals of later sections, not phase alone [2, 11].

Figure 1.7 shows the geometry: source point $\mathbf{r}'$, observation point $\mathbf{r}$, separation R, and outgoing phase $e^{-\mathrm{j}k_0 R}/(4\pi R)$ [2, 11, 12]. The same retarded phase underlies the multipole hierarchy of Subsection 1.6.4 [11, 2]. Chapter 2 develops the dyadic Green function under the same $\exp(+\mathrm{j}\omega t)$ convention [6, 12, 2].

Figure 1.8 is the minimal charge-continuous source geometry: azimuthal current on a filament loop produces dipole radiation because $\nabla \cdot \mathbf{J}_{\mathrm{imp}} = 0$ on the support while the impressed current closes the Ampère row in Eq. (1.6). Replacing the loop by a tangential $\mathbf{E}_t$ pattern on the same circle would satisfy a boundary display but not the source row unless a matching $\mathbf{J}_{\mathrm{imp}}$ is prescribed [2, 6].




Figure 1.8: Azimuthal filament loop of radius b carrying $I_0\hat{\boldsymbol{\phi}}$: charge-continuous impressed current on compact support. Illustrative shells at $k_0 b = 0.063$ (electrically small source) and $k_0 r = 6.3$ ($r \approx \lambda_0$); the latter is an order-of-magnitude illustration, not by itself a proof of Fraunhofer or full far-zone asymptotics.

With solenoidal $\mathbf{J}_{\mathrm{imp}}$, Eq. (1.15) yields a charge-continuous Maxwell field. Inserting a spurious $\rho = \rho_0\delta(\mathbf{r})$ without adjusting $\mathbf{J}_{\mathrm{imp}}$ violates Eq. (1.7) and breaks the Ampère–Gauss closure of Eqs. (1.6) [3, 2].

Example 1.2 (An electrically small current loop)**.** A filament loop of radius $b = 3\,\mathrm{cm}$ carries phasor current $I_0 = 1\,\mathrm{A}$ at $f = 100\,\mathrm{MHz}$. Then $\lambda_0 = c/f = 3\,\mathrm{m}$, $k_0 = 2\pi/\lambda_0 \approx 2.09\,\mathrm{rad\,m^{-1}}$, and $k_0 b = 0.063 \ll 1$: the loop is electrically small. The impressed azimuthal current is solenoidal on its support ($\nabla \cdot \mathbf{J}_{\mathrm{imp}} = 0$ in the distributional sense for a closed toroidal filament), so Eq. (1.15) drives primarily magnetic-dipole radiation at asymptotic distances (Subsection 1.2.5) [2, 6]. At $k_0 b = 0.063$ reactive near fields dominate on shells comparable to b. The value $k_0 r = 6.3$ corresponds to $r = \lambda_0$ and is used *illustratively* in Figure 1.8: it indicates order unity in $k_0 r$ but does not, without the separate conditions $k_0 b^2/r \ll 1$ and established multipole dominance, replace a full far-zone proof. Fraunhofer-type phase accuracy for this loop would require $k_0 b^2/r \ll 1$, which holds easily at $r = \lambda_0$ because $b \ll \lambda_0$ [2, 11].

Dispersive media require frequency-dependent $\varepsilon(\omega)$ and $\mu(\omega)$, breaking the algebraic completion of Eq. (1.11). Relativistic or quantum corrections lie outside the present harmonic class. Within the vacuum harmonic class, Eqs. (1.6)–(1.17) form the complete local law set every later angular argument inherits [3].

1.1.3 Sources, boundary conditions, and the Maxwell boundary-value problem

Free-space theory often begins with a localized Green-function representation that maps impressed sources to outgoing fields; an actual device or scatterer is specified, however, by the full Maxwell boundary-value problem on a domain Ω with boundary $\Gamma = \partial\Omega$. That statement names piecewise constitutive laws in subregions $\{\Omega_a\}$, impressed volume and surface sources, transmission conditions on internal interfaces, data on the outer boundary, and—when the exterior is open—an outgoing radiation selection [2, 3]. Imposing a tangential field on an aperture without a charge-compatible $\mathbf{J}_{\mathrm{imp}}$ and without compatible traces on Γ need not correspond to any physically realizable Maxwell state [6, 7].

A fed antenna or inhomogeneous scatterer is specified by more than a volume current. At angular frequency $\omega > 0$ under $\exp(+\mathrm{j}\omega t)$, $(\mathbf{J}_{\mathrm{imp}}, \rho)$ are impressed volume sources ($\mathrm{A\,m^{-2}}$ and $\mathrm{C\,m^{-3}}$); $\mathbf{J}_{s,ab}$ is impressed electric surface current on $\Sigma_{ab} = \partial\Omega_a \cap \partial\Omega_b$ ($\mathrm{A\,m^{-1}}$); and $\rho_{s,ab}$ is free surface charge ($\mathrm{C\,m^{-2}}$). In each subregion Ω_a, $\mathbf{D} = \varepsilon_a\mathbf{E}$ and $\mathbf{B} = \mu_a\mathbf{H}$ with piecewise constant ε_a, μ_a unless stated otherwise [2]. The finite-energy weighting of Subsection 1.0.4 (Equation (1.4)) tests admissibility on bounded domains; it is not the same statement as square-integrable energy on an unbounded exterior. Eq. (1.37) holds when $\mathbf{J}_{\mathrm{imp}}$ admits a classical outward normal trace on Γ; for filamentary or distributional feeds the same balance is stated in weak form without a general trace theorem here [2].

Interface transmission. On each Σ_{ab}, let $\hat{\mathbf{n}}_{ab}$ be the unit normal directed from Ω_a to Ω_b. Assume fields are smooth up to the interface except for the allowed jumps and that no

impressed magnetic sheet current is present. Faraday's integral in Equation (1.10), applied to a rectangular loop of area δh straddling Σ_{ab} with sides parallel and normal to the interface, yields $\oint \mathbf{E}\cdot d\boldsymbol{\ell} = -\mathrm{j}\omega\mu_0 \int_S \mathbf{H}\cdot\hat{\mathbf{n}}\, dS$. The right-hand side is $\mathcal{O}(\delta h)$, while the tangential contribution to the line integral is $[\hat{\mathbf{n}}_{ab}\times(\mathbf{E}_b-\mathbf{E}_a)]\cdot\Delta\boldsymbol{\ell}_t$ of order unity as the loop height $\delta\to 0$; and therefore $\hat{\mathbf{n}}_{ab}\times(\mathbf{E}_b-\mathbf{E}_a)=\mathbf{0}$ [3, 11]. Ampère–Maxwell on the same loop yields $\hat{\mathbf{n}}_{ab}\times(\mathbf{H}_b-\mathbf{H}_a)=\mathbf{J}_{s,ab}$ in the limit. Gauss's laws applied to a pillbox of height δ give $\hat{\mathbf{n}}_{ab}\cdot(\mathbf{D}_b-\mathbf{D}_a)=\rho_{s,ab}$ and, without magnetic monopoles, $\hat{\mathbf{n}}_{ab}\cdot(\mathbf{B}_b-\mathbf{B}_a)=0$ [2]. Collecting,

$$\begin{aligned}\hat{\mathbf{n}}_{ab}\times(\mathbf{E}_b-\mathbf{E}_a)&=\mathbf{0},\\ \hat{\mathbf{n}}_{ab}\times(\mathbf{H}_b-\mathbf{H}_a)&=\mathbf{J}_{s,ab},\\ \hat{\mathbf{n}}_{ab}\cdot(\mathbf{D}_b-\mathbf{D}_a)&=\rho_{s,ab},\\ \hat{\mathbf{n}}_{ab}\cdot(\mathbf{B}_b-\mathbf{B}_a)&=0.\end{aligned} \tag{1.29}$$

Equation (1.29) is the complete transmission law used below; omitting $\rho_{s,ab}$ or $\mathbf{J}_{s,ab}$ when a coated or fed interface carries them misstates reflected power and source closure [15, 11].

Outer boundary traces. We partition $\Gamma=\Gamma_{\mathrm{PEC}}\cup\Gamma_{\mathrm{PMC}}\cup\Gamma_Z$. On every boundary-value problem, $\hat{\mathbf{n}}$ denotes the unit normal *outward from the field domain* Ω on which Maxwell's equations are solved [2]. For a bounded interior cavity, $\hat{\mathbf{n}}$ points from the cavity into the surrounding medium or exterior. For an exterior problem Ω_{ext} (Subsection 1.1.4), the obstacle boundary is the inner surface of Ω_{ext} and

$$\hat{\mathbf{n}}_{\mathrm{ext}}=\hat{\mathbf{n}}\quad\text{on }\Gamma=\partial\mathcal{O},\qquad \hat{\mathbf{n}}_{\mathrm{body}}=-\hat{\mathbf{n}}_{\mathrm{ext}}, \tag{1.30}$$

with $\hat{\mathbf{n}}_{\mathrm{body}}$ outward from the obstacle material into the exterior vacuum [2, 6]. A PEC boundary is an ideal limit of large tangential $\mathbf{E}$ screening: $\hat{\mathbf{n}}\times\mathbf{E}=\mathbf{0}$. A PMC boundary is the dual magnetic limit: $\hat{\mathbf{n}}\times\mathbf{H}=\mathbf{0}$ [2]. Neither is universally interchangeable with a finite conductor model; both exclude penetration physics retained in richer models [2].

Passive surface impedance is stated on the *obstacle* normal because the Leontovich relation ties tangential $\mathbf{E}$ and $\mathbf{H}$ on the material side of an absorbing sheet [2, 6]. Let $\mathbf{H}_t:=(\hat{\mathbf{n}}_{\mathrm{body}}\times\mathbf{H})\times\hat{\mathbf{n}}_{\mathrm{body}}$ and $\mathbf{E}_t:=\hat{\mathbf{n}}_{\mathrm{body}}\times(\mathbf{E}\times\hat{\mathbf{n}}_{\mathrm{body}})$. The local scalar passive class used here is

$$\begin{aligned}\hat{\mathbf{n}}\times\mathbf{E}&=\mathbf{0} &&\text{on }\Gamma_{\mathrm{PEC}},\\ \hat{\mathbf{n}}\times\mathbf{H}&=\mathbf{0} &&\text{on }\Gamma_{\mathrm{PMC}},\\ \hat{\mathbf{n}}_{\mathrm{body}}\times\mathbf{E}&=-Z_s\,\mathbf{H}_t &&\text{on }\Gamma_Z,\end{aligned} \tag{1.31}$$

with scalar passive impedance $Z_s(\mathbf{r})$ specified on Γ_Z (spatially constant on the sheet unless noted) and $\mathrm{Re}(Z_s)>0$ for absorption [2, 6]. Under the obstacle normal $\hat{\mathbf{n}}_{\mathrm{body}}$ (outward from the solid into the exterior vacuum), positive flux $\frac{1}{2}\mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{body}}\cdot(\mathbf{E}\times\mathbf{H}^*)\}$ is power crossing the surface in the direction of $\hat{\mathbf{n}}_{\mathrm{body}}$, i.e. *from the obstacle into the exterior field*, not into the obstacle [2, 6]. The minus sign in Equation (1.31) aligns the Leontovich relation with absorption: define absorbed power density

$$P_{\mathrm{abs}}=-\frac{1}{2}\mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{body}}\cdot(\mathbf{E}\times\mathbf{H}^*)\}=\frac{1}{2}\mathrm{Re}\Big\{Z_s\,|\mathbf{H}_t|^2\Big\}\geq 0, \tag{1.32}$$

by Equation (1.31) when $\mathrm{Re}(Z_s)>0$ [2, 6]. Because $\hat{\mathbf{n}}_{\mathrm{ext}}=-\hat{\mathbf{n}}_{\mathrm{body}}$,

$$\mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{ext}}\cdot(\mathbf{E}\times\mathbf{H}^*)\}=+P_{\mathrm{abs}}=\frac{1}{2}\mathrm{Re}\Big\{Z_s\,|\mathbf{H}_t|^2\Big\}\geq 0 \tag{1.33}$$

on Γ_Z: power absorbed by the sheet is carried *out of* the exterior field domain across the inner boundary [2, 6]. The passive sign in Equation (1.31) is fixed here by the local complex-Poynting identity and is checked independently for a uniform plane wave on Γ_Z. Existence and uniqueness

for the full exterior impedance class are cited conditionally from Colton–Kress–Hsiao after convention conversion [16]. All outer classes are collected by the boundary operator

$$\mathcal{B}_\Gamma[\mathbf{E},\mathbf{H}] = \mathbf{g}_\Gamma, \tag{1.34}$$

with prescribed data $\mathbf{g}_\Gamma$ on Γ [2].

Outgoing selection. For exterior antenna and scattering problems, fields at large radius $R = |\mathbf{r}|$ must be asymptotically outgoing under $\exp(+\mathrm{j}\omega t)$:

$$\hat{\mathbf{n}} \times \mathbf{H} + \eta_0^{-1}(\hat{\mathbf{n}} \times \mathbf{E}) \times \hat{\mathbf{n}} = \mathbf{o}(R^{-1}), \qquad R \to \infty, \tag{1.35}$$

with $\eta_0 = \sqrt{\mu_0/\varepsilon_0}$ and $\hat{\mathbf{n}} = \hat{\mathbf{r}}$ [2, 10]. Equation (1.35) excludes the incoming branch proportional to $e^{+\mathrm{j}k_0 R}/R$ and matches $\mathbf{E}_{\mathrm{rad}} \sim \mathbf{E}_0(\theta,\phi)\, e^{-\mathrm{j}k_0 R}/R$, $\mathbf{H}_{\mathrm{rad}} = \eta_0^{-1}\hat{\mathbf{r}} \times \mathbf{E}_{\mathrm{rad}}$. It is a selection rule on the exterior solution, not a proof of existence, uniqueness, finite global energy, or full trace regularity for later torque integrals [6]. Absorbing layers at finite radius approximate the same physics on a truncated domain [14].

Source classes and global balance. Bounded excitation occupies $\Omega_s \subseteq \Omega$ and must satisfy Equation (1.7). The regular class is

$$\mathbf{J}_{\mathrm{imp}} \in L^2(\Omega_s)^3, \qquad \mathrm{supp}(\mathbf{J}_{\mathrm{imp}}) \subseteq \overline{\Omega_s}, \qquad \nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0 \text{ in } \mathcal{D}'(\Omega). \tag{1.36}$$

Square-integrable $\mathbf{J}_{\mathrm{imp}}$ with distributional continuity does not automatically imply finite exterior field energy, classical normal traces of $\mathbf{J}_{\mathrm{imp}}$ on Γ, or finite quadratic surface fluxes; those require separate hypotheses tied to the domain and outgoing selection [2]. Closed filaments and segmented dipoles in examples are *distributional* limits with $\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho = 0$ in $\mathcal{D}'(\Omega)$, not members of L^2 unless regularized by finite width [2, 11]. Integrating Equation (1.7) over Ω and applying the divergence theorem yields, *when* $\mathbf{J}_{\mathrm{imp}}$ *admits a classical outward normal trace on* Γ,

$$\int_\Omega (\nabla \cdot \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\rho)\, dV = \int_\Gamma \mathbf{J}_{\mathrm{imp}} \cdot \hat{\mathbf{n}}\, dS + \mathrm{j}\omega \int_\Omega \rho\, dV = 0. \tag{1.37}$$

The same argument shows that if $\mathbf{J}_{\mathrm{imp}}$ is supported strictly inside Ω, the surface term vanishes; otherwise impressed current crossing Γ must be specified. A general distributional trace theorem for $\mathbf{J}_{\mathrm{imp}}|_\Gamma$ is not established in this manuscript and remains an open extension [3, 2].

Example 1.3 (Reflection at a lossless dielectric interface)**.** Let Ω_1 be vacuum ($z > 0$) and Ω_2 a semi-infinite dielectric with $\varepsilon_r = 2.25$, $\mu_r = 1$ occupying $z < 0$, with interface at $z = 0$ and $\hat{\mathbf{n}}_{12} = -\hat{\mathbf{z}}$ directed from Ω_1 into Ω_2, consistent with the definition of $\hat{\mathbf{n}}_{ab}$ in Subsection 1.1.3. A normally incident plane wave in Ω_1 travels toward the interface from $z > 0$ with $\mathbf{E} = E_0 e^{+\mathrm{j}k_0 z}\hat{\mathbf{x}}$ under $\exp(+\mathrm{j}\omega t)$. Eq. (1.29) with $\mathbf{J}_{s,12} = \mathbf{0}$ gives continuous tangential $\mathbf{E}$ and $\mathbf{H}$. With intrinsic impedances $\eta_1 = \eta_0$ and $\eta_2 = \eta_0/\sqrt{\varepsilon_r}$, the reflection coefficient is $\Gamma = (\eta_2 - \eta_1)/(\eta_2 + \eta_1) = (1 - \sqrt{\varepsilon_r})/(1 + \sqrt{\varepsilon_r}) = -0.2$, so $R = |\Gamma|^2 = 0.04$ and $T = 1 - R = 0.96$ for a lossless interface; the transmitted field in Ω_2 carries wavenumber $k_2 = k_0\sqrt{\varepsilon_r}$ and amplitude $|E_t| = (1+\Gamma)|E_0| = 0.8|E_0|$ [2, 11].

Example 1.4 (TE_{10} mode in a closed rectangular guide)**.** A hollow PEC guide with cross section $a \times b$ supports $\mathbf{E} = E_0 \sin(\pi x/a)\, e^{-\mathrm{j}\beta z}\hat{\mathbf{y}}$ with cutoff $\omega_c = \pi c/a$ and $\beta = \sqrt{k_0^2 - (\pi/a)^2}$ when $k_0 > \pi/a$. Tangential $\mathbf{E}$ vanishes on $x = 0, a$ and $y = 0, b$, implementing Eq. (1.31) on Γ_{PEC}. This is a *closed* boundary-value problem: Eq. (1.35) at infinity is not part of the closed guide eigenproblem, though an open-ended or fed guide coupled to free space requires a different exterior completion [2, 15]. At $f = 10\,\mathrm{GHz}$ with $a = 2.3\,\mathrm{cm}$, $\omega_c \approx 6.52\,\mathrm{GHz}$ and $\beta/k_0 \approx 0.759$; below cutoff the same geometry is evanescent and storage-dominated [6].




Figure 1.9: Rectangular waveguide cross section $a \times b$ with PEC sidewalls, TE_{10} transverse $\mathbf{E}$ profile, and charge-compatible impressed-current feed at the aperture.

Compatible $(\mathbf{J}_{\mathrm{imp}}, \rho)$, constitutive data, Equation (1.29), outer data Eq. (1.34), and outgoing selection Eq. (1.35) where applicable define the class of Maxwell fields under consideration. Existence of a solution in that class and uniqueness under additional hypotheses are treated in Subsection 1.1.4; flux, power, and angular-momentum integrals presuppose this closure [3, 2]. Piecewise smooth interfaces and linear local constitutive laws are assumed; rough or nonlinear boundaries require enriched models before the same conservation interpretations apply [2].

1.1.4 Boundary-Value Problems and Uniqueness

Surface integrals of power, momentum, and angular momentum name observables only when the underlying field is uniquely determined. Two distinct Maxwell solutions that share the same sources, interface data, boundary traces, and—on an open exterior—the same outgoing selection would make every such integral ambiguous [2, 10]. Uniqueness is the condition that turns a completed boundary-value specification into one physical field.

Suppose $(\mathbf{E}_1, \mathbf{H}_1)$ and $(\mathbf{E}_2, \mathbf{H}_2)$ both satisfy the same data. The difference $(\Delta\mathbf{E}, \Delta\mathbf{H}) = (\mathbf{E}_1 - \mathbf{E}_2, \mathbf{H}_1 - \mathbf{H}_2)$ carries no impressed current ($\Delta\mathbf{J}_{\mathrm{imp}} = \mathbf{0}$) and obeys the homogeneous boundary operator $\mathcal{B}_\Gamma[\Delta\mathbf{E}, \Delta\mathbf{H}] = \mathbf{0}$ on every prescribed trace [2]. Under $\exp(+\mathrm{j}\omega t)$ the difference satisfies the same curl system with the domain constitutive ε and μ. The central question is whether a nontrivial source-free difference can persist under the stated boundary and radiation hypotheses.

The energy route begins with a local quadratic identity. The vector relation $\nabla\cdot(\Delta\mathbf{E}\times\Delta\mathbf{H}^*) = \Delta\mathbf{H}^*\cdot\nabla\times\Delta\mathbf{E} - \Delta\mathbf{E}\cdot\nabla\times\Delta\mathbf{H}^*$, together with $\nabla\times\Delta\mathbf{E} = -\mathrm{j}\omega\mu\Delta\mathbf{H}$, $\nabla\times\Delta\mathbf{H} = \mathrm{j}\omega\varepsilon\Delta\mathbf{E}$, and $\nabla\times\Delta\mathbf{H}^* = -\mathrm{j}\omega\varepsilon^*\Delta\mathbf{E}^*$ when ε is complex, yields the local relation

$$\nabla\cdot\mathbf{S}_\Delta = -2\mathrm{j}\omega\,(u_{\Delta H} - u_{\Delta E}) \tag{1.38}$$

for $\mathbf{S}_\Delta = \tfrac{1}{2}\Delta\mathbf{E}\times\Delta\mathbf{H}^*$, with $u_{\Delta E} = \tfrac{1}{4}\varepsilon|\Delta\mathbf{E}|^2$ and $u_{\Delta H} = \tfrac{1}{4}\mu|\Delta\mathbf{H}|^2$ [2]. The factor 2 matches Equation (1.39): a half-sized local divergence would not reproduce the integrated identity. Integrating over Ω and applying the divergence theorem yields

$$\int_\Gamma \hat{\mathbf{n}}\cdot\mathbf{S}_\Delta\,dS = -2\mathrm{j}\omega\int_\Omega (u_{\Delta H} - u_{\Delta E})\,dV \tag{1.39}$$

when $\Delta\mathbf{E}, \Delta\mathbf{H}$ are smooth enough for the classical divergence theorem on Ω [2]. Equation (1.39) does not in isolation prove existence or global regularity; it constrains the difference field.

Three conditions govern the arguments below. The difference field is source-free. Dissipation, when present, is passive: isotropic loss with $\varepsilon'', \mu'' \geq 0$ and/or passive scalar impedance with $\mathrm{Re}(Z_s) > 0$ on prescribed sheets. On open exteriors, the completion must carry outgoing selection Eq. (1.35) when flux is read at infinity. None of these items proves existence; each limits what a nontrivial $(\Delta\mathbf{E}, \Delta\mathbf{H})$ may do under the difference Poynting balance.

For real ε and μ on Ω, Equation (1.39) has a purely imaginary right-hand side, so its real part gives $\mathrm{Re}\{\int_\Gamma \hat{\mathbf{n}}\cdot\mathbf{S}_\Delta\,dS\} = 0$ for every difference field. A lossless interior therefore does not by itself forbid nontrivial source-free modes at cavity eigenfrequencies [2]. When dissipation enters through complex isotropic ε, μ on the source-free difference problem, the same identity yields

$$\nabla\cdot\mathbf{S}_\Delta = \frac{\mathrm{j}\omega}{2}\left(\varepsilon^*|\Delta\mathbf{E}|^2 - \mu|\Delta\mathbf{H}|^2\right), \tag{1.40}$$

which reduces to Equation (1.38) when ε and μ are real [2, 6]. When dissipation is included through $\varepsilon = \varepsilon' - \mathrm{j}\varepsilon''$ and/or $\mu = \mu' - \mathrm{j}\mu''$ with $\varepsilon'', \mu'' \geq 0$ (passive loss under $\exp(+\mathrm{j}\omega t)$),

$$\mathrm{Re}\{\nabla \cdot \mathbf{S}_\Delta\} = -\frac{\omega}{2}\left(\varepsilon''|\Delta\mathbf{E}|^2 + \mu''|\Delta\mathbf{H}|^2\right)$$

for isotropic local ε, μ in the interior (volume divergence, not a surface flux density) [2, 6]. For later reference, integration over Ω and the divergence theorem yield

$$\mathrm{Re}\left\{\int_\Gamma \hat{\mathbf{n}} \cdot \mathbf{S}_\Delta \, dS\right\} = -\frac{\omega}{2}\int_\Omega \left(\varepsilon''|\Delta\mathbf{E}|^2 + \mu''|\Delta\mathbf{H}|^2\right) dV \leq 0,$$

with equality forcing $\Delta\mathbf{E} = \mathbf{0}$ on open subsets where $\varepsilon'' > 0$ and $\Delta\mathbf{H} = \mathbf{0}$ on open subsets where $\mu'' > 0$, subject to the integrated balance and boundary data [2, 6]. On an open region $\Omega_\varepsilon \subset \Omega$ with $\varepsilon'' > 0$ and finite nonsingular μ, the volume integral forces $\Delta\mathbf{E} = \mathbf{0}$ almost everywhere on Ω_ε; Faraday's law $\nabla \times \Delta\mathbf{E} = -\mathrm{j}\omega\mu\Delta\mathbf{H}$ then gives $\Delta\mathbf{H} = \mathbf{0}$ there in the distributional sense under the stated nondegeneracy of μ [2, 6]. The symmetric case with $\mu'' > 0$ on Ω_μ uses the conjugated Ampère–Maxwell row to annihilate $\Delta\mathbf{H}$ first and then $\Delta\mathbf{E}$ on Ω_μ. These are *local* conclusions on the dissipative subdomains; extending $\Delta\mathbf{E} = \Delta\mathbf{H} = \mathbf{0}$ from a proper dissipative subset to all of a connected domain still requires a separate unique-continuation argument unless passive dissipation covers the whole connected volume or the boundary data already exclude nontrivial modes [2, 6].

On a bounded lossy domain with homogeneous PEC or PMC data on all of Γ, the real surface flux of $\mathbf{S}_\Delta$ vanishes. If $\varepsilon'' > 0$ throughout a connected Ω with finite nonsingular μ, or $\mu'' > 0$ throughout with finite nonsingular ε, the local argument above yields $\Delta\mathbf{E} = \Delta\mathbf{H} = \mathbf{0}$ throughout that volume; when loss occupies only a proper subset of a connected domain, global vanishing on the whole domain is not automatic from the integral identity alone [2]. Passive impedance sheets on Γ_Z enter through Eqs. (1.31)–(1.33); for $\mathrm{Re}(Z_s) > 0$, $P_{\mathrm{abs}} \geq 0$ and $\mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{ext}} \cdot \mathbf{S}\} = P_{\mathrm{abs}}$ on Γ_Z [2, 6]. The standard exception remains a *lossless* closed cavity at an eigenfrequency, which may support a nontrivial homogeneous mode [2, 10].

Antennas and scatterers are posed on unbounded exteriors. Equation (1.39) must then be combined with outgoing selection Eq. (1.35). That condition excludes incoming completion at infinity but does not, by itself, force a nontrivial difference field to vanish in the far zone [10, 6]. The exterior class used below takes Ω_{ext} as the complement of a bounded obstacle $\mathcal{O}$ with piecewise smooth boundary $\Gamma = \partial\mathcal{O}$, filled with homogeneous lossless vacuum (ε_0, μ_0). Scalar passive impedance on Γ is the third line of Eq. (1.31) with $\mathrm{Re}(Z_s) > 0$, using $\hat{\mathbf{n}}_{\mathrm{body}}$ and Eq. (1.30). For a source-free difference field $(\Delta\mathbf{E}, \Delta\mathbf{H})$ in Ω_{ext}, Eqs. (1.32) and (1.33) give

$$P_{\mathrm{abs},\Delta} = \tfrac{1}{2}\,\mathrm{Re}(Z_s)\,|\Delta\mathbf{H}_t|^2 \geq 0, \qquad \mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{ext}} \cdot \mathbf{S}_\Delta\} = +P_{\mathrm{abs},\Delta} \geq 0 \quad \text{on } \Gamma.$$

Integrating the lossless form of Equation (1.38) over a truncated exterior domain $\Omega_{\mathrm{ext},R}$ bounded by Γ and a large sphere S_R and taking the real part of Eq. (1.39) with outward normal $\hat{\mathbf{n}}_{\mathrm{ext}}$ on Γ yields, because the volume is source-free and lossless,

$$\mathrm{Re}\left\{\int_{S_R} \hat{\mathbf{r}} \cdot \mathbf{S}_\Delta \, dS\right\} + \mathrm{Re}\left\{\int_\Gamma \hat{\mathbf{n}}_{\mathrm{ext}} \cdot \mathbf{S}_\Delta \, dS\right\} = 0. \tag{1.41}$$

On Γ_Z, Eqs. (1.32) and (1.33) applied to $(\Delta\mathbf{E}, \Delta\mathbf{H})$ give

$$\mathrm{Re}\{\hat{\mathbf{n}}_{\mathrm{ext}} \cdot \mathbf{S}_\Delta\} = +P_{\mathrm{abs},\Delta} = \tfrac{1}{2}\,\mathrm{Re}(Z_s)\,|\Delta\mathbf{H}_t|^2 \geq 0 \quad \text{on } \Gamma_Z,$$

so the inner boundary contribution in Equation (1.41) is *nonnegative*. On a sphere at finite radius R, $\mathrm{Re}\{\hat{\mathbf{r}} \cdot \mathbf{S}_\Delta\}$ need not be pointwise nonnegative everywhere: reactive structure in the difference field can carry imaginary power through the shell. One therefore passes to the limit

$R \to \infty$ before interpreting radiated power. With outgoing selection Eq. (1.35), define the far-field pattern

$$\mathbf{E}_\infty(\theta,\phi) = \lim_{R\to\infty} R\, e^{+\mathrm{j}k_0 R}\, \mathbf{E}_\Delta(R,\theta,\phi)$$

and the limiting real outward power

$$\mathcal{P}_\infty = \lim_{R\to\infty} \mathrm{Re}\Big\{ \int_{S_R} \hat{\mathbf{r}} \cdot \mathbf{S}_\Delta \, dS \Big\} = \frac{1}{2\eta_0} \int_{4\pi} |\mathbf{E}_{\infty,t}|^2 \, d\Omega \geq 0.$$

Passing to the limit in Equation (1.41) yields

$$\mathcal{P}_\infty + \frac{1}{2}\,\mathrm{Re}(Z_s) \int_{\Gamma_Z} |\Delta\mathbf{H}_t|^2 \, dS = 0$$

for scalar passive Z_s with $\mathrm{Re}\, Z_s > 0$ on Γ_Z. Hence $\mathbf{E}_\infty = \mathbf{0}$ and $\Delta\mathbf{H}_t = \mathbf{0}$ on Γ_Z, whence $\Delta\mathbf{E}_t = \mathbf{0}$ on Γ_Z by Equation (1.31). In source-free homogeneous vacuum each Cartesian component of $\Delta\mathbf{E}$ satisfies $(\nabla^2 + k_0^2)u = 0$ with $k_0 = \omega\sqrt{\varepsilon_0\mu_0}$, from $\nabla\cdot\Delta\mathbf{E} = 0$ and $\nabla\times\nabla\times\Delta\mathbf{E} = k_0^2\Delta\mathbf{E}$. Outgoing selection Eq. (1.35) restricts the far field to $\mathbf{E}_\Delta \sim \mathbf{E}_\infty(\theta,\phi)e^{-\mathrm{j}k_0 r}/r$; $\mathbf{E}_\infty = \mathbf{0}$ forces every outgoing spherical-mode coefficient to vanish, hence $\Delta\mathbf{E} = \mathbf{0}$ in the connected exterior Ω_{ext} away from Γ under piecewise smooth obstacle regularity and the radiation condition stated above [10, 6]. Faraday's law $\nabla\times\Delta\mathbf{E} = -\mathrm{j}\omega\mu_0\Delta\mathbf{H}$ then gives $\Delta\mathbf{H} = \mathbf{0}$ in the same domain. This Rellich–Sommerfeld argument closes uniqueness of the *homogeneous difference problem* in the scalar passive impedance class with $\hat{\mathbf{n}}_{\mathrm{ext}} = -\hat{\mathbf{n}}_{\mathrm{body}}$; it does not by itself assert existence or well-posedness of the inhomogeneous scattering problem in a named function space [10, 6]. Colton–Kress–Hsiao establish existence and uniqueness for a broader impedance boundary-value formulation whose hypotheses and sign conventions require independent matching to the present $\exp(+\mathrm{j}\omega t)$ data; they are cited as supporting literature, not as equation-for-equation verified in this chapter without primary-text inspection [16]. Nonlocal, anisotropic, or higher-order impedance operators lie outside the scalar passive class treated here [2].

1.1.5 Energy, linear momentum, and Maxwell stress tensor

Energy transport and mechanical force are not independent postulates bolted onto Maxwell's equations. On a declared control volume, the curl–divergence structure of $(\mathbf{E},\mathbf{H})$ yields the Poynting identity, the Lorentz force density, and the symmetric Maxwell stress tensor from which linear momentum and, in Subsection 1.1.6, angular momentum follow [4, 3]. This subsection develops the instantaneous and harmonic energy balances; the momentum balances displayed here prepare the stress-moment integrals used later for torque. Let V be a control volume with outward unit normal $\hat{\mathbf{n}}$ on ∂V; let V_m enclose the matter whose force or torque is evaluated; let Γ_R be a predominantly radiative shell when radiated power or flux is read [2]. Finite surface integrals require the regularity hypotheses of Subsection 1.0.4 on the same volume—Eq. (1.4) alone does not supply every trace needed later.

Start with real-time fields in vacuum. Divergence of $\mathbf{E}\times\mathbf{H}$ splits into the curls of $\mathbf{E}$ and $\mathbf{H}$; substituting Maxwell's equations converts that product rule into a balance between impressed work, stored energy, and Poynting outflow:

$$\nabla\cdot(\mathbf{E}\times\mathbf{H}) = -\mathbf{J}_{\mathrm{imp}}\cdot\mathbf{E} - \frac{\partial}{\partial t}\left(\frac{\varepsilon_0}{2}|\mathbf{E}|^2 + \frac{\mu_0}{2}|\mathbf{H}|^2\right), \tag{1.42}$$

where $\mathbf{J}_{\mathrm{imp}}$ is impressed current density [2]. We define instantaneous Poynting vector $\mathbf{s} = \mathbf{E}\times\mathbf{H}$ and energy density $u = \frac{1}{2}(\varepsilon_0|\mathbf{E}|^2 + \mu_0|\mathbf{H}|^2)$. It follows that $\nabla\cdot\mathbf{s} + \partial u/\partial t + \mathbf{J}_{\mathrm{imp}}\cdot\mathbf{E} = 0$. The term $\mathbf{J}_{\mathrm{imp}}\cdot\mathbf{E}$ is power density at which the electromagnetic field performs work on impressed current per unit volume; $\nabla\cdot\mathbf{s}$ is net energy outflow from an infinitesimal volume. Integrating over volume V and applying the divergence theorem yields the power balance through ∂V [4].

Instantaneous transport uses real fields: $\mathbf{s} = \mathbf{E} \times \mathbf{H}$, $\mathbf{g}_{\mathrm{em}} = \varepsilon_0\, \mathbf{E} \times \mathbf{B}$, and $\mathbf{T}^{(i)}$ in Eqs. (1.49)–(1.50) [3, 4]. Harmonic phasors use $\mathbf{S}_{\mathrm{c}} = \frac{1}{2}\mathbf{E} \times \mathbf{H}^*$, $\langle \mathbf{S} \rangle = \mathrm{Re}\, \mathbf{S}_{\mathrm{c}}$, and cycle-averaged stress $\langle \mathbf{T} \rangle$ of Equation (1.53) with $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ [2]. The two descriptions are linked by $\exp(+\mathrm{j}\omega t)$ but must not be interchanged when reading reactive storage or radiative flux.

Harmonic steady state replaces time derivatives by $+\mathrm{j}\omega$ on phasors. Cycle averages of products $\mathbf{E}(t) \cdot \mathbf{H}(t)$ then collapse to $\mathbf{S}_{\mathrm{c}} = \frac{1}{2}\mathbf{E} \times \mathbf{H}^*$, $\langle \mathbf{S} \rangle = \mathrm{Re}\, \mathbf{S}_{\mathrm{c}}$, and the electric and magnetic storage terms u_E, u_H already used above. Divergence of $\mathbf{E} \times \mathbf{H}^*$ is expanded with the product rule; substituting $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0 \mathbf{H}$ and the conjugated Ampère–Maxwell row yields Equation (1.44) below [2, 6]. With $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0 \mathbf{H}$ and $\nabla \times \mathbf{H} = \mathbf{J}_{\mathrm{imp}} + \mathrm{j}\omega\varepsilon_0 \mathbf{E}$, and $\nabla \times \mathbf{H}^* = \mathbf{J}_{\mathrm{imp}}^* - \mathrm{j}\omega\varepsilon_0 \mathbf{E}^*$,

$$\nabla \cdot (\mathbf{E} \times \mathbf{H}^*) = -\mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^* + \mathrm{j}\omega \big(\varepsilon_0 \mathbf{E} \cdot \mathbf{E}^* - \mu_0 \mathbf{H}^* \cdot \mathbf{H}\big). \tag{1.43}$$

The storage difference satisfies $\varepsilon_0 \mathbf{E} \cdot \mathbf{E}^* - \mu_0 \mathbf{H}^* \cdot \mathbf{H} = 4(u_E - u_H)$ [2]. Dividing Equation (1.43) by two then yields

$$\nabla \cdot \mathbf{S}_{\mathrm{c}} = -\frac{1}{2}\mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^* - 2\mathrm{j}\omega\,(u_H - u_E)\,. \tag{1.44}$$

Physically, Equation (1.44) states that net complex power leaving a differential volume equals electromagnetic work on impressed current plus harmonic exchange between electric and magnetic storage [4]. The real part $\nabla \cdot \mathrm{Re}(\mathbf{S}_{\mathrm{c}})$ balances impressed work; the imaginary part $\nabla \cdot \mathrm{Im}(\mathbf{S}_{\mathrm{c}})$ tracks reactive exchange in the complex-power balance and is not, without further definition, a unique local stored-energy density [2]. Momentum in material media involves additional stress–energy forms (Abraham, Minkowski); vacuum-side traction and angular flux use the Maxwell stress of Eq. (1.53) [8, 9, 2].

$$\begin{aligned} \nabla \cdot \mathrm{Re}(\mathbf{S}_{\mathrm{c}}) &= -\frac{1}{2}\,\mathrm{Re}\Big(\mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^*\Big)\,, \\ \nabla \cdot \mathrm{Im}(\mathbf{S}_{\mathrm{c}}) &= -\frac{1}{2}\,\mathrm{Im}\Big(\mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^*\Big) - 2\omega(u_H - u_E). \end{aligned} \tag{1.45}$$

$$\int_{\partial V} \mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{n}}\, dS = -\frac{1}{2}\int_V \mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^*\, dV - 2\mathrm{j}\omega \int_V (u_H - u_E)\, dV. \tag{1.46}$$

Let $V \subset \Omega$ be a control volume with outward normal $\hat{\mathbf{n}}$ on ∂V [2]. The surface integral is net complex power through ∂V; the volume terms are impressed work and reactive storage imbalance inside V [4]. Integrating the local balance over any finite region therefore relates power crossing the boundary to source work and stored reactive energy within the volume—the finite-volume form of Poynting's theorem [2].

Mechanical force on matter follows from the Lorentz law,

$$\mathbf{f}_{\mathrm{matter}} = \rho_{\mathrm{phys}} \mathbf{E} + \mathbf{J}_{\mathrm{phys}} \times \mathbf{B}, \tag{1.47}$$

where ρ_{phys} and $\mathbf{J}_{\mathrm{phys}}$ are the charge and current densities of the carriers that experience the force ($\mathrm{N\,m^{-3}}$) [3, 2]. In Eqs. (1.6), ρ is the charge density in Gauss's law and $\mathbf{J}_{\mathrm{imp}}$ is the impressed current in Ampère's law—the mathematical source pair $(\rho, \mathbf{J}_{\mathrm{imp}})$ that closes Maxwell's equations [3, 2]. **Route A.** When impressed sources model the actual charge carriers on their support, set $\rho_{\mathrm{phys}} = \rho$ and $\mathbf{J}_{\mathrm{phys}} = \mathbf{J}_{\mathrm{imp}}$. The Lorentz force density $\mathbf{f}_{\mathrm{matter}}$ then coincides with the source-exchange density $\mathbf{f}_{\mathrm{src}}$ used in the momentum balance.

Route B. When $(\rho, \mathbf{J}_{\mathrm{imp}})$ is a mathematical feed that does not equal the carrier densities on a load, $\mathbf{f}_{\mathrm{matter}}$ must be evaluated with the physical $(\rho_{\mathrm{phys}}, \mathbf{J}_{\mathrm{phys}})$ of the material. Force and torque on a body in source-free vacuum are read from traction $\oint_{\partial V_b} \mathbf{T}^{(i)} \cdot \hat{\mathbf{n}}\, dS$ on a closed surface in the exterior field. The term $-\frac{1}{2}\mathbf{E} \cdot \mathbf{J}_{\mathrm{imp}}^*$ in the complex Poynting identity records impressed-source exchange; it is not, by itself, mechanical work on an arbitrary body [4, 2, 6]. The symmetric vacuum stress tensor Eqs. (1.49)–(1.53) and the local identity below are derived for regions where $(\mathbf{E}, \mathbf{B})$ obey vacuum constitutive relations ε_0, μ_0 and the displayed curl–divergence structure; they




Figure 1.10: Differential surface element with outward normal $\hat{\mathbf{n}}$: cycle-averaged traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ on a material-enclosing control volume V_m [3, 2].

are not asserted pointwise inside arbitrary macroscopic media without an applicable material stress model [2]. Using Maxwell's equations in such a vacuum/source region to eliminate the same $(\rho, \mathbf{J}_{\text{imp}})$ as in Equation (1.6), in favour of $(\mathbf{E}, \mathbf{B})$, one forms the electromagnetic momentum density

$$\mathbf{g}_{\text{em}} = \varepsilon_0 \, \mathbf{E} \times \mathbf{B} = \mathbf{s}/c^2, \tag{1.48}$$

where $\mathbf{s} = \mathbf{E} \times \mathbf{H}$ is the instantaneous Poynting vector [3, 4]. In this setting, radiation pressure on an absorber is momentum delivered through $\mathbf{T}^{(i)}$ or, in harmonic form, through $\langle \mathbf{T} \rangle$ [3, 2]. The instantaneous symmetric Maxwell stress in Cartesian components is

$$T_{ij}^{(i)} = \varepsilon_0 \Big(E_i E_j - \tfrac{1}{2} \delta_{ij} E^2 \Big) + \frac{1}{\mu_0} \Big(B_i B_j - \tfrac{1}{2} \delta_{ij} B^2 \Big), \tag{1.49}$$

with $E^2 = \mathbf{E} \cdot \mathbf{E}$ and $B^2 = \mathbf{B} \cdot \mathbf{B}$ [3, 2]. Index contraction with Gauss's and Ampère's laws yields the field momentum balance

$$\frac{\partial g_i}{\partial t} + f_{\text{src},i} = \partial_j T_{ij}^{(i)}, \tag{1.50}$$

equivalently $\partial_t \mathbf{g}_{\text{em}} + \mathbf{f}_{\text{src}} = \nabla \cdot \mathbf{T}^{(i)}$, where

$$\mathbf{f}_{\text{src}} = \rho \mathbf{E} + \mathbf{J}_{\text{imp}} \times \mathbf{B} \tag{1.51}$$

uses the same ρ and $\mathbf{J}_{\text{imp}}$ as Eqs. (1.6) [3, 11]. With real fields $\mathbf{E}(\mathbf{r}, t) = \text{Re}\{\mathbf{E}(\mathbf{r}) e^{+\text{j}\omega t}\}$ and similarly for $\mathbf{H}$, $\mathbf{B}$, $\mathbf{J}_{\text{imp}}$, and ρ, cycle averaging yields $\langle \mathbf{f}_{\text{src}} \rangle = \frac{1}{2} \text{Re}\{\rho \mathbf{E}^* + \mathbf{J}_{\text{imp}} \times \mathbf{B}^*\}$, distinct from the instantaneous product $\mathbf{f}_{\text{src}} = \rho \mathbf{E} + \mathbf{J}_{\text{imp}} \times \mathbf{B}$ [2]. Equation (1.50) is field–source bookkeeping; $\mathbf{f}_{\text{matter}}$ equals $\mathbf{f}_{\text{src}}$ only under Route A on the relevant support. Throughout the stress, Poynting, and torque balances of Subsections 1.1.5–1.1.6, V denotes a control volume enclosing the matter whose mechanical force or torque is being evaluated, and $\hat{\mathbf{n}}$ is the unit normal outward from V [2]. Integrating over that V with outward normal $\hat{\mathbf{n}}$,

$$\mathbf{F}_{\text{matter}} = \int_V \mathbf{f}_{\text{matter}} \, dV = \int_{\partial V} \mathbf{T}^{(i)} \cdot \hat{\mathbf{n}} \, dS - \frac{d}{dt} \int_V \mathbf{g}_{\text{em}} \, dV \tag{1.52}$$

when V lies in a vacuum/source region where Equation (1.50) holds and Route A applies throughout V, so $\mathbf{f}_{\text{matter}} = \mathbf{f}_{\text{src}}$ there [2]. Under Route B, $\int_V \mathbf{f}_{\text{src}} \, dV$ is source-exchange bookkeeping on the chosen volume, while mechanical force on a body is $\mathbf{F} = \oint_{\partial V_b} \mathbf{T}^{(i)} \cdot \hat{\mathbf{n}} \, dS$ (minus storage) for a closed ∂V_b in source-free vacuum enclosing that body, with traction evaluated on the vacuum field side [2, 6]. Traction must not be identified with momentum density $\mathbf{g}_{\text{em}}$ or with Poynting flux $\mathbf{S}_{\text{c}}$.

On the same Maxwell pair, figure 1.10 shows cycle-averaged traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ on a material-enclosing volume V_m.

For harmonic fields with $\exp(+\text{j}\omega t)$, time averaging yields the cycle-averaged dyadic

$$\langle \mathbf{T} \rangle = \frac{1}{2} \text{Re} \Big[\varepsilon_0 \, \mathbf{E}\mathbf{E}^* + \mu_0 \, \mathbf{H}\mathbf{H}^* - \frac{1}{2} \mathbf{I} \left(\varepsilon_0 \, \mathbf{E} \cdot \mathbf{E}^* + \mu_0 \, \mathbf{H} \cdot \mathbf{H}^* \right) \Big], \tag{1.53}$$

where $\mathbf{I}$ is the identity dyad and juxtaposition such as $\mathbf{E}\mathbf{E}^*$ is dyadic product. Operand by operand, the first two dyads are directional field intensity contributions, while the isotropic subtraction




Figure 1.11: Uniform plane wave in $+\hat{\mathbf{z}}$ on field control volume V_f ($z < 0$): outward interface normal $\hat{\mathbf{n}} = +\hat{\mathbf{z}}$ at $z = 0$; perfect absorber receives radiation pressure $|\langle \mathbf{S} \rangle|/c$, perfect reflector at normal incidence $2|\langle \mathbf{S} \rangle|/c$; transverse $\mathbf{E}$, $\mathbf{H}$, and $\langle \mathbf{S} \rangle$ remain right-handed [2, 3].

term $\frac{1}{2}\mathbf{I}(\cdots)$ removes trace pressure so that directional tractions are represented correctly. The real-part operator keeps physically observable time-averaged transfer [2]. Together, $\mathbf{S}_{\mathrm{c}}$ and $\langle \mathbf{S} \rangle$ give energetic flux densities and $\langle \mathbf{T} \rangle$ yields cycle-averaged mechanical traction; Subsection 1.1.6 uses $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ and stress-moment surface density $\langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}$ [4].

On a material-enclosing volume V_m, traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ is cycle-averaged force per unit area on matter, and $\mathbf{F} = \int_{\partial V_m} \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}\, dS$ [2]. For a plane wave in $+\hat{\mathbf{z}}$ incident on a perfectly absorbing sheet at $z = 0$ with vacuum control volume $z < 0$, the outward unit normal on the interface is $\hat{\mathbf{n}} = +\hat{\mathbf{z}}$. Radiation pressure on the absorber is $p_{\mathrm{abs}} = |\langle \mathbf{S} \rangle|/c$. A perfect reflector at normal incidence receives $p_{\mathrm{refl}} = 2|\langle \mathbf{S} \rangle|/c$ [2, 3].

Example 1.5 (Radiation pressure on an absorbing surface)**.** With $\langle \mathbf{S} \rangle = (|E_0|^2/2\eta_0)\hat{\mathbf{z}}$ from Eq. (1.55), $p_{\mathrm{abs}} = |E_0|^2/(2\eta_0 c)$. If $|E_0| = 100\,\mathrm{V/m}$, then $\langle S_z \rangle = 13.2\,\mathrm{W/m^2}$ and $p_{\mathrm{abs}} \approx 4.4 \times 10^{-8}\,\mathrm{N/m^2}$; a perfect reflector doubles the pressure [2]. The same result follows from the momentum balance: in vacuum $\langle \mathbf{g}_{\mathrm{em}} \rangle = \mathrm{Re}(\mathbf{S}_{\mathrm{c}})/c^2$ (Eq. (1.61)), so the cycle-averaged momentum flux through the interface is $\langle \mathbf{g}_{\mathrm{em}} \rangle \cdot \hat{\mathbf{n}}$ times c when the wave is absorbed; specular reversal reverses $\langle \mathbf{g}_{\mathrm{em}} \rangle$ and doubles the magnitude of the momentum delivered to the reflector [2].

Integrating the momentum flux over a control volume yields the harmonic steady-state balance

$$\langle \mathbf{f}_{\mathrm{src}} \rangle = \nabla \cdot \langle \mathbf{T} \rangle, \tag{1.54}$$

where $\langle \mathbf{f}_{\mathrm{src}} \rangle = \frac{1}{2}\,\mathrm{Re}\{\rho \mathbf{E}^* + \mathbf{J}_{\mathrm{imp}} \times \mathbf{B}^*\}$ is the cycle-averaged source-exchange density (distinct from the instantaneous $\mathbf{f}_{\mathrm{src}}$ of Equation (1.51)) and $\partial_t \langle \mathbf{g}_{\mathrm{em}} \rangle = \mathbf{0}$ on the harmonic branch [2]. Eq. (1.54) is the steady phasor limit of Eq. (1.50); mechanical force on carriers remains $\mathbf{f}_{\mathrm{matter}}$ of Eq. (1.47), equal to $\mathbf{f}_{\mathrm{src}}$ only under Route A.

The plane wave provides the simplest standard example in which energy flow and momentum flow become visibly parallel [4, 2]. Classically, for an outgoing wave with $\mathbf{k} = k\hat{\mathbf{z}}$ and transverse electric field $\mathbf{E} = E_0 e^{-\mathrm{j}kz}\hat{\mathbf{x}}$,

$$\mathbf{H} = \frac{1}{\eta_0}\,\hat{\mathbf{k}} \times \mathbf{E}, \qquad \langle \mathbf{S} \rangle = \frac{|\mathbf{E}|^2}{2\eta_0}\,\hat{\mathbf{k}}, \tag{1.55}$$

where $\eta_0 = \sqrt{\mu_0/\varepsilon_0}$ is the vacuum intrinsic impedance [2]. The time-averaged Poynting vector and normal Maxwell traction then point along $\hat{\mathbf{k}}$, with radiation pressure $|\mathbf{t}| = |\langle \mathbf{S} \rangle|/c$ on the same Maxwell branch. In structured near fields energetic and mechanical transport does not necessarily be co-directed—a common situation in reactive storage zones [2].

For a Maxwell solution branch fixed by impressed sources, interface data, boundary completion, and vacuum constitutive law on the integration region, Eqs. (1.44) and (1.53) are quadratic functionals of the same $(\mathbf{E}, \mathbf{H})$. Poynting and stress surface integrals on ∂V are defined only when the corresponding integrands are integrable on that surface—typically when $(\mathbf{E}, \mathbf{H})$ has sufficient regularity on V (Subsection 1.0.4); Equation (1.4) on V is helpful but not sufficient in isolation, and finite P_{rad} on a shell S_R alone does not replace those hypotheses [2]. Both balances then describe transport generated by one field state, which is the common basis for the angular-flux discussion later in the chapter [2].

Table 1.1: Fundamental harmonic electromagnetic quantities in vacuum (cycle-averaged where noted).

Quantity	Definition	Physical meaning	Conservation law	Units
$\mathbf{S}_{\mathrm{c}}$, $\langle\mathbf{S}\rangle$	$\mathbf{S}_{\mathrm{c}} = \frac{1}{2}\mathbf{E}\times\mathbf{H}^{*}$, $\langle\mathbf{S}\rangle = \mathrm{Re}\,\mathbf{S}_{\mathrm{c}}$	Energy flux density	Poynting theorem	$\mathrm{W\,m^{-2}}$
$\mathbf{g}_{\mathrm{em}}$, $\langle\mathbf{g}_{\mathrm{em}}\rangle$	$\mathbf{g}_{\mathrm{em}} = \varepsilon_0\,\mathbf{E}\times\mathbf{B}$; $\langle\mathbf{g}_{\mathrm{em}}\rangle = \varepsilon_0\mu_0\langle\mathbf{S}\rangle$	Instantaneous vs cycle-averaged momentum density	Momentum balance with $\mathbf{T}^{(i)}$ / $\langle\mathbf{T}\rangle$	$\mathrm{kg\,m^{-2}\,s^{-1}}$
$\mathbf{T}^{(i)}$, $\langle\mathbf{T}\rangle$	Eqs. (1.49), (1.53)	Instantaneous and cycle-averaged Maxwell stress tensors	$\langle\mathbf{f}_{\mathrm{src}}\rangle = \nabla\cdot\langle\mathbf{T}\rangle$ (steady; Eq. (1.54))	$\mathrm{N\,m^{-2}}$
$\mathbf{j}_{\mathrm{em}}$, $\langle\mathbf{j}_{\mathrm{em}}\rangle$	$\mathbf{j}_{\mathrm{em}} = \mathbf{r}\times\mathbf{g}_{\mathrm{em}}$; $\langle\mathbf{j}_{\mathrm{em}}\rangle = \mathbf{r}\times\langle\mathbf{g}_{\mathrm{em}}\rangle$	Instantaneous vs cycle-averaged angular-momentum density	Angular-momentum balance	$\mathrm{kg\,m^{-1}\,s^{-1}}$
$\mathbf{M}^{(i)}$, $\langle\mathbf{M}\rangle$	$\mathbf{M}^{(i)} = \mathbf{r}\times\mathbf{T}^{(i)}$; $\langle\mathbf{M}\rangle = \mathbf{r}\times\langle\mathbf{T}\rangle$	Stress-moment density; surface density $\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}$	$\boldsymbol{\mathcal{T}}_J = \oint\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}\,dS$	$\mathrm{N\,m^{-1}}$ ($\mathbf{M}^{(i)}$, $\langle\mathbf{M}\rangle$); $\mathrm{N\,m}$ ($\boldsymbol{\mathcal{T}}_J$)

Table 1.2: Four angular concepts that answer different physical questions.

Concept	Physical question answered
Azimuthal phase $e^{\mathrm{j}m\phi}$	How is the transverse field organized in angle on a plane or chart?
Polarization / helicity	How does the electric vector rotate in the transverse plane?
Angular-momentum density $\mathbf{j}_{\mathrm{em}}$	Where is rotational action stored in the harmonic field at a point?
Angular-momentum flux $\boldsymbol{\Phi}_{J,\mathrm{out}}$	What signed angular-momentum transport crosses a closed radiative shell?

Table 1.3: Near, transition, and far zones for an electric dipole ($r > 0$, source-free exterior).

Region	Dominant r-dependence	Interpretation	Poynting character	Angular-momentum note
Near ($kr \ll 1$)	r^{-3}, r^{-2}	Static / induction structure	Large reactive $\mathrm{Im}(\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}})$	Near-zone stress structure; not identical to stored energy
Transition ($kr \sim 1$)	Mixed	Handover to radiation	$\lvert P_{\mathrm{reac}}(r)\rvert/P_{\mathrm{rad}}$ large	Shell choice matters for reading flux
Far ($kr \gg 1$)	r^{-1}	Outgoing wave	P_{rad} fixed on nested shells	$\mathbf{E}$, $\mathbf{H}$ transverse; $U(\theta)\propto\sin^2\theta$

Eqs. (1.44) and (1.53) presuppose harmonic averaging in passive media with local ε, μ. Dispersive, anisotropic, or strongly time-varying constitutive laws modify both storage terms and traction operators. Active boundaries can inject net gain that invalidates the passive-balance route used in Subsection 1.1.4 [2].

Figure 1.12 illustrates how the reactive–radiative distinction enters these balances.

Figure 1.12 marks three concentric evaluation shells at $kr = 0.5$, $kr = 3$, and $kr = 10$ for an electrically small dipole ($k\ell \ll 1$). At $kr = 0.5$ reactive storage dominates: Equation (1.45) yields $\int_{4\pi}\mathrm{Re}(\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}})\,dS = P_{\mathrm{rad}} \ll \int_{4\pi}|\,\mathrm{Im}(\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}})|\,dS = |P_{\mathrm{reac}}|$, and traction on a small patch is oscillatory rather than proportional to P_{rad}/c. At $kr = 3$ the transition regime begins; at $kr = 10$ outward $\mathrm{Re}(\mathbf{S}_{\mathrm{c}})$ dominates and the shell supports the radiation-pressure and torque integrals of section 1.6.4 [2, 7]. The conservation law holds on any admissible closed surface; a predominantly radiative shell is preferred when the integral is to be read as outward radiated transport rather than local reactive exchange [7, 2].

Using the uniform plane-wave example of Subsection 1.1.1, take $\mathbf{S}_{\mathrm{c}} = (|E_0|^2/2\eta_0)\hat{\mathbf{z}}$ and




Figure 1.12: Concentric evaluation shells at $kr = 0.5$, $kr = 3$, and $kr = 10$ for a small dipole: reactive power exchange dominates on the inner shell, while outward $\langle \mathbf{S} \rangle$ and steady traction emerge on the radiative shell [2, 7].

evaluate power through a disk of radius a normal to $\hat{\mathbf{z}}$:

$$P(a) = \int_0^{2\pi} \int_0^a \mathrm{Re}(\mathbf{S}_c \cdot \hat{\mathbf{z}})\, \rho\, d\rho\, d\phi = \frac{\pi a^2 |E_0|^2}{2\eta_0}. \tag{1.56}$$

For a uniform plane wave, $P(a)$ in Equation (1.56) is the active power intercepted by a disk of radius a whose normal aligns with $\langle \mathbf{S} \rangle$ [4].

Within the harmonic vacuum class treated here, Eqs. (1.44) and (1.53) fix how power and linear momentum cross a surface. The next subsection takes the moment of that momentum balance about an origin and introduces $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ as the stress-moment density from which torque integrals are built [2].

1.1.6 Angular momentum conservation and torque balance

Linear momentum is already balanced by impressed force, stored electromagnetic momentum, and stress traction. Rotational balance asks how that linear transport appears about a chosen origin. Multiplying the index form of Equation (1.50) by $\varepsilon_{ijk} r_j$ and applying the Levi-Civita contraction gives, in index notation,

$$\varepsilon_{ijk}\, r_j (\partial_t g_k + f_{\mathrm{src},k} - \partial_l T_{kl}) = 0. \tag{1.57}$$

The product rule expands the stress term as

$$\varepsilon_{ijk}\, r_j\, \partial_l T_{kl} = \partial_l (\varepsilon_{ijk}\, r_j T_{kl}) - \varepsilon_{ijk}\, T_{kj}, \tag{1.58}$$

The remaining term $\varepsilon_{ijk} T_{kj}$ would represent torque density carried by an antisymmetric stress. The Maxwell tensor is symmetric ($T_{kj} = T_{jk}$), so $\varepsilon_{ijk} T_{kj} = 0$ and that contribution vanishes [3, 2]. Define the instantaneous stress-moment density $\mathbf{M}^{(i)} = \mathbf{r} \times \mathbf{T}^{(i)}$ and the angular-momentum density $\mathbf{j}_{\mathrm{em}} = \mathbf{r} \times \mathbf{g}_{\mathrm{em}}$. Equations (1.57) and (1.58) then combine to

$$\frac{\partial \mathbf{j}_{\mathrm{em}}}{\partial t} + \boldsymbol{\tau}_{\mathrm{src}} = \nabla \cdot \mathbf{M}^{(i)}, \tag{1.59}$$

with source-exchange torque density $\boldsymbol{\tau}_{\mathrm{src}} = \mathbf{r} \times \mathbf{f}_{\mathrm{src}}$ ($\mathrm{N\,m\,m^{-3}}$) obtained from the same ρ and $\mathbf{J}_{\mathrm{imp}}$ as Equation (1.50) [3, 2]. Mechanical torque on carriers is $\boldsymbol{\tau}_{\mathrm{matter}} = \mathbf{r} \times \mathbf{f}_{\mathrm{matter}}$ of Eq. (1.47); $\boldsymbol{\tau}_{\mathrm{src}} = \boldsymbol{\tau}_{\mathrm{matter}}$ only under Route A on the support where $\mathbf{f}_{\mathrm{src}} = \mathbf{f}_{\mathrm{matter}}$. The resultant mechanical torque $\mathbf{T}_{\mathrm{matter}} = \int_{V_m} \boldsymbol{\tau}_{\mathrm{matter}}\, dV$ ($\mathrm{N\,m}$) follows from Eq. (1.63) under Route A throughout V_m, or from the closed stress integral on ∂V_m in source-free vacuum under Route B (Eq. (1.64)) [2, 1]. In harmonic steady state with vanishing storage rate, $\mathbf{T}_{\mathrm{matter}} = \boldsymbol{\mathcal{T}}_J = -\boldsymbol{\Phi}_{J,\mathrm{out}}$ when the integration domain and route assumptions support that identification [1]. Eq. (1.59) is the instantaneous rotational counterpart of Eq. (1.50): stored field angular momentum changes when source-exchange torque density acts or when stress-moment flux diverges.

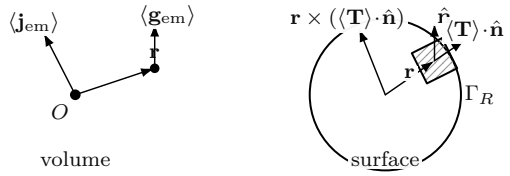


Figure 1.13: Cycle-averaged angular-momentum geometry: at observation point $\mathbf{r}$, $\langle \mathbf{g}_{\rm em} \rangle$ and $\langle \mathbf{j}_{\rm em} \rangle = \mathbf{r} \times \langle \mathbf{g}_{\rm em} \rangle$; on enclosing surface element with outward $\hat{\mathbf{n}}$, traction $\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ and stress moment $\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})$ that enters torque integrals [3, 1, 2].

For time-harmonic fields under $\exp(+\mathrm{j}\omega t)$, the same conservation laws may be cycle-averaged. Averaging Equation (1.50) yields $\partial_t \langle \mathbf{g}_{\rm em} \rangle + \langle \mathbf{f}_{\rm src} \rangle = \nabla \cdot \langle \mathbf{T} \rangle$, and averaging Eq. (1.59) yields

$$\frac{\partial \langle \mathbf{j}_{\rm em} \rangle}{\partial t} + \langle \boldsymbol{\tau}_{\rm src} \rangle = \nabla \cdot \langle \mathbf{M} \rangle, \tag{1.60}$$

where $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$, $\langle \mathbf{j}_{\rm em} \rangle = \mathbf{r} \times \langle \mathbf{g}_{\rm em} \rangle$, and $\langle \boldsymbol{\tau}_{\rm src} \rangle = \mathbf{r} \times \langle \mathbf{f}_{\rm src} \rangle$ [2]. Under Route A, $\langle \boldsymbol{\tau}_{\rm matter} \rangle = \langle \boldsymbol{\tau}_{\rm src} \rangle$ on the relevant support; under Route B, $\langle \boldsymbol{\tau}_{\rm src} \rangle$ remains field–source bookkeeping and mechanical torque on a body is read from the stress surface integral (Equation (1.64)). Angle brackets mark cycle-averaged harmonic quantities; $\mathbf{M}^{(i)}$ and $\langle \mathbf{M} \rangle$ are not interchangeable in the same displayed balance.

In linear isotropic vacuum the cycle-averaged momentum density is

$$\langle \mathbf{g}_{\rm em} \rangle = \varepsilon_0 \mu_0 \, \langle \mathbf{S} \rangle = \varepsilon_0 \mu_0 \, \mathrm{Re}(\mathbf{S}_{\rm c}), \tag{1.61}$$

and the corresponding angular-momentum density is

$$\langle \mathbf{j}_{\rm em} \rangle = \mathbf{r} \times \langle \mathbf{g}_{\rm em} \rangle. \tag{1.62}$$

Integrating Equation (1.60) over a control volume V_m with outward normal $\hat{\mathbf{n}}$ yields a valid volume identity only where that local balance holds pointwise (vacuum ε_0, μ_0 region with the same $(\rho, \mathbf{J}_{\rm imp})$ as Maxwell's equations). When V_m encloses matter, the surface balance Eqs. (1.64) and (1.66) on ∂V_m in source-free vacuum supply the mechanical resultant under Route B; the volume integral of $\langle \boldsymbol{\tau}_{\rm src} \rangle$ is then source-exchange bookkeeping, not automatic load torque [2]. With that scope,

$$\frac{d}{dt} \int_{V_m} \langle \mathbf{j}_{\rm em} \rangle \, dV + \int_{V_m} \langle \boldsymbol{\tau}_{\rm src} \rangle \, dV = \oint_{\partial V_m} \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}} \, dS. \tag{1.63}$$

The volume term $\int_{V_m} \langle \boldsymbol{\tau}_{\rm src} \rangle \, dV$ is the integrated source-exchange torque associated with $(\rho, \mathbf{J}_{\rm imp})$; it equals $\int_{V_m} \langle \boldsymbol{\tau}_{\rm matter} \rangle \, dV$ only under Route A throughout V_m [2]. The surface term is the stress moment $\boldsymbol{\mathcal{T}}_J = \oint \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}} \, dS$ [2]. At harmonic steady state with $\partial_t \langle \mathbf{j}_{\rm em} \rangle = \mathbf{0}$, Equation (1.64) and (1.66) give the *resultant* mechanical torque $\mathbf{T}_{\rm matter} = \boldsymbol{\mathcal{T}}_J - d\mathbf{J}_{\rm em,store}/dt = -\boldsymbol{\Phi}_{J,\rm out} - d\mathbf{J}_{\rm em,store}/dt$ when the enclosing surface lies in source-free vacuum and the route assumptions are satisfied (N m), not the local density $\boldsymbol{\tau}_{\rm src}$ or $\boldsymbol{\tau}_{\rm matter}$ [1]. Beth [1] measured load torque from net flux through the plate's control surface (incident minus transmitted), not from equating an impressed-source volume integral to load mechanics without that surface balance [2].

Figure 1.13 traces the cycle-averaged chain at a field point and on a surface element: $\langle \mathbf{g}_{\rm em} \rangle$, $\langle \mathbf{j}_{\rm em} \rangle = \mathbf{r} \times \langle \mathbf{g}_{\rm em} \rangle$, traction $\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$, and stress moment $\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})$ [3, 1].

The cycle-averaged stress-moment density $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ satisfies $\langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}} = \mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})$ on ∂V (stress-moment surface density). At harmonic steady state the cycle-averaged *resultant* mechanical torque on matter enclosed in V_m is

$$\mathbf{T}_{\rm matter} \equiv \int_{V_m} \langle \boldsymbol{\tau}_{\rm matter} \rangle \, dV = \oint_{\partial V_m} \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}} \, dS - \frac{d}{dt} \int_{V_m} \langle \mathbf{j}_{\rm em} \rangle \, dV = \oint_{\partial V_m} \mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}) \, dS - \frac{d}{dt} \int_{V_m} \langle \mathbf{j}_{\rm em} \rangle \, dV, \tag{1.64}$$

with outward $\hat{\mathbf{n}}$ on ∂V_m [1, 2]. The volume identity $\int_{V_m}\langle\boldsymbol{\tau}_{\text{matter}}\rangle\,dV = \int_{V_m}\langle\boldsymbol{\tau}_{\text{src}}\rangle\,dV$ holds under Route A throughout V_m. Under Route B, $\mathbf{T}_{\text{matter}}$ is obtained from the stress surface integral when ∂V_m lies in source-free vacuum. The stress moment on the same closed surface is

$$\boldsymbol{\mathcal{T}}_J \equiv \oint_{\partial V_m} \mathbf{r}\times(\langle\mathbf{T}\rangle\cdot\hat{\mathbf{n}})\,dS = \oint_{\partial V_m}\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}\,dS. \tag{1.65}$$

Equation (1.64) yields $\mathbf{T}_{\text{matter}} = \boldsymbol{\mathcal{T}}_J - d\mathbf{J}_{\text{em,store}}/dt$ with stored field angular momentum $\mathbf{J}_{\text{em,store}} = \int_{V_m}\langle\mathbf{j}_{\text{em}}\rangle\,dV$. Outward electromagnetic angular-momentum flux through ∂V_m is

$$\boldsymbol{\Phi}_{J,\text{out}} \equiv \dot{\mathbf{J}}_{\text{em,out}} = -\boldsymbol{\mathcal{T}}_J = -\oint_{\partial V_m}\mathbf{r}\times(\langle\mathbf{T}\rangle\cdot\hat{\mathbf{n}})\,dS, \tag{1.66}$$

so $\mathbf{T}_{\text{matter}} = -\boldsymbol{\Phi}_{J,\text{out}} - d\mathbf{J}_{\text{em,store}}/dt$. The stress moment $\boldsymbol{\mathcal{T}}_J$ is not the outward flux: outward transport is $\boldsymbol{\Phi}_{J,\text{out}} = -\boldsymbol{\mathcal{T}}_J$ [2, 1]. In harmonic steady state with $d\mathbf{J}_{\text{em,store}}/dt = \mathbf{0}$, $\mathbf{T}_{\text{matter}} = \boldsymbol{\mathcal{T}}_J = -\boldsymbol{\Phi}_{J,\text{out}}$; source and load resultants $\boldsymbol{\tau}_{\text{source}} = -\boldsymbol{\Phi}_{J,\text{out}}$ and $\boldsymbol{\tau}_{\text{load}} = +\boldsymbol{\Phi}_{J,\text{out}}$ apply only when the declared control surface encloses the support and the load intercepts the net flux [1].

Belinfante's 1940 field-theoretic analysis [13] showed that canonical energy–momentum and symmetric (kinetic) tensors differ by the divergence of a spin current. Correspondingly, total angular momentum $\int_V \mathbf{j}_{\text{em}}\,dV$ and closed-surface flux $\oint\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}\,dS$ are gauge invariant, whereas local spin–orbit splits are convention-dependent [13]. Classically, primary quantities are $\mathbf{j}_{\text{em}} = \mathbf{r}\times\mathbf{g}_{\text{em}}$ and stress-moment flux through $\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}$. A separate "residual spin" obtained by subtracting these identical definitions is not used. Detailed spin–orbit and canonical decompositions are representation-dependent and are developed where the modal basis is fixed (Chapter 3) [13, 12]. Beth's experiment on a wave plate under circular polarization [1] showed that the spin-associated part carries mechanical consequences; later orbital-indexed beam experiments [5] extended the vocabulary to spatial phase gradients; the measurable balance remains Equation (1.63) [13].

For torque about axis $\hat{\mathbf{u}}$, project Equation (1.63):

$$\tau_{\hat{\mathbf{u}}}(V_m) = \hat{\mathbf{u}}\cdot\left(\oint_{\partial V_m}\langle\mathbf{M}\rangle\cdot\hat{\mathbf{n}}\,dS - \frac{d}{dt}\int_{V_m}\langle\mathbf{j}_{\text{em}}\rangle\,dV\right), \tag{1.67}$$

which is the axis-projected form of Equation (1.63). Torque is therefore a projected surface integral of the stress moment, not a scalar read from a phase portrait [1, 2].

To compare directional concentration of stress moment on a sphere of radius r, note that $\langle\mathbf{M}\rangle\cdot\hat{\mathbf{r}}$ states how the local stress moment projects onto each solid-angle sector. A main-lobe concentration in $\|\langle\mathbf{M}\rangle\cdot\hat{\mathbf{r}}\|$ does not in isolation establish net torque about an axis until Equation (1.67) is evaluated with the declared origin and surface [2, 1].

Under the conventions adopted here, torque about axis $\hat{\mathbf{u}}$ is fixed once origin $\mathbf{r}_0$, axis $\hat{\mathbf{u}}$, and control surface ∂V entering $\langle\mathbf{M}\rangle = \mathbf{r}\times\langle\mathbf{T}\rangle$ are declared [2]. Changing any of these geometric choices rotates flux projections without altering the underlying Maxwell pair; published torque values therefore state $(\mathbf{r}_0, \hat{\mathbf{u}}, \partial V)$ alongside the field solution [1].

Consider two Maxwell field states $\mathcal{F}_1, \mathcal{F}_2$ at common radius r, with equal total radiated power but different directional stress-moment densities $\mathbf{M}_1\cdot\hat{\mathbf{r}} \neq \mathbf{M}_2\cdot\hat{\mathbf{r}}$ on a subset of 4π of nonzero measure. Equal P_{rad} constrains only the energetic integral; it does not fix the stress-moment distribution direction by direction. Projected torque through Eq. (1.67) can therefore differ between the two states even when their radiation patterns share the same total power [2].

Figure 1.14 contrasts symmetric radiation with azimuthally phased radiation on the same spherical shell: when the stress flux integrand possesses definite azimuthal symmetry about $\hat{\mathbf{z}}$, the solid-angle integral of $[\mathbf{r}\times(\langle\mathbf{T}\rangle\cdot\hat{\mathbf{n}})]\cdot\hat{\mathbf{z}}$ may vanish even though local phase structure is visible on a near-field display—the symmetry argument Beth exploited for circular polarization [1, 2].

For a matter-enclosing control volume V_m whose stress-evaluation surface lies in source-free vacuum, Equation (1.63) reduces at harmonic steady state to $T_{z,\text{matter}} = \oint_{\partial V_m}[\mathbf{r}\times(\langle\mathbf{T}\rangle\cdot\hat{\mathbf{n}})]\cdot\hat{\mathbf{z}}\,dS$




Figure 1.14: Spherical control shell S_R with axis $\hat{\mathbf{z}}$: axisymmetric radiation with azimuthal order $m = 0$ may carry zero $\dot{J}_{z,\mathrm{out}}$ from the stress-moment integral even when P_{rad} is finite; circular polarization fixes local handedness but does not by itself guarantee nonzero $\dot{J}_{z,\mathrm{out}}$ on S_R under Eq. (1.66). Azimuthal modes with $m \neq 0$ can break symmetry and yield nonzero net flux when the Maxwell-valid field and surface integral support it [1, 2].

and $\dot{J}_{z,\mathrm{em,out}} = -T_{z,\mathrm{matter}}$ by Equation (1.66) (here $T_{z,\mathrm{matter}}$ is the resultant torque in N m, not the local density $\boldsymbol{\tau}_{\mathrm{src}}$ of Eq. (1.59)). On sphere S_R, use $\mathbf{r} = R\hat{\mathbf{r}}$ and $dS = R^2 \sin\theta \, d\theta \, d\phi$. For axisymmetric radiation with azimuthal index $m = 0$, the far-zone pattern carries no azimuthal phase circulation about $\hat{\mathbf{z}}$, so $\dot{J}_{z,\mathrm{out}}$ from orbital winding vanishes while P_{rad} remains finite. For a uniform circularly polarized plane wave, the symmetric Maxwell stress tensor on a centered transverse disk gives $\dot{J}_{z,\mathrm{em,out}} = 0$ while power crossing the disk is nonzero (Subsection 1.6.1); $(m + \sigma)P/\omega$ and $\sigma P/\omega$ symbols elsewhere are modal-class evaluators unless derived from a Maxwell-valid field on the chosen surface [1, 2]. Torque is an integral consequence of the Maxwell stress tensor through Equation (1.67), not a local phase label [2].

Eqs. (1.59) and (1.63) assume a fixed origin, a symmetric stress-tensor completion, and local linear constitutive behavior in the present regime. Strongly nonlocal or dissipative media may require additional closure before torque partition is interpreted without ambiguity [2].

1.2 Angular Structure of Electromagnetic Fields

Once energy, linear momentum, and stress-moment flux are defined on a control surface, one can ask how the field's angular organization—its phase winding, polarization handedness, and direction-resolved intensity—connects to signed transport and torque on that same surface [5, 2, 1]. The subsections below follow that connection from rotating feeds and phased apertures to helical phase, stress integrals, and the reactive versus radiative shells on which those integrals are evaluated.

1.2.1 Rotating source versus rotating pattern

Far-zone isophase charts on a sphere S_R often show spiral contours in $\arg E$. That display records how transverse phase winds with azimuth; it does not by itself fix signed angular-momentum transport or tell a mechanically rotating feed from a stationary array whose elements impose $\exp(\mathrm{j}m\phi)$ [1, 6]. Only a Maxwell-valid $(\mathbf{E}, \mathbf{H})$ together with the stress–torque observables of Eqs. (1.74) and (1.67) answers whether rotational action is radiated [2, 1].

Figure 1.15 contrasts those two excitations at the level of the source geometry; the following paragraphs compare their balances when the patterns on S_R look alike.

In panel (a) the compact dipole $\mathbf{p}$ of Subsection 1.0.3 rotates physically about $\hat{\mathbf{z}}$. Real mechanical rotation is generally non-sinusoidal and can generate sidebands; the harmonic analysis at fixed ω therefore uses a stated single-frequency approximation—frozen orientation, selected sideband, or slow-rotation limit—rather than the full time history [2]. The motorized constraint that supplies Ω_s enters the angular-momentum budget separately from the field stress integral.

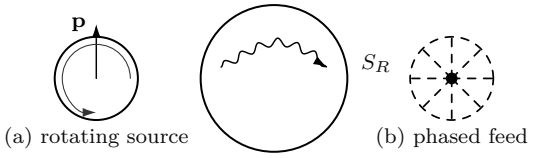


Figure 1.15: Physical source rotation (a) versus stationary phased feed (b): both can yield identical spiral isophase contours on far-zone shell S_R, yet signed flux and torque observables distinguish radiated angular action from appearance alone.

In panel (b) the hardware is fixed in the laboratory. A ring of radius $a \ll \lambda$ carries aperture phasing $\mathbf{E}_a(\phi) = \mathbf{E}_0 \exp(\mathrm{j}m\phi)\hat{\boldsymbol{\rho}}$, so the same azimuthal index m may appear on S_R without any rotating conductor [6]. Passive feed networks can impose that phase law; they do not duplicate the mechanical power channel of panel (a).

On sphere S_R in the radiative zone, define the directional observables of Eqs. (1.71)–(1.74). For configuration (b) with single azimuthal index m and axisymmetric magnitude,

$$\mathbf{E}(R, \theta, \phi) \propto \mathbf{E}_\theta(\theta)\, e^{\mathrm{j}m\phi}, \tag{1.68}$$

labels the azimuthal winding on S_R for the phased feed. Signed transport $\dot{J}_{z,\mathrm{em,out}}$ is obtained only from Equation (1.96) or Eqs. (1.69)–(1.70) for a Maxwell-valid $(\mathbf{E}, \mathbf{H})$; Eq. (1.68) does not imply $\dot{J}_{z,\mathrm{em,out}} = (m/\omega)P_{\mathrm{rad}}$ [2, 5].

For panel (a) with slow rotation $\Omega_s \ll \omega$, the radiated spectrum is a sideband superposition. A snapshot on S_R may then resemble Eq. (1.68), yet torque on a Beth-type load still includes mechanical work on the feed as well as field exchange. Beth's half-wave plate on a suspension measures the torque from reversing circular polarization on the transmitted beam [1]. A quarter-wave plate that converts circular to linear polarization is a different arrangement: it yields $\tau_{z,\mathrm{load}}$ through Equation (1.67) without reproducing Beth's suspended-plate geometry. Panel (a) can exchange angular momentum through mechanics and through flux; panel (b) with a passive feed exchanges torque through the field when the impressed currents are fixed in space [2].

Closed-surface integrals, not the phase portrait alone, fix transport:

$$\Phi_{J,z,\mathrm{out}}(R) = -\hat{\mathbf{z}} \cdot \int_{4\pi} \mathbf{j}_J(\theta, \phi; R)\, d\Omega = -\hat{\mathbf{z}} \cdot \boldsymbol{\Phi}_{J,\mathrm{out}}(R), \qquad \dot{J}_{z,\mathrm{em,out}}(R) = \Phi_{J,z,\mathrm{out}}(R), \tag{1.69}$$

$$\tau_{z,\mathrm{source}}(R) = \oint_{S_R} \left[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\right] \cdot \hat{\mathbf{z}}\, dS = -\Phi_{J,z,\mathrm{out}}(R) \tag{1.70}$$

at harmonic steady state when storage in the enclosing volume averages to zero [1, 2]. On S_R, configuration (b) with $|m| \geq 1$ and $|P_{\mathrm{reac}}(R)|/P_{\mathrm{rad}} \ll 1$ is a predominantly radiative shell; net signed $\Phi_{J,z,\mathrm{out}}(R)$ and $\tau_{z,\mathrm{source}}(R)$ follow only from evaluating Eqs. (1.69) and (1.70) for the Maxwell-valid $(\mathbf{E}, \mathbf{H})$ on that surface. Azimuthal index and a small reactive-power ratio do not by themselves guarantee nonzero transport [2, 5]. Configuration (a) matched to the same snapshot pattern can share $U_r(\theta, \phi; R)$ yet carry additional mechanical boundary terms on the feed support that do not appear in a pure phase-synthesis model; omitting those terms violates Equation (1.63). Conversely, a balanced pair of counter-rotating phase ramps $\exp(\pm\mathrm{j}m\phi)$ with equal power superpose to a standing azimuthal pattern $\sqrt{2}\cos(m\phi)$; under the fixed linear-polarization and modal assumptions of section 1.6.2, the signed stress integral in Equation (1.75) yields $\boldsymbol{\Phi}_{J,\mathrm{out}}(R) = \mathbf{0}$ for that template—an orbital-bookkeeping counterexample, not a universal cancellation of all spin-plus-orbital contributions for arbitrary polarization [5, 2].

Azimuthal index m organizes phase on a chart; Eqs. (1.69) measure transport. Panels (a) and (b) cannot be separated by phase on S_R alone, but U_r, the stress integrand, and $\tau_{z,\mathrm{source}}$ on the same surface can [2, 1].

1.2.2 Directional dependence and angular momentum

Power through a sphere is read from the normal component of $\mathbf{S}_\mathrm{c}$; signed angular-momentum transport uses the stress-moment integrand built from $\langle\mathbf{T}\rangle$. Both observables are evaluated on the same S_R, but they are different functionals of $(\mathbf{E},\mathbf{H})$ [4, 13, 1, 2]. An axisymmetric dipole may carry finite P_rad yet vanishing net z-flux when opposing sectors cancel [2]. Let $\hat{\mathbf{r}} = \hat{\mathbf{r}}(\theta,\phi)$ be radial unit vector on a radius-r sphere and $d\Omega = \sin\theta\, d\theta\, d\phi$ the solid-angle measure. With $\mathbf{S}_\mathrm{c}$ from Equation (1.1), the radiation intensity is

$$U_r(r,\theta,\phi) = r^2\,\mathrm{Re}\{\mathbf{S}_\mathrm{c}(r,\theta,\phi)\cdot\hat{\mathbf{r}}\}\,, \tag{1.71}$$

in watts per steradian [4, 6]. The far-zone limit is $U(\theta,\phi) = \lim_{r\to\infty} U_r$, total radiated power is

$$P_\mathrm{rad}(r) = \int_{4\pi} U_r(r,\theta,\phi)\, d\Omega, \tag{1.72}$$

and directivity is

$$D(\theta,\phi) = \frac{4\pi\, U(\theta,\phi)}{P_\mathrm{rad}}. \tag{1.73}$$

Equal integrated power does not imply equal directional angular-momentum structure [2].

For rotational transport, define from Equation (1.59)

$$\mathbf{j}_J(\theta,\phi;r) = r^2\left[\mathbf{r}\times(\langle\mathbf{T}\rangle\cdot\hat{\mathbf{r}})\right]. \tag{1.74}$$

Here $\mathbf{j}_J$ is the directional stress-moment density (N m/sr): solid-angle resolution of $\langle\mathbf{M}\rangle = \mathbf{r}\times\langle\mathbf{T}\rangle$ on a sphere of radius r [1, 2]. Radiation intensity U_r from Equation (1.71) describes energetic transport; $\mathbf{j}_J$ describes the corresponding rotational transport density.

The shell integrals are

$$\boldsymbol{\mathcal{T}}_J(r) = \int_{4\pi} \mathbf{j}_J(\theta,\phi;r)\, d\Omega, \qquad \boldsymbol{\Phi}_{J,\mathrm{out}}(r) = -\boldsymbol{\mathcal{T}}_J(r). \tag{1.75}$$

Integrated totals are a final summary of direction-resolved structure. Opposing solid-angle sectors can carry large $|\mathbf{j}_J|$ yet cancel in $\boldsymbol{\mathcal{T}}_J$; outward $U_r > 0$ along a ray does not by itself imply signed angular-momentum transport along that ray [2, 13].

Let two radiative states $\mathcal{F}_1, \mathcal{F}_2$ at radius r satisfy $P_\mathrm{rad}^{(1)}(r) = P_\mathrm{rad}^{(2)}(r)$. If $\mathbf{j}_J^{(1)} \neq \mathbf{j}_J^{(2)}$ on a subset $\mathcal{U} \subset 4\pi$ of nonzero measure while $U_r^{(1)} = U_r^{(2)}$ on $\mathcal{U}$, the two states differ in direction-resolved stress-moment transport even though they radiate the same power. Axis-projected torque about $\hat{\mathbf{z}}$ can then disagree while P_rad is shared, because $\hat{\mathbf{z}}\cdot\mathbf{j}_J$ is redistributed over solid angle [2].

Origin declaration remains essential because angular transport is moment-based. Changing origin re-weights directional moments even when global balances remain unchanged. Directional flux and torque statements therefore require the same origin convention established in section 1.1.6.

Directional observables represent physical transport only when outward flux is well-defined on the chosen shell and Equation (1.77) holds for the field under study. In strongly reactive near zones, strongly nonlocal media, or rapidly modulated boundaries, extra decomposition terms may be necessary before U_r and $\mathbf{j}_J$ are treated as direct rotational-transfer observables [2].

For fully polarized harmonic transverse fields, the two independent electric components E_θ and E_ϕ on a chosen surface fix the oscillation ellipse. Left- and right-circular polarization correspond to $\mathbf{E}$ and $\mathbf{H}$ tracing the same rotation sense about the propagation direction [2]. Beth's quartz-plate experiment [1] is the mechanical consequence when such a field transfers angular momentum to matter through Maxwell stress at the interface.

Directional dependence asks which portion of S^2 carries Poynting flux and whether that same directional distribution yields nonzero signed angular-momentum flux through the stress integral, independently of any modal or OAM label [13]. Circular polarization fixes the handedness of the transverse $\mathbf{E}$–$\mathbf{H}$ triad locally; outward angular flux still requires a signed stress integral on an enclosing surface [2, 1]. Helical phase topology is separated from radiated action below [5].

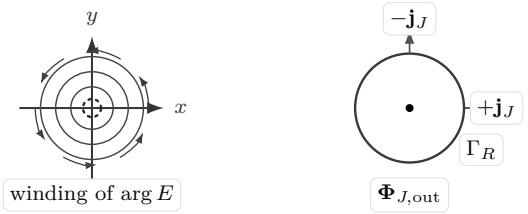


Figure 1.16: Phase topology on a transverse plane (left) and angular-flux transport on a control surface Γ_R (right). Helical isophases show the winding of $\arg E$; angular-momentum transport is established only when direction-resolved $\mathbf{j}_J$ integrates to nonzero $\mathbf{\Phi}_{J,\mathrm{out}}$ without cancellation between counter-rotating sectors [5, 1].

1.2.3 Helical phase structure and transport

Helical isophases on a transverse plane record the winding of $\arg E$. Outward transport is a different statement: the signed integral of the stress-moment density over a closed shell, sketched in Figure 1.16. A polarization converter can alter $\oint \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS$ on Γ_R while a near-zone phase sketch looks unchanged [5, 1]; Subsection 1.6.2 gives counter-rotating examples where the phase portrait stays structured but the net flux cancels.

Returning to the boundary-value data, Allen *et al.* [5] identified paraxial modes; the following is a waist-plane paraxial modal factor with the outgoing axial phase retained for the present discussion, not the full propagated Laguerre–Gaussian solution with $w(z)$, wavefront curvature, and Gouy phase [5].

$$E_\phi(\rho, \phi, z) = E_0 \left(\frac{\rho}{w_0} \right)^{|m|} L_p^{|m|} \left(\frac{2\rho^2}{w_0^2} \right) e^{-\rho^2/w_0^2}\, e^{\mathrm{j}(m\phi - k_0 z)}, \tag{1.76}$$

where $L_p^{|m|}$ is an associated Laguerre polynomial, w_0 is beam waist, and integer m is azimuthal index. For $p = 0$ and $|m| = 1$, the intensity vanishes on the axis ($\rho = 0$), while the phase advances by $2\pi m$ in one circuit about the axis. Phase topology is the winding structure of the transverse phase; transport is the outward real-power and angular-flux integral on Γ, and topology can persist while transport cancels on closed surfaces. The Poynting vector therefore has an appreciable azimuthal component on the intensity ring even when the beam is predominantly collimated. Net structured angular-momentum transport requires a nonzero signed solid-angle integral: superposing the same outgoing modal factor of Equation (1.76) with the opposite winding $m \to -m$ produces the same standing pattern as Equation (1.106), developed in Subsection 1.6.2. Topology and polarization describe local field structure; transport is fixed only after the signed solid-angle integral of $\mathbf{j}_J$ is formed on a control surface [5].

In the paraxial limit of Equation (1.76) with $p = 0$ and $|m| = 1$, the leading-order relation $\mathbf{H}^{(0)} \approx (\hat{\mathbf{z}} \times \mathbf{E}^{(0)})/\eta_0$ establishes the axial power flow. The first paraxial corrections to the Maxwell field generate the transverse, including azimuthal, Poynting component associated with the ∂_ϕ phase gradient. The complex Poynting vector $\mathbf{S}_\mathrm{c} = \frac{1}{2}\mathbf{E} \times \mathbf{H}^*$ then has an axial part $S_z \propto |E|^2$ that carries time-averaged power along $+\hat{\mathbf{z}}$. The azimuthal component can appear in $\mathrm{Re}(\mathbf{S}_\mathrm{c})$ as real energy-flow density associated with azimuthal phase winding; locally it may also contribute to $\mathrm{Im}(\mathbf{S}_\mathrm{c})$ where electric and magnetic storage are out of phase [4]. The axial component integrates to outward power through a transverse plane. Phase winding therefore produces strong local Poynting circulation without in isolation guaranteeing a nonzero $\oint \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS$ on an enclosing sphere when opposing solid-angle sectors cancel [5, 4].

Poynting circulation can be locally strong while the outward real-power integral on a surrounding shell remains small or unchanged: the complex Poynting vector separates reactive exchange through $\mathrm{Im}\{\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}}\}$ from time-averaged radiation through $\mathrm{Re}\{\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}}\}$ [4]. Poynting's 1884 memoir identifies electromagnetic energy transport with the field product $\mathbf{E} \times \mathbf{H}$ and traces energy through space accordingly [4]; it does not formulate Maxwell-stress angular-momentum flux.




Figure 1.17: Radial organization of a localized radiator: r^{-3} electrostatic storage, r^{-2} induction, and r^{-1} radiation dominate at increasing distance. The boundaries are qualitative; all three terms coexist at every radius, but their relative weight shifts with kr [2, 4].

Circulation in $\mathbf{P} = \langle \mathbf{S} \rangle = \mathrm{Re}\{\mathbf{S}_\mathrm{c}\}$ therefore marks directed energy flow and interference texture in the balances of section 1.1, while $\oint_{\partial V} \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS$ expresses outward angular-momentum transport from the stress tensor developed in this chapter [2, 1]. For later reference, subsection 1.2.4 develops the signed angular-momentum flux that follows from $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ [2].

In this setting, directional dependence tracks radiation geometry on Γ_R: the far-zone pattern may exhibit strong angular variation while source and field angular-momentum balances remain distinct objects tied to impressed currents and flux integrals [13].

1.2.4 Physical relations for angular-momentum transport

Azimuthal phase structure and radiation intensity U_r answer different questions: net outward angular-momentum transport follows from the Maxwell-stress balance and

$$\mathbf{\Phi}_{J,\mathrm{out}}(r) = -\oint_{S_r} \mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\, dS = -\int_{4\pi} \mathbf{j}_J(\theta, \phi; r)\, d\Omega, \tag{1.77}$$

and the axis-projected scalar transport is

$$\Phi_{J,z,\mathrm{out}}(r) = \hat{\mathbf{z}} \cdot \mathbf{\Phi}_{J,\mathrm{out}}(r) = -\int_{4\pi} \hat{\mathbf{z}} \cdot \mathbf{j}_J(\theta, \phi; r)\, d\Omega = \dot{J}_{z,\mathrm{em,out}}(r). \tag{1.78}$$

with $\mathbf{j}_J = r^2[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{r}})]$ from Equation (1.74) [2, 1]. Equal counter-rotating components with $P_+ = P_-$ give $\dot{J}_{z,\mathrm{orb,out}} = (m/\omega)(P_+ - P_-) = 0$ for the declared orbital modal bookkeeping scale while $|E_t| \propto \sqrt{2}\,|A(\rho)|\,|\cos(m\phi)|$ may remain large (Subsection 1.6.2); total Maxwell transport $\dot{J}_{z,\mathrm{em,out}}$ from Eq. (1.78) must still be evaluated on the stated field and surface [5, 2]. Outward power in a sector requires $\int_{\Delta\Omega} U_r\, d\Omega > 0$; outward angular momentum requires $\mathbf{\Phi}_{J,\mathrm{out}} \neq \mathbf{0}$—neither implies the other [4].

1.2.5 Reactive and radiative field regimes

The field of a finite electric dipole exhibits the classical $1/r^3$, $1/r^2$, and $1/r$ radial hierarchy in its exact exterior solution [2]. In particular, higher multipoles possess their own higher-order near-field radial structure, while every radiating spherical multipole carries an outgoing $1/r$ branch at infinity [2, 14]. Near the source the dipole $1/r^3$ and $1/r^2$ terms may be comparable with, or larger than, the $1/r$ radiation field. The near zone can therefore contain substantial electric–magnetic energy exchange and complicated phase structure while the outward real power through an enclosing sphere already equals the total radiated power of the source.

On the same Maxwell pair, figure 1.17 matches the multipole counting developed in Subsection 1.6.4: moving outward does not create new radiated power, but changes which radial term carries the local Poynting and stress flux.

At increasing distance the $1/r$ terms dominate. The electric and magnetic fields then approach the transverse relation characteristic of an outgoing wave, and the real Poynting flux becomes the principal carrier of energy away from the source [4]. Figure 1.12 illustrates this shell

dependence: reactive circulation in $\mathrm{Im}\{\mathbf{S}_\mathrm{c}\cdot\hat{\mathbf{n}}\}$ can be large on a small-kr surface even when the net outward real power is unchanged, whereas on a large-kr surface the same source supports a field whose local phase relation is predominantly radiative.

The distinction is evaluated on a spherical observation surface S_r of radius r with outward unit normal $\hat{\mathbf{n}}$. Define

$$P_\mathrm{rad}=\int_{S_r}\mathrm{Re}\{\mathbf{S}_\mathrm{c}\cdot\hat{\mathbf{n}}\}\,dS,\qquad P_\mathrm{reac}(r)=\int_{S_r}\mathrm{Im}\{\mathbf{S}_\mathrm{c}\cdot\hat{\mathbf{n}}\}\,dS, \tag{1.79}$$

where $\mathbf{S}_\mathrm{c}=\frac{1}{2}\mathbf{E}\times\mathbf{H}^*$ is the complex Poynting vector [4]. In a lossless source-free region between enclosing surfaces, P_rad is independent of r [2]: it is the total time-averaged power radiated by the source. The integral $P_\mathrm{reac}(r)$ measures reactive power associated with local oscillatory exchange between electric and magnetic storage on the chosen shell; $|P_\mathrm{reac}(r)|$ generally varies with r even when P_rad does not.

The real and imaginary parts of the complex Poynting vector distinguish active power transport from reactive harmonic exchange because they weight different phase relationships between $\mathbf{E}$ and $\mathbf{H}$. On a reactive shell, $\mathrm{Im}\{\mathbf{S}_\mathrm{c}\cdot\hat{\mathbf{n}}\}$ can integrate to a large $|P_\mathrm{reac}(r)|$ while P_rad remains fixed; on a radiative shell the ratio $|P_\mathrm{reac}(r)|/P_\mathrm{rad}$ is typically small even though the same P_rad crosses every enclosing sphere [4, 2].

Within the harmonic formulation, near the source, with $kr\ll 1$, the r^{-3} and r^{-2} multipole terms dominate and $|P_\mathrm{reac}(r)|/P_\mathrm{rad}$ is typically much greater than unity: reactive circulation dominates the normal flux pattern on that shell even though P_rad is unchanged [2]. The scale $kr\sim 1$ marks a transition region in which no single radial power law fixes the shell integrals: the ratio $|P_\mathrm{reac}(r)|/P_\mathrm{rad}$ must be evaluated for the actual field on S_r, not inferred from kr alone [2]. When $kr\gg 1$ and the r^{-1} radiation field dominates, $|P_\mathrm{reac}(r)|/P_\mathrm{rad}\ll 1$ typically holds and the field on S_r is predominantly radiative [4, 2]. Any angular-momentum interpretation that ignores shell radius therefore risks attributing storage-dominated structure to propagative torque flux [2]. Reactive shells carry standing-wave structure whose phase rotates locally while time-averaged Poynting flux through the same surface may vanish [2]. The same small electric dipole at $kr=0.5$ versus $kr=5$ illustrates why shell placement matters: the inner shell is storage-dominated with $|P_\mathrm{reac}(r)|/P_\mathrm{rad}\gg 1$; the outer shell carries $|P_\mathrm{reac}(r)|/P_\mathrm{rad}\ll 1$ and exhibits a predominantly radiative field [6]. Subsection 1.6.4 develops the two-shell comparison on the same dipole using these integrals.

1.3 Rotational covariance and reference frames

Section 1.2 evaluated fluxes in a fixed laboratory frame about a declared origin. One must now separate two operations: rotating the physical source, currents, and boundaries while the axes stay fixed, versus holding the excitation fixed and rotating only the coordinate labels used to describe it [2, 14]. The first changes the Maxwell problem when material and impressed data rotate together; the second relists components of the same field. Under proper rotations, $\mathbf{E}$, $\mathbf{H}$, and the Maxwell stress transform as vectors and tensors so that traction and stress-moment integrals rotate consistently. Gauge transformations of the potentials are an additional non-uniqueness, treated in section 1.4 [13, 3].

Active and passive rotations; transformation of vectors, tensors, and dyads

Figure 1.18 keeps apart three transformations that the literature often treats as interchangeable. Panel (a) rotates the impressed current while the reference triad stays fixed; panel (b) holds the source fixed and relabels the component chart. A third circumstance—allowing azimuthal phase to advance past a stationary line of sight without moving either source or axes—can produce angular *appearance* in a single frame; that circumstance need not coincide with (a) or (b) [14].

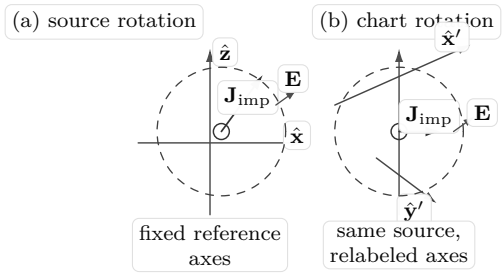


Figure 1.18: Physical source rotation in a fixed reference frame (a) versus passive relabeling of coordinate axes while the impressed current remains fixed (b). Maxwell radiation changes in (a) when source, medium, and boundary do not share rotational symmetry; passive relabeling in (b) reorders field components without moving the source [14, 2].

For panel (a), whenever source, medium, and boundaries share rotational symmetry about the chosen axis, one may rotate the impressed current and thereafter solve Maxwell's equations, or solve first and rotate the field—the two procedures agree on the physical field [2, 14]. An anisotropic or inhomogeneous medium violates that commutativity only when constitutive and boundary data fail to transform covariantly under the selected rotation [2].

Passive relabeling in (b) touches only the component chart. Traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ and its moment about a declared origin are assembled from $\langle \mathbf{T} \rangle$ (Eq. (1.53)). Vectors carry one factor of the rotation matrix; the stress tensor carries two, $\langle \mathbf{T} \rangle' = R \langle \mathbf{T} \rangle R^{\top}$ [1, 2].

Let $R \in \mathrm{SO}(3)$ denote a proper rotation, so that $R^{\top} R = I$ and $\det R = 1$. Write a vector as $\mathbf{v} = v_j \hat{\mathbf{e}}_j$ in an orthonormal basis $\hat{\mathbf{e}}_j$. Under the active convention adopted here, a physical rotation gives $\mathbf{v}'_{\text{active}} = R\mathbf{v}$; under a passive rotation of the basis by the same R, components obey $\mathbf{v}'_{\text{passive}} = R^{\top}\mathbf{v}$. The two records describe one geometric object when active and passive maps are inverse. Eq. (1.80) records the active component law

$$v'_i = R_{ij} v_j. \tag{1.80}$$

A finite rotation through angle φ about the unit axis $\hat{\mathbf{u}}$ is expressed by the active Rodrigues formula

$$R(\varphi, \hat{\mathbf{u}})\, \mathbf{v} = \mathbf{v} \cos\varphi + (\hat{\mathbf{u}} \times \mathbf{v}) \sin\varphi + \hat{\mathbf{u}} (\hat{\mathbf{u}} \cdot \mathbf{v})(1 - \cos\varphi), \tag{1.81}$$

which agrees, on vector fields, with the generator exponential introduced below and carried forward in Chapter 3 [11, 2].

One must not identify rotation of a field with rotation of its component chart alone. For $R \in \mathrm{SO}(3)$, the active map on a scalar F and on a vector field $\mathbf{F}$ reads

$$(T_R F)(\mathbf{r}) = F(R^{-1}\mathbf{r}), \qquad (T_R \mathbf{F})(\mathbf{r}) = R\, \mathbf{F}(R^{-1}\mathbf{r}), \tag{1.82}$$

so that sample point and vector direction rotate coherently [11]. Evaluating $\mathbf{E}(\mathbf{r})$ after an active rotation is not the same as multiplying $\mathbf{E}(\mathbf{r})$ by R at fixed $\mathbf{r}$, except when only the chart has been relabeled [2]. Source-free vacuum Maxwell equations are covariant under T_R because $\nabla\times$ and $\nabla\cdot$ commute with the spatial part of the action whenever ε and μ are scalars [3]; impressed sources generally break rotate-then-solve equivalence, and an anisotropic medium does so whenever constitutive and boundary data lack the stated symmetry—even though the transformation law itself stays valid [2].

Following an active source rotation, the same field strength $|E|$ on S_R appears in relabeled $\hat{\mathbf{x}}, \hat{\mathbf{y}}$ components [14]. An active rotation of the *source* (Subsection 1.0.3) modifies $\mathbf{J}_{\text{imp}}$ and can change the radiated field when symmetry is lacking; a passive rotation of the *chart*, with the source fixed, permutes components without displacing the impressed current [2].

The Maxwell stress tensor couples $\mathbf{T}$, $\hat{\mathbf{n}}$, and $\mathbf{t}$: each column of $\mathbf{T}$ gives the traction on a face whose outward normal aligns with a coordinate direction. As a geometric object that maps




Figure 1.19: Force density $\mathbf{t}$ at point P on S_m contributes to resultant force independent of origin, but torque $\boldsymbol{\tau}_O$ about O differs from $\boldsymbol{\tau}_{O'}$ about $O' = O + \Delta\mathbf{r}$ because the moment arm changes [1].

normals to force densities, $\mathbf{T}$ must inherit *two* factors of R, one per tensor index:

$$\langle \mathbf{T} \rangle' = R \, \langle \mathbf{T} \rangle \, R^{\top}, \qquad T'_{ij} = R_{ip} R_{jq} T_{pq}. \tag{1.83}$$

The factors R_{ip} and R_{jq} rotate the two tensor slots in concert. Eq. (1.83) guarantees that the stress tensor of Eq. (1.53) transforms as one object acting on normals, rather than as nine detached scalars. Treating T_{ij} as independently rotating entries—a common slip in stress-integral work—introduces spurious torque when results are compared with mechanical reaction on a polarizable body [1].

When the reference triad rotates, the oriented surface patch rotates with it; traction on the patch remains $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$, and

$$\mathbf{t}' = \langle \mathbf{T} \rangle' \cdot \hat{\mathbf{n}}' = R\mathbf{t}. \tag{1.84}$$

Eq. (1.84) expresses the mechanical content: the force density on the rotated element is the same physical traction, now written in the rotated basis [1]. In vacuum the cycle-averaged Maxwell stress is symmetric, $\langle \mathbf{T} \rangle = \langle \mathbf{T} \rangle^{\top}$, for every $R \in \mathrm{SO}(3)$ [3].

When the field is axially symmetric about $\hat{\mathbf{z}}$, azimuthal dependence factorizes as $\psi(\phi) = e^{\mathrm{j}m\phi}$, and the orbital angular index obeys

$$-\mathrm{j} \, \frac{\partial \psi}{\partial \phi} = m \, \psi. \tag{1.85}$$

Eq. (1.85) labels scalar azimuthal phase; it is not, without further structure, the vector angular-momentum operator on $(\mathbf{E}, \mathbf{H})$ [2]. Meaningful torque comparisons on matter demand an explicit record of whether R acted on the source, on the chart, or on both, together with a fixed reference origin [1, 2].

Origin dependence

Torque is invariably torque *about a point*. Shifting the reference origin from $\mathbf{r}_0$ to $\mathbf{r}'_0 = \mathbf{r}_0 + \Delta\mathbf{r}$ leaves net force unchanged yet adds the transport couple $\boldsymbol{\tau}_{\mathbf{r}'_0} = \boldsymbol{\tau}_{\mathbf{r}_0} - \Delta\mathbf{r} \times \mathbf{F}$, with $\mathbf{F} = \oint_{S_m} \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}} \, dS$, even when $(\mathbf{E}, \mathbf{H})$ and $\mathbf{T}$ on S_m are held fixed [1, 2]. Figure 1.19 separates force, which follows from traction alone, from torque, which inherits the moment arm through the origin. The angular-momentum flux $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ obeys the same rule [2].

Active rotation of the impressed current, constitutive data, and boundaries defines a new Maxwell problem when those data lack full rotational symmetry; passive relabeling of the coordinate chart records the same physical field in new components. Stress traction and stress-moment flux inherit vector and tensor transformation laws, and both mechanical torque and $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$ demand an explicit reference origin. These covariance statements close the kinematic thread opened in section 1.2; the remaining non-uniqueness of the potential description is taken up in section 1.4.

1.4 Gauge structure, helicity, and spin–orbit limits

Rotations fix how $(\mathbf{E}, \mathbf{H})$ and the stress tensor appear in a new frame, but they do not exhaust the redundancies in the potential description. This section treats gauge freedom, the field

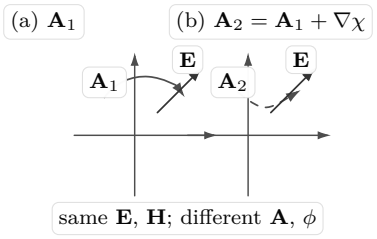


Figure 1.20: Two potential pairs can describe the same physical field: $\mathbf{A}_2 = \mathbf{A}_1 + \nabla\chi$ relabels the vector potential while $\mathbf{E} = -\nabla\phi - \mathrm{j}\omega\mathbf{A}$ and $\mathbf{H} = \nabla \times \mathbf{A}/\mu$ remain unchanged [3].

observables that survive it, helicity as a property of the Maxwell pair, dual symmetry where it applies, and the limits of assigning unique local spin and orbital parts to angular momentum [13, 11, 2].

Gauge freedom and angular structure

Once rotation and origin have been declared, the mechanical reports built from $(\mathbf{E}, \mathbf{H})$ are objective. Potentials raise a distinct issue that rotation does not resolve: may $(\mathbf{A}, \phi)$ be altered while $(\mathbf{E}, \mathbf{H})$ stay fixed? On a compact range two reconstructions can disagree on $\mathbf{A}(\mathbf{r})$ at a sample point yet yield identical tangential $\mathbf{E}$ and $\mathbf{H}$ on the scan surface [2, 14]. That freedom is not a defect of Maxwell theory; it belongs to the potential representation. Wattmeters, torsion balances, and stress integrals respond to $(\mathbf{E}, \mathbf{H})$, $\mathbf{S}_\mathrm{c}$, and $\langle\mathbf{T}\rangle$, not to $\mathbf{A}$ in isolation [3, 1].

Because $\mathbf{B} = \mu\mathbf{H} = \nabla \times \mathbf{A}$, adding $\nabla\chi$ to $\mathbf{A}$ and co-adjusting ϕ leaves $(\mathbf{E}, \mathbf{H})$ invariant (Figure 1.20). The subsection below states the transformation under $\exp(+\mathrm{j}\omega t)$, lists the field observables that survive it, and separates gauge maps from electromagnetic duality.

1.4.1 Gauge-invariant observables, helicity, and dual symmetry

Take the phasor state $\mathcal{F} = (\mathbf{E}, \mathbf{H})$ in a linear isotropic region with scalar ε, scalar μ, angular frequency ω, and intrinsic impedance $\eta = \sqrt{\mu/\varepsilon}$. Let $(\mathbf{A}, \phi)$ denote a potential pair tied to the physical fields by

$$\mathbf{E} = -\nabla\phi - \mathrm{j}\omega\mathbf{A}, \qquad \mathbf{B} = \nabla \times \mathbf{A} = \mu\mathbf{H}, \tag{1.86}$$

The vector potential $\mathbf{A}$ is a calculational device, not a field observable: its curl fixes $\mathbf{B}$, and its coupling with ϕ fixes $\mathbf{E}$. Since $\nabla \times \nabla\chi = \mathbf{0}$, a gradient shift in $\mathbf{A}$ leaves $\mathbf{B}$ unchanged; compensating ϕ by $-\mathrm{j}\omega\chi$ restores $\mathbf{E}$:

$$\mathbf{A}' = \mathbf{A} + \nabla\chi, \qquad \phi' = \phi - \mathrm{j}\omega\chi, \qquad \mathbf{E}' = \mathbf{E},\ \mathbf{H}' = \mathbf{H}. \tag{1.87}$$

Direct substitution into $\mathbf{E} = -\nabla\phi - \mathrm{j}\omega\mathbf{A}$ yields $\mathbf{E}' = \mathbf{E}$ and $\mathbf{B}' = \mathbf{B}$, as in Figure 1.20. Eq. (1.87) encodes that relabeling. Observables are $\mathbf{E}$, $\mathbf{B}$, $\mathbf{S}_\mathrm{c}$, $\langle\mathbf{T}\rangle$, and closed-surface integrals free of explicit potential dependence [3, 13]. Any local map tagged to potentials must state its gauge [13].

Coulomb and Lorenz gauges agree on $(\mathbf{E}, \mathbf{H})$ but differ on ϕ and $\nabla\phi$ in the interior, so a potential-based local map may disagree pointwise between gauges even while traction and angular-flux integrals built from $\langle\mathbf{T}\rangle$ and $\langle\mathbf{M}\rangle = \mathbf{r} \times \langle\mathbf{T}\rangle$ stay fixed on chosen surfaces [13, 3]. For illustration alone, introduce the gauge-linked map below; it exhibits non-uniqueness of potential-based local constructions and is not an electromagnetic angular-momentum density.

$$\mathbf{q}_\mathrm{loc}^{(\mathrm{pot})} = \frac{\varepsilon_0}{\mathrm{j}\omega}\,\mathbf{r} \times \nabla\phi, \tag{1.88}$$

Here ϕ is the scalar potential in the gauge of Eq. (1.86). Under $\phi' = \phi - \mathrm{j}\omega\chi$, one has $\nabla\phi' = \nabla\phi - \mathrm{j}\omega\nabla\chi$, so $\mathbf{q}_\mathrm{loc}^{(\mathrm{pot})}$ acquires the shift $-\varepsilon_0\,\mathbf{r} \times \nabla\chi$. Eq. (1.88) is thus an orbital map tied to ϕ, not the gauge-invariant density $\mathbf{j}_\mathrm{em}$ and not a Belinfante-class spin density [13, 2].




Figure 1.21: Circularly polarized plane wave: **E** and **H** rotate in the same handedness about propagation axis **k**. Helicity is the field-intrinsic sign of that handedness [2, 13].

Inside a control volume V_g of radius $R = 2\lambda$ about a dipole, Coulomb and Lorenz gauges coincide on $(\mathbf{E}, \mathbf{H})$ over ∂V_g yet disagree on $\nabla\phi$ and hence on Eq. (1.88) in the interior; $\oint_{\partial V_g} \langle \mathbf{M} \rangle \cdot \hat{\mathbf{n}}\, dS$ is unaffected [13, 2]. Helicity records the handedness with which **E** and **H** wind about **k**. In a monochromatic circularly polarized plane wave, **E** and **H** rotate in lockstep while staying transverse to **k**; right- and left-handed states differ by that winding sense, not by radiated power [2]. Figure 1.21 fixes the geometry before the density is stated.

The vacuum helicity density adopted in this chapter, at a single angular frequency, is

$$h(\mathbf{r}) = \frac{1}{2\omega c}\, \mathrm{Im}\{\mathbf{E} \cdot \mathbf{H}^*\}\,, \tag{1.89}$$

under the $\exp(+\mathrm{j}\omega t)$ phasor convention [2, 13, 12]. Dimensionally, $[\mathbf{E} \cdot \mathbf{H}^*] = \mathrm{W\,m^{-2}}$ while $[h] = \mathrm{J\,s\,m^{-3}}$—angular momentum per unit volume—because ω enters with $\mathrm{rad\,s^{-1}}$ and c with $\mathrm{m\,s^{-1}}$. Eq. (1.89) must be distinguished from optical chirality (Lipkin zilch) and from Stokes S_3: each is a separate pseudoscalar with its own normalization and conservation law [2, 12]. The scalar h reports the handedness of the transverse **E**–**H** triad; local spin–orbit splits become definite only under an explicit convention (section 1.4.2) [13, 2].

Consider an outgoing circularly polarized plane wave with *real* amplitude $E_0 > 0$, $\mathbf{E} = (E_0/\sqrt{2})(\hat{\mathbf{x}} + \mathrm{j}\sigma\hat{\mathbf{y}})\, e^{-\mathrm{j}kz}$, $\sigma = \pm 1$, $\mathbf{k} = k\hat{\mathbf{z}}$, and right-handed $(\hat{\mathbf{x}}, \hat{\mathbf{y}}, \hat{\mathbf{z}})$. Faraday's law gives $\mathbf{H} = (1/\eta_0)\, \hat{\mathbf{z}} \times \mathbf{E} = (E_0/\eta_0\sqrt{2})(\hat{\mathbf{y}} - \mathrm{j}\sigma\hat{\mathbf{x}})\, e^{-\mathrm{j}kz}$. Hence $\mathbf{E} \cdot \mathbf{H}^* = \mathrm{j}\sigma E_0^2/\eta_0$ and

$$h = \frac{\sigma E_0^2}{2\omega c \eta_0} = \frac{\sigma \varepsilon_0 E_0^2}{2\omega}, \tag{1.90}$$

so that h reverses sign between opposite circular polarizations and vanishes for linear polarization [2, 13]. Labels $\sigma = \pm 1$ are meaningful only after the spatial triad and time convention are fixed; they cannot be identified with Stokes S_3 without an explicit sign map [2].

Duality acts on field pairs through

$$\mathbf{E}' = \cos\xi\, \mathbf{E} + \sin\xi\, \eta\mathbf{H}, \qquad \mathbf{H}' = -\sin\xi\, \mathbf{E}/\eta + \cos\xi\, \mathbf{H}, \qquad \xi \in \mathbb{R}. \tag{1.91}$$

Eq. (1.91) is not a gauge map. In a source-free region with spatially uniform scalar ε and μ, direct substitution into $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu\mathbf{H}$ and $\nabla \times \mathbf{H} = \mathrm{j}\omega\varepsilon\mathbf{E}$ shows that $(\mathbf{E}', \mathbf{H}')$ obeys the same curl pair provided $\eta = \sqrt{\mu/\varepsilon}$ is the impedance used in Eq. (1.91). Complex ε and μ at fixed ω are permitted in this *frequency-domain algebraic* sense; a separate time-domain or energy-hermitian statement is not developed here [2]. Because Maxwell's equations are linear, the map sends any one source-free solution $(\mathbf{E}, \mathbf{H})$ to another on the same homogeneous constitutive branch; a sum of such solutions is mapped componentwise. The map does not extend to a complete problem with impressed ρ and $\mathbf{J}_{\mathrm{imp}}$ unless sources are transformed consistently, nor across interfaces where η jumps unless tangential boundary data are dual-covariant. Spatially varying $\varepsilon(\mathbf{r})$, $\mu(\mathbf{r})$ with non-uniform $\eta(\mathbf{r})$ likewise require a position-dependent impedance in the rotation rule and are outside the uniform-η closure of Eq. (1.91) [2, 17]. At a plane interface between two uniform half-spaces, tangential **E** and **H** remain continuous, but a global rotation mixing $(\mathbf{E}, \mathbf{H})$ with a single η on both sides does not in general map one physical boundary-value problem into another unless the impedance data are dual-covariant. To first order in $\xi = \delta\xi$, $\delta\mathbf{E} = \delta\xi\, \eta\mathbf{H}$

and $\delta\mathbf{H} = -\delta\xi\,\mathbf{E}/\eta$. For transverse states in a fixed polarization sector, a rotation through $\xi = \pi/2$ exchanges predominantly electric and magnetic roles while Eq. (1.89), evaluated on the physical $(\mathbf{E}, \mathbf{H})$ pair, continues to report handedness relative to the declared triad and $\exp(+\mathrm{j}\omega t)$ convention [2, 13].

Because Eq. (1.89) depends only on $(\mathbf{E}, \mathbf{H})$, h is gauge invariant, whereas canonical helicity definitions tied to potentials may move under $\mathbf{A}' = \mathbf{A} + \nabla\chi$ and must not be conflated with Eq. (1.89) without naming the formalism [13, 12, 11]. For circular polarization, $\langle\mathbf{S}\rangle$ has equal magnitude for $\sigma = \pm 1$ while h tracks the handedness; linear polarization gives $h = 0$ [2]. This chapter treats helicity as a field-scalar record of handedness and does not develop a separate helicity continuity law, since energy, momentum, and angular momentum already supply the transport structure required for radiation [2].

Helicity and duality complete the gauge thread of section 1.4. Maxwell's equations fix $(\mathbf{E}, \mathbf{H})$ once sources, constitutive data, boundaries, and outgoing selection are given [3, 2]. On any chosen surface, cycle-averaged power follows from $\langle\mathbf{S}\rangle = \mathrm{Re}\,\mathbf{S}_\mathrm{c}$, mechanical loading from $\langle\mathbf{T}\rangle \cdot \hat{\mathbf{n}}$, and angular transport from $\langle\mathbf{M}\rangle = \mathbf{r} \times \langle\mathbf{T}\rangle$ [4, 1].

1.4.2 Limits of local spin-orbit decompositions

Total electromagnetic angular momentum is conserved and tied to $(\mathbf{E}, \mathbf{H})$ through Eq. (1.59). Helicity, as developed above, supplies a gauge-invariant handedness sign for the pair. Local "spin" and "orbit" names split $\mathbf{j}_\mathrm{em}$ into pointwise pieces that aid interpretation yet are not fixed uniquely by Maxwell's equations alone [13, 2]. The total $\mathbf{j}_\mathrm{em}$ follows from $(\mathbf{E}, \mathbf{H})$; convention-dependent $\mathbf{s}_\mathrm{loc}$ and $\mathbf{l}_\mathrm{loc}$ may reshuffle under gauge while closed-surface flux stays put [13, 2]. What is measurable remains $\oint\langle\mathbf{M}\rangle \cdot \hat{\mathbf{n}}\,dS$ and the balance of Eq. (1.60); the paraxial index m is taken up in Chapter 2 [5].




Figure 1.22: Total angular-momentum density $\mathbf{j}_\mathrm{em}$ may be partitioned into spin-like $\mathbf{s}_\mathrm{loc}$ and orbital-like $\mathbf{l}_\mathrm{loc}$ contributions for a structured beam; helicity (polarization handedness) and azimuthal phase winding are distinct physical features, and the local split is a convention, not two separate substances [13, 5].

Formal spin–orbit partitions are useful when their conventions are stated. In a declared paraxial beam they separate polarization-linked circulation from azimuthal phase gradients; in a general vector solution they redistribute the same total $\mathbf{j}_\mathrm{em}$ without altering $\oint_{\partial V}\langle\mathbf{M}\rangle \cdot \hat{\mathbf{n}}\,dS$ on a chosen shell [13, 5, 2]. A collimated mode with azimuthal index m is an angular *label* on the chart; signed transport through Γ still follows from the Maxwell stress integral with the full $(\mathbf{E}, \mathbf{H})$ pair [5, 2].

1.5 Surface flux, torque, and physical observation

The conservation laws of section 1.1 define fluxes and torques as surface integrals of $\mathbf{S}_\mathrm{c}$, $\langle\mathbf{T}\rangle$, and $\langle\mathbf{M}\rangle$. Experiment and device modelling require the further step: which tangential samples on Γ enter a wattmeter reading, which traction patch loads a mechanical support, and which partial field charts are used only for synthesis [4, 1, 2]. Harmonic coefficients of $\mathbf{E}_t$ aid reconstruction in Chapter 2; they are not substitutes for the closed-surface balances [14, 6].

Field–matter coupling is the stage on which Maxwell predictions become mechanical fact: traction $\mathbf{t} = \langle\mathbf{T}\rangle \cdot \hat{\mathbf{n}}$ operates across conductors, dielectrics, and polarizable bodies, and the

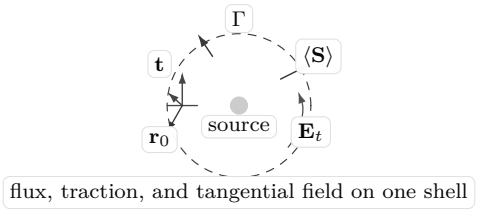


Figure 1.23: Maxwell field content on a closed surface Γ: outward cycle-averaged power flux $\langle \mathbf{S} \rangle$ enters power balance; stress traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ on a material patch enters force and torque about origin $\mathbf{r}_0$; tangential $\mathbf{E}_t$ is part of the same field pair [4, 1, 2].

attendant force and torque report how absorption or polarization conversion redistributes angular action [1]. Beth's quartz wave plate under circular polarization is the standard demonstration—the plate face supplies S_m for the stress integral, and the measured twist follows stress at the interface, not an orbital label read off a harmonic chart [1, 5].

1.5.1 Stress traction, force, and torque on matter

The cycle-averaged Maxwell stress $\langle \mathbf{T} \rangle$ is the local flux of linear momentum [3, 2]. At a vacuum–matter interface the traction

$$\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}} \tag{1.92}$$

gives the force per unit area that the field exerts on the material face with outward normal $\hat{\mathbf{n}}$. Let ∂V_b denote the *closed* surface that bounds the body, all faces included. The net electromagnetic force is

$$\mathbf{F} = \oint_{\partial V_b} \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}} \, dS. \tag{1.93}$$

A finite patch $S_m \subset \partial V_b$ contributes only a portion of that integral unless the omitted faces and any edge terms are restored [2]. Angular momentum is the moment of linear momentum about a chosen origin $\mathbf{r}_0$. The electromagnetic torque is

$$\mathbf{T}_{\mathbf{r}_0} = \oint_{\partial V_b} (\mathbf{r} - \mathbf{r}_0) \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}) \, dS. \tag{1.94}$$

The radius vector $\mathbf{r}$ is taken from the same origin as in $\langle \mathbf{M} \rangle = \mathbf{r} \times \langle \mathbf{T} \rangle$, so torque is the moment of the momentum flux carried by $\langle \mathbf{T} \rangle$ [2, 1]. Because moments are taken about an origin, $\boldsymbol{\tau}_{\mathbf{r}_0}$ shifts when $\mathbf{r}_0$ is translated even if $(\mathbf{E}, \mathbf{H})$ and $\langle \mathbf{T} \rangle$ on S_m are unchanged (Eq. (1.95)).

When $\mathbf{F}$ and $\boldsymbol{\tau}_{\mathbf{r}_0}$ are fixed by the Maxwell solution on S_m, a polarizable body transduces that electromagnetic load into measurable mechanical exchange through its constitutive and elastic response [1, 2].

1.5.2 Power flux, stress traction, and torque

On a source-enclosing shell Γ, outward $\mathrm{Re}\{\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}}\}$ integrates to the time-averaged radiated power of Eq. (1.46); $\mathrm{Im}\{\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}}\}$ records reactive harmonic exchange on that same shell [4, 2]. In a lossless exterior, $\int_\Gamma \mathrm{Re}\{\mathbf{S}_\mathrm{c} \cdot \hat{\mathbf{n}}\} \, dS$ equals P_rad on every admissible enclosing surface, while $|P_\mathrm{reac}(r)|$ generally varies with radius (section 1.2.5).

Mechanical loading uses the outward normal $\hat{\mathbf{n}}$ of the *material* face, which need not coincide with the field-domain normal on a source-enclosing sphere. Traction $\mathbf{t} = \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}$ is already defined on ∂V_b in Subsection 1.5.1; Beth's quartz plate measures torque where that traction couples to an anisotropic interface under circular polarization [1, 2]. Subsection 1.6.1 works the radiation example in full detail.

Comparisons of torque require a shared origin. When the reference point moves from $\mathbf{r}_0$ to $\mathbf{r}_0' = \mathbf{r}_0 + \Delta\mathbf{r}$, the deterministic torque integral obeys

$$\mathbf{T}'_{\mathrm{det}} = \mathbf{T}_{\mathrm{det}} - \Delta\mathbf{r} \times \mathbf{F}_{\mathrm{det}}, \tag{1.95}$$

with $\mathbf{F}_{\mathrm{det}} = \int_{S_m} \langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}}\, dS$ and $\mathbf{T}_{\mathrm{det}} = \int_{S_m} (\mathbf{r} - \mathbf{r}_0) \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\, dS$. Eq. (1.95) is the surface statement of that origin dependence; it must be in force before torque predictions are compared [2].

Example 1.6 (Why torque depends on the chosen origin)**.** With $\mathbf{r}' = \mathbf{r} - \Delta\mathbf{r}$, stress torque transforms as $\boldsymbol{\tau}' = \boldsymbol{\tau} - \Delta\mathbf{r} \times \mathbf{F}$ (Eq. (1.95)). On a thin plate centred at $\mathbf{r}_0$, a shift $\Delta\mathbf{r} = 2\,\mathrm{mm}\,\hat{\mathbf{x}}$ at fixed $\mathbf{F}_{\mathrm{det}}$ alters τ_z by $\Delta\tau_z = -F_y\,\Delta x$ when moments are taken about $\hat{\mathbf{z}}$ [2]. Stress-integral and mechanical torque data are comparable only under a common reference origin.

The choice of integration surface belongs to the field problem itself [2]. Two closed surfaces share the same force and torque resultants only if one can be deformed into the other without crossing sources, material, or singularities, if stress is evaluated on the same Maxwell-valid $(\mathbf{E}, \mathbf{H})$ branch in the intervening source-free region, and if storage terms are handled consistently [3, 2]. A partial patch S_m cannot stand for a full closed ∂V_b unless omitted segments and edge contributions are restored [2].

Stress-integral force and torque carry meaning in Chapter 1 only when the integration surface, reference origin, and torque axis are declared alongside the field solution [2, 1].

Maxwell consistency delineates which field traces may transport flux on $\mathcal{F}_{\mathrm{rad}}$ [2].

1.5.3 Field quantities, instrument readings, and inferred structure

Maxwell theory fixes $\mathbf{E}$ and $\mathbf{H}$ from sources, constitutive laws, boundary data, and the outgoing radiation condition [3, 2]. At a sample point or on a finite patch, $\mathbf{E}$ and $\mathbf{H}$ are field quantities; closed-surface integrals of $\mathbf{S}_{\mathrm{c}}$, traction, and stress moment are observables tied to a declared surface, outward normal, and origin. A receiver couples to tangential fields through its geometry and constitutive response, and a dial reading is the mechanical or electronic transduction of that coupling—not an alternative definition of flux [4, 1].

Harmonic or modal coefficients of $\mathbf{E}_t$ arise only after one chooses a representation on an aperture or reference sphere. They compress angular structure for synthesis and diagnosis in later chapters, yet they do not replace Eqs. (1.46), (1.93), or (1.96) unless the partial data are supplemented by source specification, boundary conditions, and outgoing selection so that a unique Maxwell continuation exists [14, 2].

1.5.4 Apertures, angular charts, and later radiation mappings

On a large source-enclosing sphere S_R in the source-free exterior, tangential $\mathbf{E}_t(\theta, \phi)$ and $\mathbf{H}_t(\theta, \phi)$ with outgoing radiation data fix the angle dependence of the field that sources radiate [2]. A finite aperture samples that tangential field through an opening in a conducting screen; the aperture chart is a *restriction* of the global solution, not an automatically complete radiating Maxwell state unless impressed currents behind the screen, material data on the rim, and continuity of tangential $\mathbf{E}$ and $\mathbf{H}$ across the aperture are stated together with outgoing selection in the half-space beyond [14, 6].

Angular spectra and vector-harmonic expansions reorder the same tangential samples for propagation and pattern synthesis. They streamline the bookkeeping of direction and polarisation, but conservation of power, momentum, and angular momentum on a chosen shell still requires the stress and Poynting integrals of section 1.1 evaluated on a Maxwell-valid $(\mathbf{E}, \mathbf{H})$ pair [2]. Chapter 2 connects this angular organization to radiation operators and dyadic Green functions on the outgoing branch established in section 1.1.4 [6, 12].

Throughout Chapter 1, every reported value is either a Maxwell functional on a chosen surface—flux, traction, or torque—or a quantity inferred from partial field data through a stated representation; the distinction must be explicit [2].

1.6 Examples and Counterexamples

The preceding sections stated general balances and their limitations. The examples below test those statements on concrete fields: radiation with circular polarization, modal superpositions that cancel net flux, gauge dependence of local partitions, and the radial shell structure of a Hertzian dipole including reactive power and the adopted quality factor [2, 1, 5].

1.6.1 Angular momentum conservation in radiation

Circular polarization fixes the handedness with which $\mathbf{E}$ and $\mathbf{H}$ rotate about the beam axis [2, 1]. Mechanical torque on matter, and signed outward transport through a source-free shell, are read from the Maxwell stress integrals below—not from a polarization label or phase portrait alone. The axial flux definition is

$$\dot{J}_{z,\mathrm{em,out}} = -\oint_{S_R} \left[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{r}})\right] \cdot \hat{\mathbf{z}}\, dS, \tag{1.96}$$

which is Eq. (1.66) with outward normal $\hat{\mathbf{n}} = \hat{\mathbf{r}}$ on a sphere S_R in the source-free exterior [2, 1]. For any Maxwell-valid pair $(\mathbf{E}, \mathbf{H})$ on S_R,

$$P_{\mathrm{out}} := \oint_{S_R} \mathrm{Re}\{\mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{r}}\}\, dS, \qquad \mathbf{S}_{\mathrm{c}} = \tfrac{1}{2}\mathbf{E} \times \mathbf{H}^*, \tag{1.97}$$

with $\dot{J}_{z,\mathrm{em,out}}$ from Eq. (1.96).

On a source-free sphere, outgoing spherical vector waves organize tangential data and foreshadow the radiation operators of Chapter 2 [2, 14, 11]. Fix $\exp(+\mathrm{j}\omega t)$ and outgoing $h_\ell^{(2)}(kr) = j_\ell(kr) - \mathrm{j}y_\ell(kr)$ [2]. With $\sigma = \sqrt{\ell(\ell+1)}$ and $\vec{L} = \mathrm{j}\mathbf{r} \times \nabla$,

$$\vec{Y}_{\ell m}^{\ell m} = \frac{\vec{L} Y_\ell^m}{\sigma} = \hat{\boldsymbol{\theta}}\, \frac{m Y_\ell^m}{\sigma \sin\theta} + \hat{\boldsymbol{\phi}}\, \frac{\mathrm{j}\, \partial_\theta Y_\ell^m}{\sigma}, \tag{1.98}$$

so that $\int_{4\pi} |\vec{Y}_{\ell m}^{\ell m}|^2\, d\Omega = 1$ when $\int_{4\pi} |Y_\ell^m|^2\, d\Omega = 1$ [11]. The magnetic-type wave is defined by $\mathbf{M}_{\ell m}^{+} = h_\ell^{(2)}(kr) \vec{Y}_{\ell m}^{\ell m}$ and $\mathbf{N}_{\ell m}^{+} = (1/k)\nabla \times \mathbf{M}_{\ell m}^{+}$ [2, 11]. Coefficient templates that pair $\mathbf{M}_{\ell m}^{+}$ and $\mathbf{N}_{\ell m}^{+}$ with Poynting and stress fluxes still require a print-verified Stratton–Jackson–Hansen convention lock together with a physically consistent Maxwell pair $(\mathbf{E}, \mathbf{H})$; that synthesis remains outside Chapter 1.

Remark 1.7 (Hansen modal flux deferred to Chapter 2). No single-mode Hansen power law or closed-form $\mathbf{N}_{\ell m}^{+}$ transport ratio is asserted as a Maxwell theorem in this chapter. Poynting and axial stress-moment integrals on S_R remain defined by Eqs. (1.97) and (1.96) for any *actual* source-free $(\mathbf{E}, \mathbf{H})$ [2, 11, 14].

Jackson's third-edition shell-content formulas for multipole energy and angular momentum in a spherical layer (Chapter 9, Eqs. (9.136) and (9.143)–(9.144) in the citation record) are not quoted here without page-level verification. Because Eq. (1.96) is a Maxwell-stress *surface* flux and Jackson's formulas are *volume* shell-content identities under a different phasor branch, no Jackson shell equation is displayed in Chapter 1. A verified conversion between those objects is deferred to Chapter 2 [11].

Remark 1.8 (Vector generator and mixed multipoles). No Maxwell-derived transport law of the modal form $\dot{J}_{z,\mathrm{em,out}} = (M/\omega)\, P_{\mathrm{out}}$ is asserted for arbitrary $\mathcal{J}_z$ eigenfields (compare Eq. (1.96)). Distinct (ℓ, m) contributions and electric–magnetic cross terms require separate control [11]. Literal ϕ-only modal templates without a Maxwell-valid θ envelope are bookkeeping only, not spherical vector modes.

Equatorial ring source (separate construction). For a one-dimensional ring of radius a in the plane $\theta = \pi/2$, let $I(\phi)$ be line current (A) and $\lambda(\phi)$ line charge ($\mathrm{C\,m^{-1}}$). Under $\exp(+\mathrm{j}\omega t)$, charge conservation along the ring is $(1/a)\,\partial I/\partial\phi + \mathrm{j}\omega\lambda = 0$. The coefficient I_m in $I(\phi) = \sum_m I_m e^{\mathrm{j}m\phi}$ is one harmonic of that *filament* model (amperes); it must not be paired with the surface continuity law $\nabla_s \cdot \mathbf{K} + \mathrm{j}\omega\sigma = 0$, where $\mathbf{K}$ is in $\mathrm{A\,m^{-1}}$ and σ in $\mathrm{C\,m^{-2}}$ on a finite-width sheet. A thin ring embedded in three dimensions is a distributional line current supported on the circle, with λ_m fixed by the line continuity equation for each Fourier mode [2]. No single I_m coefficient alone defines a complete radiating Maxwell solution: impressed source, continuity, boundaries, and outgoing selection remain necessary. Projection onto regular spherical vector waves is deferred to later chapters [2, 12].

Remark 1.9 (Modal $M = m + \sigma$ bookkeeping only). With $\hat{\mathbf{e}}_\sigma = (\hat{\mathbf{x}} + \mathrm{j}\sigma\hat{\mathbf{y}})/\sqrt{2}$ and helicity label $\sigma = \pm 1$, the symbol $(m + \sigma)P/\omega$ is *modal bookkeeping only* when a later chapter supplies a Maxwell-valid vector mode; it is not a Chapter 1 theorem [5, 18, 19].

Plane-wave stress countercheck (symmetric open disk). For a uniform outgoing circularly polarized plane wave $\mathbf{E} = (E_0/\sqrt{2})(\hat{\mathbf{x}} + \mathrm{j}\sigma\hat{\mathbf{y}})e^{-\mathrm{j}kz}$, $\mathbf{H} = \eta_0^{-1}\hat{\mathbf{z}} \times \mathbf{E}$, the Maxwell stress tensor is spatially constant. On a finite transverse disk centered on the beam axis, $\oint [\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{z}})]_z \, dS = 0$ by azimuthal symmetry: power through the disk is $P = |E_0|^2 A/(2\eta_0)$, but the symmetric stress-moment integral does *not* yield $\sigma P/\omega$ [2, 1, 20]. Torque on an anisotropic load in Beth's sense [1] is not recovered from this uniform-beam disk formula [1, 2].

Spin flux and ideal half-wave-plate scales (plane wave only). For the same CP plane wave with time-averaged power P and helicity label $\sigma = \pm 1$ in $\mathbf{E} \propto \hat{\mathbf{x}} + \mathrm{j}\sigma\hat{\mathbf{y}}$, a helicity bookkeeping magnitude

$$|\dot{J}_{z,\mathrm{spin,inc}}| = \frac{P}{\omega} \tag{1.99}$$

is *not* identified with the symmetric Maxwell-stress integral $\dot{J}_{z,\mathrm{em,out}}$ of Eq. (1.96) on a centred transverse disk (which vanishes for that symmetry). Eq. (1.99) records a conventional spin/helicity scale for uniform CP in vacuum, distinct from the governing stress-surface observable [2, 1, 13]. A perfect absorber that removes the beam with definite helicity exchanges mechanical torque of magnitude P/ω about $\hat{\mathbf{z}}$ [1]. An ideal lossless half-wave plate that reverses helicity while transmitting the same power changes the field helicity by $\Delta\sigma = -2\sigma$; angular-momentum conservation then requires load torque of magnitude

$$|\tau_{z,\mathrm{load}}| = \frac{2P}{\omega} \tag{1.100}$$

for the ideal reversal case. Eq. (1.100) is a polarization-conversion scale, not Beth's quartz-plate measurement geometry and not the linearly polarized Hertzian dipole of Subsection 1.6.4 [1, 2].

Under monochromatic steady state with vanishing cycle-averaged storage rate, torque on the source support and outward field angular-momentum transport are related by opposite signs:

$$\boldsymbol{\tau}_{z,\mathrm{source}} = -\dot{J}_{z,\mathrm{em,out}}, \qquad \boldsymbol{\tau}_{z,\mathrm{load}} = +\dot{J}_{z,\mathrm{em,out}}. \tag{1.101}$$

Eq. (1.101) states the same conservation law in rotational form as Eqs. (1.63) and (1.66). Beth [1] rendered the law tangible as mechanical torque on a quartz wave plate in circularly polarized light: because the plate alters the transmitted polarization, load torque follows from the net angular-momentum flux through the plate's control surface—incident minus outgoing—not from the source's isolated outward flux alone [1, 2]. The torque is not read from the polarization ellipse; it is fixed by stress-moment balance at the anisotropic interface [1, 2].

The primary radiation illustration is a localized z-directed electric dipole on finite support, enclosed by a far-zone sphere S_R. Figure 1.24 is a torque-balance schematic only: it neither

specifies a rotating dipole moment nor supplies a closed-sphere stress proof for a modal transport law. On S_R in the source-free exterior, $P_{\mathrm{rad}} = \oint_{S_R} \mathrm{Re}\{\mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{n}}\}\, dS$ is finite and independent of R on any enclosing sphere in the lossless source-free exterior [2, 1]. On a predominantly radiative shell, the field content is read most transparently as outward radiation. The dipole example uses P_{rad} from stress/Poynting integration on S_R and does not assert a universal $(m+\sigma)P/\omega$ law [2].

Figure 1.24 depicts the localized $\hat{\mathbf{z}}$-directed *electric* Hertzian dipole: in the far zone $\mathbf{E}_\theta \propto \sin\theta$ is linearly polarized in $\hat{\boldsymbol{\theta}}$, not circularly polarized [2, 6]. The sketch places torque–flux balance on S_R at stand-off $R = 5\lambda$, where $|P_{\mathrm{reac}}(R)|/P_{\mathrm{rad}} \ll 1$ in the sense of Subsection 1.2.5: reactive exchange no longer dominates the normal flux pattern, and the stress integral registers radiation rather than near-zone oscillation [2].

On a predominantly radiative shell, fields scale as $|\mathbf{E}| \propto 1/R$ with the azimuthal phase of the dominant mode; Maxwell stress Eq. (1.53) with outward normal $\hat{\mathbf{n}} = \hat{\mathbf{r}}$ supplies the integrand $[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})] \cdot \hat{\mathbf{z}}$. Multimode superpositions require summing stress integrals on the actual $(\mathbf{E}, \mathbf{H})$ field [2]. The same balance evaluated at $R = \lambda$ without stating $|P_{\mathrm{reac}}(r)|/P_{\mathrm{rad}}$ can mis-attribute reactive-dominated storage exchange as far-zone transport [2].

Under strict monochromatic steady state at angular frequency ω, the cycle-averaged stored field angular momentum $\langle \mathbf{J}_{\mathrm{em}} \rangle$ is T-periodic, so $\partial_t \langle \mathbf{j}_{\mathrm{em}} \rangle = \mathbf{0}$ in Eq. (1.60) and the storage contribution in Eq. (1.64) vanishes on a radiative shell. The inherited balance then reduces to

$$\dot{J}_{z,\mathrm{em,out}} = -\oint_{S_R} \left[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\right] \cdot \hat{\mathbf{z}}\, dS = -\mathcal{T}_{J,z}, \tag{1.102}$$

where $\mathcal{T}_{J,z}$ is the z-component of the Maxwell-stress moment on S_R. Outward transport $\dot{J}_{z,\mathrm{em,out}} = \Phi_{J,z,\mathrm{out}}$ is the negative of the stress-moment integral under the convention of Eq. (1.66).

For an absorbing load that intercepts the declared net angular-momentum flux through its enclosing control surface, $\tau_{z,\mathrm{load}} = \dot{J}_{z,\mathrm{em,out}}$; for the enclosed source support, $\tau_{z,\mathrm{source}} = -\dot{J}_{z,\mathrm{em,out}} = \mathcal{T}_{J,z}$ in steady operation [1]. A partially transmitting or polarization-changing load requires the full incoming and outgoing balance at that body's surface; the source's outward flux is not automatically equal to the load torque [1, 2]. Modal-class symbols such as $(m+\sigma)P/\omega$ are not substituted for Eq. (1.102) without a Maxwell-valid mode proof in a later chapter [2].

When several (m, σ) modes carry comparable power, no single-mode bookkeeping symbol replaces the stress integral in Eq. (1.102) [2].

When exchange is mediated at a material boundary, electromagnetic torque and angular-momentum flux are two faces of one conservation law [1]. Beth's experiment showed that circularly polarized radiation carries angular momentum whose mechanical counterpart is torque on matter exerted through Maxwell stress at the interface [1].

Example 1.10 (Electromagnetic torque scale)**.** If one *assumes* a modal bookkeeping relation $\dot{J}_z = P/\omega$ for circular polarization with $P = 1\,\mathrm{W}$, then at $f = 10\,\mathrm{GHz}$, $\omega = 2\pi f$ and $P/\omega \approx 1.59 \times 10^{-11}\,\mathrm{N\,m}$. This numeric illustration is *not* a Maxwell-stress integral over a uniform plane

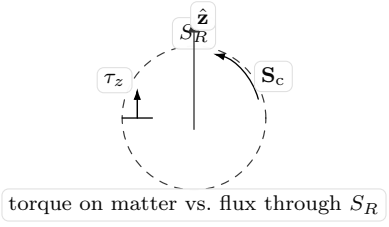


Figure 1.24: Axisymmetric Hertzian dipole radiation (linear $\hat{\theta}$ polarization in the far zone) enclosed by far-zone sphere S_R: outward Poynting flux balances finite radiated power; for this m=0 pattern the net axial stress-moment flux on S_R vanishes while P_{rad} is finite. Circular polarization and Beth-type load torque are separate examples (Fig. 1.25) [2, 1].




Figure 1.25: Beth [1]: circularly polarized light incident on a wave plate on a torsion suspension; the plate receives torque through Maxwell stress at the interface.




Figure 1.26: Open transverse plane S_o (modal flux and power through the aperture) versus closed enclosing sphere Γ_R (exact Maxwell stress-moment conservation on a control surface) [2, 1].




Figure 1.27: Counter-rotating components with $m = \pm 2$ on open aperture S_o (schematic): with matched amplitudes, $|E_t|^2 \propto \cos^2(2\phi)$ shows four intensity lobes on the plane, while equal modal powers $P_+ = P_-$ cancel signed forward orbital angular-momentum flux through S_o ($\dot{J}_z = 0$ on the open-surface modal bookkeeping, distinct from a closed-sphere stress integral) [5, 4].

wave on a symmetric disk (Subsection 1.6.1); Beth-type loads require the anisotropic boundary model of the original experiment [1, 2].

1.6.2 Phase structure without angular-momentum transport

One may construct fields with rich angular phase structure yet vanishing net angular-momentum transport. Take two coherent components with azimuthal orders $+m$ and $-m$ on an open transverse plane S_o. The forward power and forward angular-momentum flux associated with the outgoing modal components crossing S_o are forward-propagating modal statements on that aperture; the exact global conservation law remains the closed-surface Maxwell-stress balance on an enclosing surface Γ_R that bounds a control volume containing the source [2, 13]. Their signed modal fluxes oppose; equal powers cancel signed orbital transport even while intensity and phase retain strong structure [5]. Signed orbital transport is proportional to the intensity difference $I_+ - I_-$, not to the visibility of azimuthal structure alone [2].

With a common radial envelope $A(\rho)$, the transverse field on S_o varies strongly in both amplitude and azimuthal phase. Allen *et al.* [5] showed that a *single* helical mode radiates definite orbital flux; equal counter-rotating weights remove net signed angular-momentum transport while retaining visible structure and substantial radiated power [4].

Visible azimuthal structure alone does not fix net angular-momentum transport: when $I_+ = I_-$, signed flux through S_o vanishes while $P_{\text{tot}} = P_+ + P_-$ may remain large (Figure 1.16) [1, 2]. Component intensities follow from time-averaged Poynting flux:

$$I_\pm(\rho) = \tfrac{1}{2}\,\mathrm{Re}\{\mathbf{E}_\pm \times \mathbf{H}_\pm^*\} \cdot \hat{\mathbf{z}}, \tag{1.103}$$

with $\mathbf{H}_\pm = (1/\eta_0)\,\hat{\mathbf{z}} \times \mathbf{E}_\pm$ on an *outgoing paraxial/modal* branch (exact for a uniform plane wave;

for spatially varying $\mathbf{E}_\pm$ it is a template, not a full-vector Maxwell solution unless longitudinal components and $\nabla\times$ residuals are verified) and $\mathbf{S}_{c,\pm} = \frac{1}{2}\mathbf{E}_\pm \times \mathbf{H}_\pm^*$ [2, 5].

Peak-amplitude convention (counter-rotating pair). Fix peak tangential phasor amplitudes $A_\pm(\rho)$ and linear polarization $\hat{\mathbf{e}}_t$. The $\pm m$ orbital components are

$$\mathbf{E}_\pm(\rho,\phi) = \frac{A_\pm(\rho)}{\sqrt{2}}\, e^{\pm \mathrm{j}m\phi}\, \hat{\mathbf{e}}_t, \qquad \mathbf{H}_\pm = \frac{1}{\eta_0}\, \hat{\mathbf{z}} \times \mathbf{E}_\pm. \tag{1.104}$$

Algebraically,

$$\mathbf{E}_+ + \mathbf{E}_- = \frac{A_+ e^{\mathrm{j}m\phi} + A_- e^{-\mathrm{j}m\phi}}{\sqrt{2}}\, \hat{\mathbf{e}}_t; \tag{1.105}$$

when $A_+ = A_- = A$ this is $\sqrt{2}\, A(\rho)\cos(m\phi)\, \hat{\mathbf{e}}_t$, not $2A\cos(m\phi)\, \hat{\mathbf{e}}_t$. With Eq. (1.103), each component carries $I_\pm(\rho) = |A_\pm(\rho)|^2/(4\eta_0)$ on a uniform outgoing branch; matched peaks ($|A_+| = |A_-|$) give equal component powers $P_\pm = \int_{S_o} I_\pm\, dS$ while the coherent intensity $|E_t|^2$ includes the cross term $2\,\mathrm{Re}(\mathbf{E}_+ \cdot \mathbf{E}_-^*)$ and is not P_+/P_- alone.

The total transverse field is

$$\mathbf{E}_t(\rho,\phi) = \mathbf{E}_+(\rho,\phi) + \mathbf{E}_-(\rho,\phi), \tag{1.106}$$

which equals $\sqrt{2}\, A(\rho)\cos(m\phi)\, \hat{\mathbf{e}}_t$ when $A_+ = A_- = A$. With matched peaks, $I_+ = I_- = |A|^2/(4\eta_0)$. On a uniform outgoing branch with identical envelopes, component powers satisfy

$$\frac{P_+}{P_-} = \left(\frac{|A_+|}{|A_-|}\right)^2, \qquad P_\pm = \int_{S_o} I_\pm\, dS. \tag{1.107}$$

For each orbital component, the time-averaged angular-momentum flux through S_o scales as $(\pm m/\omega)$ times component power $P_\pm = \int_{S_o} I_\pm\, dS$ [2]. Summing components yields the open-aperture modal bookkeeping (distinct from a closed-sphere Maxwell-stress integral for an arbitrary full-vector field)

$$\dot{J}_{z,\mathrm{modal},S_o} \overset{\text{modal bookkeeping}}{=} \frac{m}{\omega}(P_+ - P_-) = \frac{m}{\omega}\int_{S_o} (I_+ - I_-)\, dS, \tag{1.108}$$

which is Eq. (1.109). When $I_+ = I_-$, both P_+ and P_- are equal and the bookkeeping symbol vanishes even though the coherent intensity $|E_t|^2 = |E_+|^2 + |E_-|^2 + 2\,\mathrm{Re}(\mathbf{E}_+ \cdot \mathbf{E}_-^*)$ exhibits a standing azimuthal pattern through the cross term; modal power budgets use $P_\pm = \int I_\pm\, dS$, not $|E_t|^2$ alone [2, 5].

Example 1.11 (Equal $+m$ and $-m$ components)**.** Take $m = 2$ with equal peak amplitudes $|A_+| = |A_-|$ so $P_+ = P_-$. Then the open-aperture bookkeeping of Eq. (1.109) vanishes. For a one-percent *power* imbalance, $P_+ = 1.01P_-$, Eq. (1.107) requires $|A_+|/|A_-| = \sqrt{1.01} \approx 1.0050$ at fixed η_0—not $|A_+|/|A_-| = 1.01$, which would imply $P_+/P_- = 1.0201$ (a 2.01% power imbalance). The bookkeeping transport is $\dot{J}_z = (m/\omega)(P_+ - P_-) = (m/\omega)(0.01P_-)$; e.g. if $P_- = 1\,\mathrm{W}$ and $\omega = 2\pi f$, then $\dot{J}_z = (2/\omega)(0.01\,\mathrm{W})$. This is not a closed-sphere Maxwell-stress evaluation [5].

Peak amplitudes $A_\pm(\rho)$ in Eq. (1.104) fix $I_\pm(\rho) = |A_\pm(\rho)|^2/(4\eta_0)$ on a uniform outgoing branch (Eq. (1.103)). Let $\dot{J}_z$ be net angular-momentum transport rate through S_o. The inherited balance law gives

$$\dot{J}_z = \frac{m}{\omega}\int_{S_o} (I_+ - I_-)\, dS. \tag{1.109}$$

Here m/ω is the orbital angular-momentum-per-energy factor and $I_+ - I_-$ is signed transport imbalance. Signed net transport follows $I_+ - I_-$, not $|E_t|^2$ or its azimuthal derivative [2]. The equal-amplitude counterexample is

$$I_+(\rho) = I_-(\rho) \quad \forall \rho \in S_o. \tag{1.110}$$




Figure 1.28: Ideal oscillating electric point dipole inside gauge sphere V_g: Coulomb and Lorenz gauges yield different gauge-dependent local maps at interior points while identical $(\mathbf{E}, \mathbf{H})$ on ∂V_g fixes the same stress-flux integral [13, 2].

Substitution into Eq. (1.109) yields

$$\dot{J}_z = 0 \qquad \text{while} \qquad E_t(\rho, \phi) = \sqrt{2}\, A(\rho) \cos(m\phi) \neq 0. \tag{1.111}$$

If $P_+ \neq P_-$, a finite signed flux remains. In steady operation, section 1.5 gives

$$\tau_{z,\text{source}} = -\dot{J}_z = 0 \quad \text{under Eq. (1.110).} \tag{1.112}$$

Let $I_+(\rho) = I_0(\rho) + \delta I(\rho)$ and $I_-(\rho) = I_0(\rho) - \delta I(\rho)$. Then

$$\dot{J}_z = \frac{2m}{\omega} \int_{S_o} \delta I(\rho)\, dS. \tag{1.113}$$

Under Eq. (1.110), Eqs. (1.111) and (1.112) give $\dot{J}_z = 0$ and $\tau_{z,\text{source}} = 0$ even when $|E_t|$ and $\partial_\phi E_t$ are large on S_o [2, 1]. A finite signed flux requires $I_+ \neq I_-$, as in Eq. (1.113). Unequal modal powers, polarization-selective loss, incomplete modal orthogonality, or aperture truncation can break exact cancellation; gauge relabeling cannot restore transport removed by balanced superposition [4, 6].

1.6.3 Gauge dependence of local angular-momentum densities

Under $\mathbf{A}' = \mathbf{A} + \nabla\chi$ and $\phi' = \phi - \mathrm{j}\omega\chi$, the fields $\mathbf{E} = -\nabla\phi - \mathrm{j}\omega\mathbf{A}$ and $\mathbf{B} = \nabla \times \mathbf{A}$ are unchanged [3]; two potential descriptions may therefore label the same electromagnetic field. Any local density constructed from ϕ or $\mathbf{A}$ alone inherits gauge sensitivity; stress traction, Poynting flux, and total angular-momentum density built from $(\mathbf{E}, \mathbf{H})$ do not [13, 2].

An ideal oscillating electric point dipole inside a gauge sphere V_g of radius $R = 2\lambda$ makes the distinction concrete. Coulomb and Lorenz gauges yield the same $(\mathbf{E}, \mathbf{H})$ on ∂V_g yet different $\nabla\phi$ at interior points, so any potential-linked local map differs pointwise between them. Mechanical torque $\oint_{\partial V_g} \mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{n}})\, dS$ and outward angular-momentum flux built from $(\mathbf{E}, \mathbf{H})$ remain unchanged [13, 2].

Gauge relabeling moves potential-based local maps while leaving Maxwell fields and gauge-invariant surface integrals built from $(\mathbf{E}, \mathbf{H})$ unchanged [3, 13]. Subsection 1.6.4 holds the same dipole fixed while moving the observation shell from reactive to radiative radius [2, 7].

1.6.4 Radial structure of a localized radiator

As observation moves outward from a localized source, what changes in the electromagnetic field? The source remains fixed; only the radius of observation grows. The outgoing Maxwell solution repartitions radial content: near the source, $1/r^3$ and $1/r^2$ terms dominate, and the $1/r$ radiative branch eventually sets the transverse far-zone form [2, 4]. Consider a z-directed electric dipole moment phasor $\mathbf{p} = p_0\hat{\mathbf{z}}$ at the origin with $\exp(+\mathrm{j}\omega t)$ and outgoing factor $e^{-\mathrm{j}kr}$.




Figure 1.29: Concentric observation shells: near zone ($kr \ll 1$, r^{-3} and r^{-2}), transition ($kr \sim 1$), and far zone ($kr \gg 1$, r^{-1} radiation) [2, 4].

In spherical coordinates (r, θ, ϕ) the exact source-free fields are [2, 6]

$$E_r = \frac{p_0 \cos\theta}{4\pi\varepsilon_0}\, e^{-\mathrm{j}kr}\left(\frac{2}{r^3} + \frac{2\mathrm{j}k}{r^2}\right), \tag{1.114a}$$

$$E_\theta = \frac{p_0 \sin\theta}{4\pi\varepsilon_0}\, e^{-\mathrm{j}kr}\left(\frac{1}{r^3} + \frac{\mathrm{j}k}{r^2} - \frac{k^2}{r}\right), \tag{1.114b}$$

$$H_\phi = \frac{\mathrm{j}k p_0 \sin\theta}{4\pi\varepsilon_0\eta_0}\, e^{-\mathrm{j}kr}\left(\frac{1}{r^2} + \frac{\mathrm{j}k}{r}\right), \tag{1.114c}$$

with $k = \omega/c$. For a z-directed dipole moment $\mathbf{p} = p_0\hat{\mathbf{z}}$, the retarded Lorenz-gauge vector potential in the source-free exterior ($r > 0$) is

$$\mathbf{A}(\mathbf{r}) = \mathrm{j}\omega\mu_0\, \frac{p_0\hat{\mathbf{z}}\, e^{-\mathrm{j}kr}}{4\pi r}, \qquad r > 0, \tag{1.115}$$

consistent with $\mathbf{A}(\mathbf{r}) = \mu_0 \int \mathbf{J}_{\mathrm{imp}}(\mathbf{r}')\, G(\mathbf{r} - \mathbf{r}')\, d^3r'$ and the chapter Green function [2, 6, 21]. Because $\mathbf{E} = -\mathrm{j}\omega\mathbf{A} - \nabla\phi$ and $\mathbf{H} = (1/\mu_0)\nabla \times \mathbf{A}$, each spatial derivative of $e^{-\mathrm{j}kr}/r$ lowers the power of r and, when acting on the oscillatory factor, introduces powers of $\mathrm{j}k$. Collecting terms produces the r^{-3}, r^{-2}, and r^{-1} hierarchy displayed above: the r^{-3} part matches the static dipole field; the r^{-2} terms are the induction fields; the $-k^2/r$ term in E_θ together with $H_\phi \propto k/r$ is the radiative branch [2]. At fixed kr, several orders can be comparable; "near," "transition," and "far" therefore mark dominant contributions rather than disjoint shells [2, 4].

Example 1.12 (Reading the three regions of a dipole field)**.** At $f = 300\,\mathrm{MHz}$, $k = 2\pi/\lambda \approx 6.3\,\mathrm{rad/m}$. At $r = 0.5\,\mathrm{m}$, $kr \approx 3.1$ (transition); at $r = 5\,\mathrm{m}$, $kr \approx 31 \gg 1$ and the r^{-1} terms in Eqs. (1.114b) and (1.114c) dominate, giving transverse radiation with $U(\theta) \propto \sin^2\theta$, P_{rad} from Eq. (1.122), and $D(\theta) = (3/2)\sin^2\theta$ with $D_{\max} = (3/2)$ from Eqs. (1.71)–(1.73) and Eq. (1.122) [2, 6].

For $r > 0$, $\nabla \cdot \mathbf{E} = 0$ follows from the spherical-coordinate divergence condition

$$\partial_r E_r + \frac{2}{r}E_r + \frac{1}{r}\partial_\theta E_\theta + \frac{\cot\theta}{r}E_\theta = 0$$

when Eqs. (1.114a) and (1.114b) are substituted [2]. For $r > 0$, the displayed triad satisfies $\nabla \cdot \mathbf{E} = 0$ and $\nabla \cdot \mathbf{H} = 0$ with $\mathbf{H} = H_\phi\hat{\boldsymbol{\phi}}$ independent of ϕ, so only $\partial_\phi H_\phi$ enters the spherical divergence and vanishes [2, 6]. The curl identities equivalent to $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0\mathbf{H}$ and $\nabla \times \mathbf{H} = +\mathrm{j}\omega\varepsilon_0\mathbf{E}$ hold with $\mathbf{J}_{\mathrm{imp}} = \mathbf{0}$; the radial curl component $(\nabla \times \mathbf{H})_r = (r\sin\theta)^{-1}\partial_\theta(\sin\theta H_\phi)$ balances $\mathrm{j}\omega\varepsilon_0 E_r$ even though $H_r = H_\theta = 0$ [2, 6]. At $r = 0$ the ideal point dipole requires distributional sources. For a z-directed electric dipole moment phasor $\mathbf{p} = p_0\hat{\mathbf{z}}$ (p_0 in $\mathrm{C\,m}$), the charge density in the distributional sense is

$$\rho(\mathbf{r}) = -\mathbf{p} \cdot \nabla\delta^3(\mathbf{r}) = -p_0\, \partial_z\delta^3(\mathbf{r}), \tag{1.116}$$

so that $\int f(\mathbf{r})\,\rho(\mathbf{r})\,d^3r = +p_0\,\partial_z f|_{\mathbf{r}=\mathbf{0}}$ for smooth compactly supported test functions f (integration by parts on $\partial_z\delta^3$) [11, 2]. Gauss's law $\nabla\cdot\mathbf{E} = \rho/\varepsilon_0$ then requires $\nabla\cdot\mathbf{E} = -(p_0/\varepsilon_0)\,\partial_z\delta^3$ at the origin. The compatible impressed current is

$$\mathbf{J}_{\text{imp}}(\mathbf{r}) = \mathrm{j}\omega p_0\,\hat{\mathbf{z}}\,\delta^3(\mathbf{r}), \tag{1.117}$$

because $\nabla\cdot\mathbf{J}_{\text{imp}} + \mathrm{j}\omega\rho = 0$ with $\nabla\cdot(\hat{\mathbf{z}}\,\delta^3) = \partial_z\delta^3$ in $\mathcal{D}'(\mathbb{R}^3)$ [11, 2]. With outgoing $G(\mathbf{r},\mathbf{r}') = e^{-\mathrm{j}k|\mathbf{r}-\mathbf{r}'|}/(4\pi|\mathbf{r}-\mathbf{r}'|)$ and $(\nabla^2+k^2)G = -\delta^3(\mathbf{r}-\mathbf{r}')$ in $\mathcal{D}'(\mathbb{R}^3)$, the Lorenz potentials of Eqs. (1.22) and (1.23) give

$$\mathbf{A}(\mathbf{r}) = \mathrm{j}\omega\mu_0\,\mathbf{p}\,G(\mathbf{r},\mathbf{0}), \qquad \phi(\mathbf{r}) = \frac{1}{\varepsilon_0}\int \rho(\mathbf{r}')\,G(\mathbf{r},\mathbf{r}')\,d^3r' = -\frac{1}{\varepsilon_0}\,\mathbf{p}\cdot\nabla G(\mathbf{r},\mathbf{0}), \tag{1.118}$$

using $\int(-\mathbf{p}\cdot\nabla'\delta^3(\mathbf{r}'))\,G(\mathbf{r},\mathbf{r}')\,d^3r' = \mathbf{p}\cdot\nabla' G(\mathbf{r},\mathbf{r}')|_{\mathbf{r}'=\mathbf{0}} = -\mathbf{p}\cdot\nabla G(\mathbf{r},\mathbf{0})$ [11, 2]. With $\mathbf{E} = -\mathrm{j}\omega\mathbf{A} - \nabla\phi$ and $\mathbf{H} = \mu_0^{-1}\nabla\times\mathbf{A}$ (Eq. (1.24)),

$$\mathbf{E} = \epsilon_0^{-1}\left[k^2\mathbf{p}\,G + (\nabla\nabla G)\cdot\mathbf{p}\right], \qquad \mathbf{H} = \mathrm{j}\omega\,\nabla G\times\mathbf{p}, \tag{1.119}$$

which reduce to Eqs. (1.114a)–(1.114c) for $r > 0$ [2, 6, 22]. The isotropic contact term in the distributional Hessian of $1/(4\pi r)$,

$$\partial_i\partial_j\frac{1}{4\pi r} = \mathrm{PV}\frac{3\hat{r}_i\hat{r}_j - \delta_{ij}}{4\pi r^3} - \tfrac{1}{3}\delta_{ij}\,\delta^3(\mathbf{r}),$$

is the standard source-region contact structure cited in Yaghjian [23, 22]; its combination with the $k^2G\mathbf{p}$ term is not re-derived here without primary-source inspection. For smooth compactly supported ψ, distributional Gauss's law follows from $(\nabla^2+k^2)G = -\delta^3$:

$$\nabla\cdot\mathbf{E} = \epsilon_0^{-1}\mathbf{p}\cdot\nabla\big[(\nabla^2+k^2)G\big] = -\epsilon_0^{-1}\mathbf{p}\cdot\nabla\delta^3,$$

so

$$\langle\nabla\cdot\mathbf{E},\psi\rangle = -\epsilon_0^{-1}\sum_i p_i\langle\partial_i\delta^3,\psi\rangle = +\epsilon_0^{-1}\mathbf{p}\cdot\nabla\psi(\mathbf{0}) = \langle\rho/\epsilon_0,\psi\rangle,$$

using $\langle\partial_i\delta^3,\psi\rangle = -\partial_i\psi(\mathbf{0})$ and Eq. (1.116) [11, 2]. Faraday's law is satisfied because $\nabla\times$ of the gradient term $(\nabla\nabla G)\cdot\mathbf{p}$ vanishes and the $k^2G\,\mathbf{p}$ piece balances $\mathrm{j}\omega\mu_0\mathbf{H}$ with $k^2 = \omega^2\mu_0\varepsilon_0$; $\nabla\cdot\mathbf{H} = 0$ follows from $\mathbf{H}\parallel\nabla G\times\mathbf{p}$ and $\partial_\phi H_\phi = 0$ on the axisymmetric dyadic form. Ampère–Maxwell in $\mathcal{D}'(\mathbb{R}^3)$ uses $\nabla\times(\nabla G\times\mathbf{p}) = \nabla(\mathbf{p}\cdot\nabla G) - \mathbf{p}(\nabla^2 G)$ and $(\nabla^2+k^2)G = -\delta^3$, with the isotropic Hessian contact $-\frac{1}{3}\delta_{ij}\delta^3$ absorbing the $(\nabla^2 G)$ singularity at the origin together with Eq. (1.117) [23, 22, 2]. The spherical formulas Eqs. (1.114a)–(1.114c) are the classical $r > 0$ restriction of this distribution; Yaghjian's source-region dyadic and shape-dependent depolarisation refine the contact structure when the limiting principal volume is not spherically symmetric [23, 22]. Finite-width sources converge to this point dipole only under stated moment, scale and regularisation hypotheses [22, 2]. For a charge-continuous impressed current with fixed electric dipole moment $\mathbf{p}$, source scale $\ell\to 0$, and observation points at fixed distance from the support, the exterior fields of Eqs. (1.114a)–(1.114c) follow from multipole theory when ℓ is small compared with both k^{-1} and the observation distance; $k\ell \ll 1$ alone is not a sufficient convergence criterion without moment bounds and a stated regularization [2, 6, 11, 22]. The E_r–E_θ–H_ϕ split is the outgoing Hertzian template with the published coefficients [2, 6]. The same ideal point dipole at $f = 1\,\text{GHz}$ used in Subsection 1.6.3 illustrates shell dependence on two concentric spheres S_{r_1} and S_{r_2} with $kr_1 = 0.5$ and $kr_2 = 5$, as in Figure 1.17.

In the standard multipole description of an outgoing field,

$$\mathbf{E}(\mathbf{r}) = \mathbf{E}_3(\theta,\phi)\,r^{-3} + \mathbf{E}_2(\theta,\phi)\,r^{-2} + \mathbf{E}_1(\theta,\phi)\,r^{-1} + \cdots, \qquad \mathbf{H}(\mathbf{r}) = \mathbf{H}_2(\theta,\phi)\,r^{-2} + \mathbf{H}_1(\theta,\phi)\,r^{-1} + \cdots, \tag{1.120}$$




Figure 1.30: Far-zone radiation intensity $U(\theta,\phi) \propto \sin^2\theta$ for an electric dipole aligned with $\hat{\mathbf{z}}$: intensity vanishes on axis and peaks in the equatorial plane. With Eq. (1.122), $D(\theta) = (3/2)\sin^2\theta$ and $D_{\max} = (3/2)$ [2, 6].

where the angular factors $\mathbf{E}_n, \mathbf{H}_n$ depend on direction but not on r in the source-free exterior [2]. Near the source, r^{-3} and r^{-2} terms may rival or exceed the r^{-1} radiation field. They describe stored and induction fields—local oscillation of electric and magnetic energy—while the normal Poynting vector may be largely imaginary even though the source already radiates definite outward power. At increasing distance the r^{-1} terms dominate, $\mathbf{E}$ and $\mathbf{H}$ approach the transverse relation of an outgoing wave, and the real Poynting flux carries energy away from the source [4].

The radial intensity of that flux follows from the field itself. With $\mathbf{S}_{\mathrm{c}} = \frac{1}{2}\mathbf{E}\times\mathbf{H}^*$ and H_ϕ from Eq. (1.114c) (within Eq. (1.114)), the radial component is

$$\mathrm{Re}\{(\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}})\} = \tfrac{1}{2}\,\mathrm{Re}\Big\{E_\theta H_\phi^*\Big\}, \tag{1.121}$$

since $\mathbf{H}$ has only a ϕ-component [2]. On a sphere of radius r, the radiative part of $\mathrm{Re}(S_{\mathrm{c},r})$ scales as $1/r^2$ because both $\mathbf{E}$ and $\mathbf{H}$ carry the $1/r$ factor. The element of area grows as r^2, so

$$P_{\mathrm{rad}} = \oint_{S_r} \mathrm{Re}\{\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}}\}\,dS = \frac{\omega^4|p_0|^2}{12\pi\varepsilon_0 c^3}, \tag{1.122}$$

remains constant in a lossless source-free region between enclosing surfaces [2]. Total radiated power is unchanged; with increasing r only the local field composition through which that conserved power is conveyed changes.

In the far zone, $U(\theta,\phi) \propto \sin^2\theta$ with peak $U_{\max}$ at $\theta = \pi/2$. Eqs. (1.71)–(1.73) give

$$D(\theta,\phi) = \frac{4\pi\,U(\theta,\phi)}{P_{\mathrm{rad}}} = (3/2)\sin^2\theta, \qquad D_{\max} = (3/2),$$

using Eq. (1.122) and $\int_{4\pi}\sin^2\theta\,d\Omega = 8\pi/3$, so $\int_{4\pi} D(\theta,\phi)\,d\Omega = 4\pi$ [2, 6].

Figure 1.30 displays the angular side of Eq. (1.122): P_{rad} is fixed while its solid-angle distribution is strongly non-uniform. Axisymmetric radiation carries finite power yet may carry zero net z-angular-momentum flux when the stress integrand is symmetric about $\hat{\mathbf{z}}$ [1].

Let $x = kr$. The outgoing transverse factors in Eqs. (1.114b) and (1.114c) enter $\mathbf{S}_{\mathrm{c}} = \frac{1}{2}\mathbf{E}\times\mathbf{H}^*$ as $(1 + \mathrm{j}x - x^2)$ and $(1 + \mathrm{j}x)$. Algebraically,

$$(1 + \mathrm{j}x - x^2)(1 - \mathrm{j}x) = 1 + \mathrm{j}x^3, \tag{1.123}$$

since the j^2 term cancels the x^2 contribution. Substituting Eqs. (1.114b), (1.114c), and (1.121) into $\oint_{S_r}\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}}\,dS$ and performing the θ integration on S_r gives, for the Hertzian electric dipole of Eqs. (1.114),

$$\oint_{S_r}\mathbf{S}_{\mathrm{c}}\cdot\hat{\mathbf{r}}\,dS = P_{\mathrm{rad}}\left(1 - \frac{\mathrm{j}}{(kr)^3}\right), \tag{1.124}$$

with P_{rad} from Eq. (1.122). Equivalently, with the definitions of Eq. (1.79),

$$\oint_{S_r} \mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{r}}\, dS = P_{\mathrm{rad}} + \mathrm{j}P_{\mathrm{reac}}(r), \qquad P_{\mathrm{reac}}(r) = \mathrm{Im}\left\{ \oint_{S_r} \mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{r}}\, dS \right\}. \tag{1.125}$$

Consistency with Eq. (1.124) requires $P_{\mathrm{reac}}(r) = -P_{\mathrm{rad}}/(kr)^3$ (signed reactive power through S_r), so

$$\frac{|P_{\mathrm{reac}}(r)|}{P_{\mathrm{rad}}} = \frac{1}{(kr)^3}. \tag{1.126}$$

The shell integral $P_{\mathrm{reac}}(r) = \mathrm{Im}\{\oint_{S_r} \mathbf{S}_{\mathrm{c}} \cdot \hat{\mathbf{r}}\, dS\}$ measures reactive harmonic exchange through S_r. It is not a stored-energy functional, and it is not Chu's antenna Q of Eqs. (1.128) and (1.129) [4, 2, 7]. In a lossless exterior, P_{rad} is fixed on nested spheres while $|P_{\mathrm{reac}}(r)|$ varies with r; the ratio in Eq. (1.126) therefore marks shells that are storage-dominated when it is much greater than unity and predominantly radiative when it is much less than unity [2].

At S_{r_1} with $kr_1 = 0.5$, reactive circulation still dominates the normal flux pattern although P_{rad} is unchanged. Integrating Eqs. (1.114b) and (1.114c) on S_{r_1} via Eq. (1.79) with $|p_0| = 1\,\mathrm{C\,m}$ gives $|P_{\mathrm{reac}}(r_1)|/P_{\mathrm{rad}} \approx 8$. On S_{r_2} with $kr_2 = 5$, the same integration gives $|P_{\mathrm{reac}}(r_2)|/P_{\mathrm{rad}} \approx 8 \times 10^{-3}$, and **E**–**H** approach the far-zone transverse relation under the outgoing branch and radiation condition stated in section 1.1 [2].

Angular-momentum transport demands the same distinction. Outward field angular-momentum flux through S_r is

$$\dot{J}_{z,\mathrm{em,out}} = -\oint_{S_r} \left[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{r}})\right] \cdot \hat{\mathbf{z}}\, dS \tag{1.127}$$

by Eqs. (1.66) and (1.65), and is conserved on nested source-free spheres in steady state when the same outgoing Maxwell branch is followed [2]. Outward relocation of the enclosing surface does not create angular momentum; it alters the local stress distribution that carries the same signed flux. By contrast, the integral of the magnitude $\int_{S_r} |[\mathbf{r} \times (\langle \mathbf{T} \rangle \cdot \hat{\mathbf{r}})] \cdot \hat{\mathbf{z}}|\, dS$ may vary with r because near-zone reactive structure contributes differently to the stress moment than the far-zone radiative field—without implying growth of the conserved net flux [2, 1].

Chu's quality factor for a control volume V enclosing the source is

$$Q_{\mathrm{adopted}}(V) = \frac{2\omega \max(W_e, W_m)}{P_{\mathrm{rad}}}, \tag{1.128}$$

with cycle-averaged stored energies W_e, W_m and outward radiated power P_{rad} adopted in this chapter for later antenna bookkeeping [7, 6]. Chu's original spherical-wave and equivalent-circuit Q in Ref. [7] uses model-specific stored-energy partitions; Eq. (1.128) is an adopted functional and is not asserted to be identical to every quantity in the 1948 report without a separate equivalence derivation. At resonance under the adopted definition, $Q_{\mathrm{adopted}} = \omega(W_e + W_m)/P_{\mathrm{rad}}$. The shell integral $P_{\mathrm{reac}}(r)$ is reactive power through S_r, not Q_{adopted} [7, 2]. Eq. (1.129) applies to Chu's idealized minimum-Q spherical-wave radiator of radius a in free space ($ka \ll 1$); it is not asserted for arbitrary geometries or stored-energy definitions [7, 6]. Under that model,

$$Q_{\mathrm{LB}} = \frac{1}{(ka)^3} + \frac{1}{ka}. \tag{1.129}$$

Local r^{-3}, r^{-2}, r^{-1} weighting changes with radius; P_{rad} and nested-sphere $\mathbf{\Phi}_{J,\mathrm{out}}$ do not [4, 2]. Chapter 2 develops angular-spectrum mappings for bounded sources [6].

1.7 Summary

This chapter has kept angular questions tied to a completed Maxwell field. Impressed sources, constitutive laws, interface data, and outgoing selection fix $(\mathbf{E}, \mathbf{H})$; on that pair the balances

are complex Poynting power, symmetric Maxwell traction for force, and stress-moment flux $\boldsymbol{\Phi}_{J,\mathrm{out}} = -\boldsymbol{\mathcal{T}}_J$ for signed angular-momentum transport through a chosen surface [3, 4, 1, 2]. In applications, three ideas must remain separate: how the field is *organized* in angle (phase, polarization, modal labels); how much angular momentum is *associated* with the field in a volume or chart; and how much is actually *transported* outward through a physical interface [5, 2].

The chapter's constructive results are the closed-surface observables, the reactive-versus-radiative shell integrals for a Hertzian dipole, and the scoped modal and helicity scales in Subsection 1.6.1 [2, 6, 7]. Subsection 1.1.4 combines a difference-field energy balance on a passive scalar impedance sheet with a Rellich–Sommerfeld outgoing continuation that yields $\Delta\mathbf{E} = \Delta\mathbf{H} = \mathbf{0}$ in the stated exterior vacuum class; existence of the inhomogeneous scattering problem and full Colton–Kress–Hsiao operator matching remain cited, not reproduced here [10, 6, 16]. Subsection 1.6.4 states distributional closure of the ideal electric dipole under the contact-term model quoted, with Yaghjian source-region refinements and finite-width convergence hypotheses noted explicitly. Chu's original equivalent-circuit Q, Jackson shell-content identities under this phasor branch, and a general Hansen modal transport law are bounded explicitly and passed to Chapter 2 [11, 22, 12, 7]. The following volume develops angular-spectrum and dyadic-Green operators on the same outgoing branch, so bounded sources can be analysed without conflating open-aperture modal accounts with closed-sphere stress theorems [6].

1.8 Problems

1. **Maxwell conservation laws: Poynting, momentum, stress, and torque.** For harmonic fields under $\exp(+\mathrm{j}\omega t)$, use the complex Poynting balance Eq. (1.44), the instantaneous momentum identity Eq. (1.50), and the angular-momentum balance Eq. (1.59) [4, 3, 2]. Separate impressed-source torque $\boldsymbol{\tau}_{\mathrm{src}}$, mechanical torque on matter, and load torque when a body intercepts flux. (a) Derive the real and imaginary parts in Eq. (1.45) and state physically what $\mathrm{Re}(\mathbf{S}_{\mathrm{c}})$ and $\mathrm{Im}(\mathbf{S}_{\mathrm{c}})$ measure. (b) Starting from Eqs. (1.47) and (1.51), outline how index contraction with Maxwell's equations yields Eq. (1.50) and when $\mathbf{f}_{\mathrm{matter}} = \mathbf{f}_{\mathrm{src}}$ (Route A) versus when net body force follows from a source-free stress integral (Route B). (c) Multiply Eq. (1.50) by $\mathbf{r}\times$, use $T_{kj} = T_{jk}$, and obtain Eq. (1.59) with $\boldsymbol{\tau}_{\mathrm{src}}$; define $\mathbf{M}^{(i)} = \mathbf{r} \times \mathbf{T}^{(i)}$ and $\langle\mathbf{M}\rangle = \mathbf{r} \times \langle\mathbf{T}\rangle$, with $\boldsymbol{\mathcal{T}}_J = \oint\langle\mathbf{M}\rangle \cdot \hat{\mathbf{n}}\, dS$ and $\boldsymbol{\Phi}_{J,\mathrm{out}} = -\boldsymbol{\mathcal{T}}_J$; distinguish $\boldsymbol{\tau}_{\mathrm{src}}$ from mechanical $\boldsymbol{\tau}_{\mathrm{matter}}$ (Route A) and from the resultant $\tau_{\hat{\mathbf{u}}}(V_m)$ in Eq. (1.67); show how the latter equals $-\boldsymbol{\Phi}_{J,\mathrm{out}}$ at harmonic steady state on a source-free enclosing surface and distinguish $\boldsymbol{\tau}_{\mathrm{source}}$ from $\boldsymbol{\tau}_{\mathrm{load}}$ when the load intercepts net flux [1]. (d) For the plane wave of Eq. (1.55) normally incident on a perfect absorber with vacuum control volume $z < 0$ and outward normal $\hat{\mathbf{n}} = +\hat{\mathbf{z}}$, verify $p_{\mathrm{abs}} = |\langle\mathbf{S}\rangle|/c$ [2]. (e) For the same wave on a perfect reflector, show $p_{\mathrm{refl}} = 2|\langle\mathbf{S}\rangle|/c$ and explain the factor of two physically [3, 2].

2. **Charge continuity and Green-function bridge.** (a) Under $\exp(+\mathrm{j}\omega t)$, take the divergence of the phasor Ampère–Maxwell law and obtain Eq. (1.7). Explain why ρ and $\mathbf{J}_{\mathrm{imp}}$ cannot be specified independently [3, 2]. (b) Integrate Eq. (1.7) over a source region and interpret Eq. (1.37). (c) Explain why longitudinal/transverse Helmholtz decomposition of $\mathbf{J}_{\mathrm{imp}}$ is not the same as near-field versus far-field decomposition [2, 11]. *[Chapter 2.]* (d) State how Eqs. (1.19) and (1.21) connect localized sources to outgoing fields and how Eq. (1.28) introduces angular phase [12, 2].

3. **Boundary conditions and outgoing selection.** (a) State PEC, PMC, and impedance boundary conditions of Eq. (1.31) [2]. (b) For a radiating exterior problem, explain the physical content of Eq. (1.35) and why it excludes incoming completion [10, 2]. (c) Using

the local relation $\nabla \cdot \mathbf{S}_\Delta = -2\mathrm{j}\omega(u_{\Delta H} - u_{\Delta E})$ and Eq. (1.39) in Subsection 1.1.4, summarize uniqueness on (i) bounded domains with $\varepsilon'', \mu'' > 0$ throughout and homogeneous PEC/PMC data, (ii) lossless cavities at eigenfrequency, and (iii) exterior radiating problems with outgoing selection; state what the passive-loss integral implies when only one of ε'', μ'' is positive in part of the domain, and note that passive impedance boundaries require the boundary flux from Eqs. (1.31) and (1.32) rather than assuming zero [2, 6]. (d) Explain why compatible source, interface, and boundary data must be fixed before Poynting and torque integrals are physically defined [6].

4. **Angular spectrum.** *[Chapter 2.]* Using only Eq. (1.28), explain how a localized source imprints direction-dependent phase on the outgoing field and why that phase structure is not yet a complete angular-spectrum representation [2, 24].

5. **Cylindrical waves.** *[Chapter 2.]* Under $\exp(+\mathrm{j}\omega t)$, state which cylindrical Hankel branch is outgoing and why constant-phase analysis must be used rather than sign inspection alone [2, 6]. Relate azimuthal phase $e^{\mathrm{j}m\phi}$ to angular *dependence* without claiming net angular-momentum transport; the $\mathbf{H} = \eta^{-1}\hat{\mathbf{z}} \times \mathbf{E}$ relation is exact for uniform plane waves but is only a paraxial/modal template for spatially varying transverse fields unless full Maxwell residuals are verified [1, 5].

6. **Spherical harmonics and VSH.** *[Chapter 3.]* Explain why a tangential vector field on a sphere requires componentwise scalar harmonics or an explicit tangential vector basis, and why scalar Y_ℓ^m alone is not a complete electromagnetic basis [2, 14].

7. **Rotation, helicity, and limits of $(m + \sigma)P/\omega$.** (a) Distinguish active source rotation from passive coordinate rotation using Section 1.3 [1, 2]. (b) For Remark 1.9 and the Maxwell-stress definition Eq. (1.96), state the separable/modal-class assumptions required, why the relation is not universal for arbitrary full-vector fields, and why the uniform plane-wave disk countercheck in Subsection 1.6.1 does *not* establish $\sigma P/\omega$ from the symmetric Maxwell stress integral [2, 5]. (c) For field-based helicity Eq. (1.89), explain why $(\mathbf{E}, \mathbf{H})$ built quantities are gauge invariant whereas potential-based canonical splits may not be [11, 13]. (d) Two equal-power outgoing modes carry azimuthal indices $+m$ and $-m$ on aperture S_o, producing a standing azimuthal intensity pattern. Using Eq. (1.109) and the stated modal assumptions, find the net signed orbital flux and explain why the standing pattern does not reveal that flux by inspection alone [5, 1].

8. **Fraunhofer and aperture patterns.** *[Chapter 2.]* Starting from Eq. (1.28), state the Fraunhofer far-field condition $r \gg a^2/\lambda$ in words and explain the role of $-\hat{\mathbf{r}} \cdot \mathbf{r}'$ in selecting observable direction [25, 24].

9. **Dipole fields, continuity, and Maxwell closure.** (a) From Eq. (1.22), explain how the $e^{-\mathrm{j}k_0 R}/R$ phase generates a dipole far field without re-deriving full multipole theory [11, 2]. (b) Using Eq. (1.7), explain why an isolated localized source cannot support a time-varying radiating electric monopole while static Coulomb fields remain [3, 2]. (c) Using Eqs. (1.114a), (1.114b), and (1.114c) (within Eq. (1.114)), verify $\nabla \cdot \mathbf{E} = 0$ for $r > 0$, $\nabla \times \mathbf{E} = -\mathrm{j}\omega\mu_0\mathbf{H}$, and $\nabla \times \mathbf{H} = +\mathrm{j}\omega\varepsilon_0\mathbf{E}$ in source-free spherical coordinates; identify r^{-3}, r^{-2}, r^{-1} zones and the $\sin^2\theta$ intensity pattern. Do not treat these exterior checks as a proof of full distributional closure at $r = 0$ unless the complete Green-function limit is supplied [2, 11]. (d) At $f = 300\,\mathrm{MHz}$, compute kr at $r = 0.5\,\mathrm{m}$ and $r = 5\,\mathrm{m}$. State which radial terms dominate in each case and describe the corresponding Poynting behaviour (reactive versus radiative) [2, 4]. (e) Using the intensity and directivity definitions Eqs. (1.71) and (1.73) together with the aligned-dipole power Eq. (1.122), show $D(\theta) = (3/2)\sin^2\theta$, verify $\int_{4\pi} D(\theta, \phi)\, d\Omega = 4\pi$, and state $D_{\max} = (3/2)$ [6, 2].

10. **Reactive shell, Chu quality factor, and finite size.** (a) Distinguish P_{rad} from $P_{\mathrm{reac}}(r)$ in Eq. (1.79) and explain why $|P_{\mathrm{reac}}(r)|/P_{\mathrm{rad}}$ depends on shell radius [4, 2]. (b) Using $Q_{\mathrm{adopted}} = 2\omega \max(W_e, W_m)/P_{\mathrm{rad}}$ from Eq. (1.128), explain why shell reactive power $P_{\mathrm{reac}}(r)$ from Eq. (1.79) is neither Q_{adopted} nor Chu's original equivalent-circuit Q, and state the resonance form $Q_{\mathrm{adopted}} = \omega(W_e + W_m)/P_{\mathrm{rad}}$ under the adopted definition [7]. (c) For the two-shell dipole comparison in Subsection 1.6.4, relate reactive dominance at $kr_1 = 0.5$ to radiative dominance at $kr_2 = 5$ without changing P_{rad} [2]. (d) State Chu's small-ka scaling $Q_{\mathrm{LB}} \sim (ka)^{-3}$ under Eq. (1.129) [7, 6].

Bibliography

[1] R. A. Beth, "Mechanical detection and measurement of the angular momentum of light," *Physical Review*, vol. 50, no. 2, pp. 115–125, 1936.

[2] J. A. Stratton, *Electromagnetic Theory*. McGraw-Hill, 1941.

[3] J. C. Maxwell, *A Treatise on Electricity and Magnetism*, 1st ed. Clarendon Press, 1873.

[4] J. H. Poynting, "On the transfer of energy in the electromagnetic field," *Philosophical Transactions of the Royal Society of London*, vol. 175, pp. 343–361, 1884.

[5] L. Allen, M. W. Beijersbergen, R. J. C. Spreeuw, and J. P. Woerdman, "Orbital angular momentum of light and the transformation of laguerre-gaussian laser modes," *Physical Review A*, vol. 45, no. 11, pp. 8185–8189, 1992.

[6] R. F. Harrington, *Time-Harmonic Electromagnetic Fields*. Wiley-IEEE Press, 2001.

[7] L. J. Chu, "Physical limitations of omni-directional antennas," *Journal of Applied Physics*, vol. 19, no. 12, pp. 1163–1175, 1948.

[8] M. Abraham, "Zur elektrodynamik bewegter körper," *Rendiconti del Circolo Matematico di Palermo*, vol. 28, no. 1, pp. 1–28, 1910.

[9] H. Minkowski, "Die grundgleichungen für die elektromagnetischen vorgänge in bewegten körpern," *Nachrichten von der Gesellschaft der Wissenschaften zu Göttingen, Mathematisch-Physikalische Klasse*, pp. 53–111, 1908.

[10] A. Sommerfeld, *Partial Differential Equations in Physics*. Academic Press, 1949.

[11] J. D. Jackson, *Classical Electrodynamics*, 3rd ed. Wiley, 1999.

[12] C.-T. Tai, *Dyadic Green Functions in Electromagnetic Theory*, 2nd ed. IEEE Press, 1994.

[13] F. J. Belinfante, "On the current and the density of the electric charge, the energy, the linear momentum and the angular momentum of arbitrary fields," *Physica*, vol. 7, no. 5, pp. 449–474, 1940.

[14] J. E. Hansen, *Spherical Near-Field Antenna Measurements*. Peter Peregrinus, 1988.

[15] R. E. Collin, *Field Theory of Guided Waves*, 2nd ed. IEEE Press, 1991.

[16] D. Colton, R. Kress, and G. C. Hsiao, "The impedance boundary value problem for the time harmonic Maxwell equations," *Mathematical Methods in the Applied Sciences*, vol. 3, no. 1, pp. 475–487, 1981.

[17] I. Fernández-Corbatón, M. Lu, S. Nanz, R. Romero, and R. W. Ziolkowski, "Electromagnetic duality symmetry and helicity conservation for the macroscopic Maxwell's equations," *Physical Review Letters*, vol. 111, p. 060401, 2013.

[18] A. Cerjan and C. Cerjan, "Orbital angular momentum of Laguerre–Gaussian beams beyond the paraxial approximation," *Journal of the Optical Society of America A*, vol. 28, no. 11, pp. 2253–2260, 2011.

[19] P. B. Monteiro, P. A. Maia Neto, and H. M. Nussenzveig, "Angular momentum of focused beams: Beyond the paraxial approximation," *Physical Review A*, vol. 79, p. 033830, 2009.

[20] A. M. Stewart, "Angular momentum of the electromagnetic field: The plane wave paradox resolved," *European Journal of Physics*, vol. 26, no. 4, pp. 635–641, 2005.

[21] S. J. Orfanidis, *Electromagnetic Waves and Antennas*. Rutgers University, 2014, online monograph.

[22] A. D. Yaghjian, "A delta-distribution derivation of the electric field in the source region," *Electromagnetics*, vol. 2, no. 2, pp. 161–167, 1982.

[23] ——, "Electric dyadic Green's functions in the source region," *Proceedings of the IEEE*, vol. 68, no. 2, pp. 248–263, 1980.

[24] S. Silver, Ed., *Microwave Antenna Theory and Design*, ser. MIT Radiation Laboratory Series. McGraw-Hill, 1949, vol. 12.

[25] M. Born and E. Wolf, *Principles of Optics*, 7th ed. Cambridge University Press, 1999.