


Compiler

Ram Sarkar, CSE, JU

What Do Compilers Do (1)

- ▶ A compiler acts as a translator, transforming human-oriented programming languages into computer-oriented machine languages.
- ▶ Ignore machine-dependent details for programmer

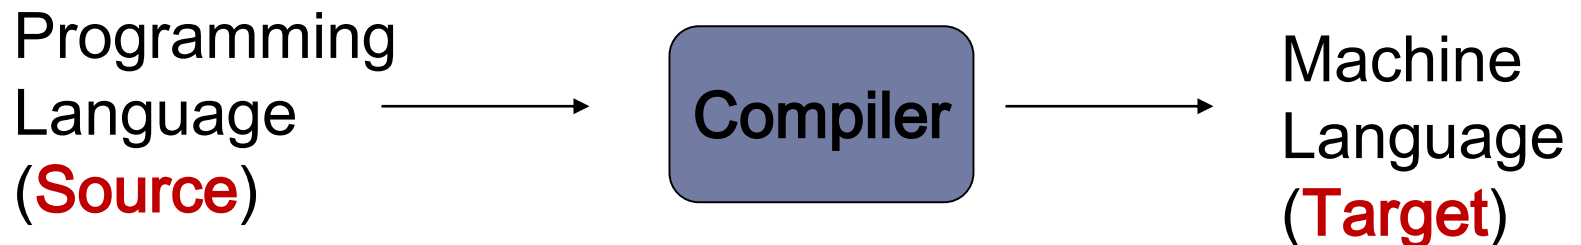

What Do Compilers Do (2)


- ▶ Compilers may generate three types of code:
 - ▶ Pure Machine Code
 - ▶ Machine instruction set without assuming the existence of any operating system or library.
 - ▶ Mostly being OS or embedded applications.
 - ▶ Augmented Machine Code
 - ▶ Code with OS routines and runtime support routines.
 - ▶ More often
 - ▶ Virtual Machine Code
 - ▶ Virtual instructions, can be run on any architecture with a virtual machine interpreter or a just-in-time compiler
 - ▶ Ex. Java

What Do Compilers Do (3)

- ▶ Another way that compilers differ from one another is in the format of the target machine code they generate:
 - ▶ Assembly or other source format
 - ▶ Relocatable binary
 - ▶ Relative address
 - ▶ A linkage step is required
 - ▶ Absolute binary
 - ▶ Absolute address
 - ▶ Can be executed directly


The Structure of a Compiler (1)

- ▶ Any compiler must perform two major tasks

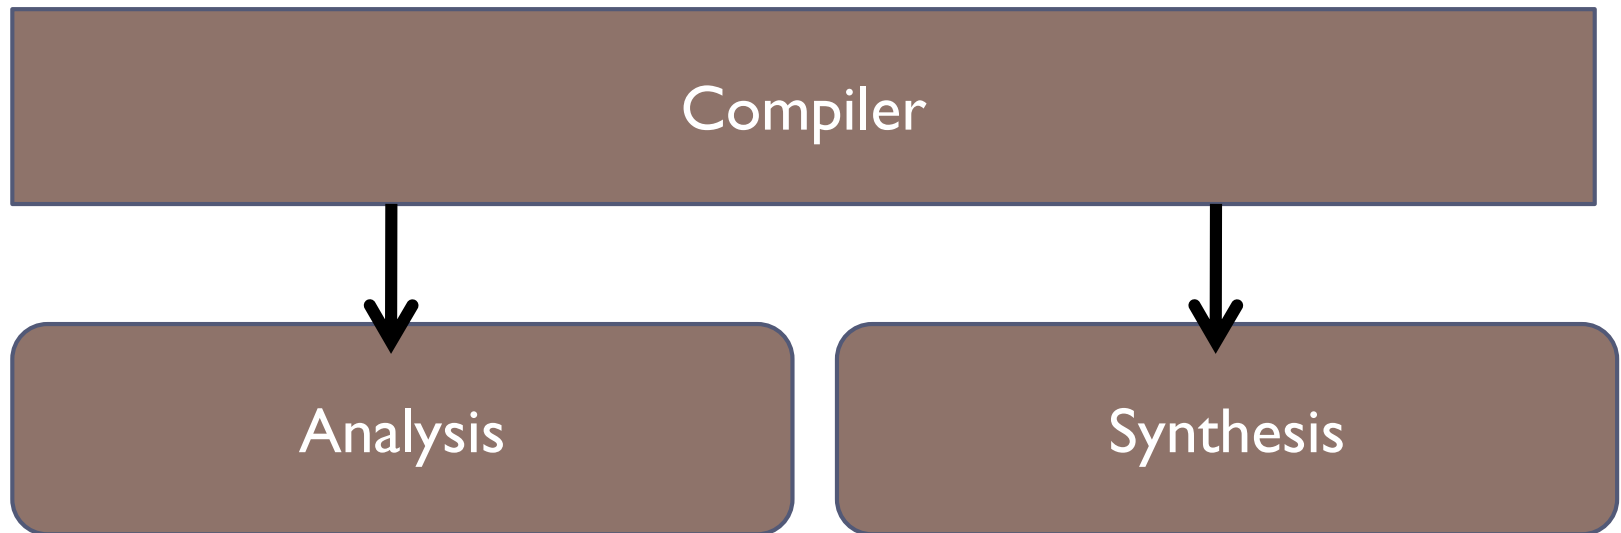


- ▶ Analysis of the source program
- ▶ Synthesis of a machine-language program


The Structure of a Compiler (2)

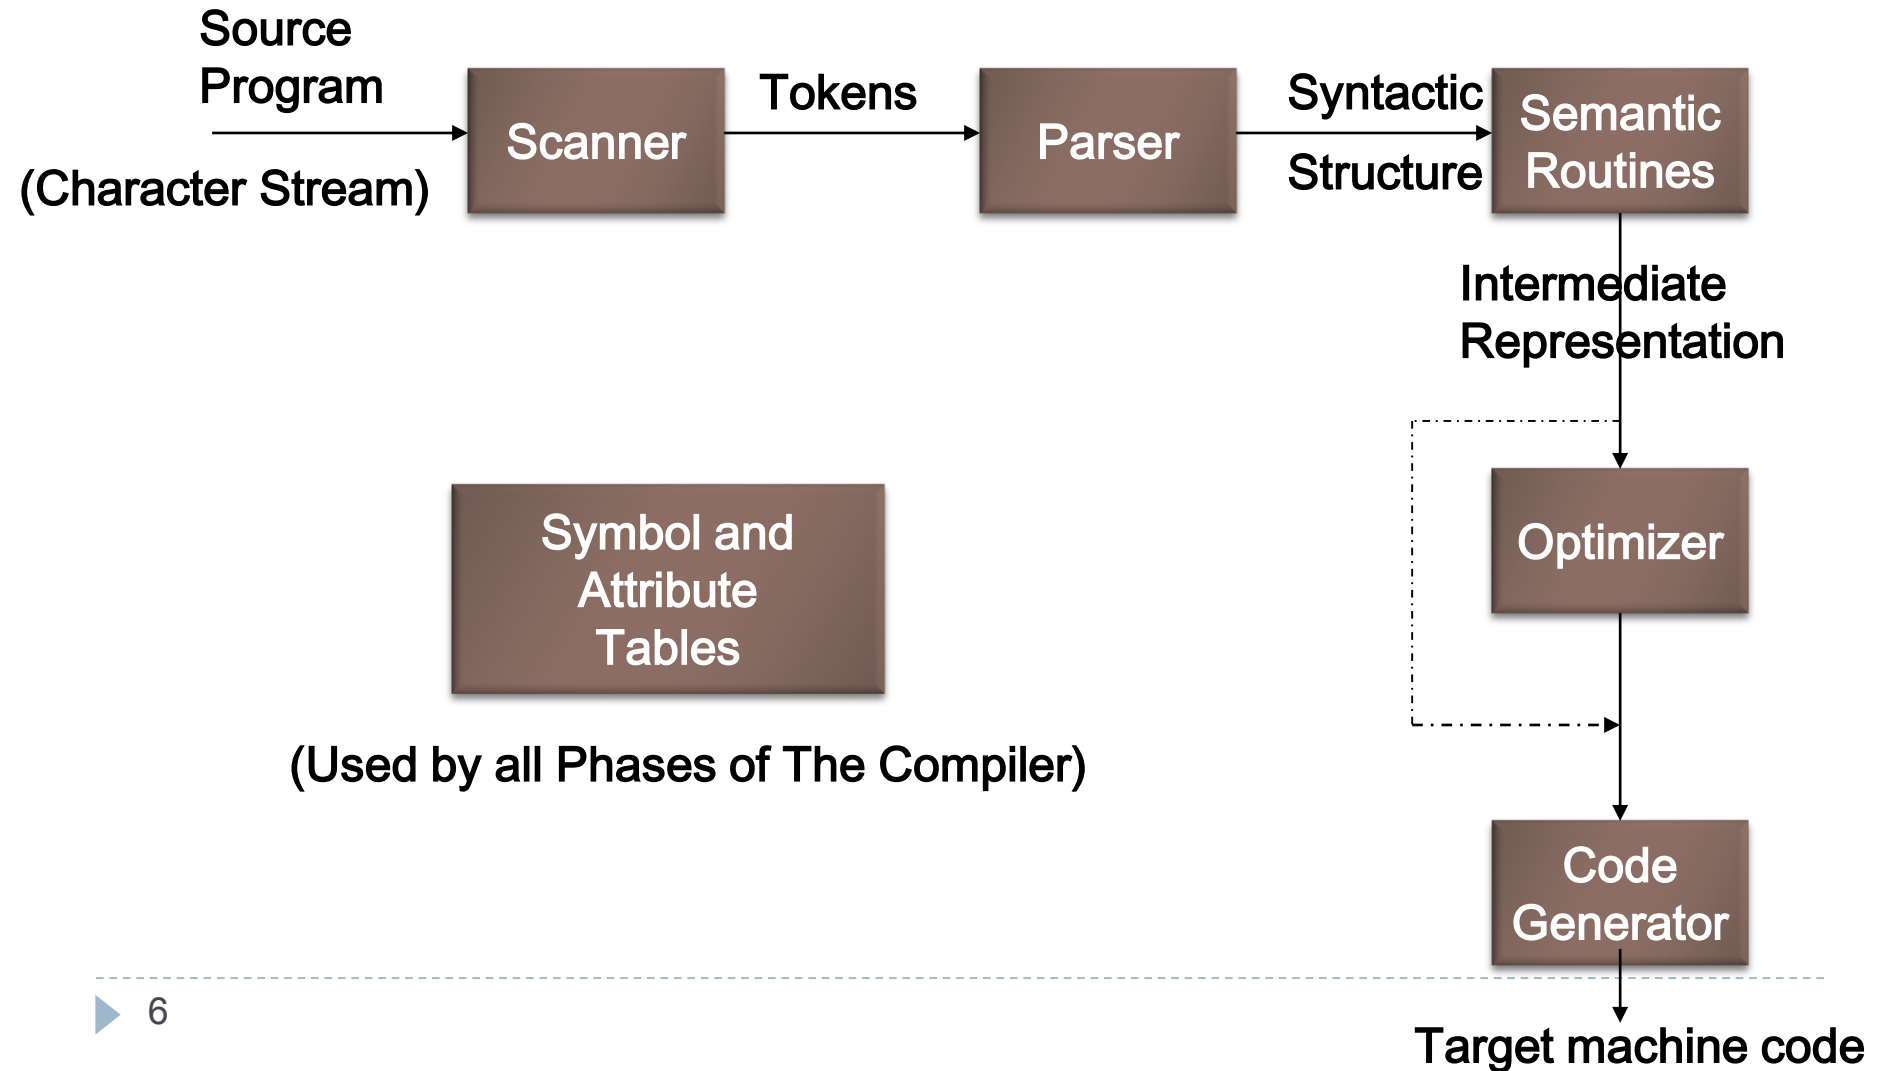


The Structure of a Compiler (3)

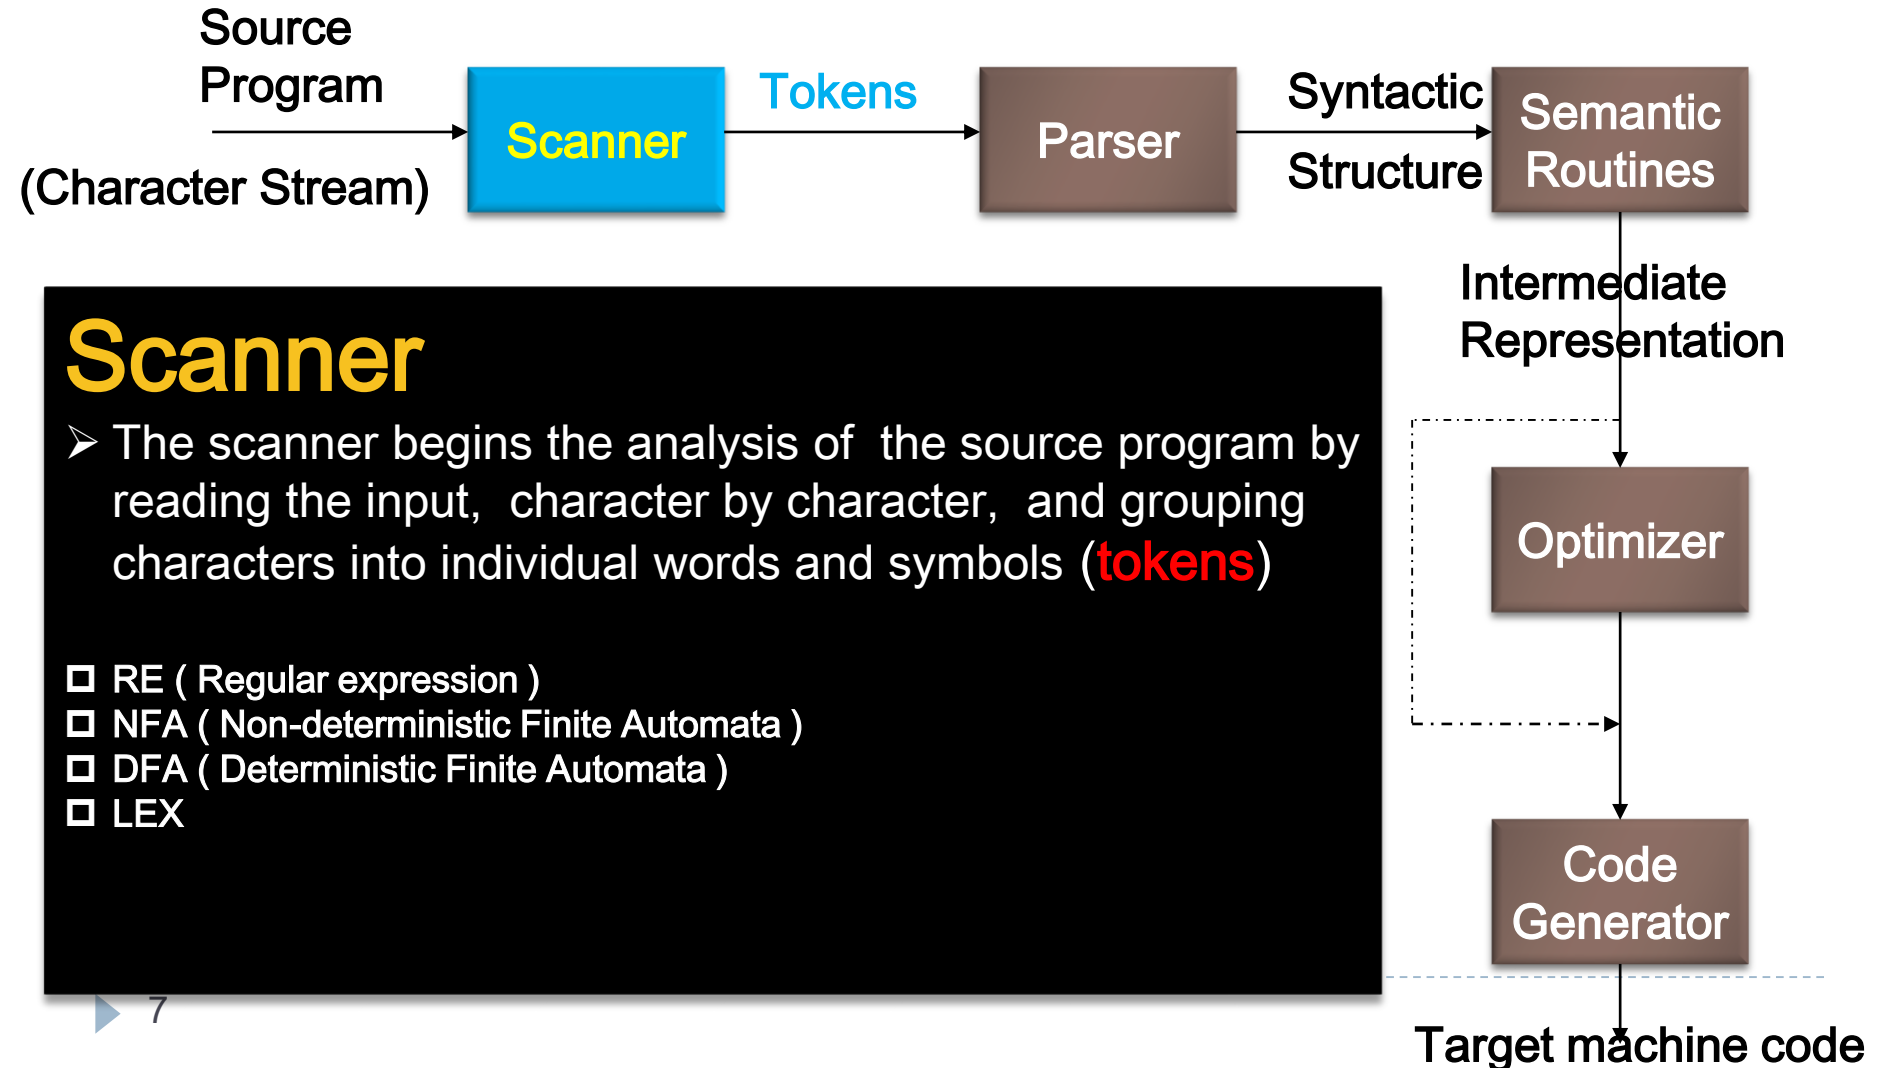


The Structure of a Compiler (4)

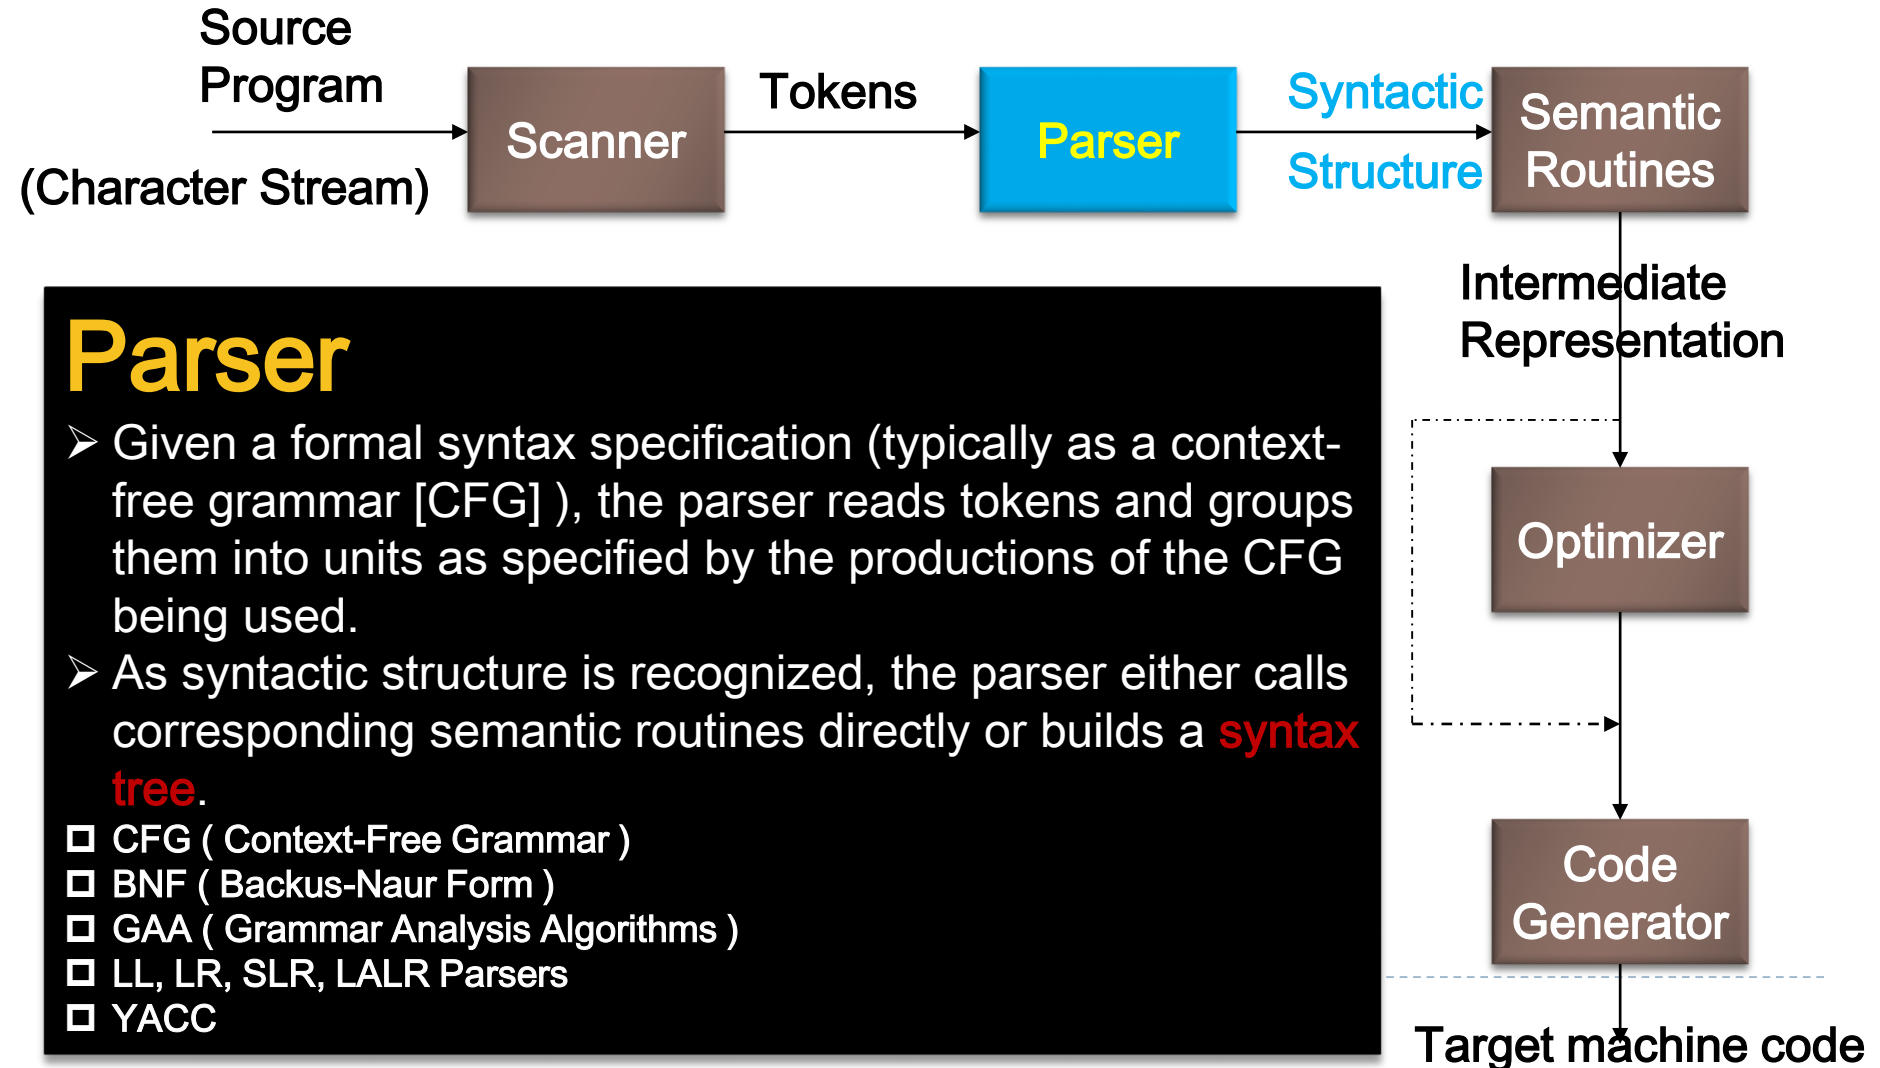


The Structure of a Compiler (5)

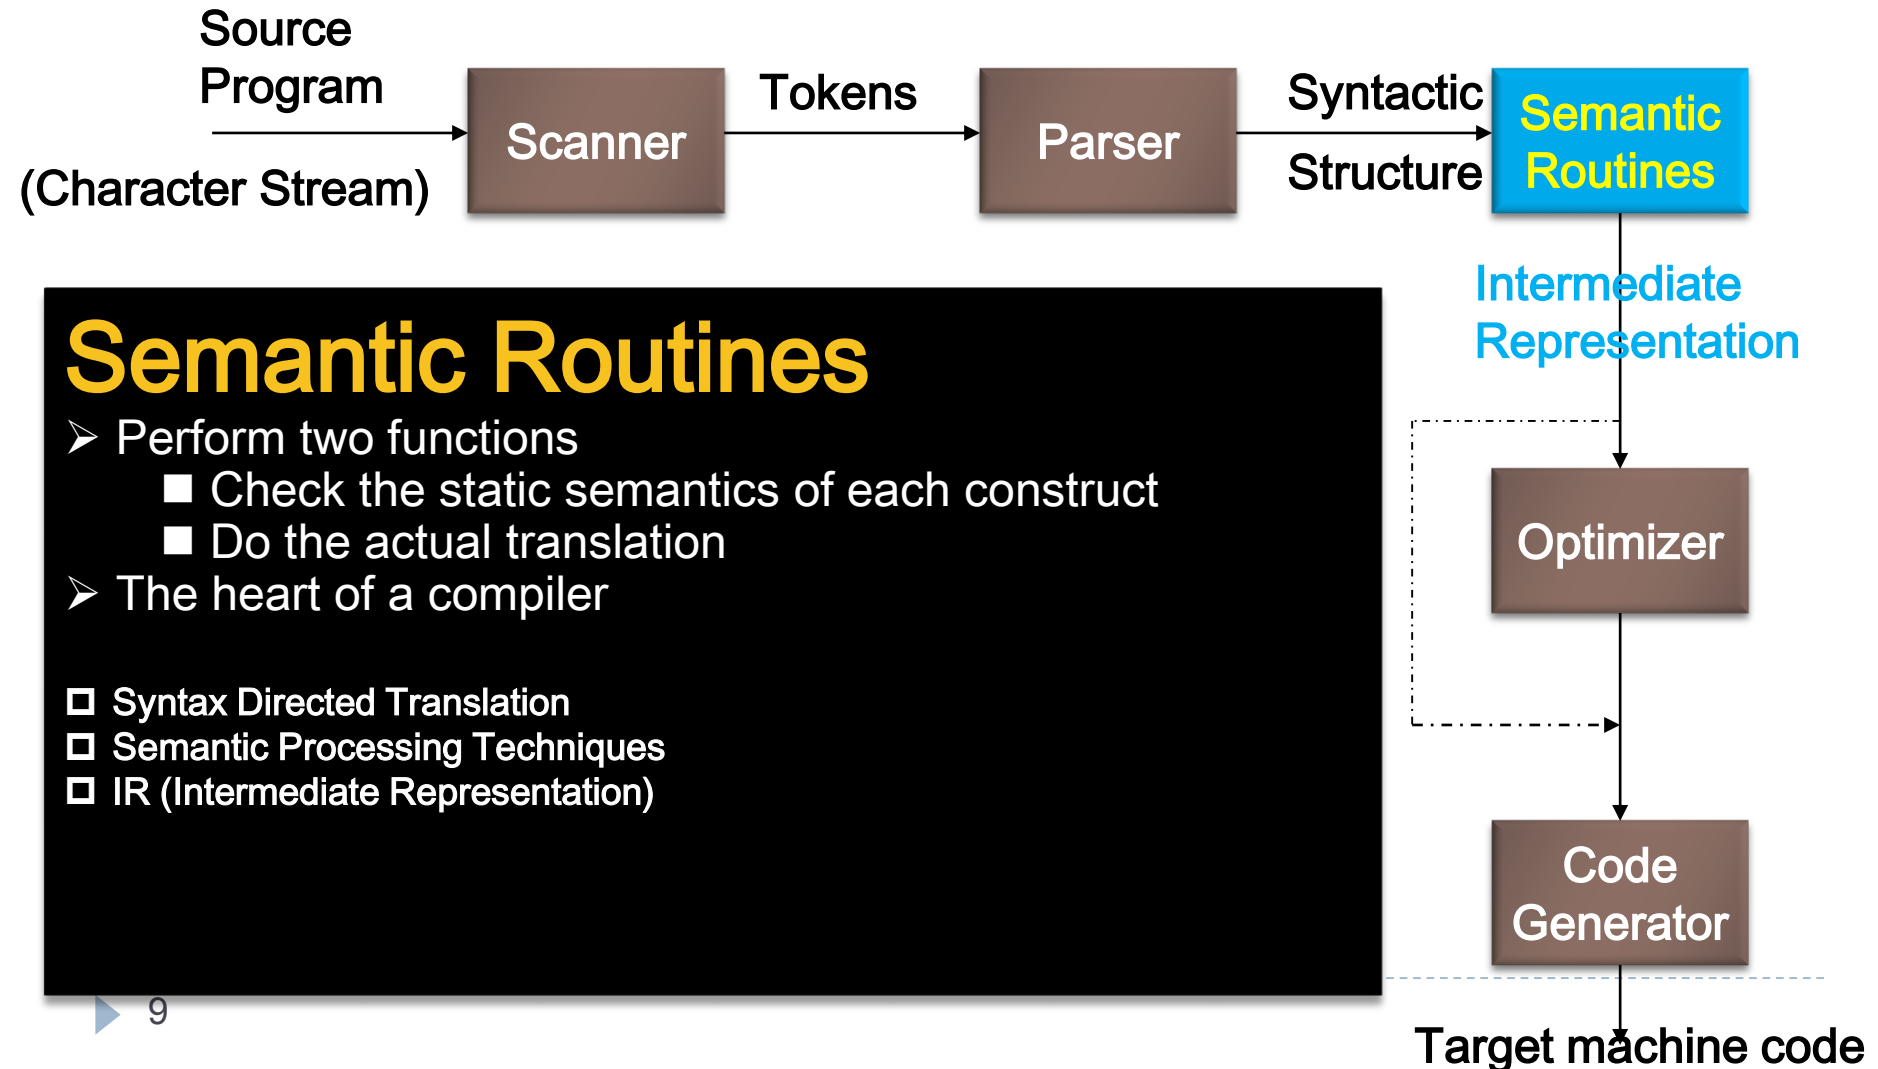

The Structure of a Compiler (6)

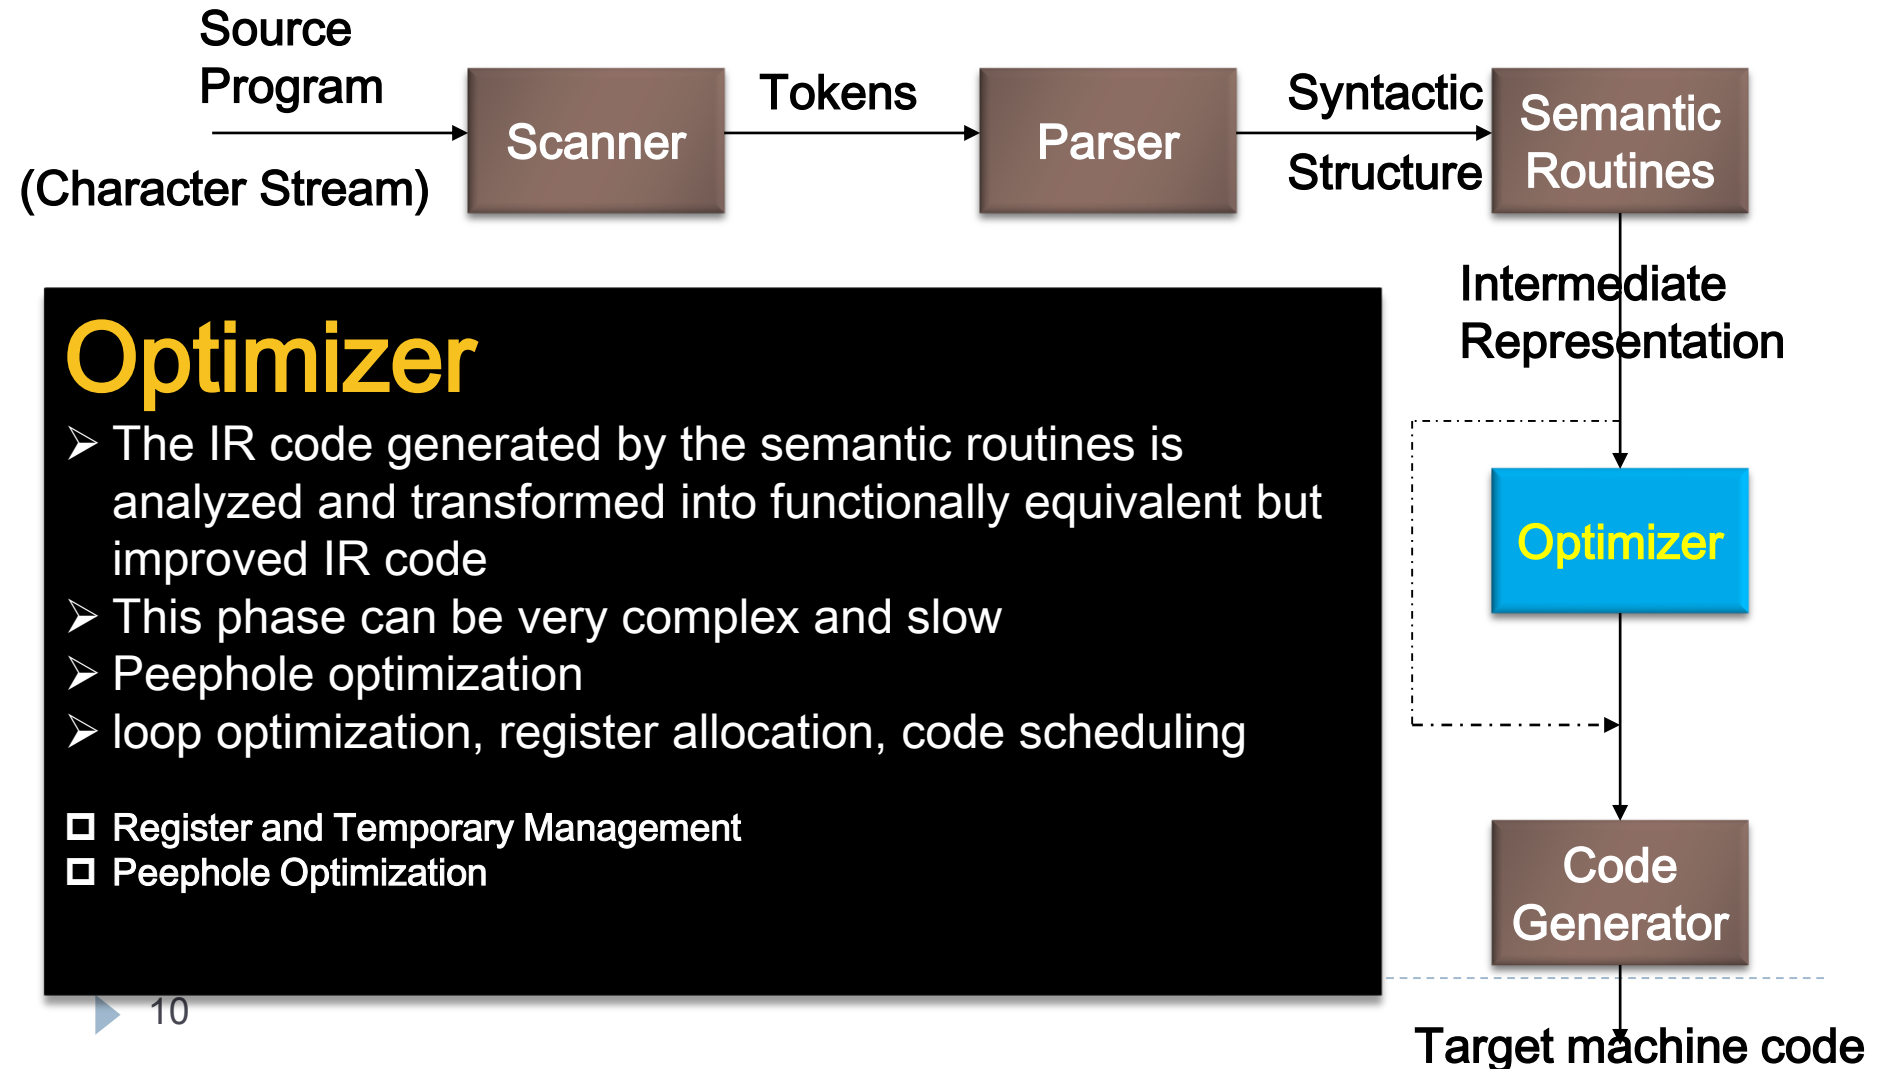

The Structure of a Compiler (7)

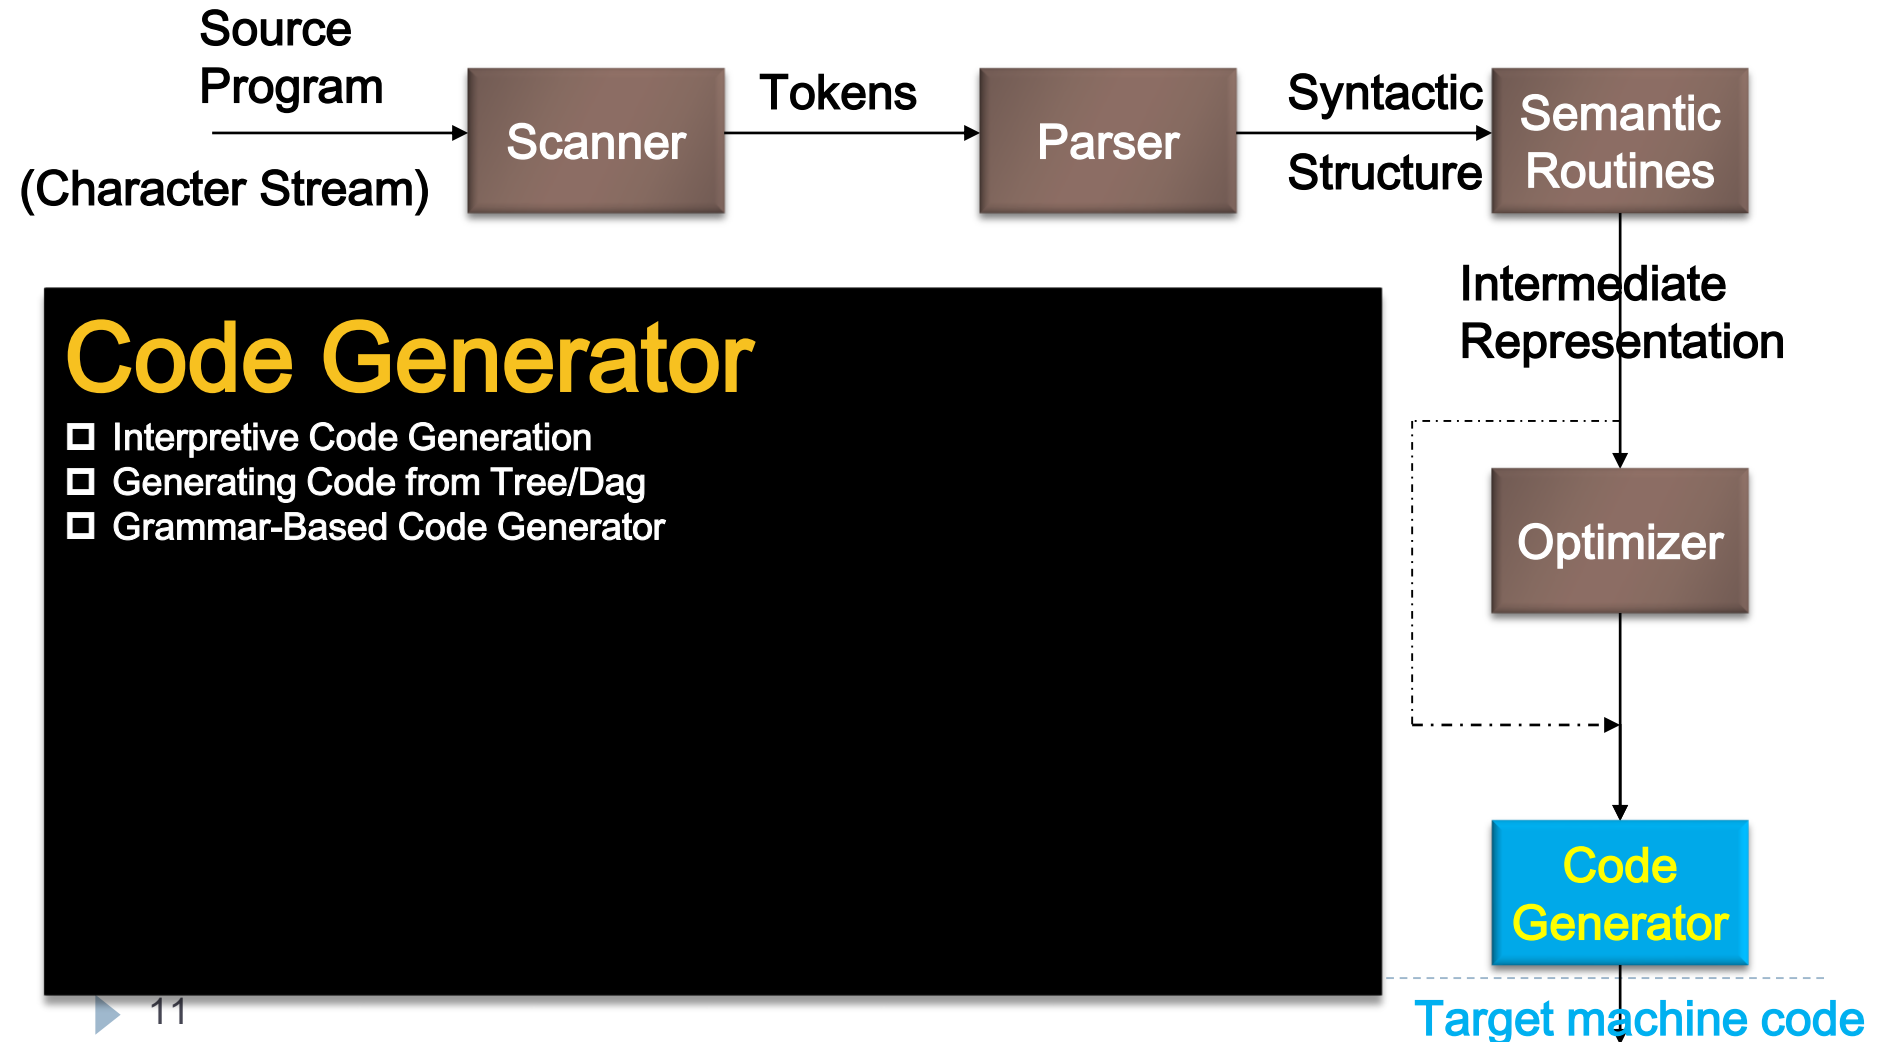

The Structure of a Compiler (8)

SYMBOL TABLE

1	position	...
2	initial	...
3	rate	...
4		

```
position := initial + rate * 60
```


Scanner
[Lexical Analyzer]

Tokens

```
id1 := id2 + id3 * 60
```


Parser
[Syntax Analyzer]

Parse tree

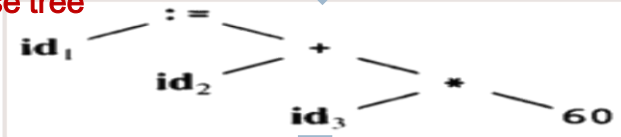

Semantic Process
[Semantic analyzer]

Abstract Syntax Tree w/ Attributes

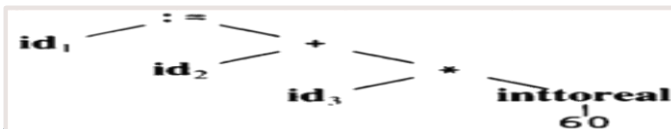

Code Generator
[Intermediate Code Generator]

Non-optimized Intermediate Code

```
temp1 := inttoreal(60)
temp2 := id3 * temp1
temp3 := id2 + temp2
id1 := temp3
```

Code Optimizer

Optimized Intermediate Code

```
temp1 := id3 * 60.0
id1 := id2 + temp1
```

Code Optimizer

Target machine code

```
MOVFB id3, R2
MULFB #60.0, R2
MOVFB id2, R1
ADDFB R2, R1
MOVFB R1, id1
```

The Structure of a Compiler (9)

- ✓ **Compiler writing tools**

- ▶ **Compiler generators or compiler-compilers**

- E.g. scanner and parser generators
 - Examples : Yacc, Lex

The Syntax and Semantics of Programming Language (1)

- ▶ A programming language must include the specification of **syntax (structure)** and **semantics (meaning)**.
- ▶ **Syntax** typically means the context-free syntax because of the almost universal use of **context-free-grammar (CFGs)**
- ▶ Ex.
 - ▶ $a = b + c$ is syntactically legal
 - ▶ $b + c = a$ is illegal

The Syntax and Semantics of Programming Language (2)

- ▶ The **semantics** of a programming language are commonly divided into two classes:
 - ▶ Static semantics
 - ▶ Semantics rules that can be checked at compiled time.
 - ▶ Ex. The type and number of a function's arguments
 - ▶ Runtime semantics
 - ▶ Semantics rules that can be checked only at run time