Mathematical formulation of linear instability problem of a viscous incompressible liquid round jet in a gaseous medium.

Srikumar Warrier

April 27, 2016

1 Governing Equations.

The continuity equation in polar cylindrical coordinates for the liquid phase is given by

$$\frac{1}{r}\frac{\partial(ru_{r1})}{\partial r} + \frac{1}{r}\frac{\partial u_{\theta1}}{\partial \theta} + \frac{\partial u_{z1}}{\partial z} = 0 \tag{1}$$

For the gas phase,

$$\frac{1}{r}\frac{\partial(ru_{r2})}{\partial r} + \frac{1}{r}\frac{\partial u_{\theta2}}{\partial \theta} + \frac{\partial u_{z2}}{\partial z} = 0 \tag{2}$$

The non dimensionalised momentum equation in the r direction (radial direction) is given by

$$\frac{\partial u_{r1}}{\partial t} + u_{r1}\frac{\partial u_{r1}}{\partial r} + \frac{u_{\theta1}}{r}\frac{\partial u_{r1}}{\partial \theta} - \frac{u_{\theta1}^2}{r} + u_{z1}\frac{\partial u_{r1}}{\partial z} = -\frac{\partial p}{\partial r} + \frac{1}{Re_1}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{r1}}{\partial r}\right) - \frac{u_{r1}}{r^2} + \frac{1}{r^2}\frac{\partial^2 u_{r1}}{\partial \theta^2} - \frac{2}{r^2}\frac{\partial u_{\theta1}}{\partial \theta} + \frac{\partial^2 u_{r1}}{\partial z^2}\right] \tag{3}$$

For the gas phase,

$$\frac{\partial u_{r2}}{\partial t} + u_{r2}\frac{\partial u_{r2}}{\partial r} + \frac{u_{\theta2}}{r}\frac{\partial u_{r2}}{\partial \theta} - \frac{u_{\theta2}^2}{r} + u_{z2}\frac{\partial u_{r2}}{\partial z} = -\frac{\partial p}{\partial r} + \frac{1}{Re_2}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{r2}}{\partial r}\right) - \frac{u_{r2}}{r^2} + \frac{1}{r^2}\frac{\partial^2 u_{r2}}{\partial \theta^2} - \frac{2}{r^2}\frac{\partial u_{\theta2}}{\partial \theta} + \frac{\partial^2 u_{r2}}{\partial z^2}\right] \tag{4}$$

In the azimuthal direction (θ direction),

$$\frac{\partial u_{\theta1}}{\partial t} + u_{r1}\frac{\partial u_{\theta1}}{\partial r} + \frac{u_{\theta1}}{r}\frac{\partial u_{\theta1}}{\partial \theta} + \frac{u_{\theta1}u_{r1}}{r} + u_{z1}\frac{\partial u_{\theta1}}{\partial z} = -\frac{1}{r}\frac{\partial p}{\partial \theta} + \frac{1}{Re_1}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{\theta1}}{\partial r}\right) - \frac{u_{\theta1}}{r^2} + \frac{1}{r^2}\frac{\partial^2 u_{\theta1}}{\partial \theta^2} + \frac{2}{r^2}\frac{\partial u_{r1}}{\partial \theta} + \frac{\partial^2 u_{\theta1}}{\partial z^2}\right] \tag{5}$$

For the gas phase,

$$\frac{\partial u_{\theta2}}{\partial t} + u_{r2}\frac{\partial u_{\theta2}}{\partial r} + \frac{u_{\theta2}}{r}\frac{\partial u_{\theta2}}{\partial \theta} + \frac{u_{\theta2}u_{r2}}{r} + u_{z2}\frac{\partial u_{\theta2}}{\partial z} = -\frac{1}{r}\frac{\partial p}{\partial \theta} + \frac{1}{Re_2}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{\theta2}}{\partial r}\right) - \frac{u_{\theta2}}{r^2} + \frac{1}{r^2}\frac{\partial^2 u_{\theta2}}{\partial \theta^2} + \frac{2}{r^2}\frac{\partial u_{r2}}{\partial \theta} + \frac{\partial^2 u_{\theta2}}{\partial z^2}\right] \tag{6}$$

In the axial direction (z direction) for the liquid phase

$$\frac{\partial u_{z1}}{\partial t} + u_{r1}\frac{\partial u_{z1}}{\partial r} + \frac{u_{\theta1}}{r}\frac{\partial u_{z1}}{\partial \theta} + u_{z1}\frac{\partial u_{z1}}{\partial z} = -\frac{\partial p}{\partial z} + \frac{1}{Re_1}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{z1}}{\partial r}\right) + \frac{1}{r^2}\frac{\partial^2 u_{z1}}{\partial \theta^2} + \frac{\partial^2 u_{z1}}{\partial z^2}\right] \tag{7}$$

For the gas phase,

$$\frac{\partial u_{z2}}{\partial t} + u_{r2}\frac{\partial u_{z2}}{\partial r} + \frac{u_{\theta 2}}{r}\frac{\partial u_{z2}}{\partial \theta} + u_{z2}\frac{\partial u_{z2}}{\partial z} = -\frac{\partial p}{\partial z} + \frac{1}{Re_2}\left[\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial u_{z2}}{\partial r}\right) + \frac{1}{r^2}\frac{\partial^2 u_{z2}}{\partial \theta^2} + \frac{\partial^2 u_{z2}}{\partial z^2}\right] \tag{8}$$

where u_r , u_θ and u_z are the velocity components in the radial, azimuthal and axial directions respectively.

2 Base flow.

The flow variables are assumed to consist of a mean part and an infinitesimally small perturbation.

$$\begin{aligned} u_r &= U_r + u_r'(r,\theta,z,t) \\ u_\theta &= U_\theta + u_\theta'(r,\theta,z,t) \\ u_z &= U_z + u_z'(r,\theta,z,t) \end{aligned} \tag{9}$$

The base flow is taken to be an incompressible viscous axisymmetric one with locally parallel flow assumption. The base flow quantities are

$$\begin{aligned} U_{r1} &= U_{r1}(r) \\ U_{r2} &= U_{r2}(r) \\ U_\theta &= 0 \\ U_{z1} &= U_{z1}(r) \\ U_{z2} &= U_{z2}(r) \\ P &= 0 \end{aligned} \tag{10}$$

2.1 Normal mode form of perturbation.

The flow is periodic in azimuthal and axial direction. We assume perturbations of the form

$$[u_r, u_\theta, u_z, p] = [i\tilde{u}_r(r), \tilde{u}_\theta(r), \tilde{u}_z(r), \tilde{p}(r)]e^{i(\alpha z + m\theta - \omega t)} \tag{11}$$

It is to be noted that $u_r \propto i\tilde{u}_r$. This can be readily seen from the contunity equation, the phase of u_r differs by $\frac{\pi}{2}$ from that of u_θ and u_r. Substituting eq(11) into eq(3), eq(4), eq(5), eq(6), eq(7), eq(8) , eq(1) and eq(2), we have, In the radial direction,

$$-i\frac{\tilde{u}_{r1}''}{Re_1} + i\left(U_{r1} - \frac{1}{rRe_1}\right)\tilde{u}_{r1}' + \left[\omega + iU_{r1}' - \alpha U_{z1} + \frac{i}{Re_1}\left(\frac{m^2+1}{r^2} + \alpha^2\right)\right]\tilde{u}_{r1} + \frac{2im}{r^2 Re_1}\tilde{u}_{\theta 1} + \tilde{p}' = 0 \tag{12}$$

$$-i\frac{\tilde{u}_{r2}''}{Re_2} + i\left(U_{r2} - \frac{1}{rRe_2}\right)\tilde{u}_{r2}' + \left[\omega + iU_{r2}' - \alpha U_{z2} + \frac{i}{Re_2}\left(\frac{m^2+1}{r^2} + \alpha^2\right)\right]\tilde{u}_{r2} + \frac{2im}{r^2 Re_2}\tilde{u}_{\theta 2} + \tilde{p}' = 0 \tag{13}$$

In the azimuthal direction,

$$-\frac{\tilde{u}_{\theta 1}''}{Re_1} + \left(U_{r1} - \frac{1}{rRe_1}\right)\tilde{u}_{\theta 1}' + \left[-i\omega + i\alpha U_{z1} + \frac{U_{r1}}{r} + \frac{1}{Re_1}\left(\frac{m^2+1}{r^2} + \alpha^2\right)\right]\tilde{u}_{\theta 1} + \left(\frac{2m}{r^2 Re_1}\right)\tilde{u}_{r1} + \frac{im\tilde{p}}{r} = 0 \tag{14}$$

2

$$-\frac{\tilde{u}_{\theta 2}''}{Re_2} + \left(U_{r2} - \frac{1}{rRe_2}\right)\tilde{u}_{\theta 2}' + \left[-i\omega + i\alpha U_{z2} + \frac{U_{r2}}{r} + \frac{1}{Re_2}\left(\frac{m^2+1}{r^2} + \alpha^2\right)\right]\tilde{u}_{\theta 2} + \left(\frac{2m}{r^2 Re_2}\right)\tilde{u}_{r2} + \frac{im\tilde{p}}{r} = 0 \qquad (15)$$

In the axial direction,

$$-\frac{\tilde{u}_{z1}''}{Re_1} + \left(U_{r1} - \frac{1}{rRe_1}\right)\tilde{u}_{z1}' + \left[-i\omega + i\alpha U_{z1} + \frac{1}{Re_1}\left(\frac{m^2}{r^2} + \alpha^2\right)\right]\tilde{u}_{z1} + iU_{z1}'\tilde{u}_{r1} + i\alpha\tilde{p} = 0 \qquad (16)$$

$$-\frac{\tilde{u}_{z2}''}{Re_2} + \left(U_{r2} - \frac{1}{rRe_2}\right)\tilde{u}_{z2}' + \left[-i\omega + i\alpha U_{z2} + \frac{1}{Re_2}\left(\frac{m^2}{r^2} + \alpha^2\right)\right]\tilde{u}_{z2} + iU_{z2}'\tilde{u}_{r2} + i\alpha\tilde{p} = 0 \qquad (17)$$

Continuity equation yields,

$$\tilde{u}_{r1}' + \frac{\tilde{u}_{r1}}{r} + \frac{m\tilde{u}_{\theta 1}}{r} + \alpha\tilde{u}_{z1} = 0 \qquad (18)$$

$$\tilde{u}_{r2}' + \frac{\tilde{u}_{r2}}{r} + \frac{m\tilde{u}_{\theta 2}}{r} + \alpha\tilde{u}_{z2} = 0 \qquad (19)$$

3   Boundary Conditions.

Due to the singular nature of the coordinate system on the centerline, all physical quantities must be smooth and bounded at r = 0 .Therefore as $r \to 0, \lim_{r\to 0} \frac{\partial \mathbf{V}}{\partial \theta} = 0.(20)$

$$\lim_{r\to 0} \frac{\partial p'}{\partial \theta} = 0 \qquad (21)$$

where $\mathbf{V}$ is the total velocity vector. the above limits represents the boundedness and smoothness conditions on the solutions along the centerline.(Batchelor and Gill 1962, also Khorrami et al.,JCP 81,206-229 (1989)). while expanding the limits, we need to consider only the perturbation part of the velocity since the mean flow is independent of z and θ

$$\lim_{r\to 0} \frac{\partial \mathbf{V}}{\partial \theta} = \lim_{r\to 0} \frac{\partial}{\partial \theta}(u_{r1}\mathbf{e_r} + u_{\theta 1}\mathbf{e_\theta} + u_{z1}\mathbf{e_z}) = 0$$

But

$$\frac{\partial \mathbf{e_z}}{\partial \theta} = 0; \frac{\partial \mathbf{e_r}}{\partial \theta} = \mathbf{e_\theta}; \frac{\partial \mathbf{e_\theta}}{\partial \theta} = -\mathbf{e_r} \qquad (22)$$

$$-(m\tilde{u}_{r1})\mathbf{e_r} + i(\tilde{u}_{r1} + m\tilde{u}_{\theta 1})\mathbf{e_\theta} + in\tilde{u}_{z1}\mathbf{e_z} = 0$$

$$imp = 0$$

In order for the inequality to hold, each component of the resultant vector must be zero. This gives,

$$m\tilde{u}_{r1} = 0 \qquad (23)$$

$$\tilde{u}_{r1} + m\tilde{u}_{\theta 1} = 0 \qquad (24)$$

$$m\tilde{u}_{z1} = 0 \qquad (25)$$

$$mp = 0 \qquad (26)$$

For axisymmetric perturbation $m = 0$,

$$\tilde{u}_{r1}(0) = \tilde{u}_{\theta 1}(0) = 0 \qquad (27)$$

3

$\tilde{u}_{z1}(0)$ and $\tilde{p}(0)$ must be finite. and for $m = \pm 1$

$$\tilde{u}_{r1}(0) \pm \tilde{u}_{\theta 1}(0) = 0 \tag{28}$$

$$\tilde{u}_{z1}(0) = \tilde{p}(0) = 0 \tag{29}$$

if $|m| > 1$,

$$\tilde{u}_{z1}(0) = \tilde{p}(0) = 0 \tag{30}$$

$$\tilde{u}_{r1}(0) = \tilde{u}_{\theta 1}(0) = 0 \tag{31}$$

In case when $|m| = 1$, continuity equation is applied on the centerline with $\tilde{u}_z = 0$ which gives,

$$2\tilde{u}'_{r1}(0) + m\tilde{u}'_{\theta 1}(0) = 0 \tag{32}$$

3.1 Matching Conditions at the interface.

Let

$$\phi(r, z, \theta, t) = h(z, \theta, t) - r \tag{33}$$

so that the 0 level set of ϕ describes the interface between the liquid jet and the gaseous medium. The Kinematic condition that the interface is a material surface gives ,

$$\frac{D\phi}{Dt} = 0 \tag{34}$$

$$\frac{\partial h}{\partial t} + \frac{u_\theta}{r}\frac{\partial h}{\partial \theta} + u_z \frac{\partial h}{\partial z} = \left(\frac{\partial r}{\partial t}\right)_{r=R} = u_r(h(z, \theta, t), \theta, z, t) \tag{35}$$

We assume wave-like perturbation of the interface as

$$h'(z, \theta, t) = \tilde{h}e^{i(\alpha z + m\theta - \omega t)} \tag{36}$$

$$h = \overline{h}(z) + h'(z, \theta, t) \tag{37}$$

Substituting eq(36) in eq(35) and subtracting the mean flow we get,

$$\frac{\partial h'(z, \theta, t)}{\partial t} + \frac{u'_\theta(h(z, \theta, t), z, \theta, t)}{r}\left(\frac{\partial h'(z, \theta, t)}{\partial \theta}\right) + U_z(r)\left(\frac{\partial h'(z, \theta, t)}{\partial z}\right) + u'_z(h(z, \theta, t), \theta, z, t)\frac{d\overline{h}(z)}{dz} +$$
$$u'_z(h(z, \theta, t), \theta, z, t)\frac{\partial h'(z, \theta, t)}{\partial z} = u'_r(h(z, \theta, t), \theta, z, t) \tag{38}$$

The above equation is nonlinear in h as u'_z and u'_θ are functions of h, θ, z, t.
For infintesimally small perturbation , we linearise the above equation as ,

$$\frac{\partial h'(z, \theta, t)}{\partial t} + U_z(r)\frac{\partial h'(z, \theta, t)}{\partial z} + u'_z(h(z, \theta, t), z, \theta, t)\frac{d\overline{h}(z)}{dz} = u'_r(h(z, \theta, t), \theta, z, t) \tag{39}$$

Substituting normal mode form of perturbation, we get,

$$-i\omega\tilde{h}e^{i(\alpha z + m\theta - \omega t)} + i\alpha U_z(r)\tilde{h}e^{i(\alpha z + m\theta - \omega t)} + \tilde{u}_z e^{i(\alpha z + m\theta - \omega t)}\frac{d\overline{h}(z)}{dz} = \tilde{u}_r(h(z, \theta, t))e^{i(\alpha z + m\theta - \omega t)} \tag{40}$$

or ,

4

$$-i\omega\tilde{h} + i\alpha U_z(r)\tilde{h} + \tilde{u}_z\frac{d\overline{h}(z)}{dz} = \tilde{u}_r(h(z,\theta,t)) \tag{41}$$

At the interface, we can write ,

$$-i\omega\tilde{h} + i\alpha\tilde{h}U_{z1}(r) + \tilde{u}_{z1}\frac{d\overline{h}(z)}{dz} = \tilde{u}_{r1}(h(z,\theta,t)) \tag{42}$$

$$-i\omega\tilde{h} + i\alpha\tilde{h}U_{z2}(r) + \tilde{u}_{z2}\frac{d\overline{h}(z)}{dz} = \tilde{u}_{r2}(h(z,\theta,t)) \tag{43}$$

4   Stress boundary conditions

The normal stress in terms of the local pressure and velocity field is given by

$$\tau = -pI + \mu[(\nabla u) + (\nabla u)^T] \tag{44}$$

where,

$$\nabla u = \left(\mathbf{e_r}\frac{\partial}{\partial\mathbf{r}} + \frac{\mathbf{e_\theta}}{\mathbf{r}}\frac{\partial}{\partial\theta} + \mathbf{e_z}\frac{\partial}{\partial z}\right)(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) \tag{45}$$

$$\nabla u = \mathbf{e_r}\frac{\partial}{\partial r}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) + \frac{\mathbf{e_\theta}}{r}\frac{\partial}{\partial\theta}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) + \mathbf{e_z}\frac{\partial}{\partial z}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) \tag{46}$$

The following identities are to be noted,

$$\frac{\partial\mathbf{e_r}}{\partial r} = 0; \frac{\partial\mathbf{e_\theta}}{\partial r} = 0; \frac{\partial\mathbf{e_z}}{\partial r} = 0;$$

$$\frac{\partial\mathbf{e_r}}{\partial\theta} = \mathbf{e_\theta}; \frac{\partial\mathbf{e_\theta}}{\partial\theta} = -\mathbf{e_r}; \frac{\partial\mathbf{e_z}}{\partial\theta} = 0;$$

$$\frac{\partial\mathbf{e_r}}{\partial z} = 0; \frac{\partial\mathbf{e_\theta}}{\partial z} = 0; \frac{\partial\mathbf{e_z}}{\partial z} = 0;$$

We evaluate eq(46) term by term by using the above identities

$$\mathbf{e_r}\frac{\partial}{\partial r}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) = \mathbf{e_r}\mathbf{e_r}\frac{\partial u_r}{\partial r} + \mathbf{e_r}\mathbf{e_\theta}\frac{\partial u_\theta}{\partial r} + \mathbf{e_r}\mathbf{e_z}\frac{\partial u_z}{\partial r} \tag{47}$$

$$\frac{\mathbf{e_\theta}}{r}\frac{\partial}{\partial\theta}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) = \mathbf{e_\theta}\mathbf{e_r}\left(\frac{1}{r}\frac{\partial u_r}{\partial\theta}\right) + \mathbf{e_\theta}\mathbf{e_\theta}\left(\frac{u_r}{r}\right) + \mathbf{e_\theta}\mathbf{e_\theta}\left(\frac{1}{r}\frac{\partial u_\theta}{\partial\theta}\right) - \mathbf{e_\theta}\mathbf{e_r}\left(\frac{u_\theta}{r}\right) + \mathbf{e_\theta}\mathbf{e_z}\left(\frac{1}{r}\frac{\partial u_z}{\partial\theta}\right) \tag{48}$$

$$\mathbf{e_z}\frac{\partial}{\partial z}(u_r\mathbf{e_r} + u_\theta\mathbf{e_\theta} + u_z\mathbf{e_z}) = \mathbf{e_z}\mathbf{e_r}\frac{\partial u_r}{\partial z} + \mathbf{e_z}\mathbf{e_\theta}\frac{\partial u_\theta}{\partial z} + \mathbf{e_z}\mathbf{e_z}\frac{\partial u_z}{\partial z} \tag{49}$$

$$\nabla u = \begin{bmatrix} \frac{\partial u_r}{\partial r} & \frac{\partial u_\theta}{\partial r} & \frac{\partial u_z}{\partial r} \\ \left(\frac{1}{r}\frac{\partial u_r}{\partial\theta} - \frac{u_\theta}{r}\right) & \left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial\theta}\right) & \frac{1}{r}\frac{\partial u_z}{\partial\theta} \\ \frac{\partial u_r}{\partial z} & \frac{\partial u_\theta}{\partial z} & \frac{\partial u_z}{\partial z} \end{bmatrix} \tag{50}$$

$$(\nabla u)^T = \begin{bmatrix} \frac{\partial u_r}{\partial r} & \left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} \right) & \frac{\partial u_r}{\partial z} \\[2mm] \frac{\partial u_\theta}{\partial r} & \left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta} \right) & \frac{\partial u_\theta}{\partial z} \\[2mm] \frac{\partial u_z}{\partial r} & \frac{1}{r}\frac{\partial u_z}{\partial \theta} & \frac{\partial u_z}{\partial z} \end{bmatrix} \tag{51}$$

$$[\nabla u + (\nabla u)^T] = \begin{bmatrix} 2\frac{\partial u_r}{\partial r} & \left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r} \right) & \left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z} \right) \\[2mm] \left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r} \right) & 2\left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta} \right) & \left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z} \right) \\[2mm] \left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z} \right) & \left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z} \right) & 2\frac{\partial u_z}{\partial z} \end{bmatrix} \tag{52}$$

eq(44) becomes ,

$$\tau = \begin{bmatrix} -p + 2\mu\frac{\partial u_r}{\partial r} & \mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r} \right) & \mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z} \right) \\[2mm] \mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r} \right) & -p + 2\mu\left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta} \right) & \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z} \right) \\[2mm] \mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z} \right) & \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z} \right) & -p + 2\mu\frac{\partial u_z}{\partial z} \end{bmatrix} \tag{53}$$

4.1 Stress balance conditions at the liquid-gas interface.

We now derive the normal and tangential stress conditions at the liquid-gas interface. Consider an interfacial surface S bounded by a closed curve C. Surface tension σ is defined as the force per unit length in the s-direction at every point along C that acts to flatten the surface S. Performing a force balance on a volume element V enclosing the interfacial surface S defined by the contour C :

$$\int_V \rho \frac{D\mathbf{u}}{Dt} dV = \int_V f dV + \int_S [(\mathbf{t_1}(\mathbf{n})) + (\mathbf{t_2}(\mathbf{n}))] dS + \int_C \sigma \mathbf{s} dl \tag{54}$$

dl is elemental length segment along the curve C. $\tau = -pI + \mu[(\nabla u) + (\nabla u)^T]$ is the total normal stress tensor. $\mathbf{t_1}(\mathbf{n}) = -\mathbf{n} \cdot \tau_1$ is the total normal stress vector exerted by the liquid phase on the interface while $\mathbf{t_2}(\mathbf{n}) = \mathbf{n} \cdot \tau_2$ is the total normal stress vector exerted by the gas phase on the interface. Now if ϵ is the typical length scale of the element V ,then the acceleration and body forces will scale as ϵ^3, while the surface forces scale as ϵ^2. Hence in the limit of $\epsilon \to 0$, only the surface forces must balance,

$$\int_S [(\mathbf{t_1}(\mathbf{n})) + (\mathbf{t_2}(\mathbf{n}))] dS + \int_C \sigma \mathbf{s} dl = 0 \tag{55}$$

consider $\int_C \sigma \mathbf{s} dl$. using stokes theorem we can write ,

$$\int_C \sigma \mathbf{s} dl = \int_S \mathbf{n}\sigma (\nabla \cdot \mathbf{n}) ds \tag{56}$$

interface1.png

6

proof

From stokes theorem we know that,

$$\int_C \mathbf{F} \cdot \mathbf{dl} = \int_S \mathbf{n} \cdot (\nabla \times \mathbf{F}) ds$$

Along the curve C, $\mathbf{dl} = \mathbf{m} dl$

$$\int_C \mathbf{F} \cdot \mathbf{m} dl = \int_s \mathbf{n} \cdot (\nabla \times \mathbf{F}) ds$$

choose $\mathbf{F} = \mathbf{f} \times \mathbf{b}$. Where $\mathbf{b}$ is an arbitrary constant vector.

$$\int_C (\mathbf{f} \times \mathbf{b}) . \mathbf{m} dl = \int_S \mathbf{n} \cdot (\nabla \times (\mathbf{f} \times \mathbf{b})) ds$$

using the vector identities ,

$$\mathbf{A} \cdot (\mathbf{B} \times \mathbf{C}) = -\mathbf{B} \cdot (\mathbf{A} \times \mathbf{C}) \tag{57}$$

$$\nabla \times (\mathbf{A} \times \mathbf{B}) = \mathbf{A}(\nabla \cdot \mathbf{B}) - \mathbf{B}(\nabla \cdot \mathbf{A}) + (\mathbf{B} \cdot \nabla)\mathbf{A} - (\mathbf{A} \cdot \nabla)\mathbf{B} \tag{58}$$

the LHS can be written $\int_C (\mathbf{f} \times \mathbf{b}) . \mathbf{m} dl = \int_C -\mathbf{b} \cdot (\mathbf{f} \times \mathbf{m}) dl$, the RHS can be written as

$\int_S \mathbf{n} \cdot [\mathbf{f}(\nabla \cdot \mathbf{b}) - \mathbf{b}(\nabla \cdot \mathbf{f}) + (\mathbf{b} \cdot \nabla \mathbf{f}) - (\mathbf{f} \cdot \nabla \mathbf{b}) ds$

since $\mathbf{b}$ is an constant vector $(\nabla \cdot b) = 0$ and $\nabla b = 0$

$$\int_C -\mathbf{b} \cdot (\mathbf{f} \times \mathbf{m}) dl = \int_S \mathbf{n} \cdot (-\mathbf{b}(\nabla \cdot \mathbf{f}) + (\mathbf{b} \cdot \nabla \mathbf{f})) ds \tag{59}$$

since $\mathbf{b}$ is an arbitrary vector

$$b \cdot \int_C (\mathbf{f} \times \mathbf{m}) dl = b \cdot \int_S (\mathbf{n}(\nabla \cdot \mathbf{f}) - (\mathbf{n} \cdot \nabla \mathbf{f})) ds \tag{60}$$

choose $\mathbf{f} = \sigma \mathbf{n}$.

$$\int_C (\sigma \mathbf{n} \times \mathbf{m}) dl = \int_S [\mathbf{n}(\nabla \cdot \sigma \mathbf{n}) - (\mathbf{n} \cdot \nabla \sigma \mathbf{n})] ds \tag{61}$$

we note the following,

1) $\nabla \cdot \sigma \mathbf{n} = \nabla \sigma \cdot \mathbf{n} + \sigma \nabla \cdot \mathbf{n}$.

2) $\nabla(\sigma \mathbf{n}) = \sigma \nabla \mathbf{n} + \mathbf{n} \nabla \sigma$.

3) $\mathbf{n} \times \mathbf{m} = -\mathbf{s}$

4) $\nabla \sigma \cdot \mathbf{n} = 0$

5) $\nabla \mathbf{n} \cdot \mathbf{n} = \frac{1}{2} \nabla(\mathbf{n} \cdot \mathbf{n}) = 0$

6) We assume that $\nabla \sigma = 0$

This yields,

$$-\int_C \sigma \mathbf{s}\,dl = \int_S \mathbf{n}\sigma(\nabla \cdot \mathbf{n})ds$$

end of proof.

Rewriting eq(55),

$$\int_S [(\mathbf{t_1}(\mathbf{n})) + (\mathbf{t_2}(\mathbf{n}))]dS + \int_C \sigma \mathbf{s}\, dl = 0$$

$$\int_S [\mathbf{n} \cdot \tau_\mathbf{2} - \mathbf{n} \cdot \tau_\mathbf{1}]ds - \int_S \mathbf{n}\sigma(\nabla \cdot \mathbf{n})ds = 0 \tag{62}$$

Since the surface element is arbitrary , the integral must vanish identically.

$$\mathbf{n} \cdot \tau_\mathbf{2} - \mathbf{n} \cdot \tau_\mathbf{1} = \mathbf{n}\sigma(\nabla \cdot \mathbf{n}) \tag{63}$$

4.2 Normal stress balance

Taking $\mathbf{n}\cdot(eq63)$ yields the normal stress balance at the interface :

$$\mathbf{n} \cdot \tau_\mathbf{2} \cdot \mathbf{n} - \mathbf{n} \cdot \tau_\mathbf{1} \cdot \mathbf{n} = \sigma(\nabla \cdot \mathbf{n}) \tag{64}$$

4.3 Tangential stress balance

Taking $\mathbf{t}\cdot(eq63)$ yields the tangential stress balance at the interface :

$$\mathbf{n} \cdot \tau_\mathbf{2} \cdot \mathbf{t} - \mathbf{n} \cdot \tau_\mathbf{1} \cdot \mathbf{t} = 0 \tag{65}$$

where ,

$$\tau_1 = \begin{bmatrix} -p + 2\mu_1 \frac{\partial u_{r1}}{\partial r} & \mu_1\left(\frac{1}{r}\frac{\partial u_{r1}}{\partial \theta} - \frac{u_{\theta 1}}{r} + \frac{\partial u_{\theta 1}}{\partial r}\right) & \mu_1\left(\frac{\partial u_{z1}}{\partial r} + \frac{\partial u_{r1}}{\partial z}\right) \\ \mu_1\left(\frac{1}{r}\frac{\partial u_{r1}}{\partial \theta} - \frac{u_{\theta 1}}{r} + \frac{\partial u_{\theta 1}}{\partial r}\right) & -p + 2\mu_1\left(\frac{u_{r1}}{r} + \frac{1}{r}\frac{\partial u_{\theta 1}}{\partial \theta}\right) & \mu_1\left(\frac{1}{r}\frac{\partial u_{z1}}{\partial \theta} + \frac{\partial u_{\theta 1}}{\partial z}\right) \\ \mu_1\left(\frac{\partial u_{z1}}{\partial r} + \frac{\partial u_{r1}}{\partial z}\right) & \mu_1\left(\frac{1}{r}\frac{\partial u_{z1}}{\partial \theta} + \frac{\partial u_{\theta 1}}{\partial z}\right) & -p + 2\mu_1\frac{\partial u_{z1}}{\partial z} \end{bmatrix} \tag{66}$$

$$\tau_2 = \begin{bmatrix} -p + 2\mu_2 \frac{\partial u_{r2}}{\partial r} & \mu_2\left(\frac{1}{r}\frac{\partial u_{r2}}{\partial \theta} - \frac{u_{\theta 2}}{r} + \frac{\partial u_{\theta 2}}{\partial r}\right) & \mu_2\left(\frac{\partial u_{z2}}{\partial r} + \frac{\partial u_{r2}}{\partial z}\right) \\ \mu_2\left(\frac{1}{r}\frac{\partial u_{r2}}{\partial \theta} - \frac{u_{\theta 2}}{r} + \frac{\partial u_{\theta 2}}{\partial r}\right) & -p + 2\mu_2\left(\frac{u_{r2}}{r} + \frac{1}{r}\frac{\partial u_{\theta 2}}{\partial \theta}\right) & \mu_2\left(\frac{1}{r}\frac{\partial u_{z2}}{\partial \theta} + \frac{\partial u_{\theta 2}}{\partial z}\right) \\ \mu_2\left(\frac{\partial u_{z2}}{\partial r} + \frac{\partial u_{r2}}{\partial z}\right) & \mu_2\left(\frac{1}{r}\frac{\partial u_{z2}}{\partial \theta} + \frac{\partial u_{\theta 2}}{\partial z}\right) & -p + 2\mu_2\frac{\partial u_{z2}}{\partial z} \end{bmatrix} \tag{67}$$

4.4 Finding unit normal vector and unit tangent vector to the interface.

To find the tangent vector , we write the parametric form of the surface for which two independent parameters and three dependent variables are required.

Let the equation of surface in parametrized form be $\mathbf{X}(u,v) = [\mathbf{z}(u,v), \theta(u,v), \mathbf{r} = \mathbf{h}(u,v)]$, for some u and v intervals, define a surface S in the u-v plane. $\mathbf{X}_u$ is the tangent in the u direction , Since v is held constant. similarly $\mathbf{X}_v$ is the tangent in the v direction , Since u is held constant.

$$\mathbf{X}_u = \frac{\partial X}{\partial u} = [1, 0, \frac{\partial h}{\partial u}]$$

9

Let the position of the interface at any instant of time t be $r = \mathbf{h}(\mathbf{z}, \theta)$.

Choosing $\mathbf{z} = u$; , $\theta = v$. then $\mathbf{r} = \mathbf{h}(u, v)$, then the unit tangent vector in the r direction is given by,

$$\mathbf{t_r} = [1, 0, \frac{\partial \mathbf{h}}{\partial z}]\left(\frac{1}{\sqrt{1 + (\frac{\partial \mathbf{h}}{\partial z})^2}}\right) \tag{68}$$

Similarly the unit tangent vector in the θ direction is given by,

$$\mathbf{t}_\theta = [0, 1, \frac{1}{r}\frac{\partial \mathbf{h}}{\partial \theta}]\left(\frac{1}{\sqrt{1 + (\frac{1}{r}\frac{\partial \mathbf{h}}{\partial \theta})^2}}\right) \tag{69}$$

Since both $\mathbf{t_r}$ and $\mathbf{t}_\theta$ are orthogonal ($\mathbf{u}$,$\mathbf{v}$ are orthogonal),their cross product yiels a vector which is orthogonal to both $\mathbf{t_r}$ and $\mathbf{t}_\theta$ which is the normal vector to the interface.

$$\mathbf{n} = \frac{\mathbf{t_r} \times \mathbf{t}_\theta}{||\mathbf{t_r} \times \mathbf{t}_\theta||} \tag{70}$$

$$\mathbf{t_r} \times \mathbf{t}_\theta = \left[-\frac{\partial h}{\partial z}, -\frac{1}{r}\frac{\partial h}{\partial \theta}, 1\right] \tag{71}$$

$$||\mathbf{t_r} \times \mathbf{t}_\theta|| = \sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1} \tag{72}$$

$$\mathbf{n} = \left[-\frac{\partial h}{\partial z}, -\frac{1}{r}\frac{\partial h}{\partial \theta}, 1\right]\frac{1}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}} \tag{73}$$

4.5   Evaluating normal stress and shear stress at the interface.

rewriting eq(64) ,

$$\mathbf{n} \cdot \tau_\mathbf{2} \cdot \mathbf{n} - \mathbf{n} \cdot \tau_\mathbf{1} \cdot \mathbf{n} = \sigma(\nabla \cdot \mathbf{n})$$

evaluating ,

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}(\tau_{ij}\mathbf{e_i}\mathbf{e_j})\right) \cdot \left(\sum_{l=1}^{3}(n_l\mathbf{e_l})\right) \tag{74}$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\sum_{l=1}^{3}(\tau_{ij}n_l(\mathbf{e_i}\mathbf{e_j}) \cdot \mathbf{e_l})\right)$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\sum_{l=1}^{3}(\tau_{ij}n_l(\mathbf{e_i}\delta_{\mathbf{jl}}))\right)$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\tau_{ij}n_j\mathbf{e_i}\right)$$

10

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3} \sum_{i=1}^{3} \sum_{j=1}^{3} \tau_{ij} n_j n_l (\mathbf{e_i} \cdot \mathbf{e_l})$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = \sum_{l=1}^{3} \sum_{j=1}^{3} \tau_{lj} n_j n_l = \sum_{l=1}^{3} n_l \sum_{j=1}^{3} \tau_{lj} n_j$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{n} = n_1(\tau_{11}n_1 + \tau_{12}n_2 + \tau_{13}n_3) + n_2(\tau_{21}n_1 + \tau_{22}n_2 + \tau_{23}n_3) + n_3(\tau_{31}n_1 + \tau_{32}n_2 + \tau_{33}n_3) \tag{75}$$

$$n_1(\tau_{11}n_1 + \tau_{12}n_2 + \tau_{13}n_3) = \frac{1}{\left(\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1\right)} \left[(-p + 2\mu\frac{\partial u_r}{\partial r}) + \mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r}\right)(\frac{-1}{r}\frac{\partial h}{\partial \theta}) + \mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z}\right)(\frac{-\partial h}{\partial z})\right] \tag{76}$$

$$n_2(\tau_{21}n_1 + \tau_{22}n_2 + \tau_{23}n_3) = \frac{\frac{-1}{r}\frac{\partial h}{\partial \theta}}{\left(\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1\right)} \left[\mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r}\right) + \left(-p + 2\mu\left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta}\right)(\frac{-1}{r}\frac{\partial h}{\partial \theta})\right) + \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z}\right)(\frac{-\partial h}{\partial z}\right.$$

$$\tag{77}$$

$$n_3(\tau_{31}n_1 + \tau_{32}n_2 + \tau_{33}n_3) = \frac{\frac{-\partial h}{\partial z}}{\left(\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1\right)} \left[\mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z}\right) + \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z}\right)(\frac{-1}{r}\frac{\partial h}{\partial \theta}) + (-p + 2\mu\frac{\partial u_z}{\partial z})(\frac{-\partial h}{\partial z})\right] \tag{78}$$

4.6 Evaluation of tangential stress.

We saw from the stress balance equations that the tangential stress balance across the interface gives,

$$\mathbf{n} \cdot \tau_{\mathbf{2}} \cdot \mathbf{t} - \mathbf{n} \cdot \tau_{\mathbf{1}} \cdot \mathbf{t} = 0 \tag{79}$$

where $\mathbf{t}$ is a unit tangent vector to the interface surface. This has got 2 components $\mathbf{t_r}$ and $\mathbf{t}_\theta$,

$$\mathbf{n} \cdot \tau_{\mathbf{2}} \cdot \mathbf{t_r} - \mathbf{n} \cdot \tau_{\mathbf{1}} \cdot \mathbf{t_r} = 0 \tag{80}$$

and ,

$$\mathbf{n} \cdot \tau_{\mathbf{2}} \cdot \mathbf{t}_\theta - \mathbf{n} \cdot \tau_{\mathbf{1}} \cdot \mathbf{t}_\theta = 0 \tag{81}$$

evaulating ,

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = \sum_{l=1}^{3}(n_l \mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}(\tau_{ij}\mathbf{e_i e_j})\right) \cdot \left(\sum_{k=1}^{3}(t_k \mathbf{e_k})\right) \tag{82}$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = \sum_{l=1}^{3}(n_l \mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\sum_{k=1}^{3}(\tau_{ij}t_k(\mathbf{e_i}\delta_{\mathbf{jk}}))\right)$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = \sum_{l=1}^{3}(n_l \mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\tau_{ij}t_j \mathbf{e_i}\right)$$

11

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = \sum_{l=1}^{3} \sum_{i=1}^{3} \sum_{j=1}^{3} \tau_{ij} t_j n_l (\mathbf{e_i} \cdot \mathbf{e_l})$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = \sum_{l=1}^{3} \sum_{j=1}^{3} \tau_{lj} t_j n_l = \sum_{l=1}^{3} n_l \sum_{j=1}^{3} \tau_{lj} t_j$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_r} = n_1(\tau_{11}t_1 + \tau_{12}t_2 + \tau_{13}t_3) + n_2(\tau_{21}t_1 + \tau_{22}t_2 + \tau_{23}t_3) + n_3(\tau_{31}t_1 + \tau_{32}t_2 + \tau_{33}t_3) \tag{83}$$

$$\mathbf{t_r} = [t_r, t_\theta, t_z] = [t_1, t_2, t_3] = [\frac{\partial h}{\partial z}, 0, 1]\left(\frac{1}{\sqrt{1 + (\frac{\partial \mathbf{h}}{\partial z})^2}}\right)$$

$$n_1(\tau_{11}t_1 + \tau_{12}t_2 + \tau_{13}t_3) = \frac{1}{\left(\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + 1}\right)} \frac{1}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}} \left[(-p + 2\mu\frac{\partial u_r}{\partial r})(\frac{\partial h}{\partial z}) + \mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z}\right)\right] \tag{84}$$

$$n_2(\tau_{21}t_1 + \tau_{22}t_2 + \tau_{23}t_3) = \frac{1}{\left(\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + 1}\right)} \frac{\frac{-1}{r}\frac{\partial h}{\partial \theta}}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}} \left[\mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r}\right)(\frac{\partial h}{\partial z}) + \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z}\right)\right] \tag{85}$$

$$n_3(\tau_{31}t_1 + \tau_{32}t_2 + \tau_{33}t_3) = \frac{1}{\left(\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + 1}\right)} \frac{\frac{-\partial h}{\partial z}}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}} \left[\mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z}\right)(\frac{\partial h}{\partial z}) + \left(-p + 2\mu\frac{\partial u_z}{\partial z}\right)\right] \tag{86}$$

evaluating ,

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}(\tau_{ij}\mathbf{e_i e_j})\right) \cdot \left(\sum_{k=1}^{3}(t_k\mathbf{e_k})\right) \tag{87}$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\sum_{k=1}^{3}(\tau_{ij}t_k(\mathbf{e_i}\delta_{\mathbf{jk}}))\right)$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = \sum_{l=1}^{3}(n_l\mathbf{e_l}) \cdot \left(\sum_{i=1}^{3}\sum_{j=1}^{3}\tau_{ij}t_j\mathbf{e_i}\right)$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = \sum_{l=1}^{3}\sum_{i=1}^{3}\sum_{j=1}^{3}\tau_{ij}t_j n_l(\mathbf{e_i} \cdot \mathbf{e_l})$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = \sum_{l=1}^{3}\sum_{j=1}^{3}\tau_{lj}t_j n_l = \sum_{l=1}^{3} n_l \sum_{j=1}^{3}\tau_{lj}t_j$$

$$\mathbf{n} \cdot \tau \cdot \mathbf{t_\theta} = n_1(\tau_{11}t_1 + \tau_{12}t_2 + \tau_{13}t_3) + n_2(\tau_{21}t_1 + \tau_{22}t_2 + \tau_{23}t_3) + n_3(\tau_{31}t_1 + \tau_{32}t_2 + \tau_{33}t_3) \tag{88}$$

12

$$\mathbf{t}_\theta = [0, 1, \frac{1}{r}\frac{\partial h}{\partial \theta}]\left(\frac{1}{\sqrt{1 + (\frac{1}{r}\frac{\partial \mathbf{h}}{\partial \theta})^2}}\right)$$

$$[t_1, t_2, t_3] = [\frac{1}{r}\frac{\partial h}{\partial \theta}, 1, 0]\left(\frac{1}{\sqrt{1 + (\frac{1}{r}\frac{\partial \mathbf{h}}{\partial \theta})^2}}\right)$$

$$n_1(\tau_{11}t_1 + \tau_{12}t_2 + \tau_{13}t_3) = \frac{1}{\left(\sqrt{\left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}\right)} \frac{1}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}}\left[\left(-p + 2\mu\frac{\partial u_r}{\partial r}\right)(\frac{1}{r}\frac{\partial h}{\partial \theta}) + \mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r}\right)\right] \quad (89)$$

$$n_2(\tau_{21}t_1 + \tau_{22}t_2 + \tau_{23}t_3) = \frac{1}{\left(\sqrt{\left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}\right)} \frac{\frac{-1}{r}\frac{\partial h}{\partial \theta}}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}}\left[\mu\left(\frac{1}{r}\frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r} + \frac{\partial u_\theta}{\partial r}\right)(\frac{1}{r}\frac{\partial h}{\partial \theta}) + \left(-p + 2\mu\left(\frac{u_r}{r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta}\right)\right)\right]$$

$$(90)$$

$$n_3(\tau_{31}t_1 + \tau_{32}t_2 + \tau_{33}t_3) = \frac{1}{\left(\sqrt{\left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}\right)} \frac{\frac{-\partial h}{\partial z}}{\sqrt{\left(\frac{\partial h}{\partial z}\right)^2 + \left(\frac{1}{r}\frac{\partial h}{\partial \theta}\right)^2 + 1}}\left[\mu\left(\frac{\partial u_z}{\partial r} + \frac{\partial u_r}{\partial z}\right)(\frac{1}{r}\frac{\partial h}{\partial \theta}) + \mu\left(\frac{1}{r}\frac{\partial u_z}{\partial \theta} + \frac{\partial u_\theta}{\partial z}\right)\right] \quad (91)$$
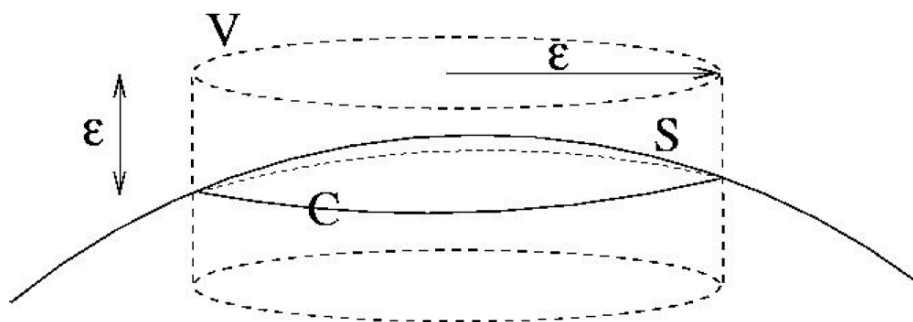
Figure 2: A Gaussian fluid pillbox of height and radius ϵ spanning the interface evolves under the combined influence of volume and surface forces.
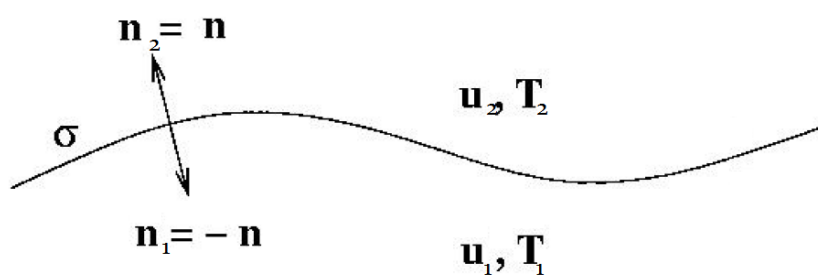

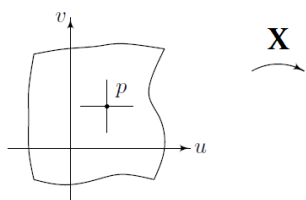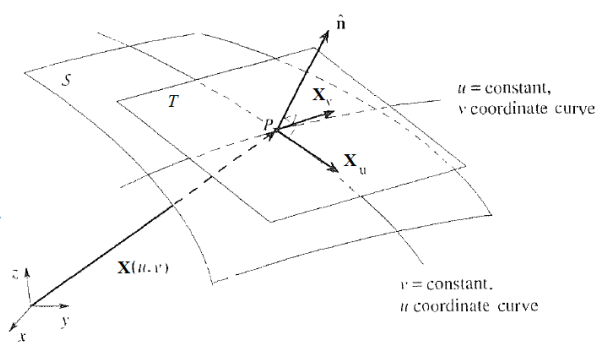Figure 3: A definitional sketch of a fluid-fluid interface.

Figure 4.1: Point p on the parametric surface.

Figure 4. Tangent plane and normal.