

Basic Wireless Settings

2.4 GHz

Network Mode: Auto

Network Name (SSID): HomeSSID

SSID Broadcast: ☒ Enabled ☐ Disabled

Standard Channel: 6 - 2.437GHz

Channel Bandwidth: Auto

Wireless Security

2.4 GHz

Security Mode: WPA2 Personal

Encryption: AES

Passphrase: Cisco123

Key Renewal: 3600 seconds

5 GHz - 1

Security Mode: Disabled

5 GHz - 2

Administration

Router Access

Router Password: *****

Re-enter to confirm: *****

Web Access

Web Utility Access: ☒ HTTP ☐ HTTPS

Web Utility Access via Wireless: ☒ Enabled ☐ Disabled

Remote Access

Remote Management: ☐ Enabled ☒ Disabled

Wireless Network Monitor

Link Information Connect Profiles

Below is a list of available wireless networks. To search for more wireless networks, click the Refresh button. To view more information about a network, select the wireless network name. To connect to that network, click the Connect button below.

Wireless Network Name	CH	Signal
HomeSSID	6	100%

Site Information

Wireless Mode: Infrastructure

Network Type: Mixed B/G/N

Radio Band: Auto

Security: WPA2-PSK

MAC Address: 00E0 F797 9006

Refresh Connect

Adapter is Active

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 203.0.113.78

Pinging 203.0.113.78 with 32 bytes of data:

Request timed out.

Request timed out.

Reply from 203.0.113.78: bytes=32 time=63ms TTL=128

Reply from 203.0.113.78: bytes=32 time=35ms TTL=128

Ping statistics for 203.0.113.78:

Packets: Sent = 4, Received = 2, Lost = 2 (50% loss)

Approximate round trip times in milli-seconds:

Minimum = 35ms, Maximum = 63ms, Average = 49ms

C:\>

Web Browser

URL: http://203.0.113.78

Go Stop

Cisco Packet Tracer

Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.

Quick Links:

- [A small page](#)
- [Copyrights](#)
- [Image page](#)
- [Image](#)

Part 1 Configure a Home Wireless Router

Step 1 DHCP

- Router LAN IP : **192.168.6.1**
- Subnet Mask : **255.255.255.224**
- DHCP Server : **Enable**
- Starting IP : **192.168.6.3**

- Maximum Users : **20**
 - Internet Connection : **Automatic Configuration (DHCP)**
 - Static DNS : **10.100.100.252**
-

Step 2 Wireless

- Network Mode : **Auto**
 - SSID : **HomeSSID**
 - Channel : **6**
 - SSID Broadcast : **Enable**
-




Step 3 Security

- Security Mode : **WPA2-Personal**
 - Passphrase : **Cisco123**
 - Router Password : **Cisco123**
-

Step 4 Client

Laptop, Tablet และ Smartphone

- SSID : **HomeSSID**
- Authentication : **WPA2-Personal**
- Password : **Cisco123**

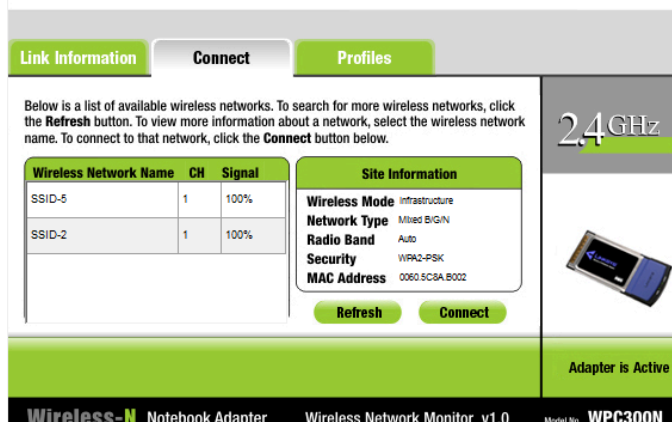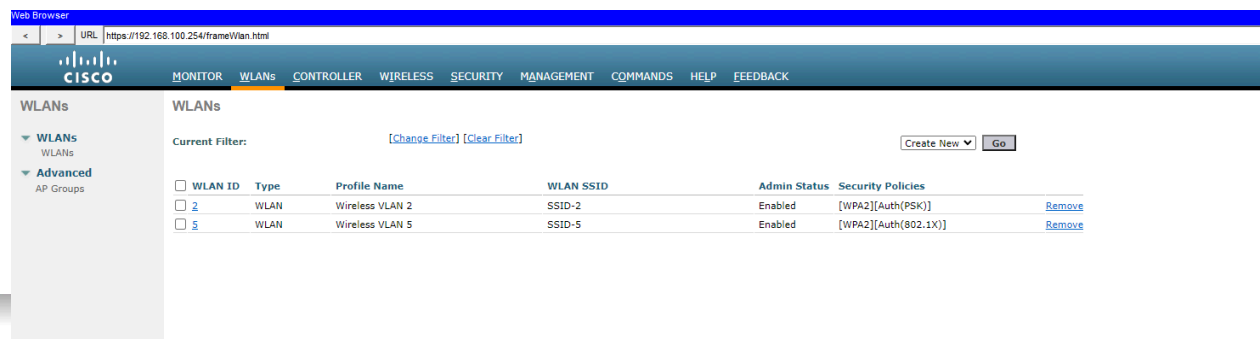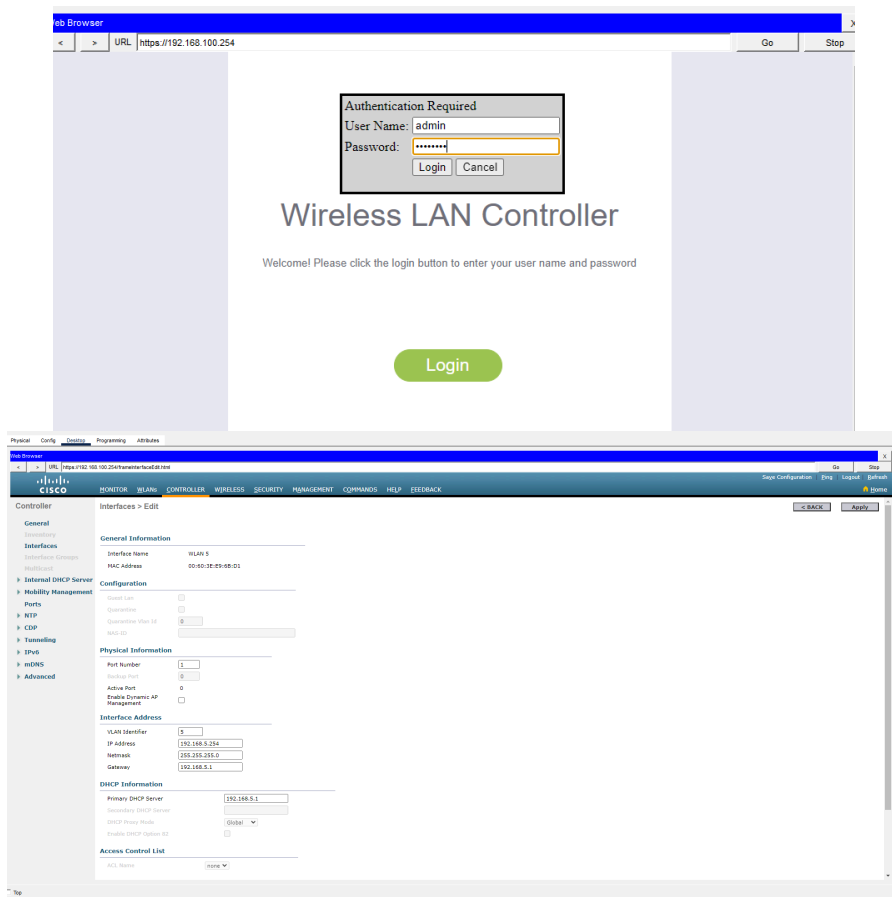

Part 2 Configure WLC

VLAN Interface 2

- Name : **WLAN 2**
 - VLAN : **2**
 - Port : **1**
 - IP Address : **192.168.2.254**
 - Mask : **255.255.255.0**
 - Gateway : **192.168.2.1**
 - DHCP Server : **192.168.2.1**
-

VLAN Interface 5

- Name : **WLAN 5**
 - VLAN : **5**
 - Port : **1**
 - IP Address : **192.168.5.254**
 - Mask : **255.255.255.0**
 - Gateway : **192.168.5.1**
 - DHCP Server : **192.168.5.1**
-

DHCP Scope

- Scope Name : **management**
 - Start Address : **192.168.100.235**
 - End Address : **192.168.100.245**
 - Network : **192.168.100.0**
 - Netmask : **255.255.255.0**
 - Default Router : **192.168.100.1**
-

RADIUS

- Server Index : **1**
 - Server Address : **10.6.0.254**
 - Shared Secret : **RadiusPW**
-

SNMP

- Community : **WLAN**
 - IP Address : **10.6.0.254**
-

WLAN 2

- Profile Name : **Wireless VLAN 2**
 - SSID : **SSID-2**
 - ID : **2**
 - Interface : **WLAN 2**
 - Security : **WPA2-PSK**
 - Passphrase : **Cisco123**
 - FlexConnect Local Switching : **Enable**
 - FlexConnect Local Authentication : **Enable**
-

WLAN 5

- Profile Name : **Wireless VLAN 5**
 - SSID : **SSID-5**
 - ID : **5**
 - Interface : **WLAN 5**
 - Security : **WPA2-Enterprise (802.1X)**
 - Authentication Server : **10.6.0.254**
 - FlexConnect Local Switching : **Enable**
 - FlexConnect Local Authentication : **Enable**
-

Wireless Host 1

- SSID : **SSID-2**

- Security : **WPA2-PSK**
 - Password : **Cisco123**
-

Wireless Host 2

- SSID : **SSID-5**
 - Security : **WPA2-Enterprise**
 - Username : **userWLAN5**
 - Password : **userW5pass**
-

การทดสอบ

ทดสอบด้วยคำสั่ง

None

ping 203.0.113.78

จาก Wireless Host ทั้งสอง

จากนั้นเปิด Web Browser

None

http://203.0.113.78

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 203.0.113.78

Pinging 203.0.113.78 with 32 bytes of data:

Reply from 203.0.113.78: bytes=32 time=77ms TTL=126
Reply from 203.0.113.78: bytes=32 time=46ms TTL=126
Reply from 203.0.113.78: bytes=32 time=25ms TTL=126
Reply from 203.0.113.78: bytes=32 time=50ms TTL=126

Ping statistics for 203.0.113.78:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 25ms, Maximum = 77ms, Average = 49ms

C:\>
```

Question

Verify the address. What address did it receive?

Answer

The Internet interface received an IP address **automatically from the DHCP server**. The exact IP address depends on the Packet Tracer simulation and may vary for each activity.

ผลลัพธ์จากการตั้งค่า

