

How to Keep Your IGEL OS 12 System up to Date

Rationale

Software updates fix newly discovered vulnerabilities in the IGEL OS Base System and the apps installed. This means that keeping up with updates is one of the most important measures in securing IGEL OS systems.

Prerequisites

- Your devices are managed by the Universal Management Suite (UMS) 12
- Your Universal Management Suite (UMS) has access to the IGEL App Portal. It must be registered for this; see [Registering the UMS](#).
- Your devices have valid licenses

Receiving regular safety information

→ To get new ISNs and ISN updates delivered to your inbox, subscribe to the Security Announcements Mailing List. Go to <http://igel.com> and find the "Subscribe for Updates" form at the bottom of the page. This will initially subscribe you to all mailings from IGEL, but by using the unsubscribe link at the bottom of a mail, you can select which communications you wish to receive and which not.

Before You Begin

As the steps for the Base System differ from those for the other apps, the procedure is as follows:


- [Setting the UMS to Update Regularly](#)
- [House Keeping: Delete Older, Unused Versions Regularly](#)
- [Setting up a Test Directory](#)
- [Keeping the Base System up to Date](#)
 - [Testing the Base System Updates on One or a Few Devices](#)
 - [Rolling out the Base System Update on All Devices](#)
- [Keeping Other Apps up to Date](#)
 - [Testing the App Updates on One or a Few Devices](#)
 - [Rolling out the App Update on All Devices](#)

Setting the UMS to Update Regularly


To ensure you have every version of your apps available in the UMS, we will set the UMS to import new versions automatically.

Follow these steps for each app installed on your devices. We will use the Base System as an example.

1. In your UMS Web App, go to **APPS** and then open the **Update Settings**.

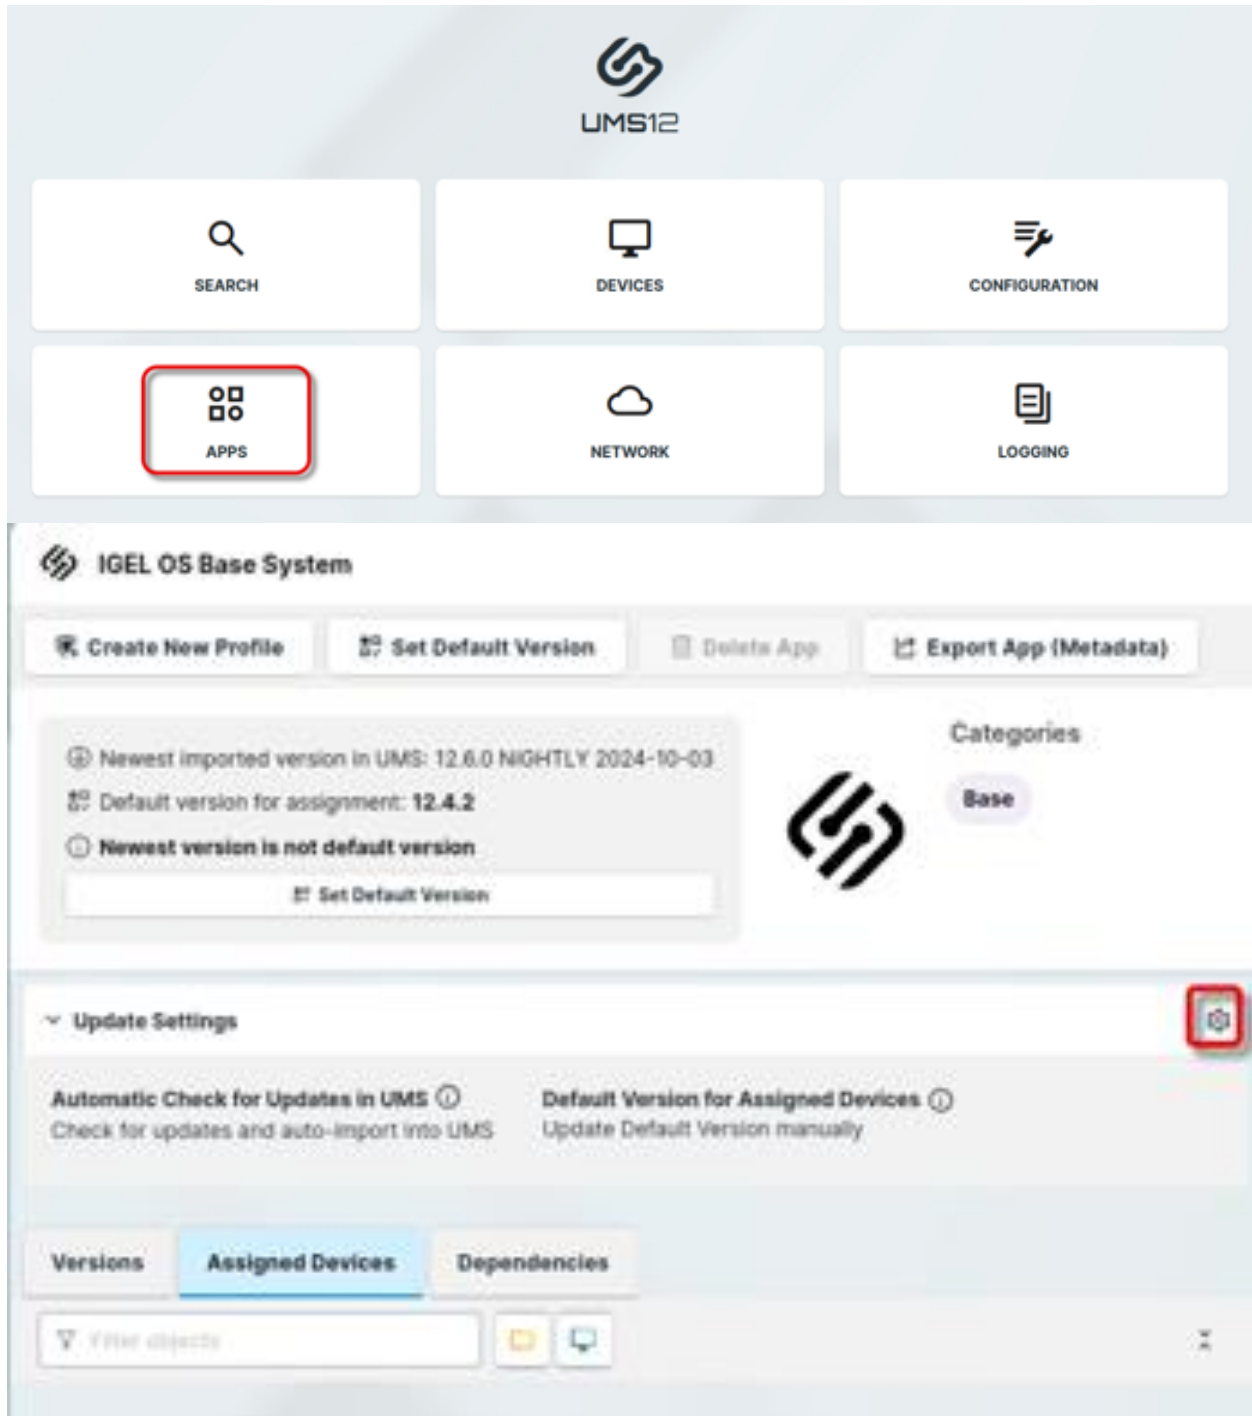



2. Enable **Check for updates and auto-import into UMS** and **Update Default Version manually**.

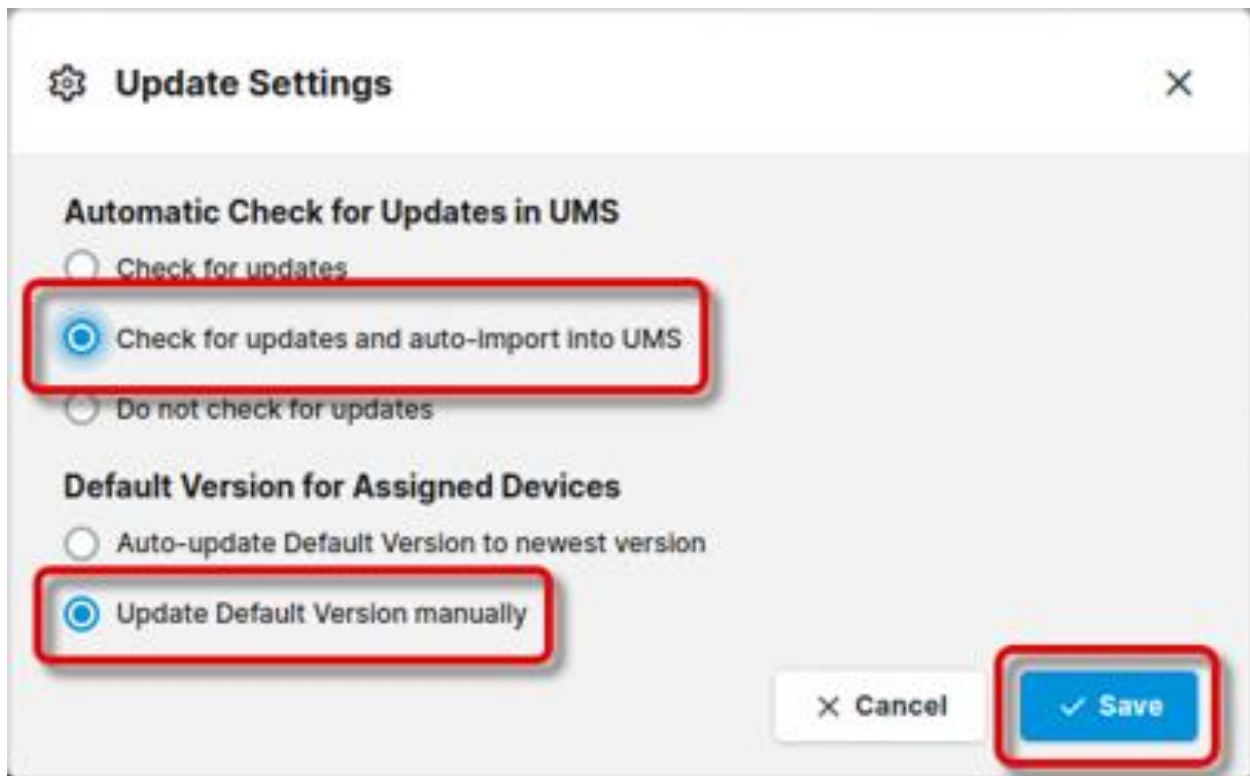

The UMS is now kept always up-to-date. The latest software versions are imported automatically. As **Update Default Version manually** is selected, the updates are not automatically rolled out to the devices.

The default interval for update checks is 120 minutes. You can configure the interval via **Settings > Automatic Updates**:

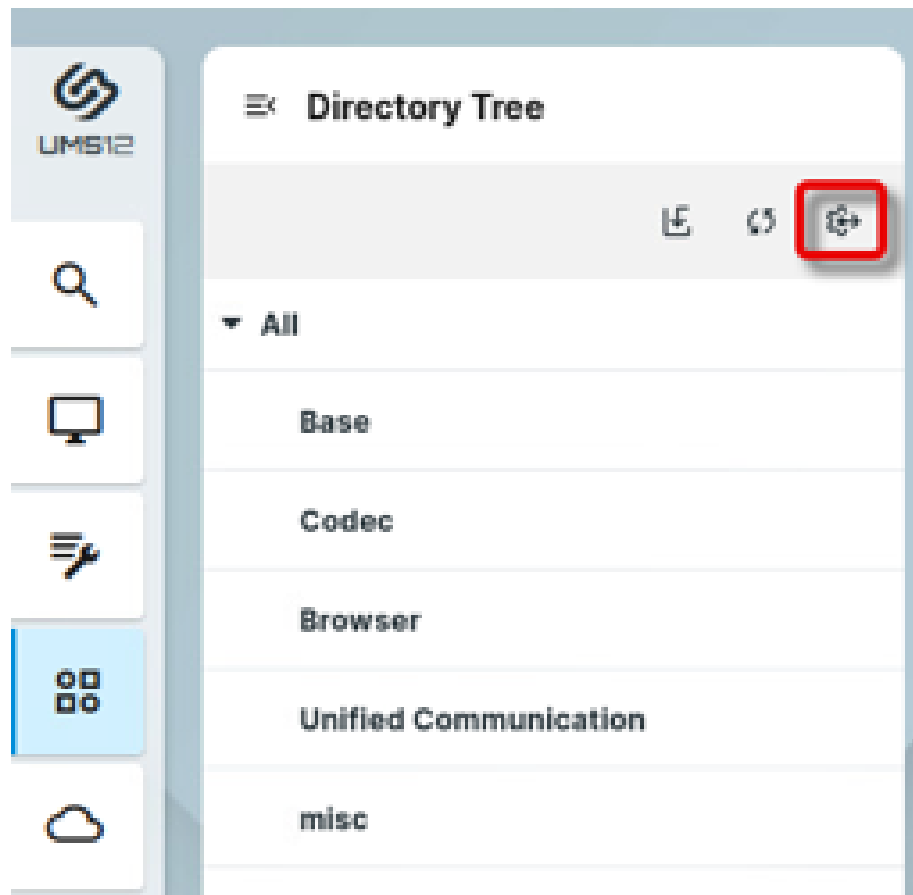


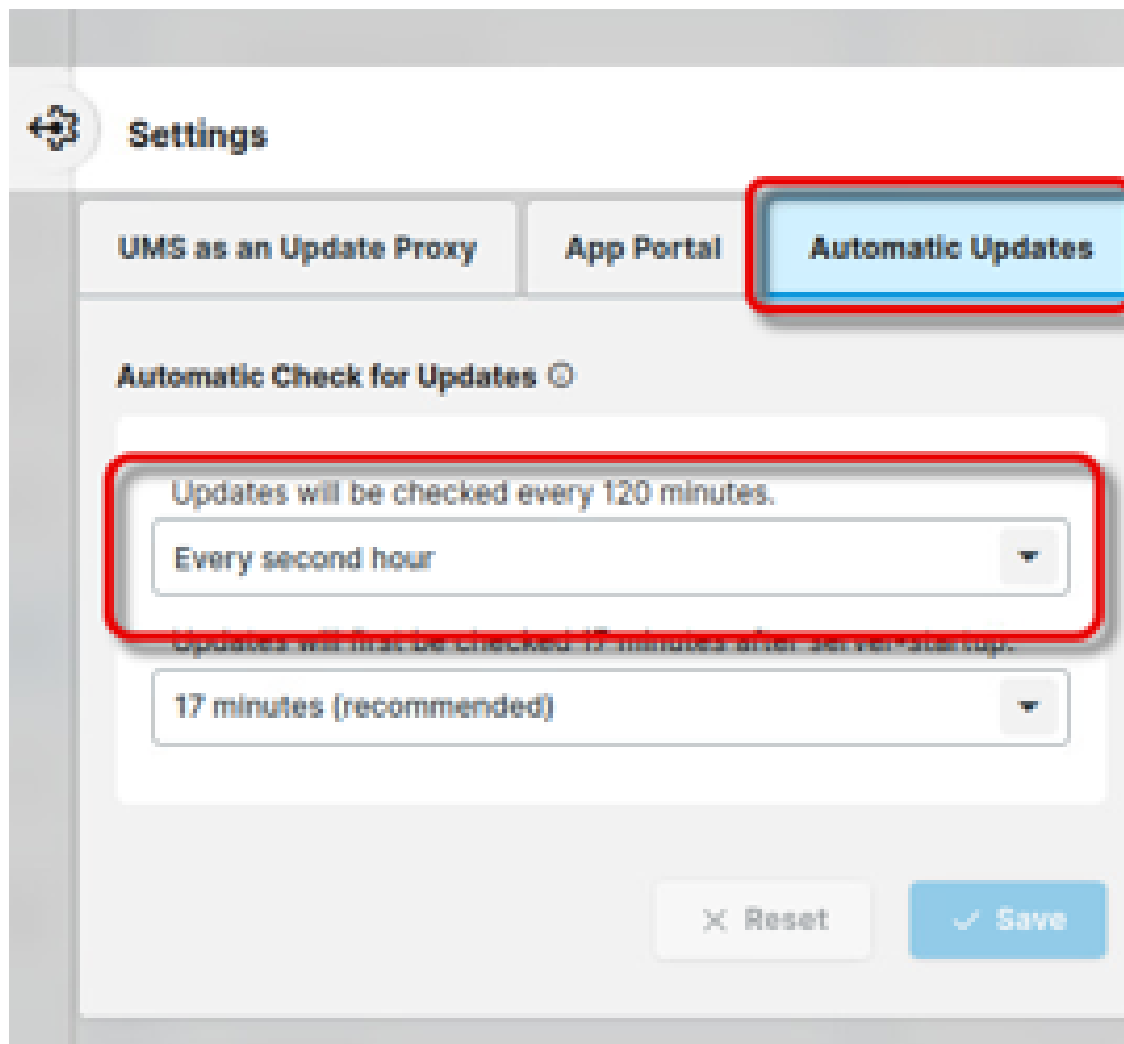

House Keeping: Delete Older, Unused Versions Regularly

If you have configured your UMS to import every new version of your imported apps, as described above, you should dispose of older, unused versions. It is recommended to do this regularly.

→ In your UMS Web App, go to the app version in question and click  to remove it.

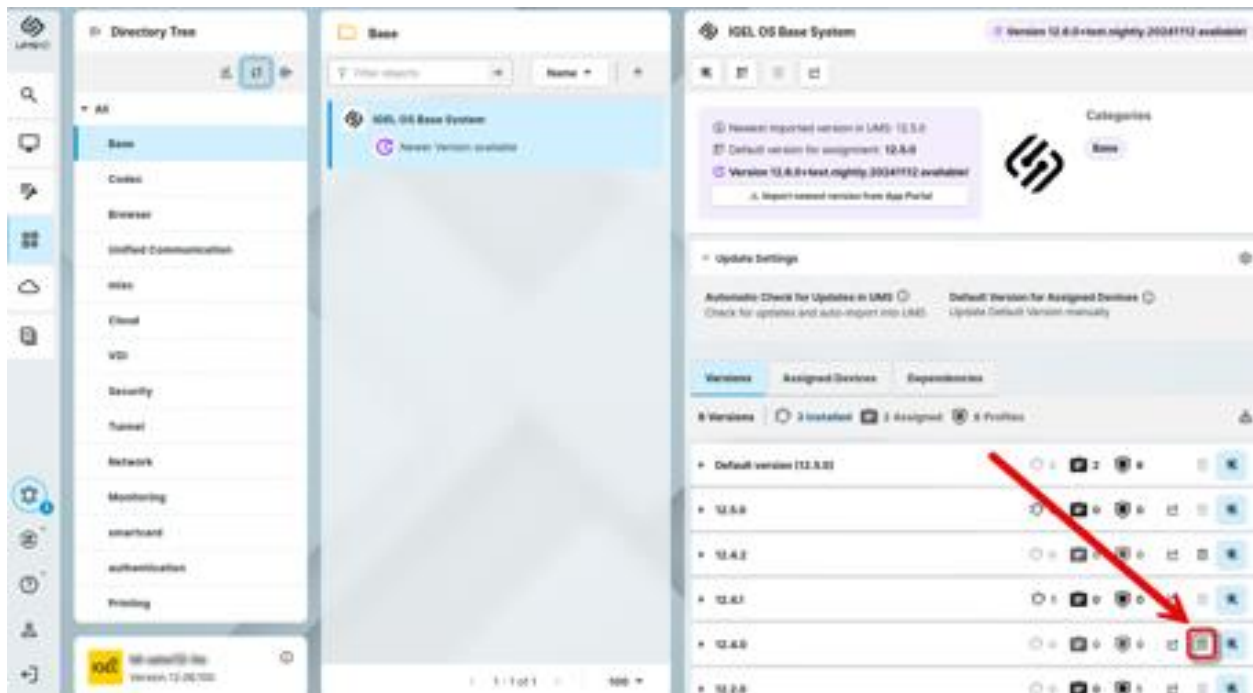

Setting up a Test Directory

It is highly recommended that test devices be put into a separate directory.

1. In your UMS Web App, go to **DEVICES** and create a directory for your test devices, e.g., "Update test".



SEARCH



DEVICES



CONFIGURATION



APPS



NETWORK



LOGGING



Directory Tree



Devices (3/6)

Augsburg (0/3)

techdoc (3/3)

Devices



Filter objects

Name



ITC

11.10.150.01

UC1-LX

192.168.30.104



ITC

12.4.1

UC1-LX

192.168.30.105




ITC



12.4.1


UC1-LX

192.168.30.106

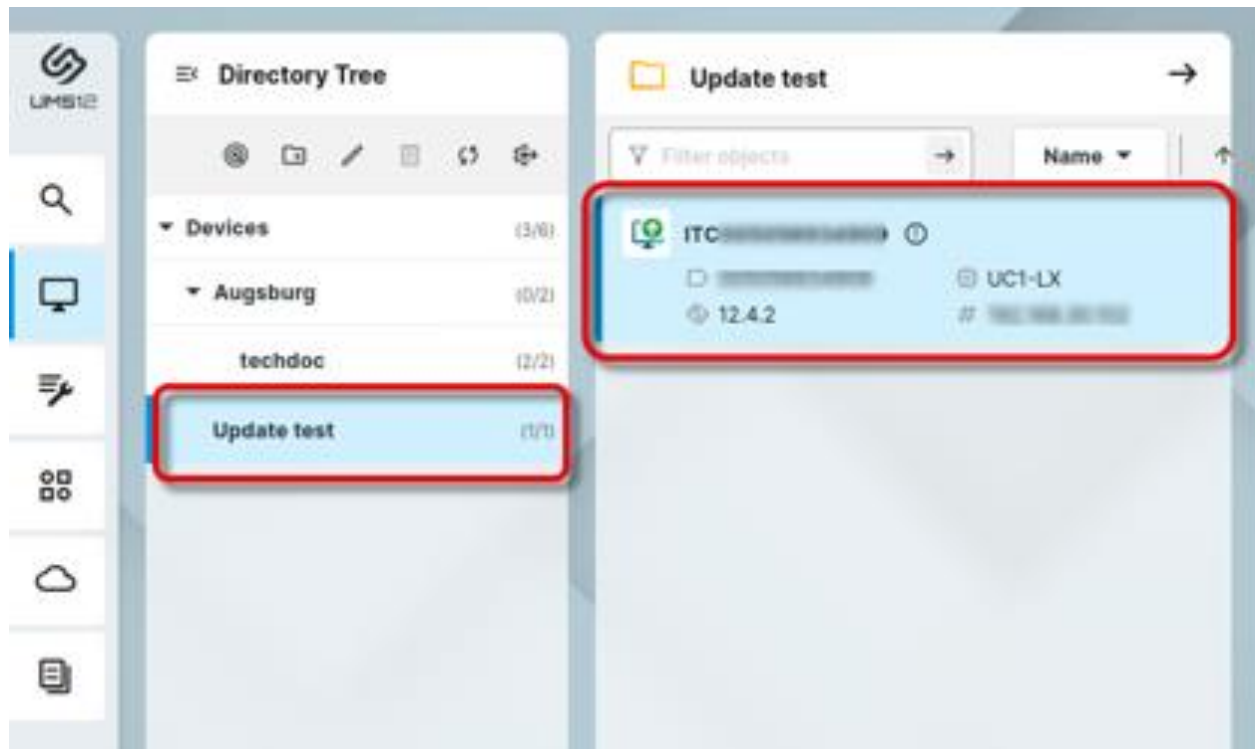

3. Find your test devices and put them into the new test directory using drag & drop.

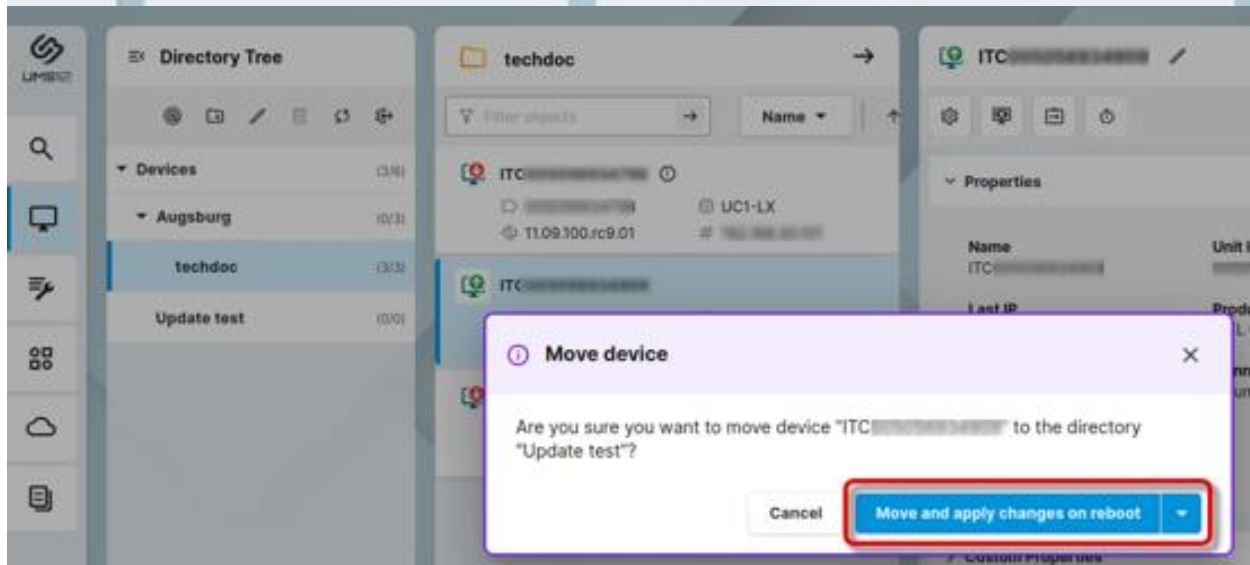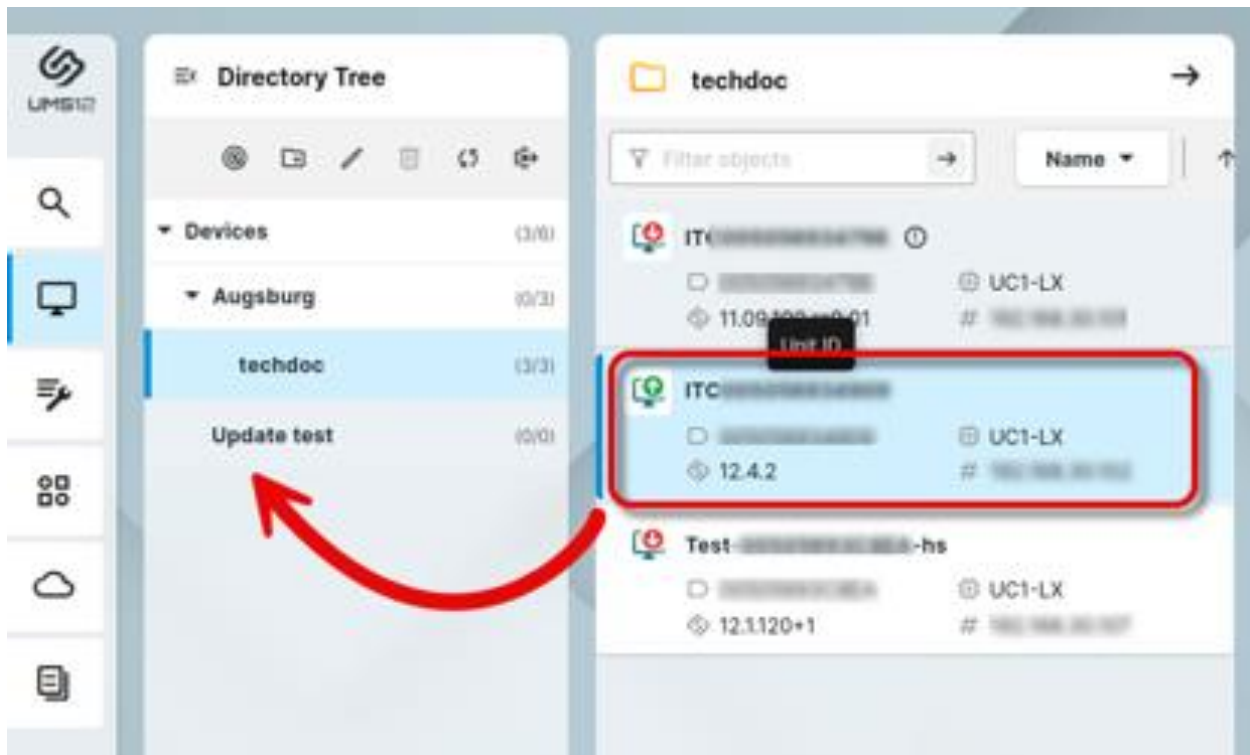

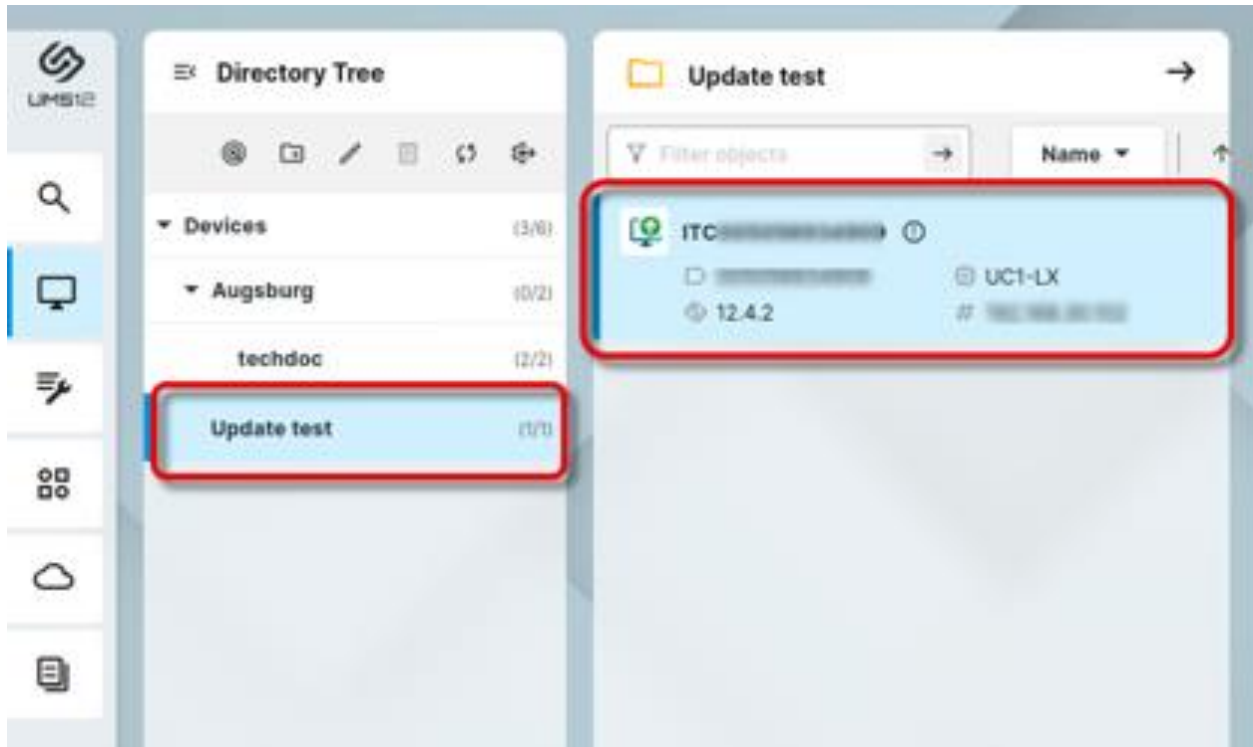

Keeping the Base System up to Date

Testing the Base System Updates on One or a Few Devices

To prepare for testing the Base System update, we will proceed in two steps:


1. Create a test profile to be able to activate or configure new features, e.g. security features of the new Base System version
2. Assign the new Base System version explicitly to the test devices

As of IGEL OS 12.7.1, there is a downgrade limit. See [Downgrade Limit on IGEL OS 12.7.1 or Higher](#).

Creating the Test Profile

To create a test profile, we will duplicate the productive profile by exporting and re-importing it.

1. In your UMS Web App, go to the **Configuration Objects** and then find the relevant profile.

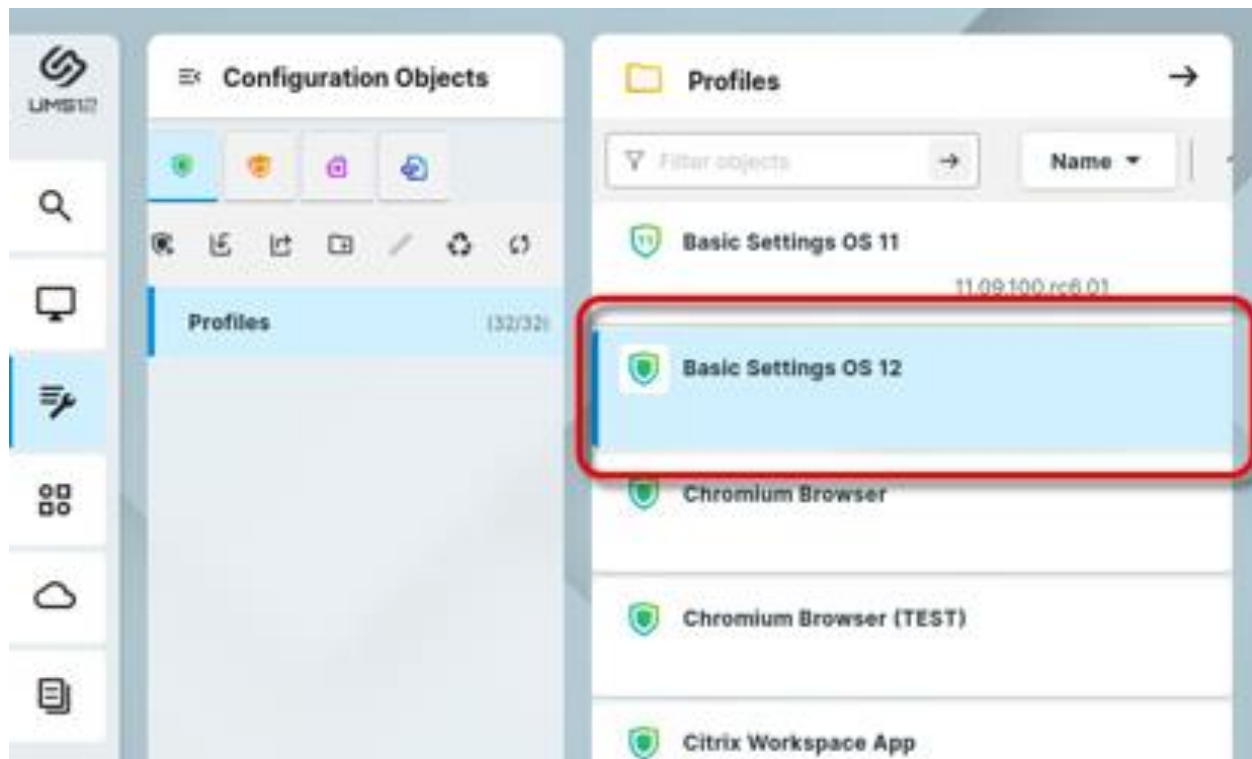

2. Click **Export Profile** and save the file on your machine.



Basic Settings OS 12

Edit Configuration

Export Profile

wums.configuration.dialog.del

▼ Properties



Name	Id
Basic Settings OS 12	10098
Directory Path	
Profiles	

Activated Settings

Template Key Relation

Assigned Devices

Apps



Assign device

Enter device or directory name

Filter objects



Export Profile



Profiles: (Profiles based on OS11 can't be exported)

☒ Name	Directory Path
☒ Basic Settings OS 12	Profiles


File name:


profile-export-2024-10-28

Cancel


Export as *.ipm

4. Click  and import the file.

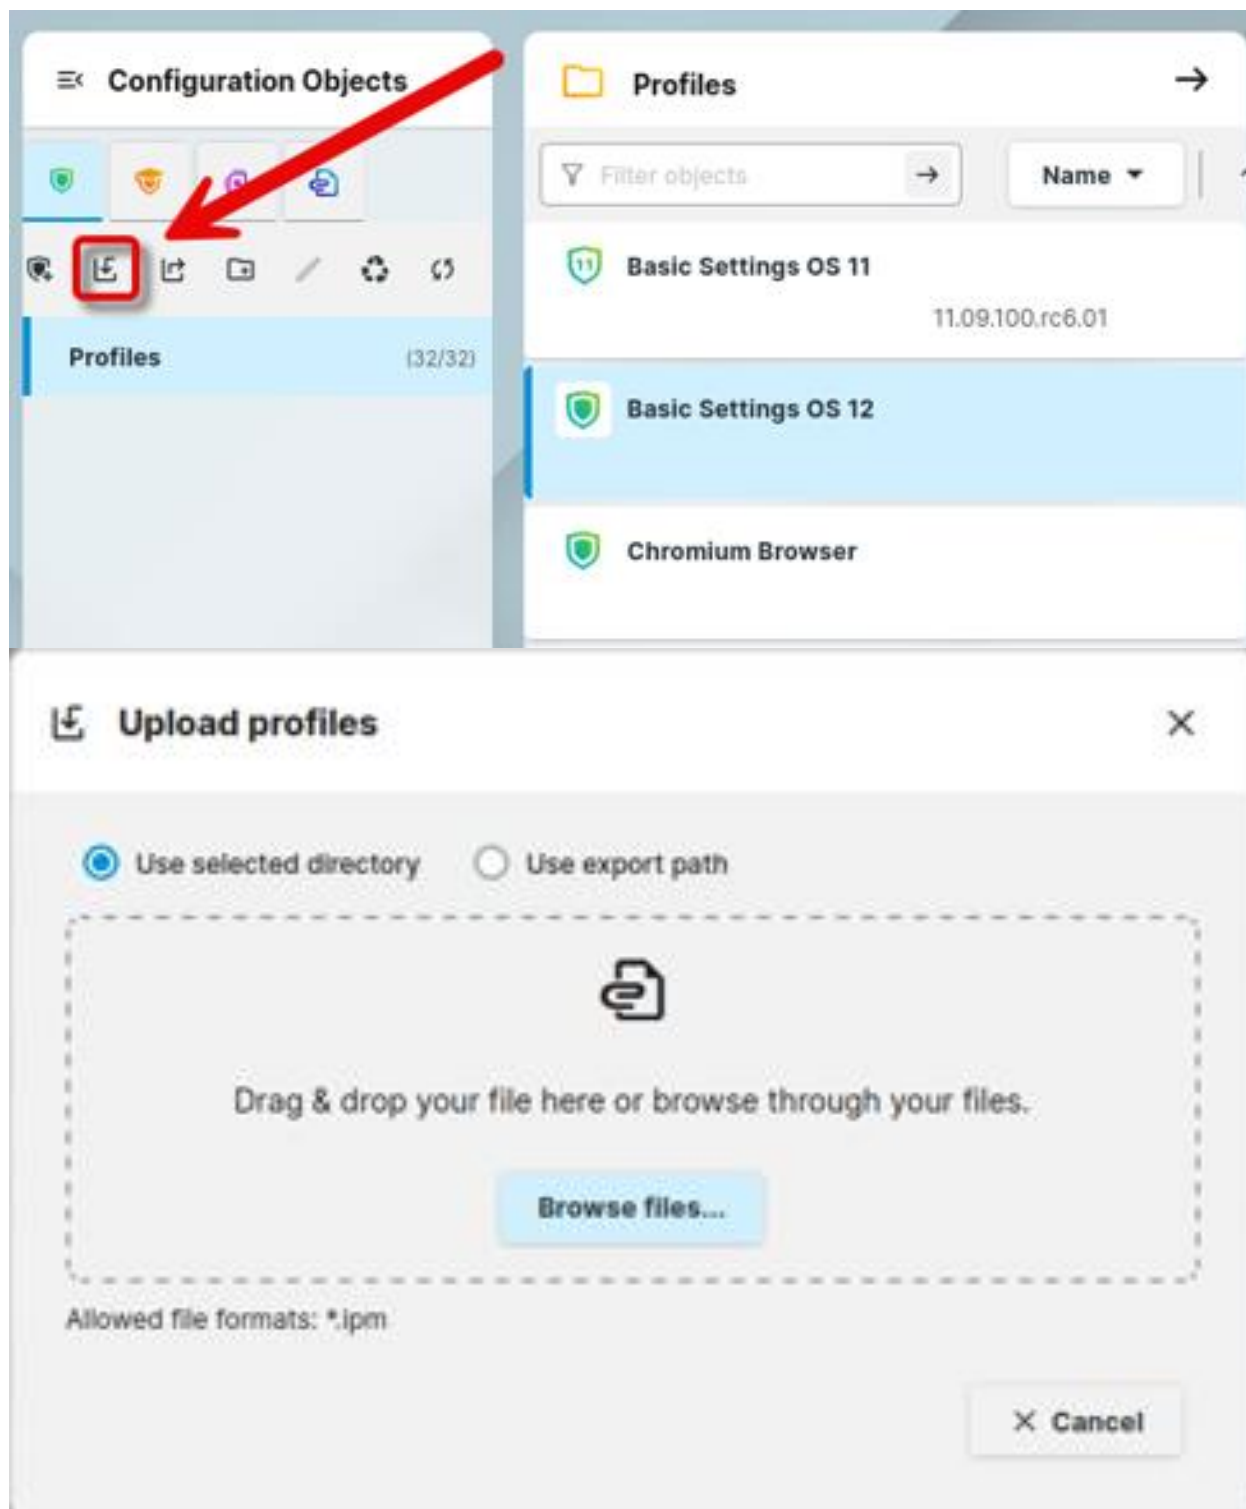


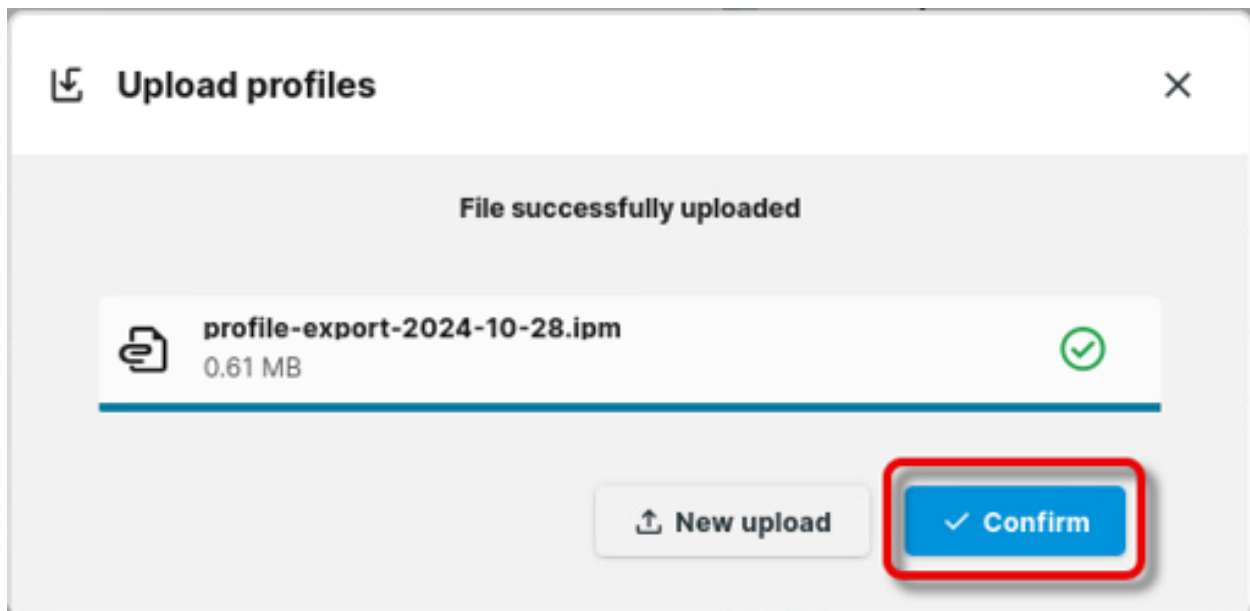

The imported profile is displayed underneath the original profile. The imported profile can be distinguished from the original one by its ID, which is higher.

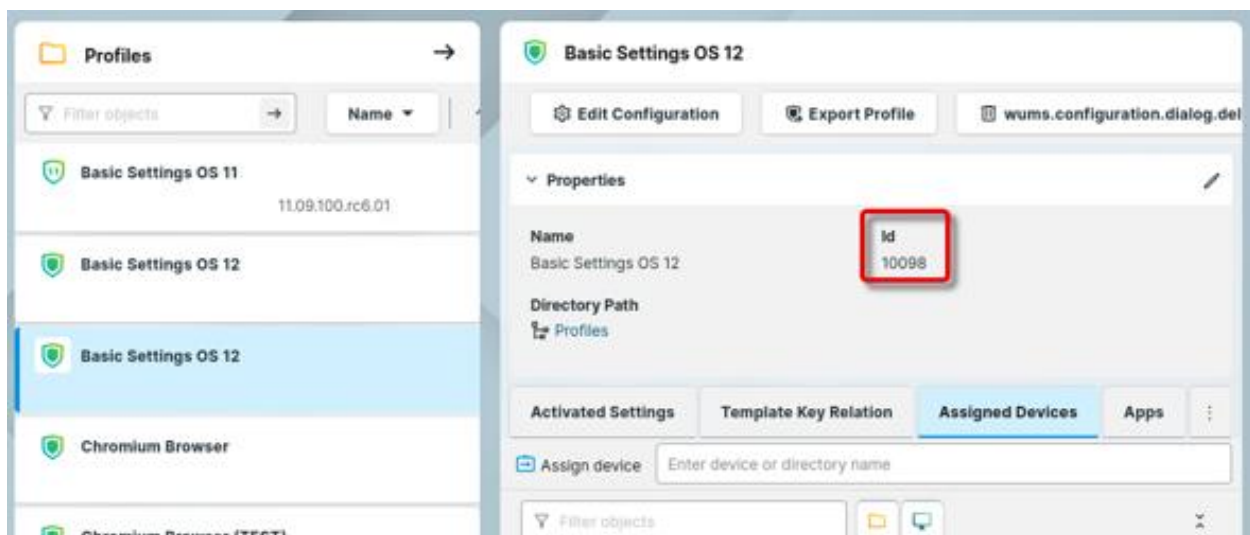

4. Select the imported profile, and click  to change the name appropriately.

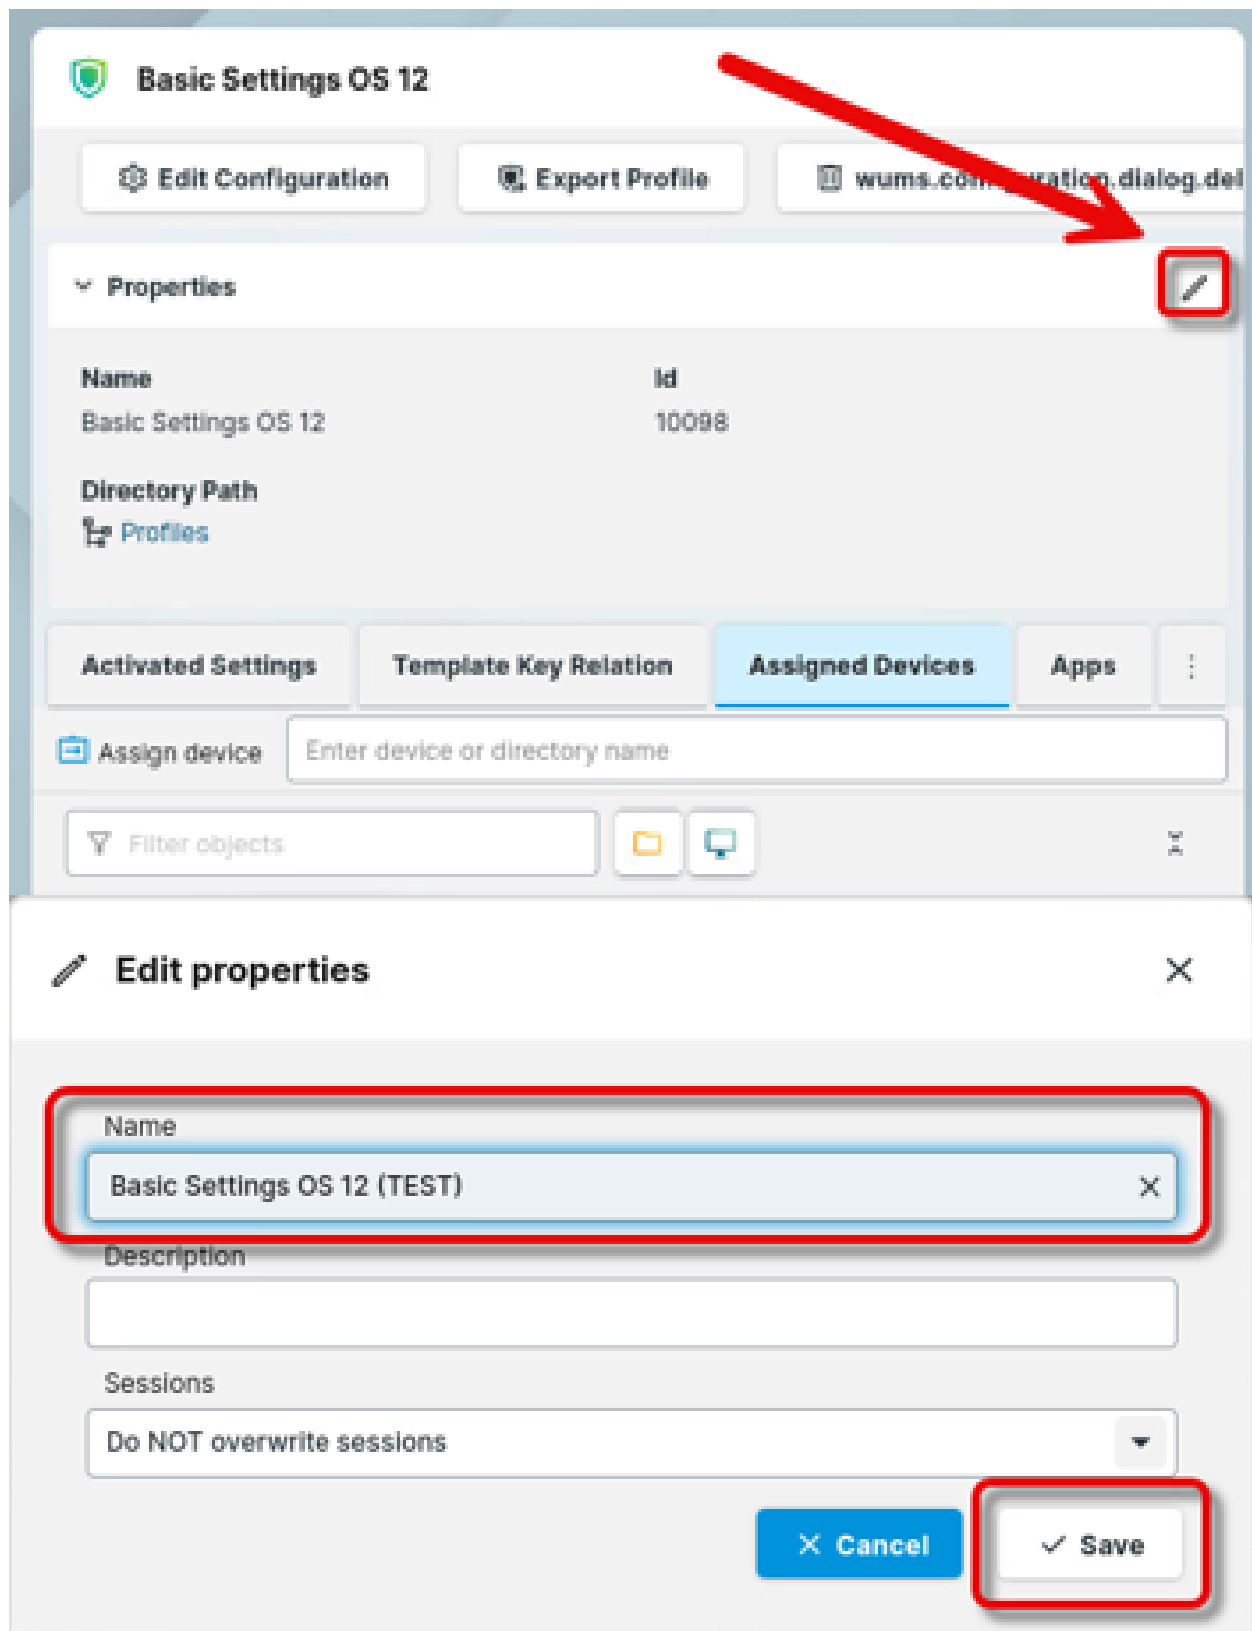

5. Set the app version of the test profile to the target version.

Profiles

Filter objects → Name ▾

Basic Settings OS 11

11.09.100.rc6.01

Basic Settings OS 12

Basic Settings OS 12 (TEST)

Chromium Browser

Basic Settings OS 12 (TEST)

Edit Configuration Export Profile wums.configuration.dialog.del

Properties

Name

Basic Settings OS 12 (TEST)

Id

10098

Directory Path

Profiles

Activated Settings

Template Key Relation

Assigned Devices

Apps

⋮

Assign device

Enter device or directory name

Profile Configurator - Basic Settings OS 12 (TEST)

Accessories +

User Interface +

Network

Devices

Security +

System

Terminals

SSH Client

VNC Viewer

Network Tools

Application Launcher

App Portal

System Information

Screenshot Tool

Setup

System Log Viewer

Task Manager

Terminal Sessions

Session Name

Local Terminal

App Selector

Close Save Save and Close

App Selector - Basic Settings OS 12 (TEST)



☒ Show Versions



In OS 12 you can define what apps should be configured by a profile.
Please select at least one app. (You can choose from Base System and/or Apps.)
This selection can always be changed.

Base System

☒




ROEL OS Base System
Version: Default version

Apps

☐		Competitor Version: Default version 12.6.0+test NIGHTLY 2024-10-25 12.6.0+test NIGHTLY 2024-10-24 12.6.0+test NIGHTLY 2024-10-23 12.6.0+test NIGHTLY 2024-10-22 12.5.0 12.4.2
☐		SuperfluxKart Version: Default version
☐		Olivio Gato Version: 12.4.2
☐		ThinLine Version: Default version



Cancel

Save

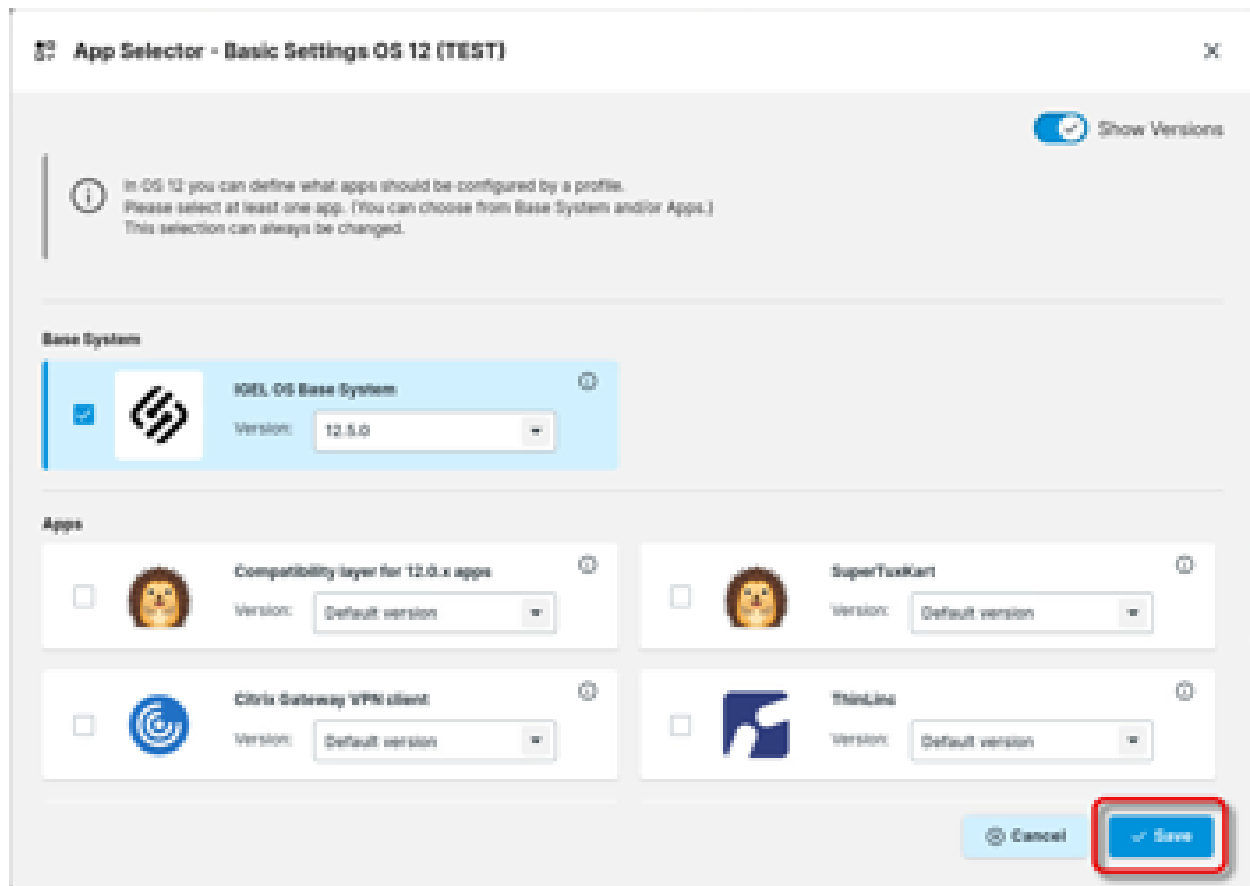

Assigning the Profiles to the Test Devices

1. Find your test devices and detach the relevant productive profiles from each test device.

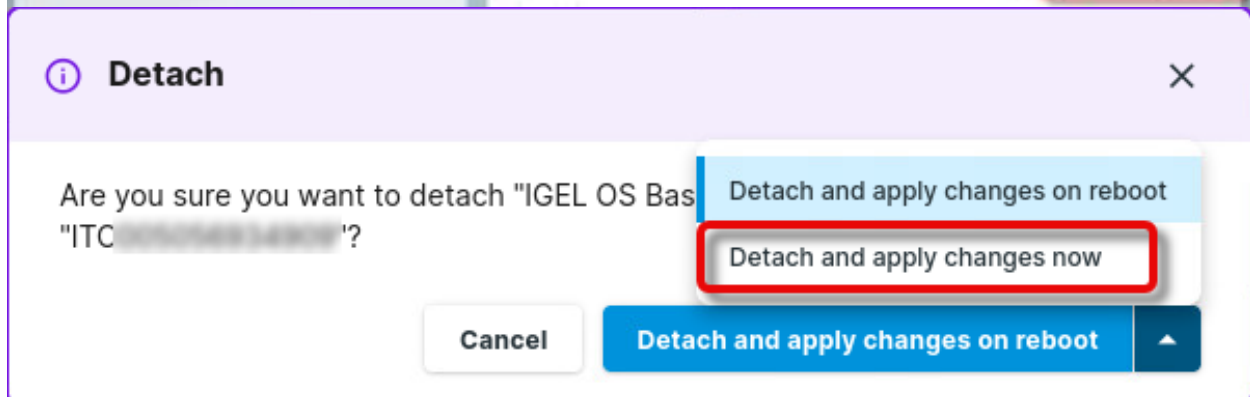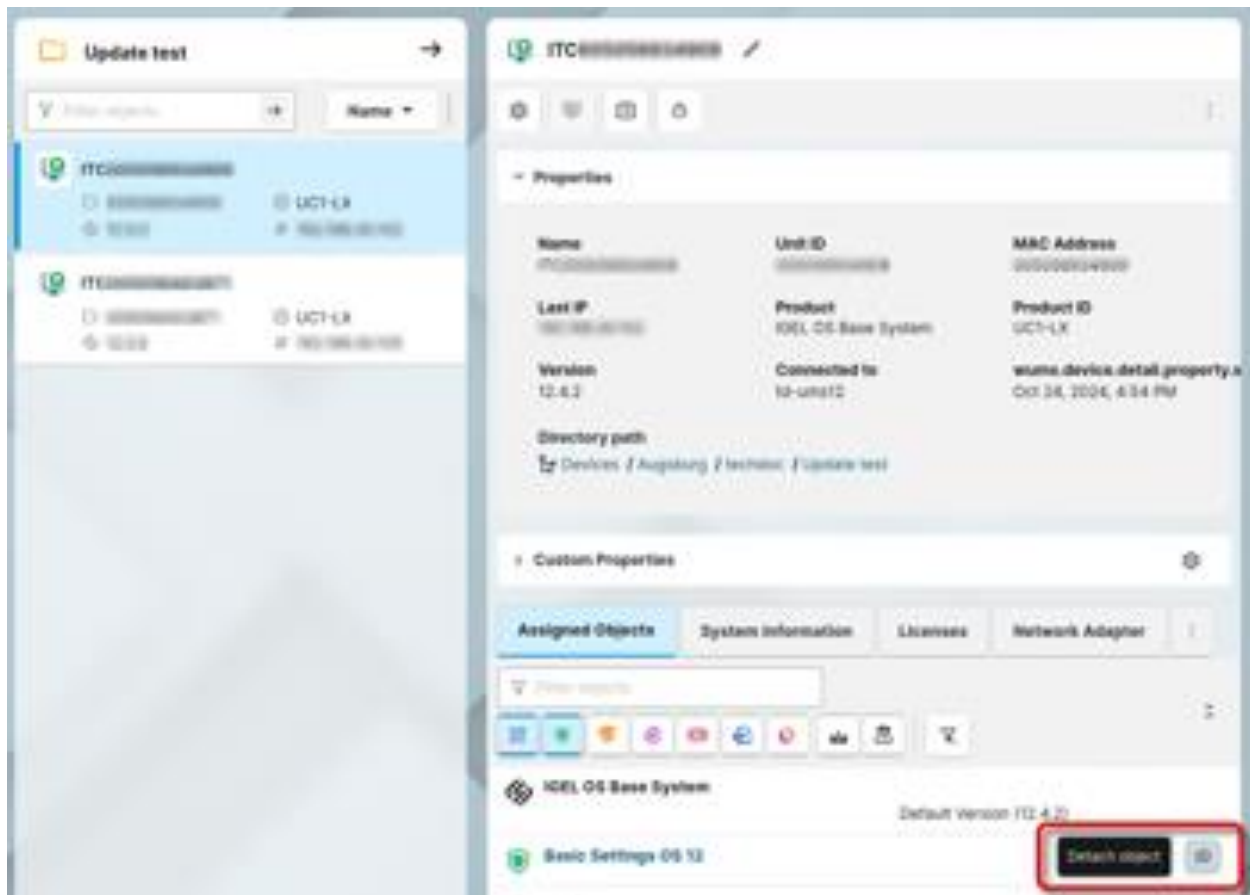

2. Assign the test profile to your test directory.

Assign Object to Directory



Update test (2)

Devices / Ausübung / technol / Update test

Filter objects



Assignable Objects

SSO

OS 12 Chromium Browser

Basic Settings OS 12 (TEST)

Basic Settings OS 11

Resonance Audio Extension

HOEL Windows 365

HOEL Remote Desktop

Microsoft Teams PWA




Assignments

Chromium Browser

Cancel


Save and apply on reboot




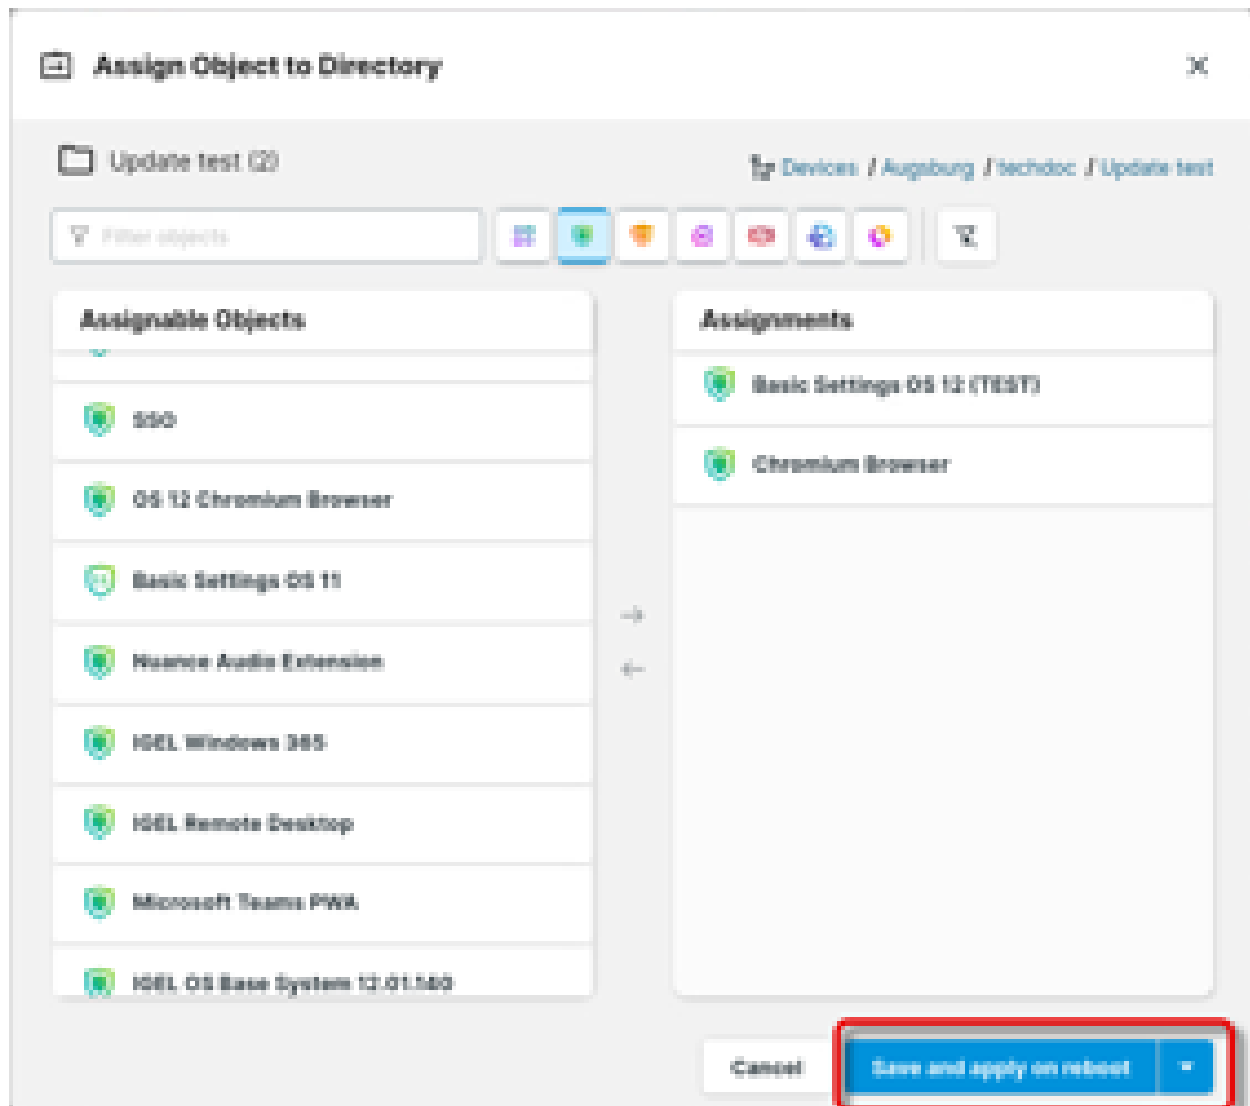


Assigning the New Base System Version to the Devices


1. Go to each of your test devices and check under **Assigned Objects** if a version of the IGEL OS Base System is assigned to the device.

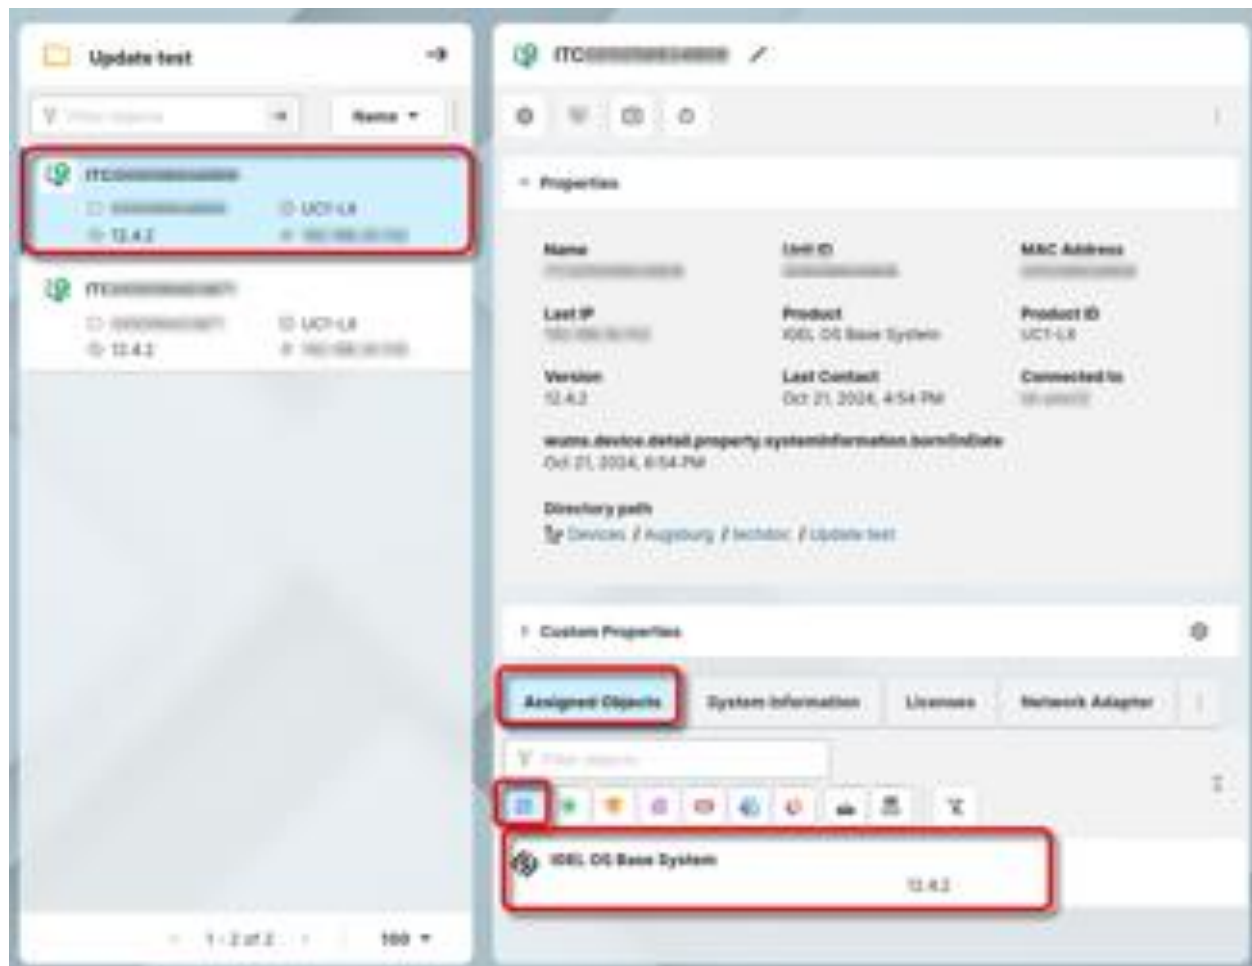

2. Move your mouse to the right side of the **IGEL OS Base System** entry; if a **Detach object** button () appears, click it and confirm your change.

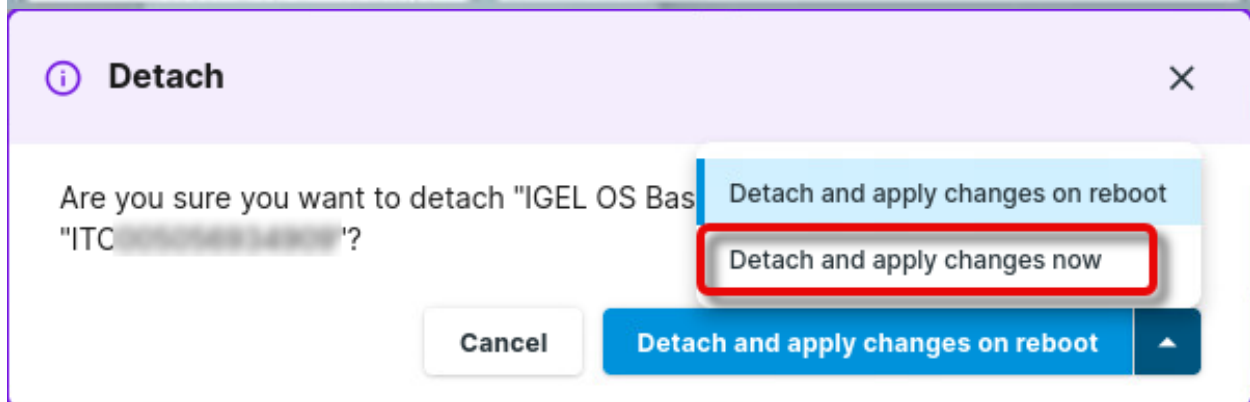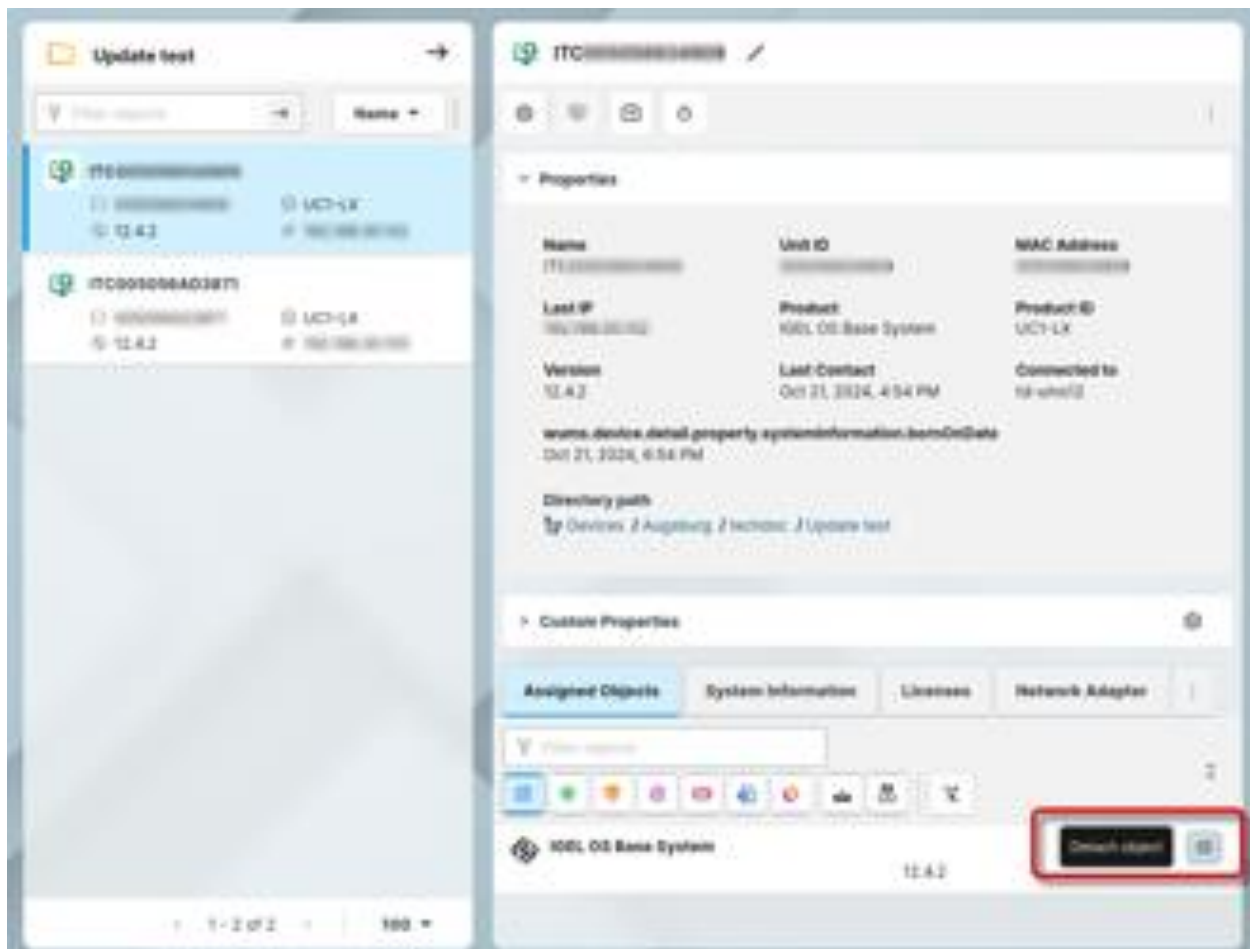

3. Go to the test directory and click **Assign Object**.

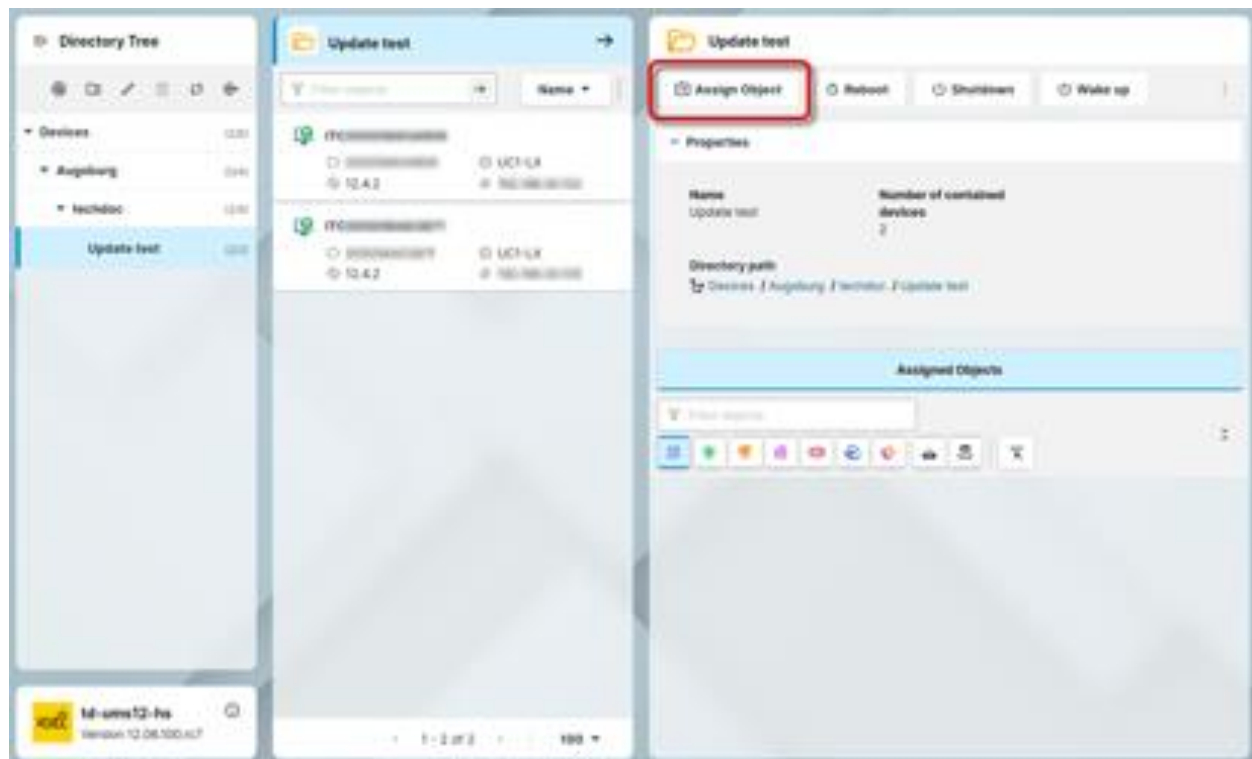

2. In the dialog **Assign Object to Directory**, choose the desired version of the IGEL OS Base System and assign it to the directory.

Assign Object to Directory



Update test (2)

Devices / Augsburg / techdoc / Update test

Filter objects



Assignable Objects



IOSL OS Base System

Default Version (12.4.2)



Default Version (12.4.2)

12.5.0

12.4.2

12.4.1

12.4.0 NIGHTLY 2024-03-21

12.4.0 NIGHTLY 2024-03-14

12.4.0 RC 12



Chromium fingerprint codes

Default Version (108.0.5359+1 BUILD)




Assignments

Cancel

Save and apply on reboot





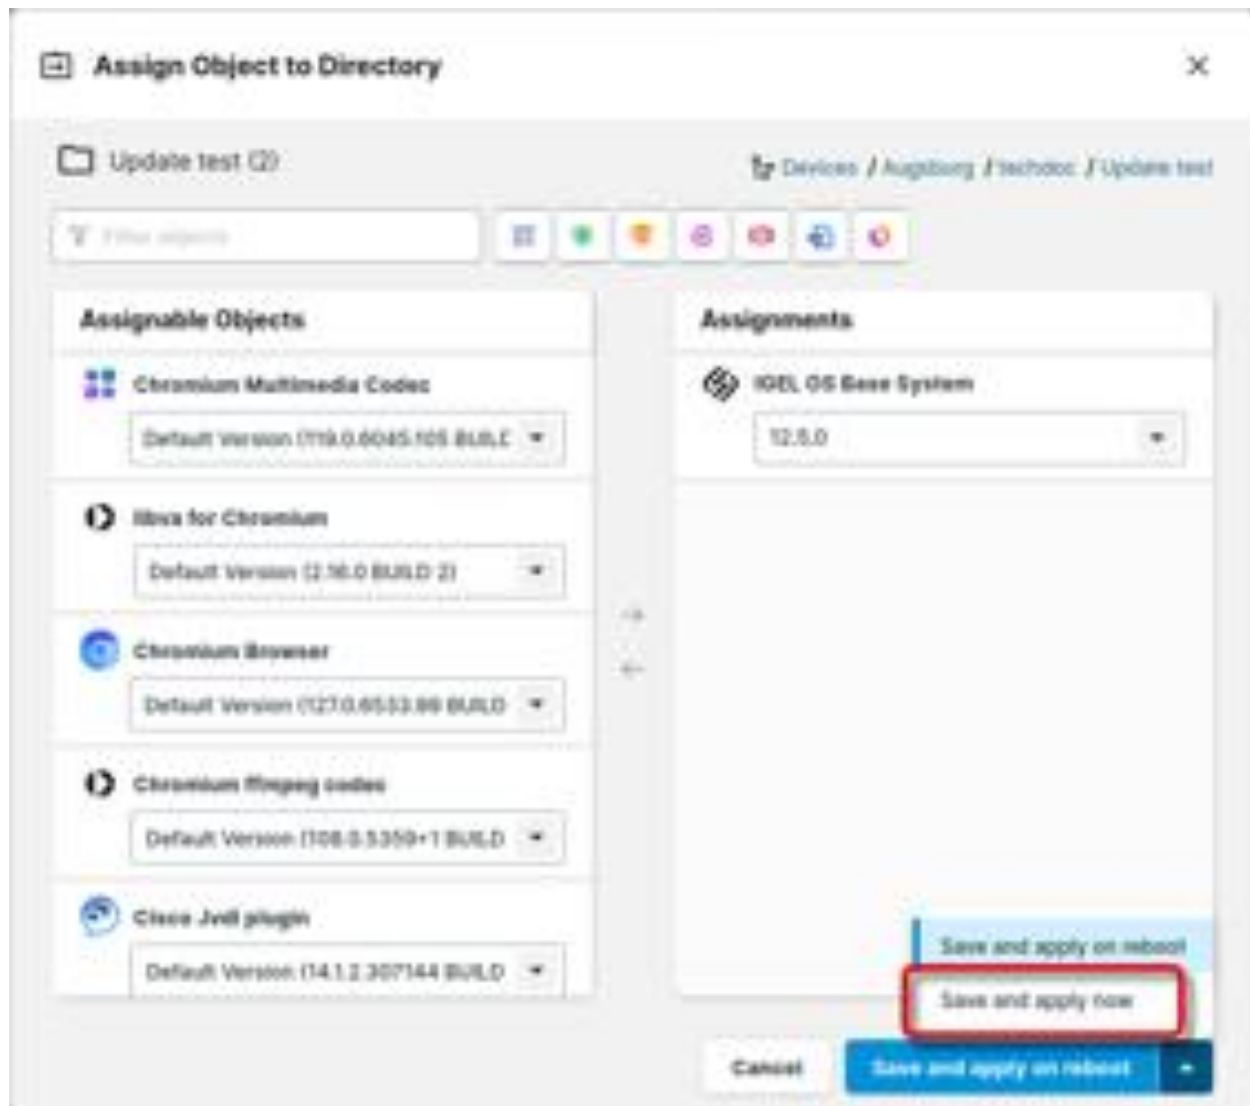


After a dialog timeout, the devices update to the new version of the IGEL OS Base System. You can perform your tests as appropriate.

Rolling out the Base System Update on All Devices


1. Go to your productive profile and ensure it is set to use the default version of the app.

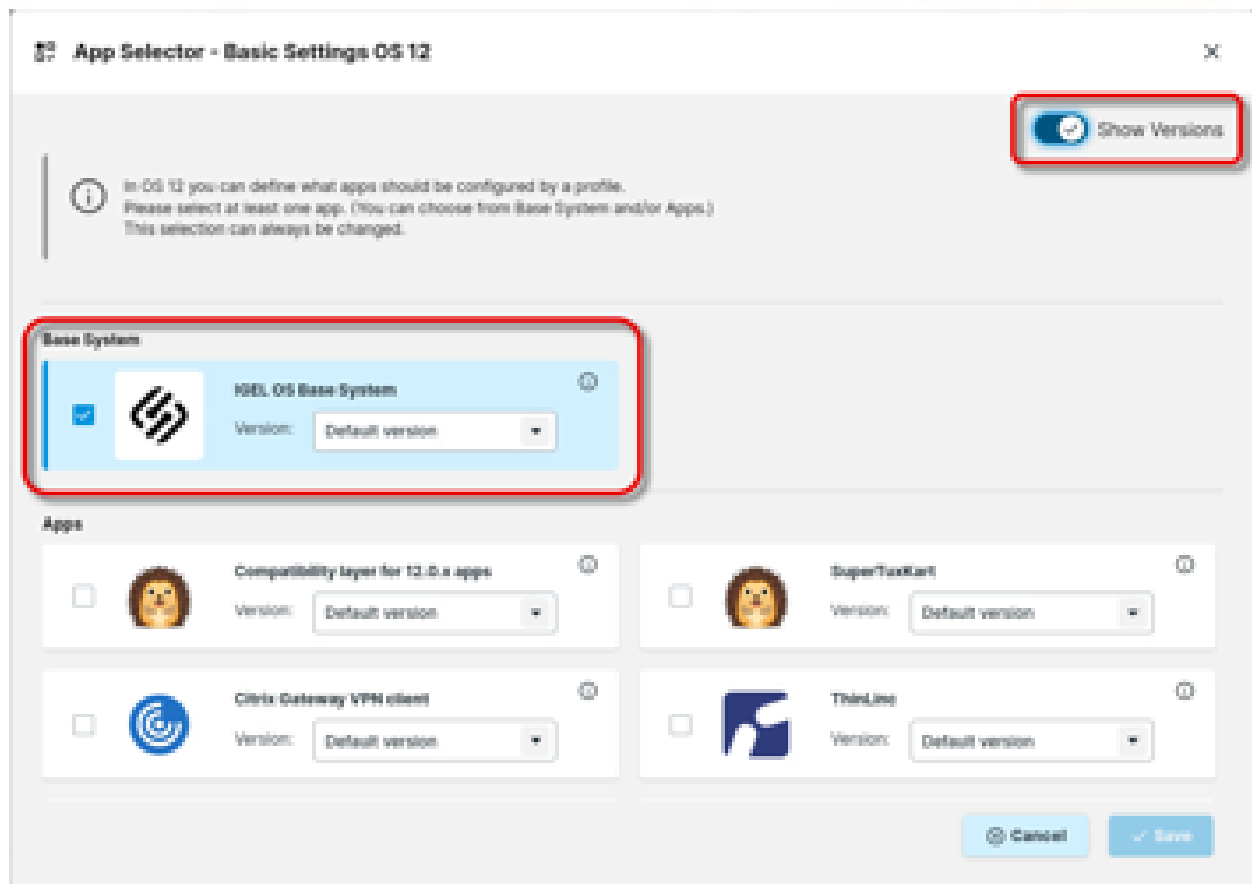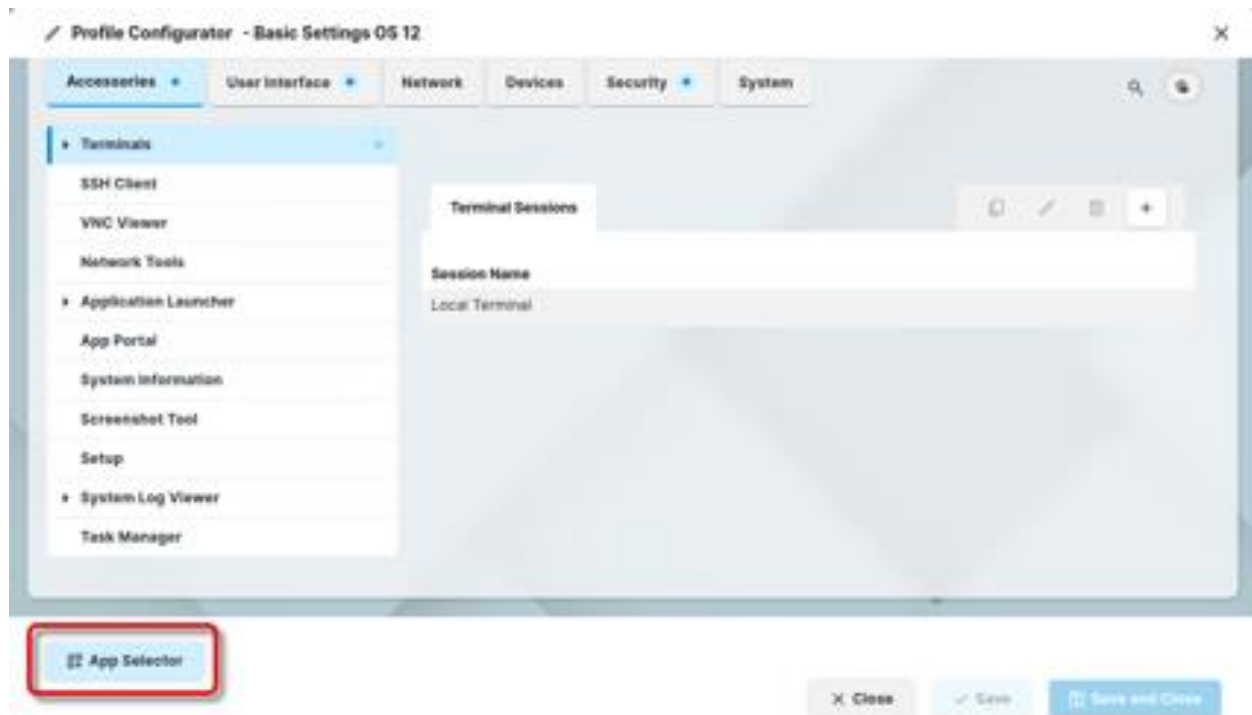

2. In the apps section, select the app to be updated, and click **Set Default Version**.

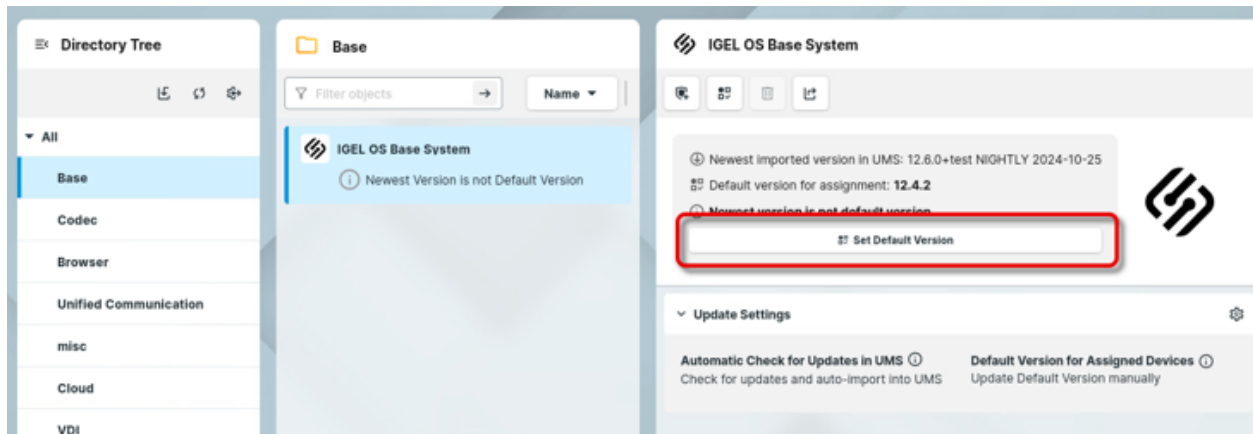

2. Set the default version to the version you have tested successfully.

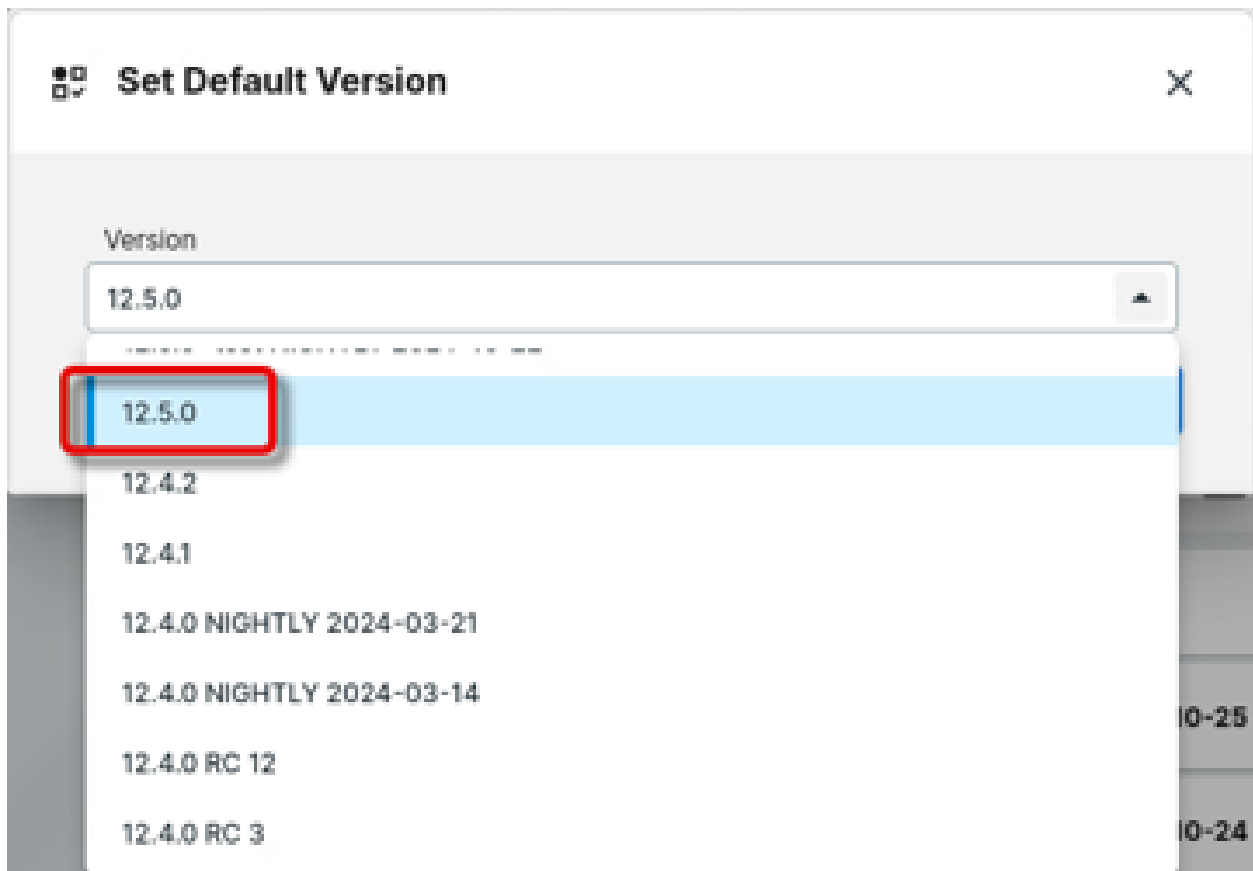


3. Choose whether the update should take place immediately or on the next reboot.

On reboot, the devices update their Base System to the default version.



Keeping the Other Apps up to Date

Testing the App Updates on One or a Few Devices


1. Go to each of your test devices and check under **Assigned Objects** if a version of the app is assigned to the device.

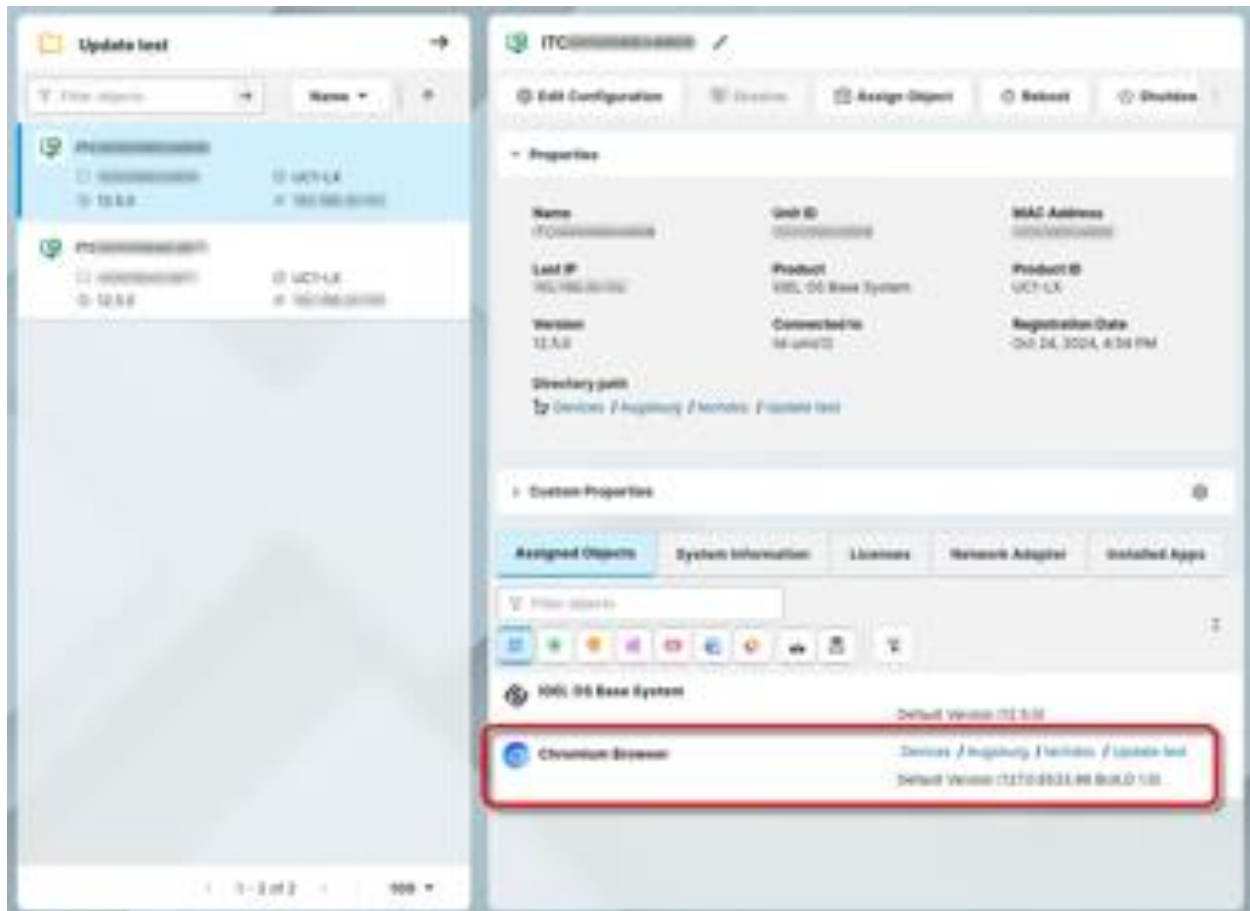

2. Move your mouse to the right side of the app's entry; if a **Detach object** button () appears, click it and confirm your change.

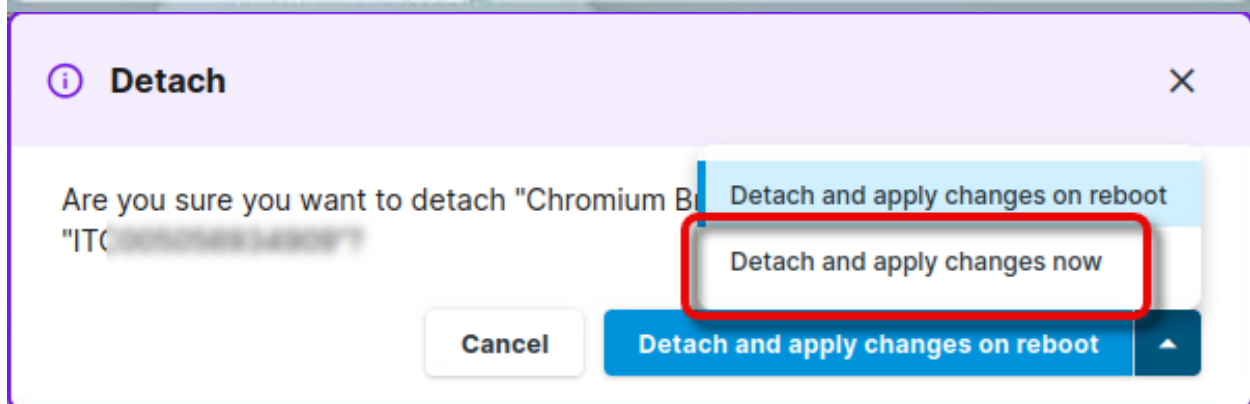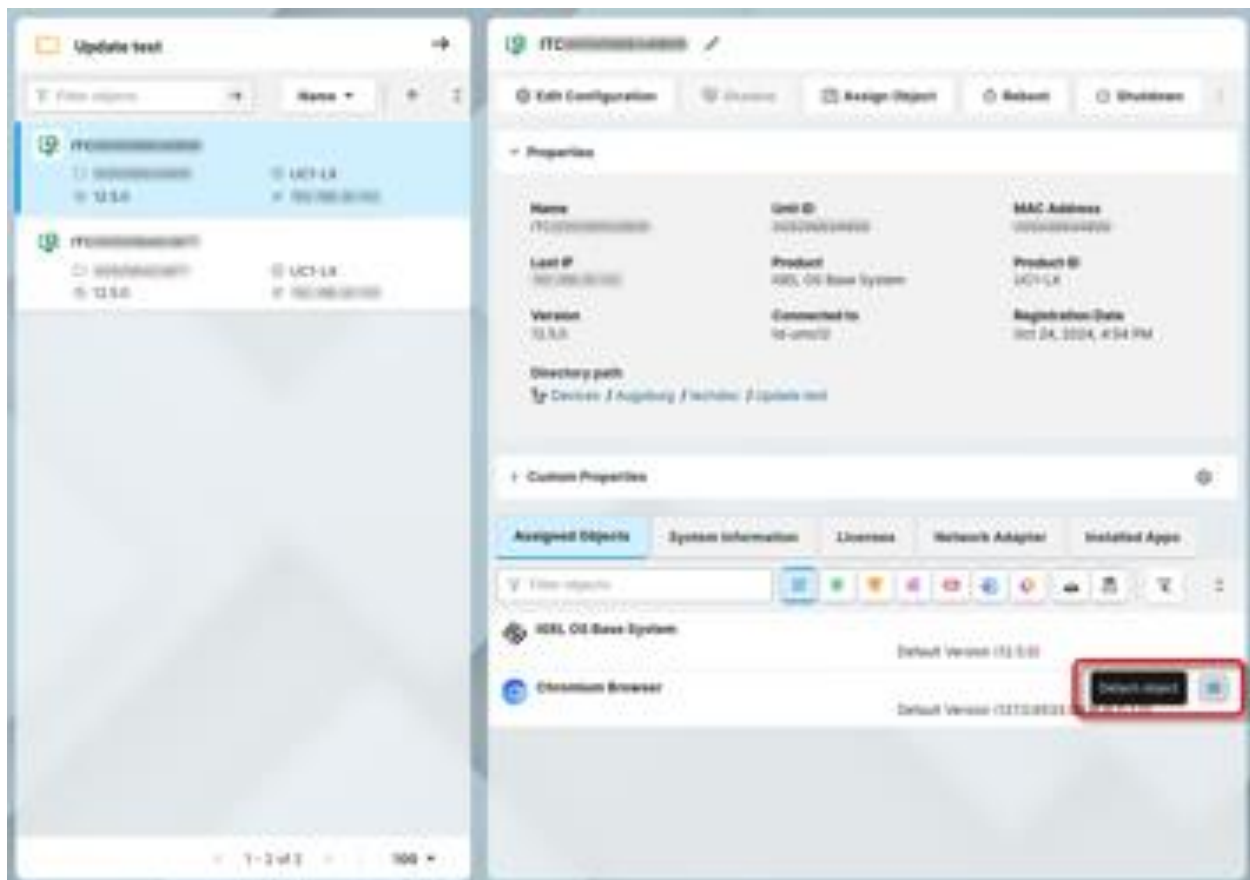

3. Go to the test directory and click **Assign Object**.

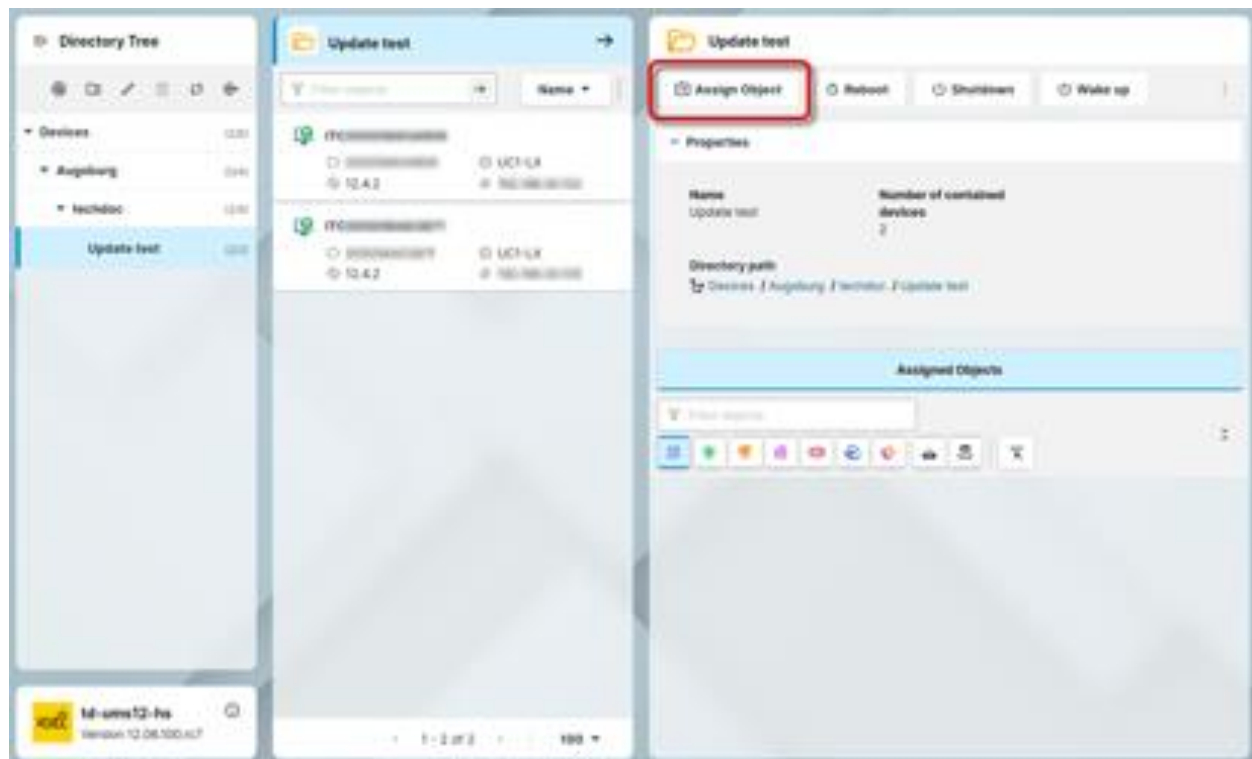

2. In the dialog **Assign Object to Directory**, choose the desired version of the app and assign it to the directory.

Assign Object to Directory



Update test (2)

Devices / Augsburg / Pischdon / Update test

Filter objects



Assignable Objects



NOEL OS Base System

Default Version (12.5.2)



Chromium Multimedia Codes

Default Version (776.0.8045.105 BUILD 1.0)



Nvra for Chromium

Default Version (12.16.0 BUILD 2)



Chromium Browser

Default Version (1273.8533.99 BUILD 1.0)



Default Version (1273.8533.99 BUILD 1.0)

130.0.6723.91 BUILD 1.0

1273.8533.99 BUILD 1.0

128.0.6479.128 BUILD 1.0

776.0.8045.105 BUILD 1.0




Assignments



Chromium Browser

Cancel


Save and apply assignment

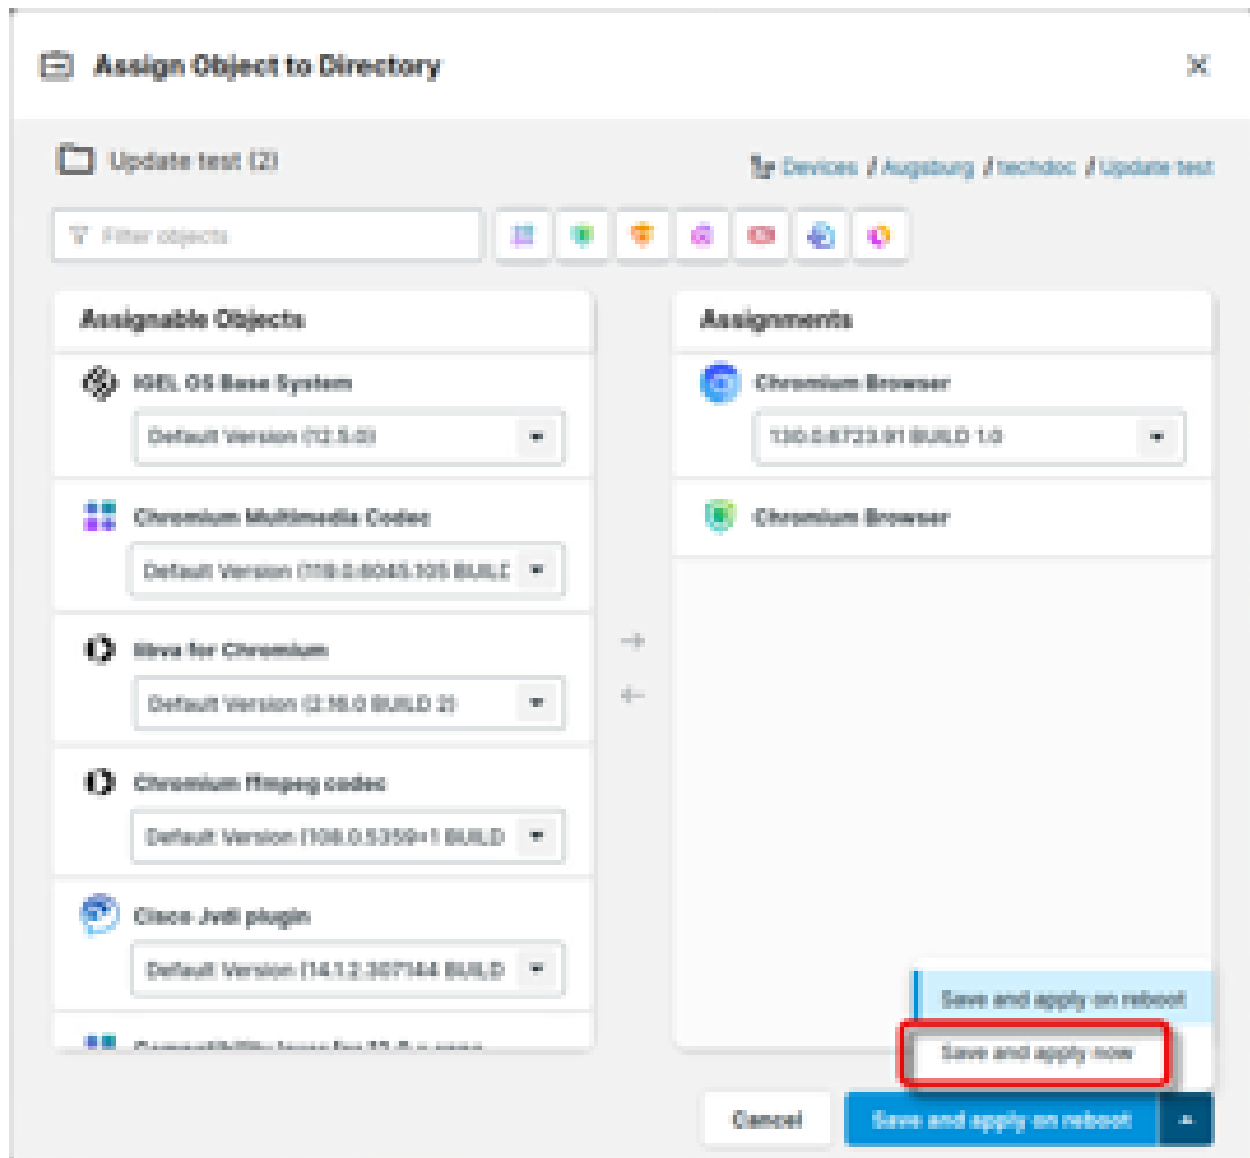


After a dialog timeout, the device reboots to install the new version of the app. You can perform your tests as appropriate.

Rolling out the App Update on All Devices

1. In the apps section, select the app to be updated, and click **Set Default Version**.

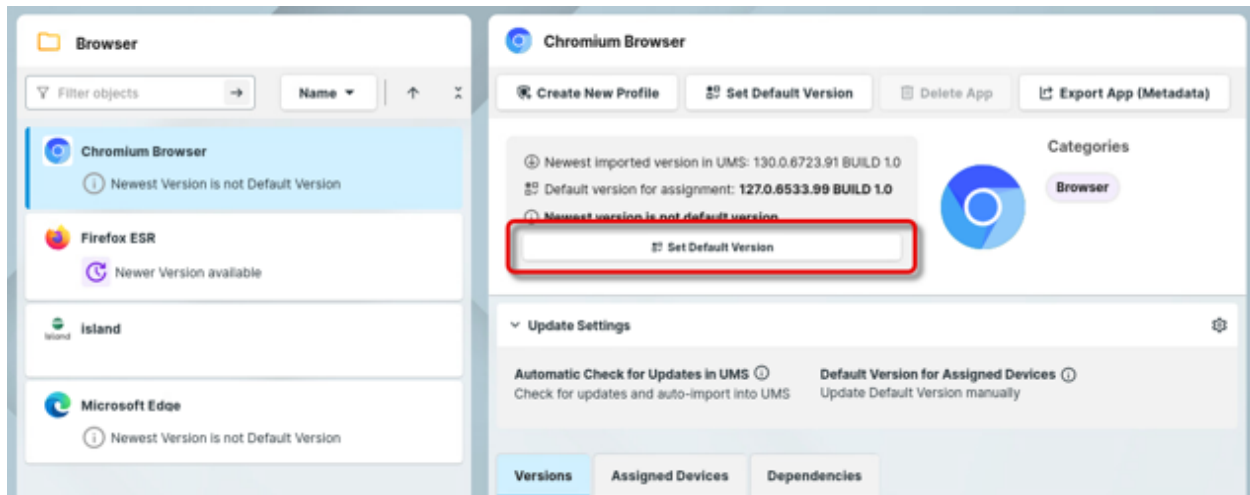

2. Set the default version to the version you have tested successfully.

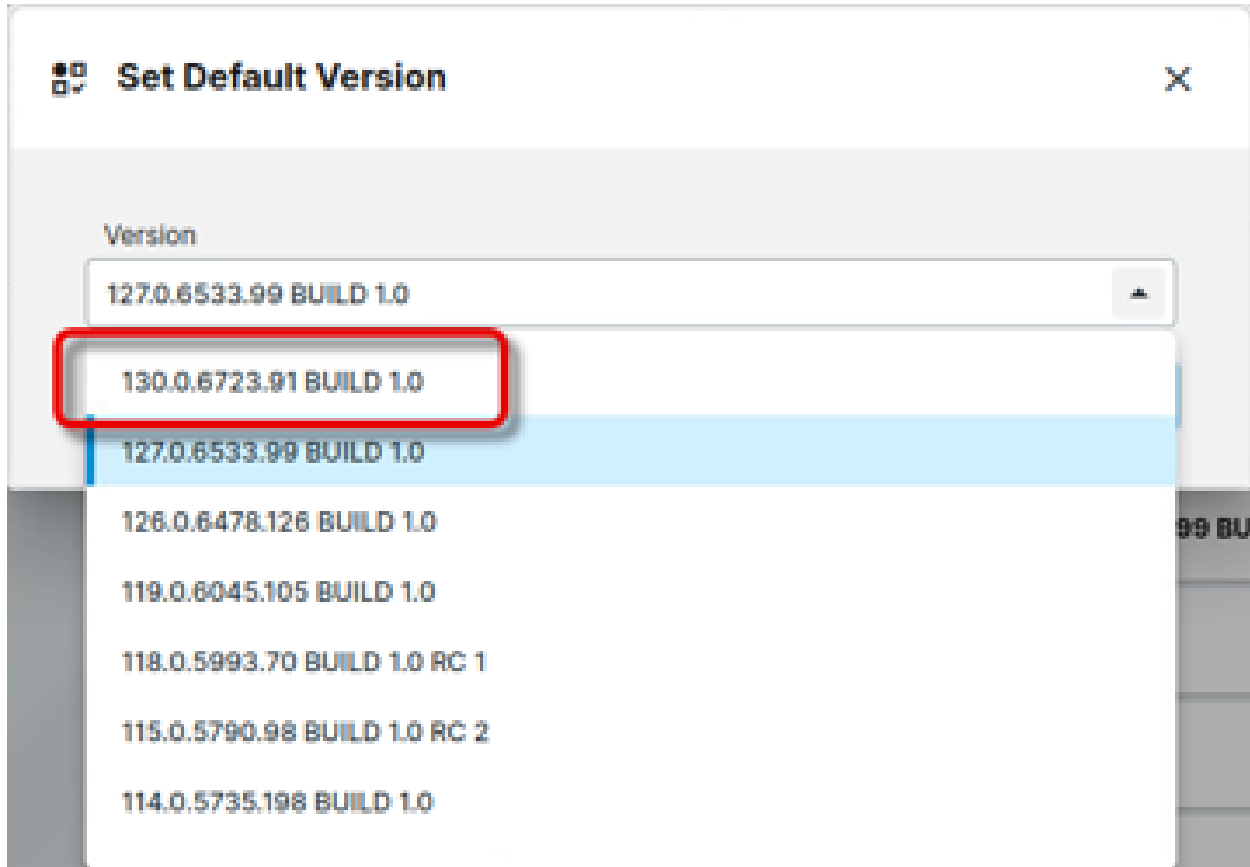

3. Choose whether the update should take place immediately or on the next reboot.

 **Set Default Version** ×

Version

130.0.6723.91 BUILD 1.0

Save and apply changes on reboot

Save and apply changes now

× Cancel

Save and apply changes on reboot 

4. Go to the directory that contains your productive devices and click **Assign Object**.

Assign Object to Directory



techdoc (2)

Devices / Ausgabe / techdoc

Filter objects



Assignable Objects



Intel OS Base System

Default Version (12.5.0)



Chromium Multimedia Codec

Default Version (118.0.6045.105 BUILD)



Brave for Chromium

Default Version (2.58.0 BUILD 2)



Chromium Browser

Default Version (106.0.5723.91 BUILD)



Chromium Hmpag codec

Default Version (108.0.5359-1 BUILD)



Microsoft Build archive




Assignments

Cancel

Save and apply on reboot



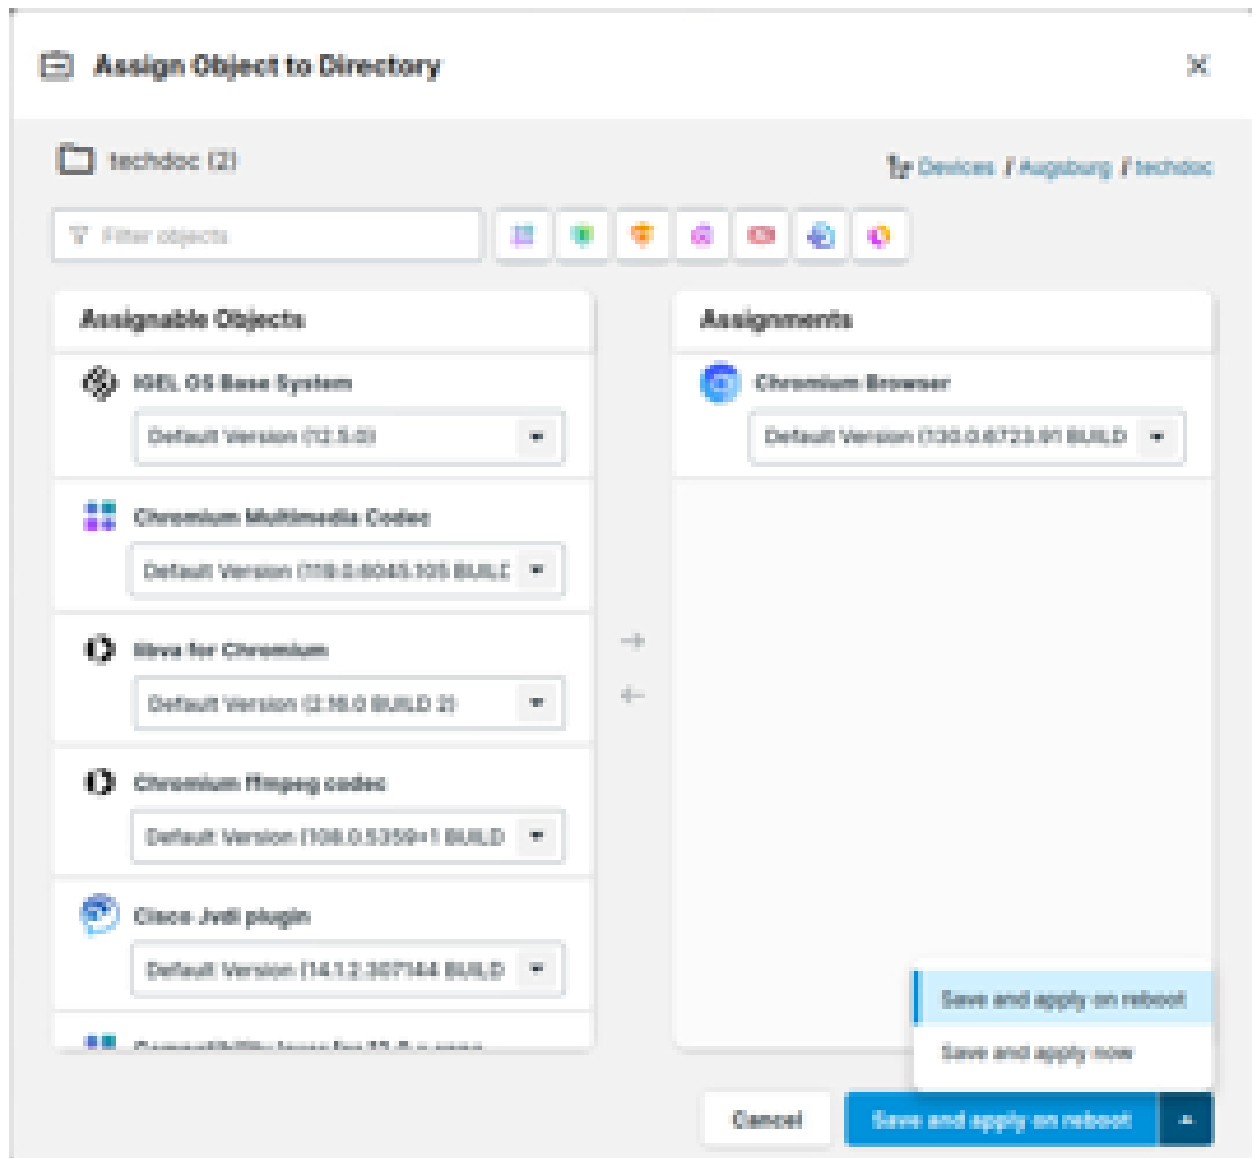

On reboot, the devices update their app to the new version.