

# Information Systems Security

## Mandatory TP 2 - AES

October 15th, 2025

Submit on **Moodle** your Python 3 file(s) **.py**, before **Tuesday, November 4th, 2025 at 11:59 pm (23h59)**.

Your code needs to be **commented**.

### Goal

The goal of this TP is the following : you will create an AES block cipher, and use it to encode messages with ECB (Electronic Codebook) mode.

### AES Encryption Box

The AES Box will be used with 128 bits plaintext/ciphertext blocks, and with keys of either 128, 192 or 256 bits. We have one initial step, and we then add 10 rounds for 128 bit keys, 12 rounds for 192 bit keys, or 14 rounds for 256 bit keys.

Whatever the size of the key, we will always use 128 bit blocks, and create sub-keys of 128 bits each. The only impact the length of the key has is on the number of sub-keys created, and thus the number of rounds.

**IMPORTANT** : All calculations are made considering the 128 bits block as a 4x4 matrix of bytes (8 bits), where each byte is as an element of  $GF(2^8)$ , which is the group of polynomials of degree 7 (0 to 7, that's eight coefficients) with elements being either 0 or 1.

For instance, 00110101 represents the polynomial  $x^5 + x^4 + x^2 + 1$ .

We will then use addition and multiplication for polynomials. In this case, the addition becomes a simple XOR, since we only work with 0 and 1 modulo 2.

**VERY IMPORTANT** : When slicing the 128 bit message as a 4x4 matrix, they are ordered column by column :

$$\begin{pmatrix} m(1,8) & m(33,40) & m(65,72) & m(97,104) \\ m(9,16) & m(41,48) & m(73,80) & m(105,112) \\ m(17,24) & m(49,56) & m(81,88) & m(113,120) \\ m(25,32) & m(57,64) & m(89,96) & m(121,128) \end{pmatrix}$$

Where  $m(x,y)$  represents the bits  $x$  to  $y$  from the message block (starting with 1 in this case). Each 128 sub-key is also organised as a matrix, in the exact same way (if you do either row by row, your results will obviously be wrong in some of the operations).

- **Key expansion** : First, we need a key expansion system, which will create a number of keys equal to the number of rounds plus one (which we will need for the initial step).

We define multiple 32 bits constants, named  $rcon_1$  to  $rcon_{10}$  (which are created following some rules, but it's easier to just give the table) :

$$rcon_i = [rc_i (00)_{16} (00)_{16} (00)_{16}]$$

So the last 24 bits are zeros for all these constants. Only the first 8 bits,  $rc_i$ , will differ, as follows (for ex,  $rcon_9 = (1B000000)_{16}$ ) :

i	1	2	3	4	5	6	7	8	9	10
$rc_i$	$(01)_{16}$	$(02)_{16}$	$(04)_{16}$	$(08)_{16}$	$(10)_{16}$	$(20)_{16}$	$(40)_{16}$	$(80)_{16}$	$(1B)_{16}$	$(36)_{16}$

We also define :

- $N$  as the number of 32-bit words of the key (4,6 or 8 depending if the key is 128, 192 or 256 bits),
- $K_0, K_1, \dots, K_{N-1}$  the 32-bit words of the original key,
- $R$  the number of keys needed (11, 13 or 15),
- $W_0, W_1, \dots, W_{4R-1}$  the 32-bit words of the expanded key (this is the result we're looking for).
- $\text{Rotation}([b_0, b_1, b_2, b_3]) = [b_1, b_2, b_3, b_0]$  as a one byte left circular shift,
- $\text{SBox}([b_0, b_1, b_2, b_3]) = [S(b_0), S(b_1), S(b_2), S(b_3)]$  the application of the AES S-Box on each of the four bytes.

And we can finally compute the whole expanded key as :

$$W_i = \begin{cases} K_i, & \text{if } i < N, \\ W_{i-N} \oplus \text{SBox}(\text{Rotation}(W_{i-1})) \oplus rcon_{\frac{i}{N}}, & \text{if } i \geq N \text{ and } i \equiv 0 \pmod{N}, \\ W_{i-N} \oplus \text{SBox}(W_{i-1}), & \text{if } i \geq N, N > 6, \text{ and } i \equiv 4 \pmod{N}, \\ W_{i-N} \oplus W_{i-1}, & \text{otherwise.} \end{cases}$$

So the first 4 words ( $W_0$  to  $W_3$ ) are the first 128 bit key (for the initial step), then the next four ones ( $W_4$  to  $W_7$ ) are the 128 bit key for the first round, and so on to the last four ones ( $W_{4R-4}$  to  $W_{4R-1}$ ) for the last round.

- **initial step** : The initial step is an xor with the first sub-key (The  $W_0$  to  $W_3$  in the previous definition),
- **Rounds** : Now, we will do 10/12/14 rounds as follows :
  1. **ByteSub** : ByteSub is a non linear permutation, applied byte by byte, following this given table :

R,C	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	63	7C	77	7B	F2	6B	6F	C5	30	01	67	2B	FE	D7	AB	76
1	CA	82	C9	7D	FA	59	47	F0	AD	D4	A2	AF	9C	A4	72	C0
2	B7	FD	93	26	36	3F	F7	CC	34	A5	E5	F1	71	D8	31	15
3	04	C7	23	C3	18	96	05	9A	07	12	80	E2	EB	27	B2	75
4	09	83	2C	1A	1B	6E	5A	A0	52	3B	D6	B3	29	E3	2F	84
5	53	D1	00	ED	20	FC	B1	5B	6A	CB	BE	39	4A	4C	58	CF
6	D0	EF	AA	FB	43	4D	33	85	45	F9	02	7F	50	3C	9F	A8
7	51	A3	40	8F	92	9D	38	F5	BC	B6	DA	21	10	FF	F3	D2
8	CD	0C	13	EC	5F	97	44	17	C4	A7	7E	3D	64	5D	19	73
9	60	81	4F	DC	22	2A	90	88	46	EE	B8	14	DE	5E	0B	DB
A	E0	32	3A	0A	49	06	24	5C	C2	D3	AC	62	91	95	E4	79
B	E7	C8	37	6D	8D	D5	4E	A9	6C	56	F4	EA	65	7A	AE	08
C	BA	78	25	2E	1C	A6	B4	C6	E8	DD	74	1F	4B	BD	8B	8A
D	70	3E	B5	66	48	03	F6	0E	61	35	57	B9	86	C1	1D	9E
E	E1	F8	98	11	69	D9	8E	94	9B	1E	87	E9	CE	55	28	DF
F	8C	A1	89	0D	BF	E6	42	68	41	99	2D	0F	B0	54	BB	16

Fig. 3. S-box lookup table

Figure 1: The AES S-Box

The four first bits (the bigger ones) of the byte give the row, and the last four (the weaker ones) give the column. For example,  $(27)_{16}$  is replaced by  $(cc)_{16}$ .

2. **ShiftRow** : It is a simple operation in which the elements of each row of the matrix are shifted.
  - The first row is left intact,
  - the second row is shifted one byte on the left,
  - the third row two bytes on the left,
  - and the last one by three bytes on the left.

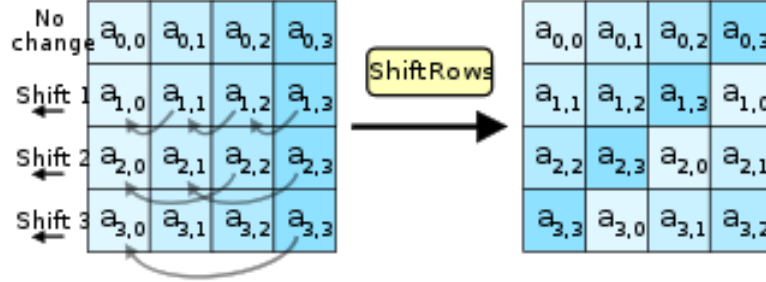


Figure 2: Shift Rows step for AES

3. **MixColumn** : Each column of 4 bytes  $b_0, b_1, b_2, b_3$  is considered as a polynomial of degree 3 with coefficients being the bytes, which means elements of  $GF(2^8)$ .

These columns are then multiplied by a fixed polynomial modulo another fixed polynomial (Details can be found easily on google), but it is equivalent (proof can be found easily too, even on wikipedia) to say the new bytes  $d_0, d_1, d_2$  and  $d_3$  are equal to :

$$\begin{pmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \end{pmatrix} = \begin{pmatrix} (02)_{16} & (03)_{16} & (01)_{16} & (01)_{16} \\ (01)_{16} & (02)_{16} & (03)_{16} & (01)_{16} \\ (01)_{16} & (01)_{16} & (02)_{16} & (03)_{16} \\ (03)_{16} & (01)_{16} & (01)_{16} & (02)_{16} \end{pmatrix} \cdot \begin{pmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{pmatrix} \quad (1)$$

**Note** : this matrix multiplication applies to bytes which are elements in  $GF(2^8)$ . Which means all operations are in  $GF(2^8)$ , so addition is a XOR, and multiplication is a polynomial multiplication modulo 2 (we'll explain this operation later in detail).

4. **AddRoundKey** : And a very easy step to finish : a simple xor with the sub-key for the round.
- **Warning** : The last round (either the 10th/12th/14th depending on key length) does not apply the MixColumn step.

## AES Decryption

Decryption goes through the same process, you have to create the same keys, just use them in reverse order, and apply each round in reverse order with inverse operations, which means :

- Creating the keys with the original S-box,
- The ByteSub step is done with the inverted S-box :

		right (low-order) nibble															
		0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
left (high-order) nibble	0	52	09	6a	d5	30	36	a5	38	bf	40	a3	9e	81	f3	d7	fb
	1	7c	e3	39	82	9b	2f	ff	87	34	8e	43	44	c4	de	e9	cb
	2	54	7b	94	32	a6	c2	23	3d	ee	4c	95	0b	42	fa	c3	4e
	3	08	2e	a1	66	28	d9	24	b2	76	5b	a2	49	6d	8b	d1	25
	4	72	f8	f6	64	86	68	98	16	d4	a4	5c	cc	5d	65	b6	92
	5	6c	70	48	50	fd	ed	b9	da	5e	15	46	57	a7	8d	9d	84
	6	90	d8	ab	00	8c	bc	d3	0a	f7	e4	58	05	b8	b3	45	06
	7	d0	2c	1e	8f	ca	3f	0f	02	c1	af	bd	03	01	13	8a	6b
	8	3a	91	11	41	4f	67	dc	ea	97	f2	cf	ce	f0	b4	e6	73
	9	96	ac	74	22	e7	ad	35	85	e2	f9	37	e8	1c	75	df	6e
	a	47	f1	1a	71	1d	29	c5	89	6f	b7	62	0e	aa	18	be	1b
	b	fc	56	3e	4b	c6	d2	79	20	9a	db	c0	fe	78	cd	5a	f4
	c	1f	dd	a8	33	88	07	c7	31	b1	12	10	59	27	80	ec	5f
	d	60	51	7f	a9	19	b5	4a	0d	2d	e5	7a	9f	93	c9	9c	ef
	e	a0	e0	3b	4d	ae	2a	f5	b0	c8	eb	bb	3c	83	53	99	61
	f	17	2b	04	7e	ba	77	d6	26	e1	69	14	63	55	21	0c	7d

Figure 3: AES S-Box Inverse

- Shifting rows right instead of left,
- An inverted MixColumn matrix :

$$\begin{pmatrix} (0E)_{16} & (0B)_{16} & (0D)_{16} & (09)_{16} \\ (09)_{16} & (0E)_{16} & (0B)_{16} & (0D)_{16} \\ (0D)_{16} & (09)_{16} & (0E)_{16} & (0B)_{16} \\ (0B)_{16} & (0D)_{16} & (09)_{16} & (0E)_{16} \end{pmatrix}$$

- And the inverse of AddRoundKey is itself, since it's a xor.
- And of course, you need to reverse the order of operations in each round, and finish with the reverse initial step.

## Reminder : Polynomial Operations

In  $GF(2^8)$ , addition is just a bitwise XOR.

Multiplication is a more complicated matter though. Let's say we have  $p_1, p_2$  two polynomials. Their product in  $GF(2^8)$  is computed as their standard product, modulus the irreducible polynomial used to define  $GF(2^8)$  (in this case, it is Rijndael's finite field, defined by  $r = x^8 + x^4 + x^3 + x + 1$ ).

So all you have to do is multiply  $p_1$  and  $p_2$ , and then reduce it modulo  $r$  to a polynomial of degree strictly inferior to 8. We can do it by observing  $x^8 + x^4 + x^3 + x + 1 \equiv 0$  means  $-x^8 \equiv x^8 \equiv x^4 + x^3 + x^1 + 1$  (the first equivalence is because we work modulo two since we're in  $GF(2^8)$ ). And of course, you have to remember that we're working modulo 2. For example, let's say  $p_1 = x^6 + x^4 + x^3 + 1$  and  $p_2 = x^5 + x^4 + x^2 + x$  :

$$\begin{aligned} p_1 \cdot p_2 &= x^6 \cdot p_2 + x^4 \cdot p_2 + x^3 \cdot p_2 + p_2 \\ &= (x^{11} + x^{10} + x^8 + x^7) + (x^9 + x^8 + x^6 + x^5) + (x^8 + x^7 + x^5 + x^4) + (x^5 + x^4 + x^2 + x) \\ &= x^{11} + x^{10} + x^9 + x^8 + x^6 + x^5 + x^2 + x \\ &= (x^3 + x^2 + x^1 + 1) \cdot x^8 + x^6 + x^5 + x^2 + x \end{aligned}$$

Now, we still have to apply the modulo with the polynomial  $r$  : as observed earlier,  $x^8 \equiv x^4 + x^3 + x + 1$ , which means we can replace  $x^8$  to reduce our polynomial :

$$\begin{aligned} &= (x^3 + x^2 + x^1 + 1) \cdot (x^4 + x^3 + x + 1) + x^6 + x^5 + x^2 + x \\ &= (x^7 + x^4 + x^3 + 1) + x^6 + x^5 + x^2 + x = x^7 + x^6 + x^5 + x^4 + x^3 + x^2 + x + 1 \end{aligned}$$

This may have to be applied recursively until the final result is of degree 7 or less.

With this example, we have  $p_1 = (01011001)_2$  and  $p_2 = (00110110)_2$ , and their product is  $p = p_1 \cdot p_2 = (11111111)_2$ .

## Padding and ECB mode

Now that we have an AES Box fully functional for encryption and decryption, we just need to format any message into 128 bit blocks, i.e. 16 bytes blocks.

For that, we will start by applying the following padding, then slicing the obtained padded message into 128 bit blocks (16 bytes), and then encrypting each one separately with the AES Box (and we obviously end by concatenating all cipher blocks to get the final cipher).

## Padding

We add padding for every message (even if the message already has a size that is a multiple of 16 bytes, we still add some padding), in the following way :

Let  $L$  be the length of our message in bytes (for example, "Hello" has length  $L=5$  if we consider characters encoded on 8 bits). Padding is done by adding  $X$  bytes of padding with value  $X$ , such that  $16 \geq X > 0$ , and that  $L+X = 16 \cdot k$ ,  $k \in \mathbb{N}^*$ .

Examples :

- 1) "Hello" will be followed by 11 bytes of value 11 (i.e. 11 bytes each with value "00001011" in binary). We then have only one block to encrypt.
- 2) "Can you smell what the Rock is cooking?" (39 bytes) would be followed by 9 bytes of value 9 (i.e. 00001001) to obtain a total of 48 bytes in total, which is three blocks of 16 bytes each.
- 3) "You can't see me" is exactly 16 bytes. We then add 16 bytes of padding, with value 16 (i.e. 00010000). We'll end up with 32 bytes as two blocks of 16 bytes.

## ECB mode and decryption

After padding, we just need to slice the obtained padded message into blocks of 128 bits (16 bytes), run each one separately in the AES Box, and you'll get the cipher (with as many 16 bytes blocks).

Decryption with ECB is simple, since each block is encrypted independently : just slice the ciphertext into 16 bytes block, apply the AES decryption Box on each, and then you have the padded message, which you just have to unpad (check the last byte, and if its value is  $X$ , get rid of the last  $X$  bytes) :

## TP : Implement AES Encryption and Decryption

You have all the information you need to implement a real version of AES with ECB mode with Python 3. Note that a file named **"Sboxes.py"** is on Moodle and contains the S-box and S-box inverse already, as two big tuples (you can obviously modify them if you prefer to work with another type of structure).

Here's what you need to do for encryption :

- Taking a message (as a string) in entry, and pad it as explained earlier.
- Slice it into 16 bytes blocks.
- Encrypt each block separately with AES. For that, you will need to create the whole AES Box described in this TP, including the sub-key generation, and including the possibility to use all AES possible key lengths, i.e. 128, 192 or 256 bits.
- And then put the cipher blocks back together to form the complete ciphertext.

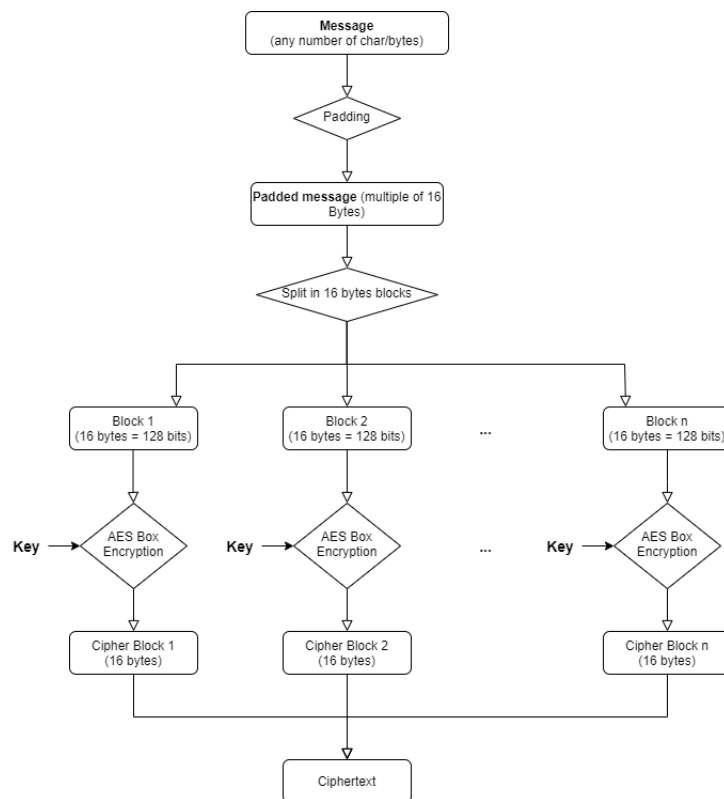


Figure 4: Electronic Codebook (ECB) encryption mode, with AES

For the decryption, same thing in reverse :

- Slice the cipher in 16 bytes blocks,
- Decrypt each one separately with your AES decryption Box (the dedicated section about decryption details how to do the decryption : it's mostly about reversing the order of operations and changing the matrices).
- Then put the plaintexts together to get the padded message.
- And finally unpad the message.

## Help : A good debugging example

To debug your AES box, you can use this very useful document : <https://kavaliro.com/wp-content/uploads/2014/03/AES.pdf>.

It provides an complete example of what happens in the Box, with a 128 bit message and a 128 bit key, all in hexadecimal representation, what is the final ciphertext, and every one of the results after each step of the calculation.

Be careful though : that's just the encryption for one block, which is not what you would find if you encrypted this message (as it would be padded with a



full block of padding, and thus would have a second block), so this only focuses on the box itself, not the whole ECB mode encryption. Try with this message and key to see if your AES box is fully functional before testing the complete encryption with padding.

## Expected results and output

Here are examples of messages and keys to use to show your results (these are also included in the python file with the S-Boxes and examples) :

With the message "Can you smell what the Rock is cooking?" (which should make three blocs for the encryption), and the 128 bit key "You can't see me", you should find the following results, given here in hexadecimal (split in three for each of the three blocs for easier reading) :

d69e09957672bb537f137948e9755d12

ea924c80079da5b141a576d0142ed4c0

5c26547acb217669f3c0291966bafbe4

(The actual string that is printed by Python may change depending on the character encoding, hence the hexadecimal verification).

Same message, with the 192 bit key "Adrenaline in my soul " (three spaces at the end, see python file for the examples)

You should find the following results (in hexadecimal) :

952291caeddd45a514214ef7c2e0bbd9

2ae6dfa584b6fe9d73acfbcb2457fa73d

f725535f53e8b60d0c2121c9486d3edb

Same message, with the 256 bit key "Every thought out of control !!!" You should find the following results (in hexadecimal) :

4abe9fbb975f21ac88aba265147e437b

47a1ae4b2b7b786d7bada2d50f1451cd

582ac8988dfdec00d90f5104cb9eb5fb

Please use this message and these keys to print the following elements when running your code to clearly present the results :

- The message before encryption (using the example of message given in this section and in the python file)
- The key used (one of the three keys given in this section and in the python file)
- The ciphertext obtained (in hexadecimal)
- And the decryption to show that the decryption works and does indeed find the original message.
- And repeat that process three times, once for each of the three keys, to show it works with each key size.