



UNIVERSITY OF GENEVA
Department of Informatics

Methods and Heuristics for Learning and Optimization

Simulated Annealing and Parallel Tempering for the Traveling
Salesman Problem

14X013

Michel Jean Joseph Donnet

October 20, 2025

Table of Contents

1	Introduction	2
2	Methodology	3
2.1	Modelization and definitions	3
2.1.1	Search space	3
2.1.2	Neighborhood	3
2.1.3	Fitness	4
2.2	Heuristic vs metaheuristic	4
2.2.1	Heuristic	4
2.2.2	Metaheuristic	5
2.2.3	Comparison	5
2.3	Simulated Annealing	6
2.3.1	Physical inspiration	6
2.3.2	Algorithm principe	6
2.3.3	Algorithm structure	6
2.3.4	Algorithm variantes	6
3	Implementation	7
4	Results	8
5	Discussion	9
6	Conclusion	10
7	Annexe	11

1 Introduction

(0.25)

be specific on

- search space
- neighborhood
- fitness
- TSP
- greedy
- SA

Human have been always interested in optimization problem to avoid a loss of energy or money or something else. In our digital world, the optimization play an important role in most domains. For instance, a travel compagny will try to maximise its customer base by proposing the customer to visit a maximum number of cities with minimal cost for him. Depending on the optimization of this problem, the compagny will have more customers and will develop more than another compagny in the same domain. To deal with theses optimization issues, heuristics and metaheuristics algorithm are created, using different approaches and modelizations of the real problem to propose an optimization. For instance, in case of the travel compagny, the problem can be modelized by finding a route that minimizes costs and passes through all the cities before returning to the agency. Each city then represents a node in a graph, and each city is connected to the others by an edge weighted by the price of travel between those two cities. This modelization of the problem is called Traveling Salesman Problem (TSP) and is known to be a NP-hard (Nondeterministic Polynomial-time hard) problem, that means that we can't find a solution in polynomial time. To find a solution that may not necessarily be optimal, we use heuristics and metaheuristics algorithm.

In this work, we will try to find a solution to the TSP problem by a metaheuristic method called Simulated Annealing method.

2 Methodology

(1.5)

First, we will explain some terms and definitions used in the rest of this report.

2.1 Modelization and definitions

The TSP problem can be modeled by N cities to visit, numeroted from 0 to $N - 1$, with a cost matrix W that gives at the position i, j the cost of the travel between city i and city j . Each city is connected to each others, so the graph is fully connected. In this work, we assume that the cost of the travel between city i and j is the same in both directions. So the cost matrix W is symetric because $W_{ij} = W_{ji} \forall i, j \in \{0, \dots, N - 1\}$, which implies that $W = W^T$. Each solution can be written as a list of N cities in the order of visit. When the last city of the list is reached, the customers returns to the agency in the first city of the list. For instance, for $N = 3$ cities, a solution can be $[3, 1, 2]$ that means the customer will first visit city 3, then city 1 and finally city 2 and then return to agency in city 3.

2.1.1 Search space

The search space gives the set of all possibles solutions for a given problem. In specific case of TSP problem, the search space will be the set of all the cyclic paths that go through all the cities.

As the paths are cyclic, it means that for instance path $[1, 2, 3]$ is the same that $[3, 1, 2]$. For N cities, for a given path, it's possible to perform N cyclic rotations before returning on the given path.

As we have assumed that the cost between city i and j is the same in both directions, it means that for instance path $[1, 2, 3]$ is the same that $[3, 2, 1]$. So for N cities, for a given path with its set of cyclic rotations, if we perform an inversion, we will obtain an inversed path with its corresponding set of cyclic rotations.

So a path with a given cost can have $2N$ variants.

So for N cities, the search space will be of size S given by the formula 1.

$$S = \frac{\text{Number of possible paths}}{\text{Number of variant per path}} = \frac{N!}{2N} = \frac{(N-1)!}{2} \quad (1)$$

So with a great N , the search space becomes astronomic.

Example: $N = 15 \implies S = \frac{(15-1)!}{2} = 4.3 \times 10^{10}$

2.1.2 Neighborhood

The neighborhood returns a set of solutions closest to the given solution by slightly modifying the given solution. It depends on the modelization of the problem. In our case,

each solution is a list of cities in order of visit.

We define the neighborhood like a swap of 2 elements of the current solution that gives another solution. The neighbor solution obtained must differs from the current solution and also from all cyclic rotations and inversions of the current solution.

So for a solution given with N cities, the size of the neighborhood is borned by the number of unique permutations of 2 elements in a list, like the formula 2 show us. The born is the number of permutations of 2 elements in a list because all the permutations will not be taken since certain permutations can result in a cyclic or inverse rotation of the solution.

$$\text{Number of neighbors} \leq \binom{N}{2} = \frac{N!}{2!(N-2)!} = \frac{N(N-1)}{2} \quad (2)$$

2.1.3 Fitness

The fitness, or cost function, returns the total cost of the travel around all the cities, according to the weight matrix W . As explained above, the cost between city i and city j is given by the element i, j of the cost matrix W which is symetric.

So we can define a fitness function as the sum of the cost of all travel between cities in a given solution x , as shown in the formula 3.

$$f(x) = W_{x_N x_1} + \sum_{i=2}^N W_{x_{i-1} x_i} \quad (3)$$

Note that the term $W_{x_N x_1}$ in the formula 3 design the cost of returning to the agency.

2.2 Heuristic vs metaheuristic

2.2.1 Heuristic

An heuristic approach to an optimization problem will try to find a good solution in polynomial time. It's a deterministic approach, which means that with same input, the method will give always the same output: nothing is given to the hasard. However, the heuristic approach is specific to each problem. Due to its deterministic nature, the algorithm will tend to be blocked by local optimal solutions in case of complex problems.

For instance, an heuristic algorithm that find the minimum of a function will pretty work on simple function like squared functions. However, for a complex function that admits a lot of local minimum, the heuristic algorithm will be blocked in a local minimum because for the algorithm, the minimum is found.

A greedy algorithm is a heuristic algorithm which make the best choice at each step. In this way, we hope to reach the global optimum.

2.2.2 Metaheuristic

A metaheuristic approach will try to find a good solution for a given problem by exploring the search space 2.1.1 of the problem. It's a stochastic approach, that means that probabilities are integrated to choose a solution for next step, that allow to don't take always the optimum solution. The stopping criteria is not the found of a good solution, but it is defined by the user through the guided parameters. The guided parameters are customisable by user and indicate in most case how, where and how long the metaheuristic algorithm will search.

Since the algorithm does not stop when it finds a solution and have some non-deterministic mechanism to choose next solution, theses prevent it from being blocked by a local solution, compared to heuristic algorithms.

So metaheuristic algorithms are good for complex problems. However, for simple problems, heuristic algorithm are more efficient because they will not make a big exploration of the search space like a metaheuristic algorithm can make, especially if the guided parameters are not properly set.

Metaheuristic algorithms are relatively simple to implement and don't depend on given problem. The challenge in metaheuristic algorithms result in the choice of guided parameters, which balance exploring the search space and exploiting the regions already visited.

2.2.3 Comparison

The table 1 describe the differences between heuristic and metaheuristic algorithms.

Table 1: Comparison between heuristic and metaheuristic algorithms

Feature	Heuristic	Metaheuristic
Method type	deterministic	often stochastic
Approach	problem-based	general
Implementation	often simple	often simple
Speed	fast	slower
Problem type	well-defined, structured problems	complex or poorly understood problems
Stopping criteria	fixed (e.g. solution found)	user-defined (e.g. time, iterations, convergence)
Local optima	often stuck	can escape
Use case	when problem structure is known	when heuristics are ineffective

In our case, we will try to implement both heuristic and metaheuristic algorithms: a greedy algorithm for heuristic and an algorithm that follows the simulated annealing

method for metaheuristic. Then, we will compare obtained results.

2.3 Simulated Annealing

The simulated annealing is inspired on the physical annealing process in metallurgy.

2.3.1 Physical inspiration

In metallurgy, to improve quality and capabilities of a metal, the metal is heated to high temperature and then cooled slowly. This is based on the fact that every physical system tends toward a state of equilibrium where energy is minimal. So when the metal is heated, the atoms of metal will have enough energy to move inside the metal. Then, they will position themselves in such a way as to reduce energy consumption. Their new positions will be more ordered than before heating the metal. This will create a better structured metal, which will improve quality and capabilities of the metal, like making it less brittle, more flexible or something else.

2.3.2 Algorithm principle

For the simulated annealing method in algorithmics, it will be the same process.

At the beginning of the algorithm, the temperature will be very high, allowing a great exploration of the search space. In fact, with a great temperature, the system will have enough energy to make big jumps accross the search space.

Then, the temperature will decrease, which will force the exploitation. It's due to the fact that with a smaller temperature, the system is no longer able to achieve big jumps accross the search space.

Finally, the algorithm will run until a state of equilibrium is reached, with a temperature more and more cold. The state of equilibrium is in general user defined. In our case, the state of equilibrium is reached when no improvement of fitness is made during last 3 changes of temperature.

2.3.3 Algorithm structure

The algorithm can be represented by the Figure 1 in annexe 7.

2.3.4 Algorithm variantes

There is a lot of different variants of the simulated annealing algorithm, such as parallel tempering,

Simulated annealing what is it ?? Kind of simulated annealing etc...

3 Implementation

(1)

Pseudo-code

4 Results

(1)

- circle
- cities
- cities2
- 20
- 60
- 80
- 100

Temperature change execution time

Just show plots and results, not discussion...

5 Discussion

(2)

- greedy vs simulated annealing (SA)
- abrupt temperature change
- diversification
- intensification

6 Conclusion

(0.25)

7 Annexe

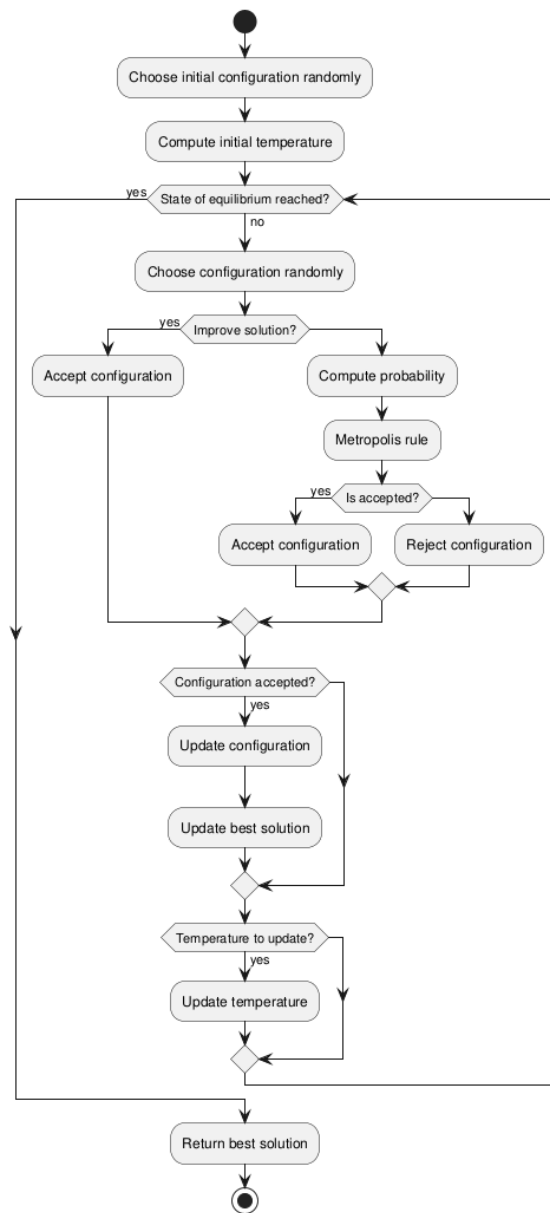


Figure 1: Simulated Annealing Diagram