




deeplearning.ai

Recurrent Neural Networks


Gated Recurrent Unit (GRU)

RNN unit

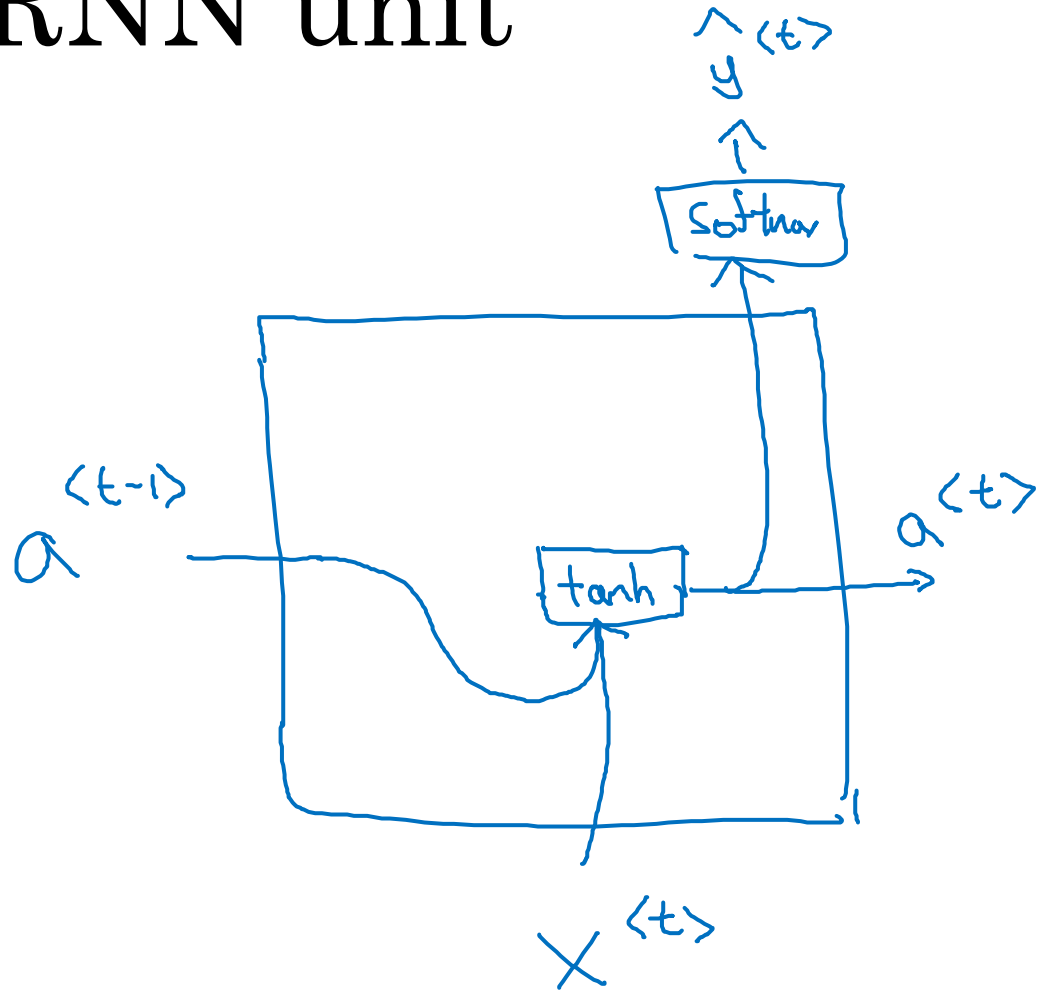


$$\underline{a^{<t>}} = \overset{\substack{\text{tanh} \\ \downarrow}}{g}(\underbrace{W_a[a^{<t-1>}, x^{<t>}]}_{\uparrow} + \underline{b_a})$$

GRU (simplified)

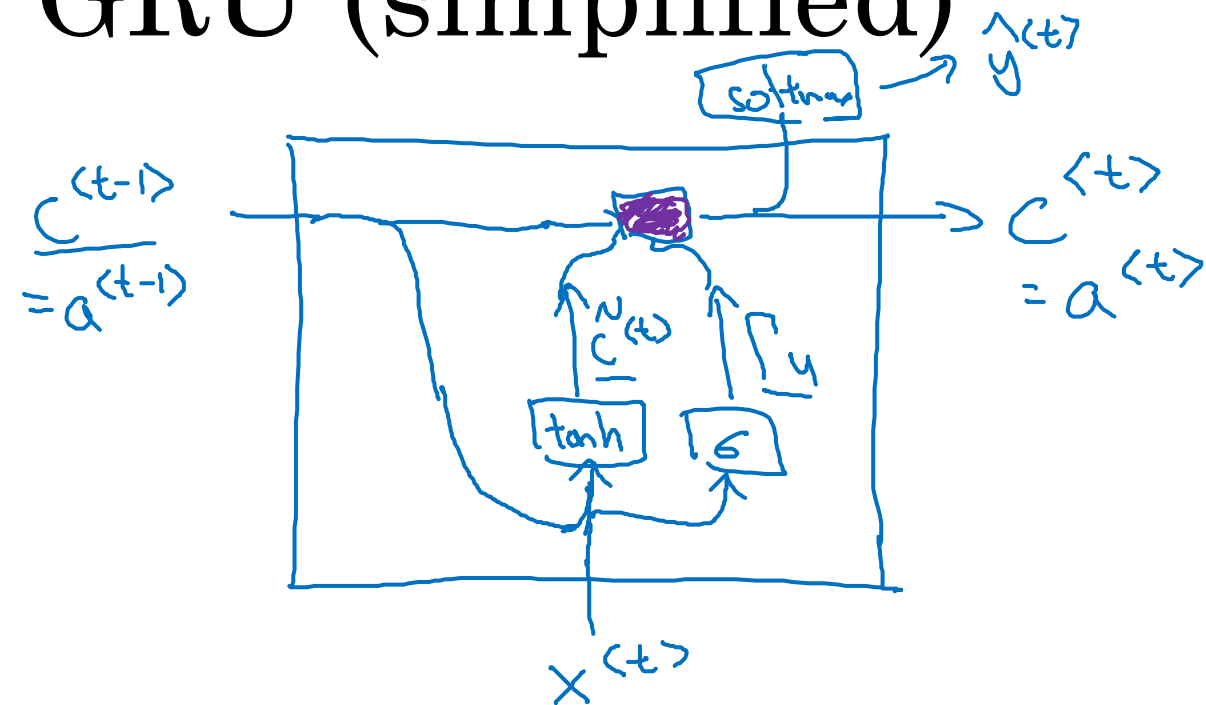

$\Gamma_u = 1$
 $c^{(t)} = 1$
 $\Gamma_u = 0 \quad \Gamma_u = 0 \quad \Gamma_u = 0 \quad \dots$
 The cat, which already ate ..., was full.

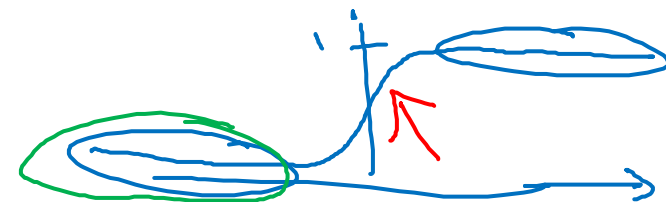

c = memory cell


$$\rightarrow \boxed{c^{(t)}} = \underline{a^{(t)}}$$

$$\rightarrow \boxed{\tilde{c}^{(t)}} = \tanh(W_c [c^{(t-1)}, x^{(t)}] + b_c)$$

$$\rightarrow \boxed{\Gamma_u} = \sigma(W_u [c^{(t-1)}, x^{(t)}] + b_u)$$

← "update"

$$\boxed{c^{(t)}} = \underbrace{\Gamma_u}_{=1} * \tilde{c}^{(t)} + (1 - \Gamma_u) * \boxed{c^{(t-1)}}$$

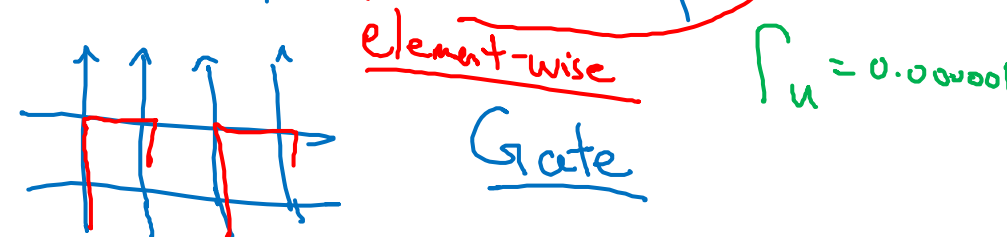

[Cho et al., 2014. On the properties of neural machine translation: Encoder-decoder approaches]

[Chung et al., 2014. Empirical Evaluation of Gated Recurrent Neural Networks on Sequence Modeling]

Andrew Ng

Full GRU

$$\tilde{c}^{<t>} = \tanh(W_c [\tilde{c}^{<t-1>}, x^{<t>}] + b_c)$$

$$\Gamma_u = \sigma(W_u [c^{<t-1>}, x^{<t>}] + b_u)$$

$$\Gamma_r = \sigma(W_r [c^{<t-1>}, x^{<t>}] + b_r)$$

$$c^{<t>} = \Gamma_u * \tilde{c}^{<t>} + (1 - \Gamma_u) * c^{<t-1>}$$

LSTM

The cat, which ate already, was full.