

הגדרות להפעלת אינטרנט בתצורת BeeComm



תאריך עדכון: 14-11-2019


פנימי בלבד

כל הזכויות שמורות ל iPracticom


טלפון: 03-6576576

דוא"ל: sales@ip-com.co.il

אתר: www.ip-com.co.il

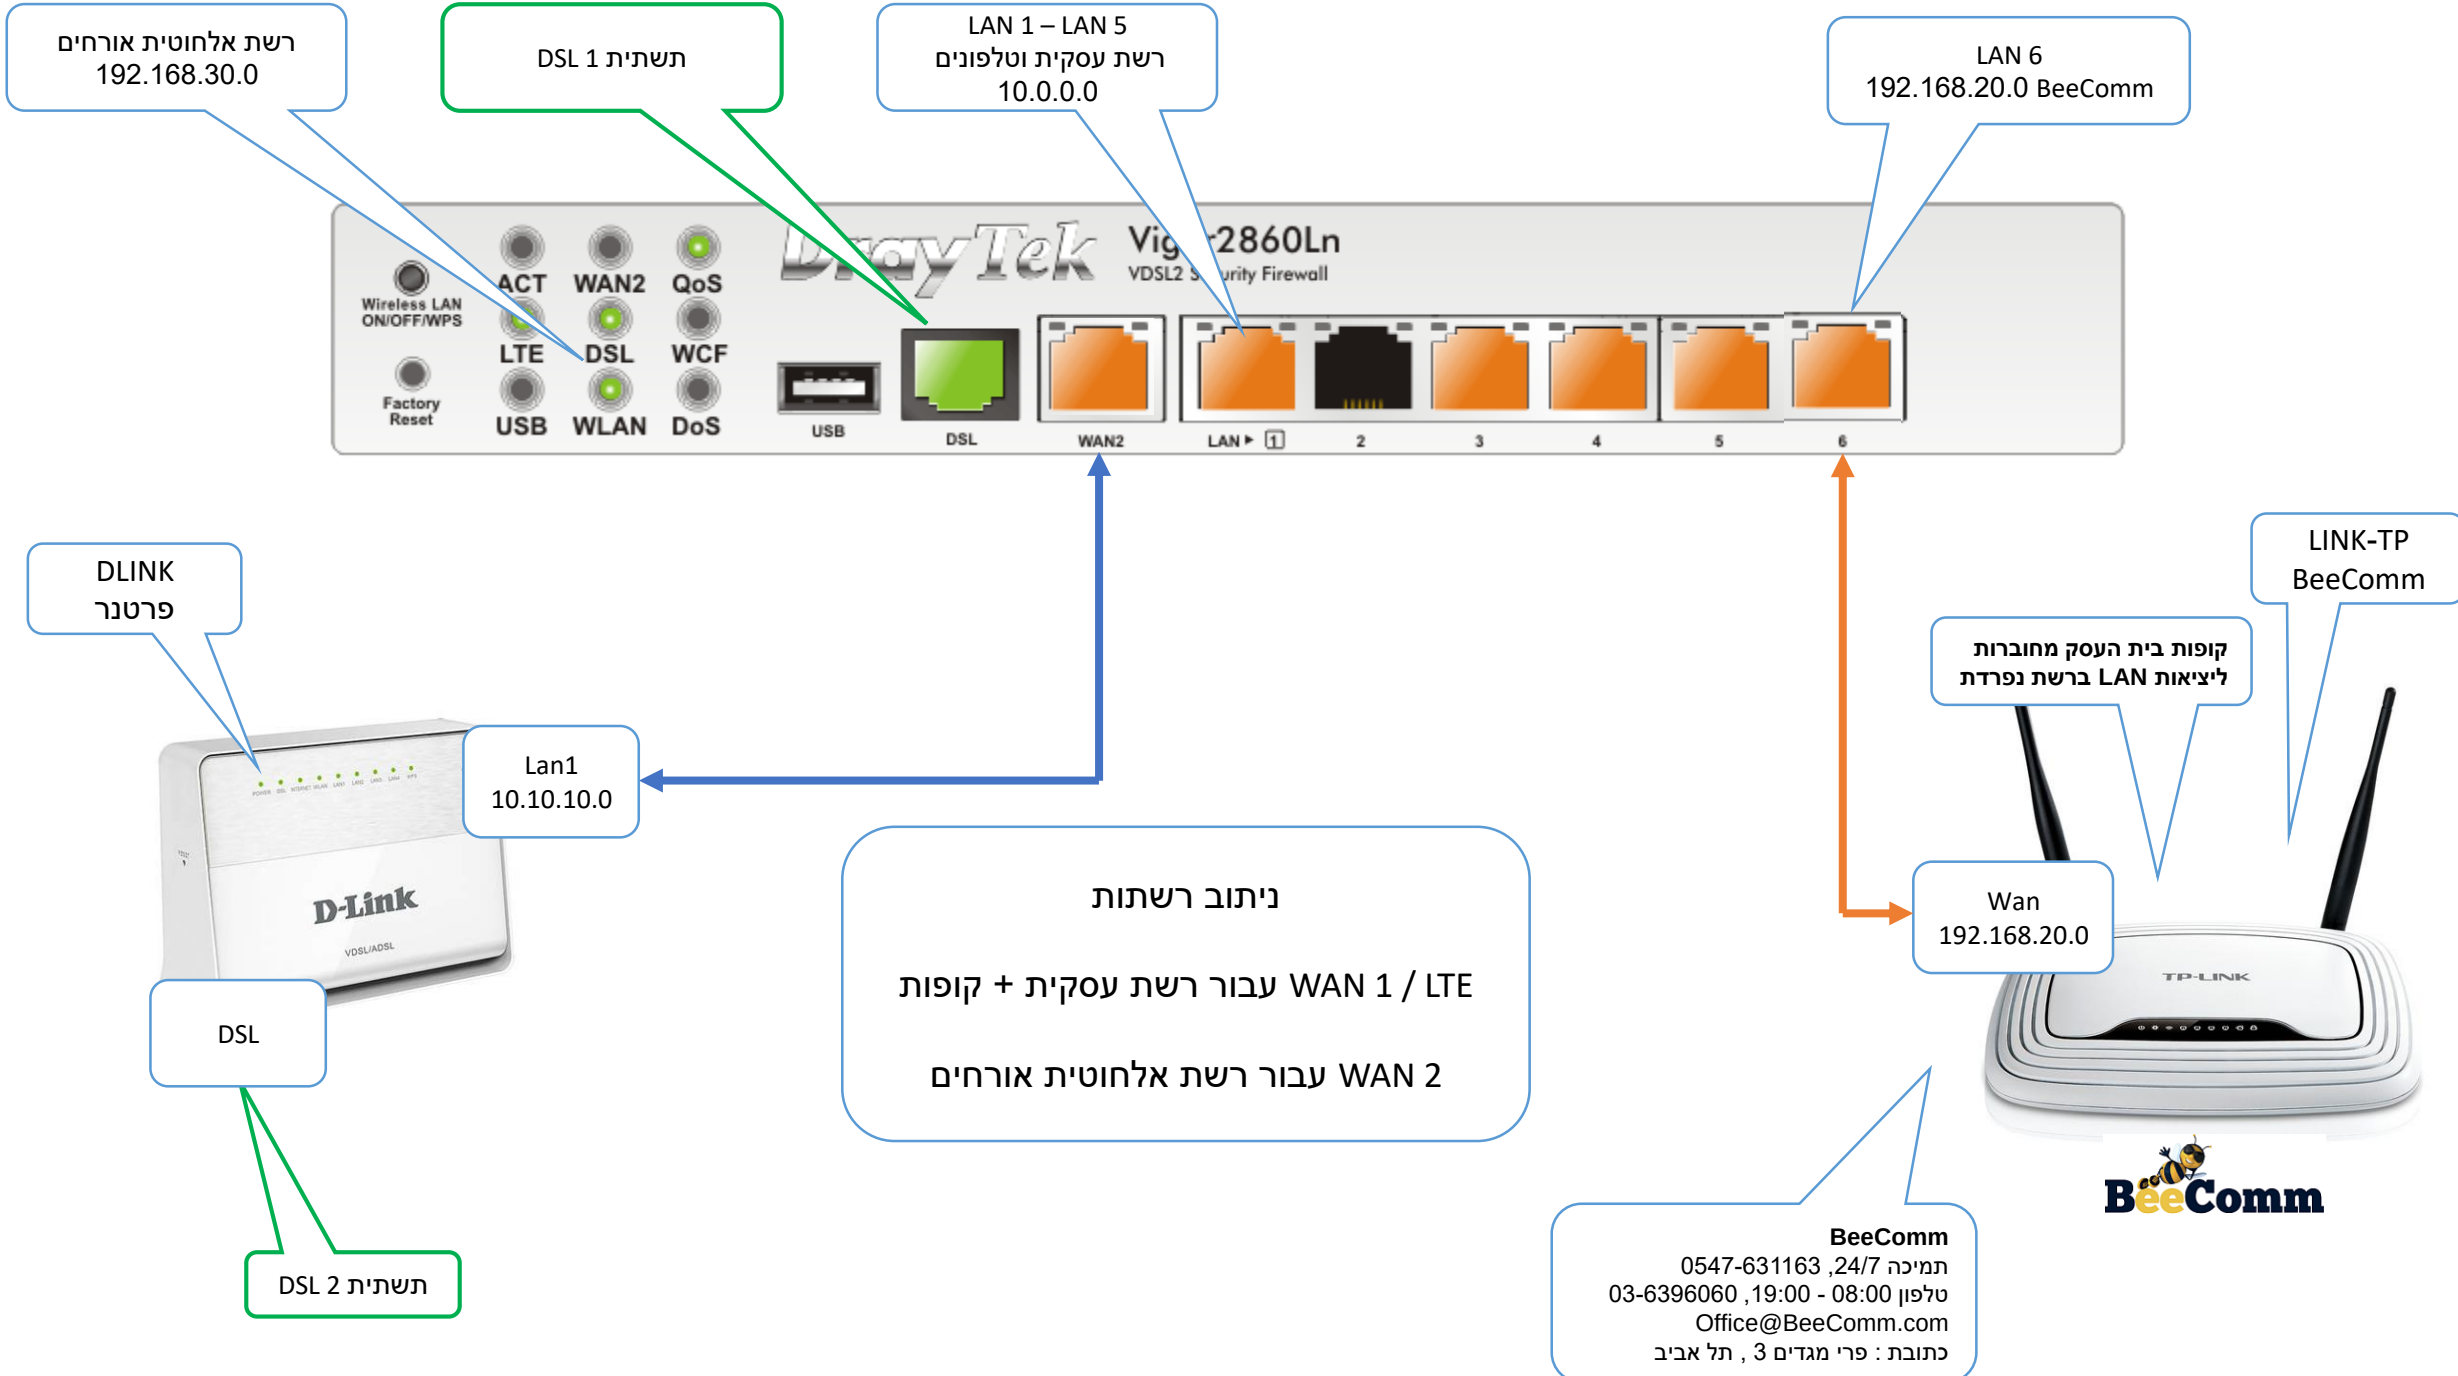

הגדרות TP-LINK TL-WRB41N

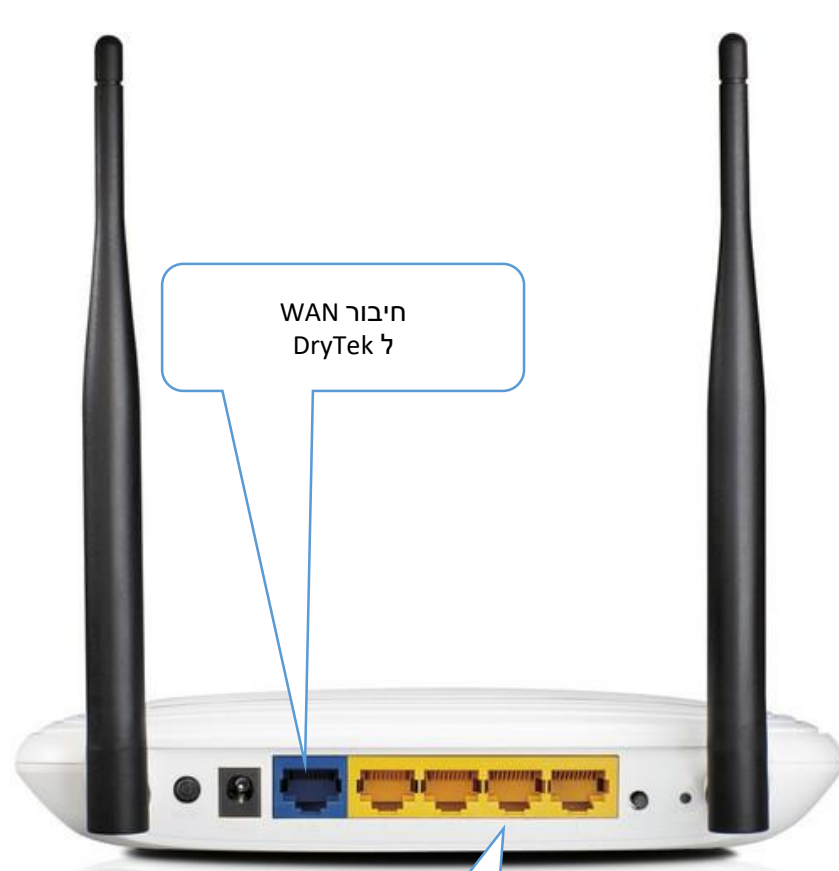

חיבור WAN
ל DryTek

LAN 1 – LAN 4
רשת ביקום פרטית
192.168.0.0
GW: 192.168.0.254



TP-LINK TL-WRB41N - WAN

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

- WAN
- LAN
- IPTV
- MAC Clone

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

WAN Settings

Connection Type: PPTP Detect

Username: burgk@CActcom

Password: *****

Connect Disconnect

Addressing Type: ☒ Dynamic IP ☐ Static IP

Server IP Address/Name: 212.25.127.13

IP Address: 192.168.20.11

Subnet Mask: 255.255.255.0

Gateway: 192.168.20.1

DNS Server: 80.179.52.100, 80.179.55.100

Internet IP Address: 192.168.226.62

Internet DNS: 192.115.106.35, 62.219.186.7

MTU(Bytes): 1420 (1420 as default, do not change unless necessary)

Connection Mode: ☒ Always on
☐ Connect on demand
☐ Connect manually

Max Idle Time: 15 minutes (0 meaning connection remains active at all times)

Save

יוזר זמני של ביקום
beecommtes3
סיסמא : Alex2009

יוזר ביקום

DHCP

שרת ביקום

כתובת פנימית- יוזר ביקום

TP-LINK TL-WRB41N - LAN

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

- WAN
- LAN
- IPTV
- MAC Clone

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

LAN Settings

MAC Address:

D8:0D:17:69:42:80

IP Address:

Subnet Mask:

Save

כתובת שרת ברשת פרטית

TP-LINK TL-WRB41N – Wi-Fi no iPads

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

- Basic Settings

- WPS

- Wireless Security

- Wireless MAC Filtering

- Wireless Advanced

- Wireless Statistics

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

Wireless Settings

Wireless: ☐ Enable ☒ Disable

Wireless Network Name: (Also called SSID)

Mode:

Channel:

Channel Width:

☒ Enable SSID Broadcast

Save

רשת אלחוטית כבוייה
אם לא מופעלים iPads

TP-LINK TL-WRB41N – Wi-Fi with iPads (1)

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

- Basic Settings
- WPS
- Wireless Security
- Wireless MAC Filtering
- Wireless Advanced
- Wireless Statistics

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

Wireless Settings

Wireless:

☒ Enable ☐ Disable

Wireless Network Name:

beecomm ipad

(Also called SSID)

Mode:

11bgn mixed

▼

Channel:

Auto

▼

Channel Width:

Auto

▼

☒ Enable SSID Broadcast

Save

אם מופעלים iPads
רשת אלחוטית מופעלת

שם רשת אלחוטית
beecomm ipad

TP-LINK TL-WRB41N – Wi-Fi with iPads (2)

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

- Basic Settings
- WPS
- Wireless Security
- Wireless MAC Filtering
- Wireless Advanced
- Wireless Statistics

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

Wireless Security Settings

Note: WEP security, WPA/WPA2 - Enterprise authentication and TKIP encryption are not supported with WPS enabled. For network security, it is strongly recommended to enable wireless security and select WPA2-PSK AES encryption.

☐ Disable Wireless Security

☒ WPA/WPA2 - Personal(Recommended)

Version:

Encryption:

Wireless Password:

Group Key Update Period:

☐ WPA/WPA2 - Enterprise

Version:

Encryption:

RADIUS Server IP:

RADIUS Server Port: (1-65535, 0 stands for default port 1812)

RADIUS Server Password:

Group Key Update Period:

☐ WEP

Authentication Type:

WEP Key Format:

Selected Key:	WEP Key	Key Type
Key 1: ☒		Disabled
Key 2: ☐		Disabled
Key 3: ☐		Disabled
Key 4: ☐		Disabled

סיסמת רשת אלחוטית
0547631163-2

TP-LINK TL-WRB41N - Forwarding

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

Guest Network

DHCP

Forwarding

- Virtual Server

- Port Triggering

- DMZ

- UPnP

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

Virtual Server

☐	Service Port	IP Address	Internal Port	Protocol	Status	Edit
☐	5631-5632	192.168.0.1	5631-5632	TCP or UDP	Enabled	Edit
☐	5633-5634	192.168.0.2	5633-5634	TCP or UDP	Enabled	Edit
☐	5635-5636	192.168.0.3	5635-5636	TCP or UDP	Enabled	Edit
☐	8010	192.168.0.1	8010	TCP or UDP	Enabled	Edit
☐	9010	192.168.0.1	9010	TCP or UDP	Enabled	Edit
☐	3389	192.168.0.1	3389	TCP or UDP	Enabled	Edit

Add New

Enable Selected

Disable Selected

Delete Selected

Service Port	IP Address
5631-5632	192.168.0.1
5633-5634	192.168.0.2
5635-5636	192.168.0.3
8010	192.168.0.1
9010	192.168.0.1
3389	192.168.0.1

Refresh

הפניית פורטים עבור
שרותי BeeComm

TP-LINK TL-WRB41N - Security

Status	Remote Management Web Management Port: 80 Remote Management IP Address: 255.255.255.255 (Enter 255.255.255.255 for all) Save
Quick Setup	
Operation Mode	
Network	
Wireless	
Guest Network	
DHCP	
Forwarding	
Security	
- Basic Security	
- Advanced Security	
- Local Management	
- Remote Management	
Parental Controls	
Access Control	
Advanced Routing	
Bandwidth Control	
IP & MAC Binding	
Dynamic DNS	
IPv6	
System Tools	
Logout	

פורט 80 לגישה לממשק
ניהול מה WAN

TP-LINK TL-WRB41N – DHCP Settings no iPads

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

Guest Network

DHCP

- DHCP Settings

- DHCP Clients List

- Address Reservation

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

DHCP Settings

DHCP Server:

☒ Disable ☐ Enable

Start IP Address:

192.168.0.100

End IP Address:

192.168.0.105

Lease Time:

120

minutes (1~2880 minutes, the default value is 120)

Default Gateway:

192.168.0.254

(optional)

Default Domain:

(optional)

DNS Server:

0.0.0.0

(optional)

Secondary DNS Server:

0.0.0.0

(optional)

Save

ללא iPads
שרות DHCP כבוי

TP-LINK TL-WRB41N – DHCP Settings with iPads

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

Guest Network

DHCP

- DHCP Settings

- DHCP Clients List

- Address Reservation

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

Logout

DHCP Settings

DHCP Server:

☐ Disable ☒ Enable

Start IP Address:

192.168.0.100

End IP Address:

192.168.0.105

Lease Time:

120

minutes (1~2880 minutes, the default value is 120)

Default Gateway:

192.168.0.254

(optional)

Default Domain:

(optional)

DNS Server:

0.0.0.0

(optional)

Secondary DNS Server:

0.0.0.0

(optional)

Save

אם מופעלים iPads
שרות DHCP מופעל

כתובת התחלתית
192.168.0.100

כתובת סופית
בהתאמה למספר ה iPads

TP-LINK TL-WRB41N – DHCP Clients with iPads

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

[Status](#)
[Quick Setup](#)
[Operation Mode](#)
[Network](#)
[Wireless](#)
[Guest Network](#)
[DHCP](#)
- DHCP Settings
- DHCP Clients List
- Address Reservation
[Forwarding](#)
[Security](#)
[Parental Controls](#)
[Access Control](#)
[Advanced Routing](#)
[Bandwidth Control](#)
[IP & MAC Binding](#)
[Dynamic DNS](#)
[IPv6](#)
[System Tools](#)
[Logout](#)

DHCP Clients List

This page displays information of all DHCP clients on the network.

ID	Client Name	MAC Address	Assigned IP	Lease Time
1	iPad	F4:1B:A1:17:3E:5F	192.168.0.101	01:21:04

Refresh

רשימת iPads
שמחוברים לרשת האלוטית

TP-LINK TL-WRB41N – Ping Test

**TP-Link Wireless N Router WR841N**
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

IPv6

System Tools

- Time Settings

- Diagnostic

- Reboot

- System Log

- Statistics

Logout

Diagnostic Tools

Diagnostic Parameters

Diagnostic Tool: ☒ Ping ☐ Traceroute

IP address/Domain name:

Ping Count: ping(1 - 50)

Ping Packet Size: (0 - 65500 Bytes)

Ping Timeout: (1 - 60 Seconds)

Traceroute Max TTL: (1 - 30)

Diagnostic Results

PING 194.194.193.58 (194.194.193.58): 64 data bytes

72 bytes from 194.194.193.58: icmp_seq=1 ttl=128 time=49.26 ms

72 bytes from 194.194.193.58: icmp_seq=2 ttl=128 time=34.28 ms

72 bytes from 194.194.193.58: icmp_seq=3 ttl=128 time=50.78 ms

72 bytes from 194.194.193.58: icmp_seq=4 ttl=128 time=45.14 ms


---194.194.193.58 ping statistics---

4 packets transmitted, 4 packets received,0% packet loss

round-trip min/avg/max = 34.28/44.865/50.78 ms

בדיקת קישור לשרת שבא
194.194.193.58

דרייטק Dash Board

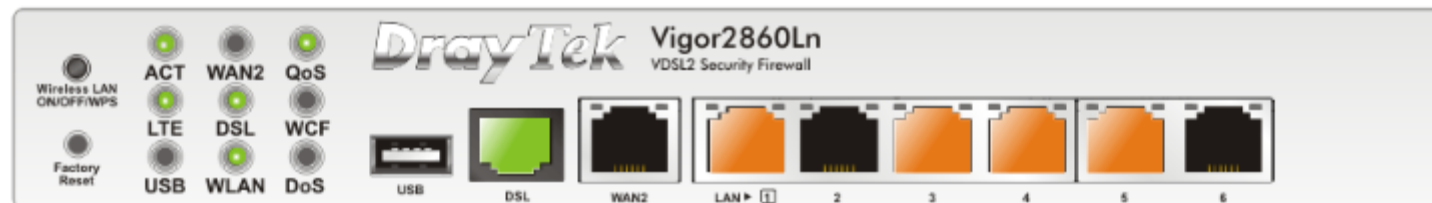

System Information

Model Name	Vigor2860Ln	System Up Time	68:12:53
Router Name	MANSORA	Current Time	2019 Jul 13 Sat 7:59:28
Firmware Version	3.8.4.3_Partner_RC3b_VT1	Build Date/Time	May 24 2017 14:39:54
DSL Version	567517_A/B/C HW: A	LAN MAC Address	00-1D-AA-15-81-38

IPv4 Internet Access

	Line / Mode	IP Address	MAC Address	Up Time
WAN1	VDSL2 / PPPoE	84.228.55.101	00-1D-AA-15-81-39	47:03:28
WAN2	Ethernet / DHCP Client	Disconnected	00-1D-AA-15-81-3A	00:00:00
LTE	USB / DHCP Client	84.228.55.102	00-A0-C6-00-00-55	68:11:57
WAN4	USB / ---	Disconnected	00-1D-AA-15-81-3C	00:00:00

Interface

DSL	Connected : Down Stream : 83500Kbps / Up Stream : 5023Kbps
WAN	Connected : 2, ☒ WAN1 ☐ WAN2 ☒ LTE ☐ WAN4
LAN	Connected : 0, ☒ Port1 ☐ Port2 ☒ Port3 ☒ Port4 ☒ Port5 ☐ Port6
WLAN	Connected : 2
USB	Connected : 0, ☐ USB

Status

LTE
Status
Operational
Access Tech
LTE
Band
E-UTRA Op Band 3
Operator
Partner
Signal
RSRP: -78 dBm (Excellent)
RSSI: -49 dBm (Excellent)
New SMS
0

Quick Access

System Status

שיוך פורט LAN ורשתות אלחוטיות

LAN >> VLAN Configuration

VLAN Configuration

☒ Enable

	LAN						Wireless LAN				Subnet	VLAN Tag		
	P1	P2	P3	P4	P5	P6	SSID1	SSID2	SSID3	SSID4		Enable	VID	Priority
VLAN0	☒	☒	☒	☒	☒	☐	☒	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾
VLAN1	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐	LAN 2 ▾	☐	0	0 ▾
VLAN2	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐	LAN 3 ▾	☐	0	0 ▾
VLAN3	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾
VLAN4	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾
VLAN5	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾
VLAN6	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾
VLAN7	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▾	☐	0	0 ▾

SSID1, LAN 1 – LAN 5
רשת עסקית, טלפונים,
אלחוטית עסקית
10.0.0.0

LAN 6
192.168.20.0 BeeComm

SSID2
רשת אלחוטית אורחים
192.168.30.0

☒ Permit untagged device in P1 to access router

Note:

1. For each VLAN row, selecting Enable VLAN Tag will apply the associated VID to the selected wired LAN port.
2. Wireless LAN traffic is always untagged, but the SSID is still a member of the selected VLAN (group).
3. Each VID must be unique.

OK

Clear

Cancel

הגדרות LAN

LAN >> General Setup

General Setup

Index	Status	DHCP	IP Address	
LAN 1	V	V	10.0.0.138	Details Page
LAN 2	☒	☒	192.168.20.1	Details Page
LAN 3	☒	☒	192.168.30.1	Details Page
LAN 4	☐	☒	192.168.4.1	Details Page
LAN 5	☐	☒	192.168.5.1	Details Page
LAN 6	☐	☒	192.168.6.1	Details Page
DMZ Port	☐	☒	192.168.7.1	Details Page
IP Routed Subnet	☐	☒	192.168.0.1	Details Page

LAN1
רשת עסקית 10.0.0.0

LAN2
רשת BeeComm 192.168.20.0

LAN3
רשת אורחים 192.168.30.0

הגדרות LAN 1 - רשת עסקית, טלפונים, אלחוטית עסקית

LAN >> General Setup

LAN 1 Ethernet TCP / IP and DHCP Setup	
Network Configuration For NAT Usage	DHCP Server Configuration
IP Address	☐ Enable Server ☐ Disable Server
Subnet Mask	☐ Enable Relay Agent
RIP Protocol Control	Start IP Address
	IP Pool Counts
	Gateway IP Address
	Lease Time
	☒ Clear DHCP lease for inactive clients periodically
	DNS Server IP Address
	Primary IP Address
	Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN1 Virtual IP to the same domain IP.

הגדרות LAN 2 – רשת BeeComm

LAN >> General Setup

LAN 2 Ethernet TCP / IP and DHCP Setup	
Network Configuration	DHCP Server Configuration
☒ Enable ☐ Disable	☒ Enable Server ☐ Disable Server
☒ For NAT Usage ☐ For Routing Usage	☐ Enable Relay Agent
IP Address	Start IP Address
Subnet Mask	IP Pool Counts
	Gateway IP Address
	Lease Time
	☒ Clear DHCP lease for inactive clients periodically.
	DNS Server IP Address
	Primary IP Address
	Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN2 Virtual IP to the same domain IP.

הגדרות LAN 3 – רשת אלחוטית אורחים

LAN >> General Setup

LAN 3 Ethernet TCP / IP and DHCP Setup

Network Configuration

☒ Enable ☐ Disable

☒ For NAT Usage ☐ For Routing Usage

IP Address

Subnet Mask

DHCP Server Configuration

☒ Enable Server ☐ Disable Server

☐ Enable Relay Agent

Start IP Address

IP Pool Counts

Gateway IP Address

Lease Time (s)

☒ Clear DHCP lease for inactive clients periodically.

DNS Server IP Address

Primary IP Address

Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN3 Virtual IP to the same domain IP.

רשתות אלחוטיות

Wireless LAN >> General Setup

General Setting (IEEE 802.11)

☒ Enable Wireless LAN

Mode :

Mixed(11b+11g+11n) ▼

Channel:

Channel 4, 2427MHz ▼

	Enable	Active	Hide SSID	SSID	Isolate Member	Isolate VPN
1	☒	V	☐	MO	☐	☐
2	☒	V	☐	Mansura	☐	☐
3	☐	X	☐		☐	☐
4	☐	X	☐		☐	☐

Note:

Enabling the Isolate Member configuration will forbid the wireless clients associated to the same SSID from connecting to each other.

The isolate VPN configuration will isolate the wireless traffic from VPN connections and thus, wireless clients will not be able to access the VPN network under this setting.

When High Availability is set as Hot-Standby redundant method and displayed as Secondary State with Stable condition on the page of High Availability Status, the wireless function will be disabled.

רשת אלחוטית עסקית
10.0.0.0

רשת אלחוטית אורחים
192.168.30.0

הגדרות Load Balance

Load-Balance/Route Policy



Load-Balance/Route Policy

10 rules per page | [Set to Factory Default](#)

Index	Enable	Comment	Protocol	Interface	Priority	Src IP Start	Src IP End	Dest IP Start	Dest IP End	Dest Port Start	Dest Port End	Move Up	Move Down
1	☐	SIP	TCP/UDP	WAN1	1	Any	Any	Any	Any	5060	5095		Down
2	☐	RTP	UDP	WAN1	1	Any	Any	Any	Any	10000	35000	UP	Down
3	☒	officeph...	Any	WAN1	1	10.0.0.0	10.0.0.255	Any	Any	Any	Any	UP	Down
4	☒	beecomm	Any	WAN1	1	192.168.20.0	192.168.20.255	Any	Any	Any	Any	UP	Down
5	☒	guest	Any	WAN1	142	192.168.30.0	192.168.30.255	Any	Any	Any	Any	UP	Down
6	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
7	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
8	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
9	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
10	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down

<< [1-10](#) | [11-20](#) | [21-30](#) | [31-40](#) | [41-50](#) >>

[Next](#) >>

רשת עסקית
10.0.0.0

BeeComm רשת
192.168.20.0

רשת אורחים
192.168.30.0

הגדרות Load Balance רשת עסקית

Index: 3

☒ Enable

Comment:

Criteria

Protocol:

Source

☐ Any

☒ Src IP Range

Start: End:

☐ Src IP Subnet

Destination

☒ Any

☐ Dest IP Range

☐ Dest IP Subnet

☐ Domain Name

Destination Port

☒ Any

☐ Dest Port Start ~ Dest Port End

Send via if Criteria Matched

Interface

☒ WAN/LAN

☐ VPN

Gateway

☒ Default Gateway

☐ Specific Gateway

Priority

Priority:

Low 250 150 0 High

Default Route Routes in Routing Table

Packet Forwarding to WAN via

☒ Force NAT

☐ Force Routing

☒ Failover to

☒ WAN/LAN

☐ VPN

☐ Route Policy

Gateway

☒ Default Gateway

☐ Specific Gateway

☐ Failback

New sessions affected by this Policy will be sent via primary interface once that interface resumes service; while existing sessions will remain on the failovered interface.

הגדרת תחום כתובות

ניתוב ראשי WAN1

ניתוב גיבוי LTE

הגדרות Load Balance רשת BeeComm

Index: 4

☒ Enable

Comment:

Criteria

Protocol:

Source

- ☐ Any
- ☒ Src IP Range
Start: End:
- ☐ Src IP Subnet

Destination

- ☒ Any
- ☐ Dest IP Range
- ☐ Dest IP Subnet
- ☐ Domain Name

Destination Port

- ☒ Any
- ☐ Dest Port Start ~ Dest Port End
 ~

Send via if Criteria Matched

Interface

- ☒ WAN/LAN
- ☐ VPN

Gateway

- ☒ Default Gateway
- ☐ Specific Gateway

Priority

Priority:

Low 250 150 0 High
Default Route Routes in Routing Table

☐ More Options

Packet Forwarding to WAN via

- ☒ Force NAT
- ☐ Force Routing

☒ Failover to

- ☒ WAN/LAN
- ☐ VPN
- ☐ Route Policy

Gateway

- ☒ Default Gateway
- ☐ Specific Gateway

☐ Failback
New sessions affected by this Policy will be sent via primary interface once that interface resumes service; while existing sessions will remain on the failovered interface.

הגדרת תחום כתובות

ניתוב ראשי WAN1

ניתוב גיבוי LTE

הגדרות Load Balance רשת אלחוטית אורחים

Index: 5

☒ Enable

Comment

guest

Delete

Criteria

Protocol

Any ▼

Source

☐ Any☒ Src IP Range

Start: 192.168.30.0

End: 192.168.30.255

☐ Src IP Subnet

Destination

☒ Any☐ Dest IP Range☐ Dest IP Subnet☐ Domain Name

Destination Port

☒ Any☐ Dest Port Start

Dest Port End

Send via if Criteria Matched

Interface

☒ WAN/LAN

WAN2 ▼

☐ VPN

VPN 1.??? ▼

Gateway

☒ Default Gateway☐ Specific Gateway

Priority

Priority: 142

Low

High

250

150

0

Default Route

Routes in Routing Table

☒ More Options

Packet Forwarding to WAN via

☒ Force NAT☐ Force Routing☐ Failover to☒ WAN/LAN

Default WAN ▼

☐ VPN

VPN 1.??? ▼

☐ Route Policy

Index 1 ▼

Gateway

☒ Default Gateway☐ Specific Gateway 0.0.0.0

הגדרת תחום כתובות

ניתוב ראשי WAN2

ללא ניתוב גיבוי

טבלת DHCP

Diagnostics >> View DHCP Assigned IP Addresses

DHCP IP Assignment Table

[Refresh](#)

LAN1 : 10.0.0.138/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	10.0.0.1	80-5E-C0-0E-6F-24	15:44:47	W60B
2	10.0.0.4	00-1F-08-02-45-DF	12:25:00	SecuritySystem
3	10.0.0.6	88-63-40-49-68-A4	15:21:58	iPhone
4	10.0.0.23	F8-BC-12-62-1A-FF	15:49:59	office21
LAN2 : 192.168.20.1/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	192.168.20.10	00-1F-08-02-45-DF	3:44:49	SecuritySystem
LAN3 : 192.168.30.1/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	192.168.30.10	D8-9C-67-58-27-EB	3:49:08	DESKTOP-2DEUSL8
2	192.168.30.11	C0-E8-62-8A-49-B3	63:19:54	iPhone
3	192.168.30.12	A8-A7-95-A4-17-95	29:14:35	LAPTOP-SKKBIM20
4	192.168.30.13	7C-D6-61-62-D8-C8	29:17:03	
5	192.168.30.14	B2-BE-76-78-F0-38	68:14:23	TL-WA850RE
6	192.168.30.15	B2-BE-76-A4-17-95	68:05:26	LAPTOP-SKKBIM20

☐ Show Comment