


Things to do in V11:


- Change the links in Views of Setup ->about.php &showupdateprogress.php as

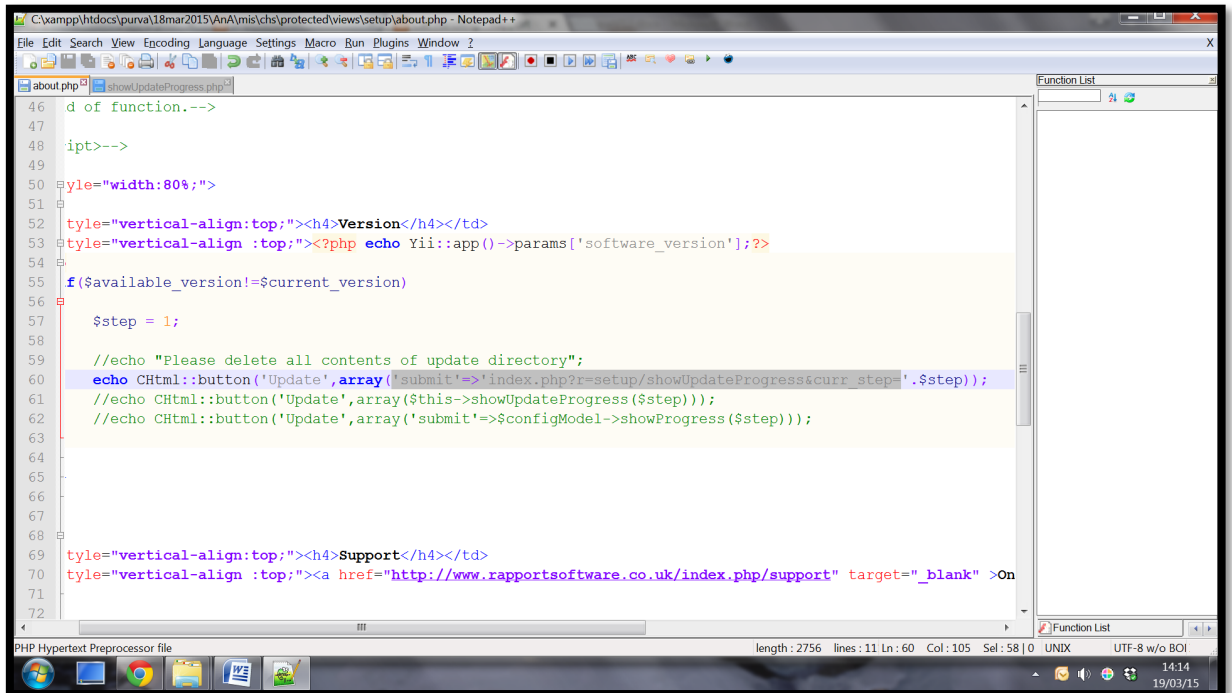

```
46 d of function.-->
47
48 ipt>-->
49
50 yle="width:80%";
51
52 tyle="vertical-align:top;"><h4>Version</h4></td>
53 tyle="vertical-align :top;"><?php echo Yii::app()->params['software_version'];?>
54
55 f($available_version!=$current_version)
56
57 $step = 1;
58
59 //echo "Please delete all contents of update directory";
60 echo CHtml::button('Update',array('submit'=>'index.php?r=setup/showUpdateProgress&curr_step='.$step));
61 //echo CHtml::button('Update',array($this->showUpdateProgress($step));
62 //echo CHtml::button('Update',array('submit'=>$configModel->showProgress($step)));
63
64
65
66
67
68
69
70 tyle="vertical-align:top;"><h4>Support</h4></td>
71 tyle="vertical-align :top;"><a href="http://www.rapportsoftware.co.uk/index.php/support" target="_blank" >On
72
```

line 60 in about.php “echo


CHtml::button('Update',array('submit'=>'index.php?r=showUpdateProgress&curr\_step='.\$step));”

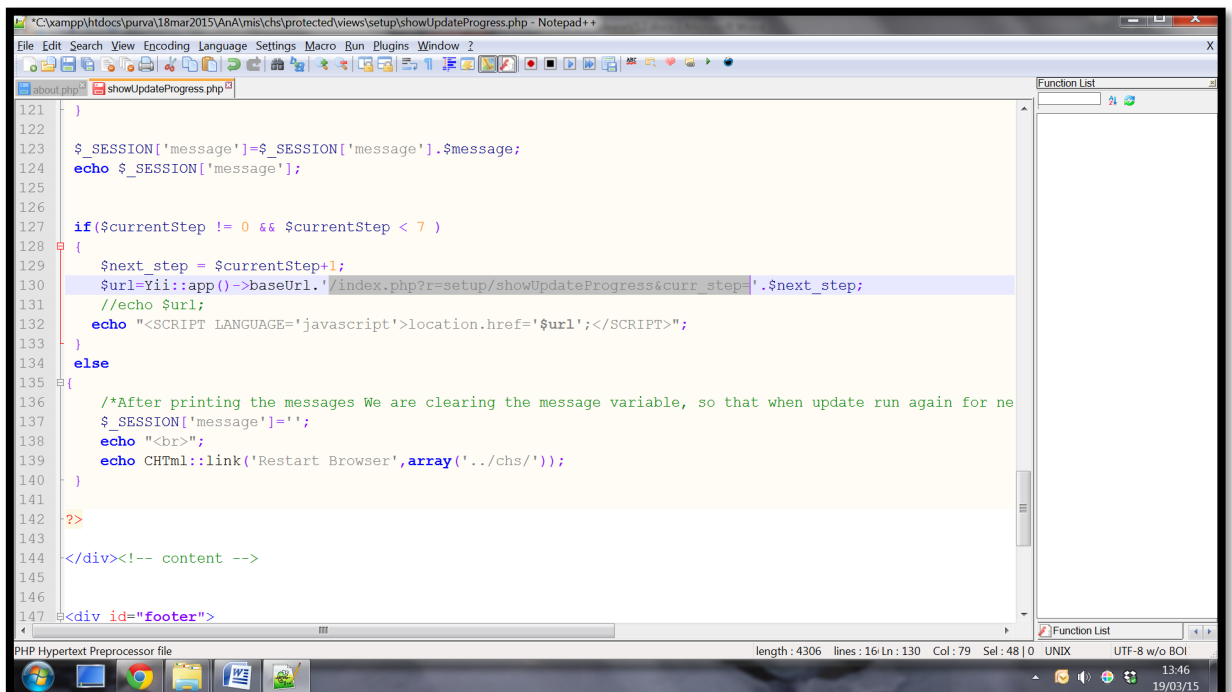

```
121
122
123 $_SESSION['message']=$_SESSION['message'].$message;
124 echo $_SESSION['message'];
125
126
127 if($currentStep != 0 && $currentStep < 7 )
128 {
129 $next_step = $currentStep+1;
130 $url=Yii::app()->baseUrl.'/index.php?r=setup/showUpdateProgress&curr_step='.$next_step;
131 //echo $url;
132 echo "<SCRIPT LANGUAGE='javascript'>location.href='$url';</SCRIPT>";
133 }
134 else
135 {
136 /*After printing the messages We are clearing the message variable, so that when update run again for ne
137 $_SESSION['message']='';
138 echo "<br>";
139 echo CHtml::link('Restart Browser',array('../chs/'));
140 }
141
142
143
144 </div><!-- content -->
145
146
147 <div id="footer">
```

Line130 in showupdateprogress.php “\$url=Yii::app()->baseUrl.'/index.php?r=setup/showUpdateProgress&curr\_step='.\$next\_step;”

- Update the server URI in setup table at backend via phpliteadmin

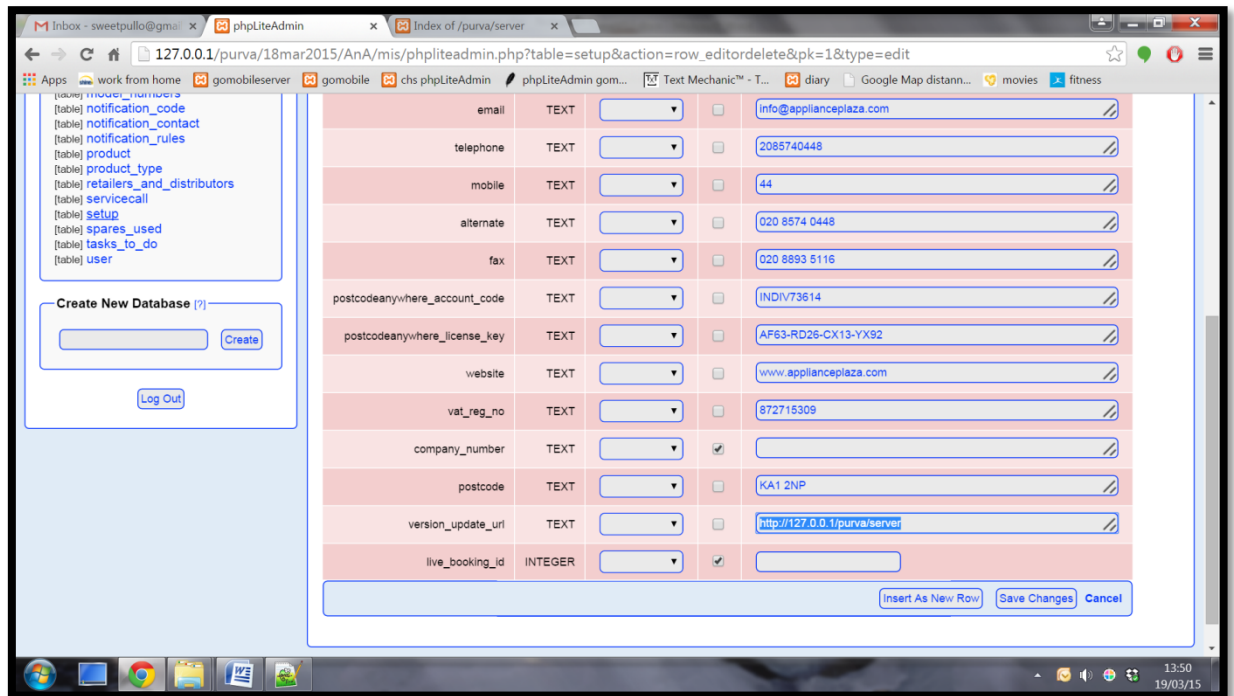

- If there is no phpliteadmin file found in main(CHS) folder please paste the one.
- Paste the updated framework available
- If you cannot login the site, goto user controller and the change the permissions for create function in access rules method

Version 12:

- First of all change the logo to your company\_logo  
Goto setup->sidebar->companylogo->choose file->change, it can take a while to change the logo due to cache
- Now some change to backend, as new system introduced the concept of User Permission Rights module we have to do some changes in user table:
  - Goto backend->user table, whatever user are there we have create the same for 'tbl\_users' table by frontend
  - For this go to frontend->setup->users->manage user->create user



- Now create user by filling the info available for existing user in 'User' table from backend and likewise create other users:

username \*

santosh

password \*

\*\*\*\*\*

E-mail \*

applianceplaza3@gmail.com

Superuser \*

Yes

Status \*

Active

First Name \*

Santosh

Last Name \*

Santosh

Birthday

0000-00-00

Create

- We have to update tables 'tbl\_users' & 'tbl\_profiles' in backend for column 'user\_id' as it should be same as 'users' table

phpLiteAdmin v1.9.0

Documentation | License | Project Site

Change Database

[rw] 00chs.db

[rw] chs.db

chs.db

[table] AuthAssignment

[table] AuthItem

[table] AuthItemChild

[table] Rights

[table] addons

[table] advance\_settings

[table] brand

[table] contact\_details

[table] contract

[table] contract\_type

[table] country\_codes

[table] customer

[table] enggdiary

[table] engineer

[table] gm\_json\_fields

[table] gm\_server\_status

[table] gm\_servicecalls

[table] job\_status

[table] model\_numbers

[table] notification\_code

[table] notification\_contact

[table] notification\_rules

[table] product

[table] product\_type

chs.db → tbl\_profiles

Browse Structure SQL Search Insert Export Import Rename Empty Drop

Show: 30 row(s) starting from record # 0

Showing rows 0 - 3 (4 total, Query took 0.0005 sec)


SELECT \* FROM tbl\_profiles LIMIT 0, 30

	edit	delete	user_id	lastname	firstname	birthday
<input type="checkbox"/>	edit	delete	1	Admin	Administrator	0000-00-00
<input type="checkbox"/>	edit	delete	2	Santosh	Santosh	NULL
<input type="checkbox"/>	edit	delete	3	Vix	Vix	NULL
<input type="checkbox"/>	edit	delete	1000000	User	Remote	NULL


Check All / Uncheck All With selected: Edit Go

Powered by phpLiteAdmin | Page generated in 0.0089 seconds.


- Now we have to update User Permission as per the requirement, for this go to Setup->user permissions->roles tab->delete engg Task tab->delete brand Operations tab->delete all operations

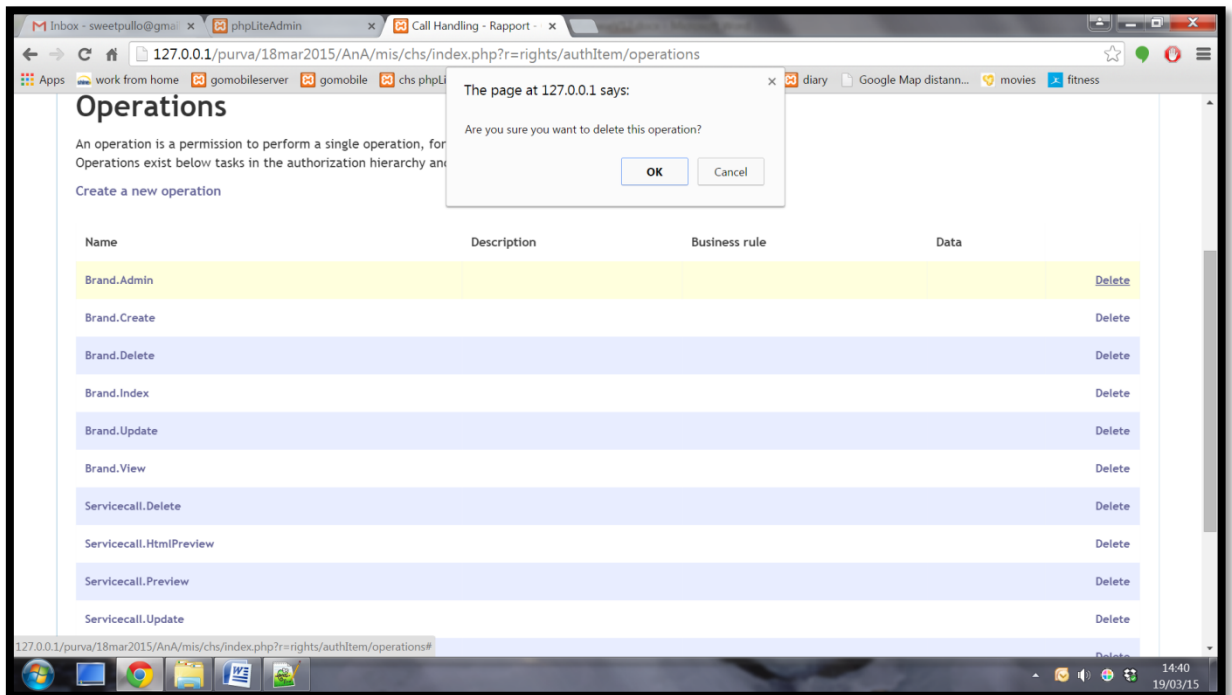


- Roles tab-> describe each role, like Admin:have all access

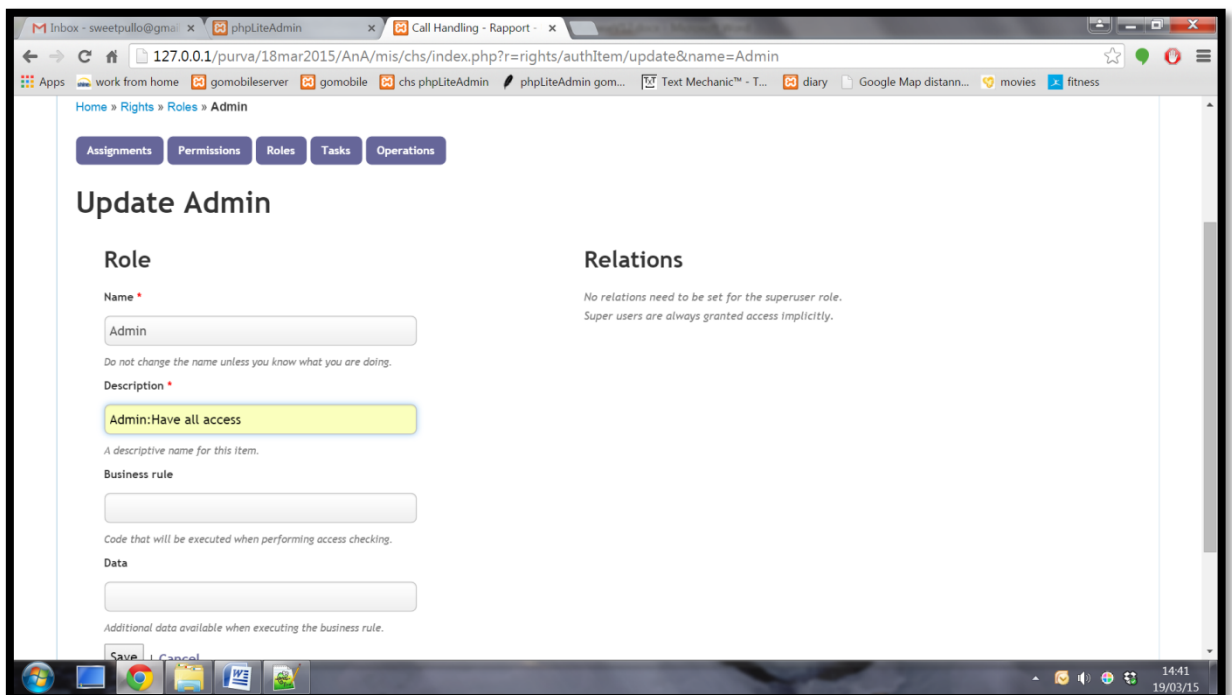

End result will look like:

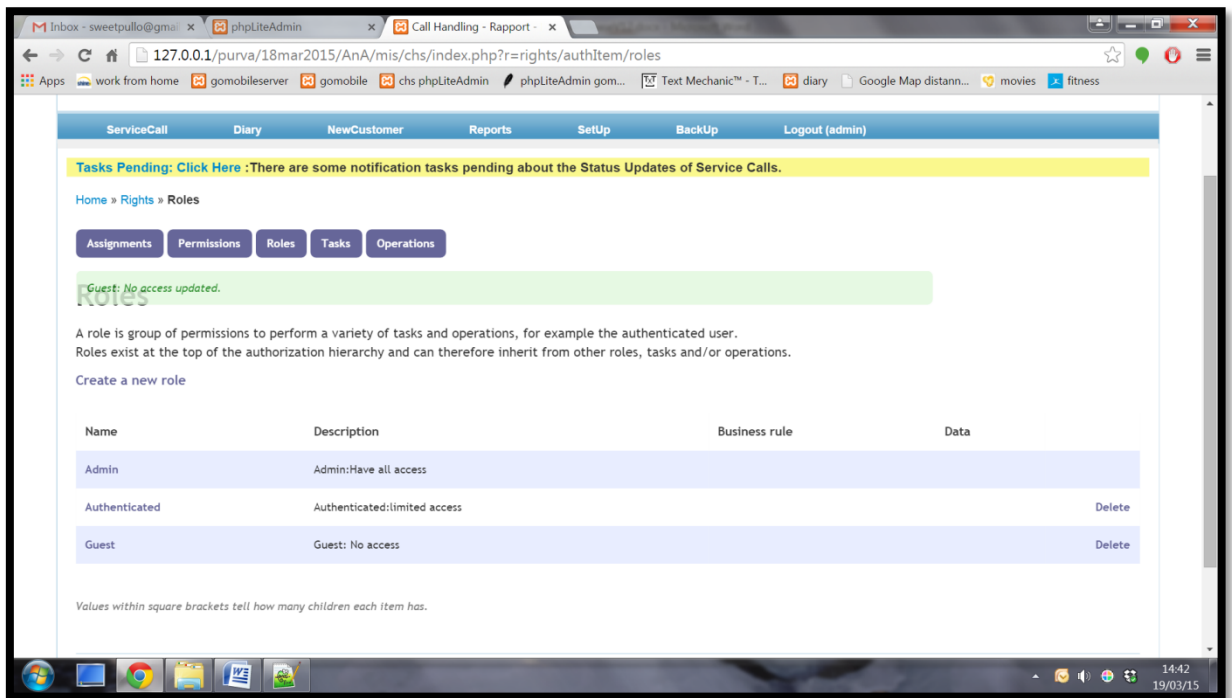

- Go to assignments tab->and assign the roles

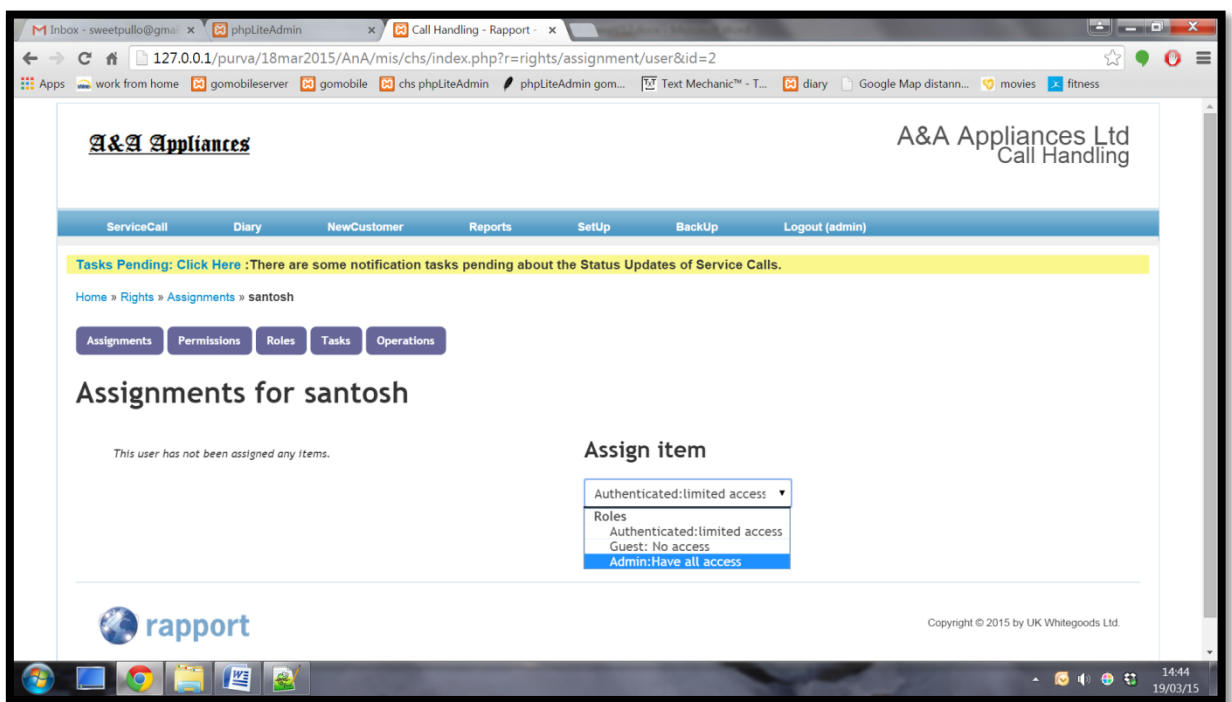

- Installing graphs and reports module, go to setup->install addon->choose file->install
- If going from 0.5.4beta to 12 you have to run this sql statement in phpliteadmin  

```
"/***** ADDING NEW FIELD IN SPARES USED TABLE *****/
ALTER TABLE spares_used ADD notes TEXT;
/***** ADDING NEW FIELD IN SERVICECALL TABLE *****/
ALTER TABLE servicecall ADD work_summary TEXT;
VACUUM;"
```