Open your **Linux Terminal** and run these commands one by one.

1. Check Linux disk space

df -h

This will show something like:

Filesystem   Size Used Avail Use%
/dev/vdb   50G   18G   30G   38%

The important column is **Avail** (available space).

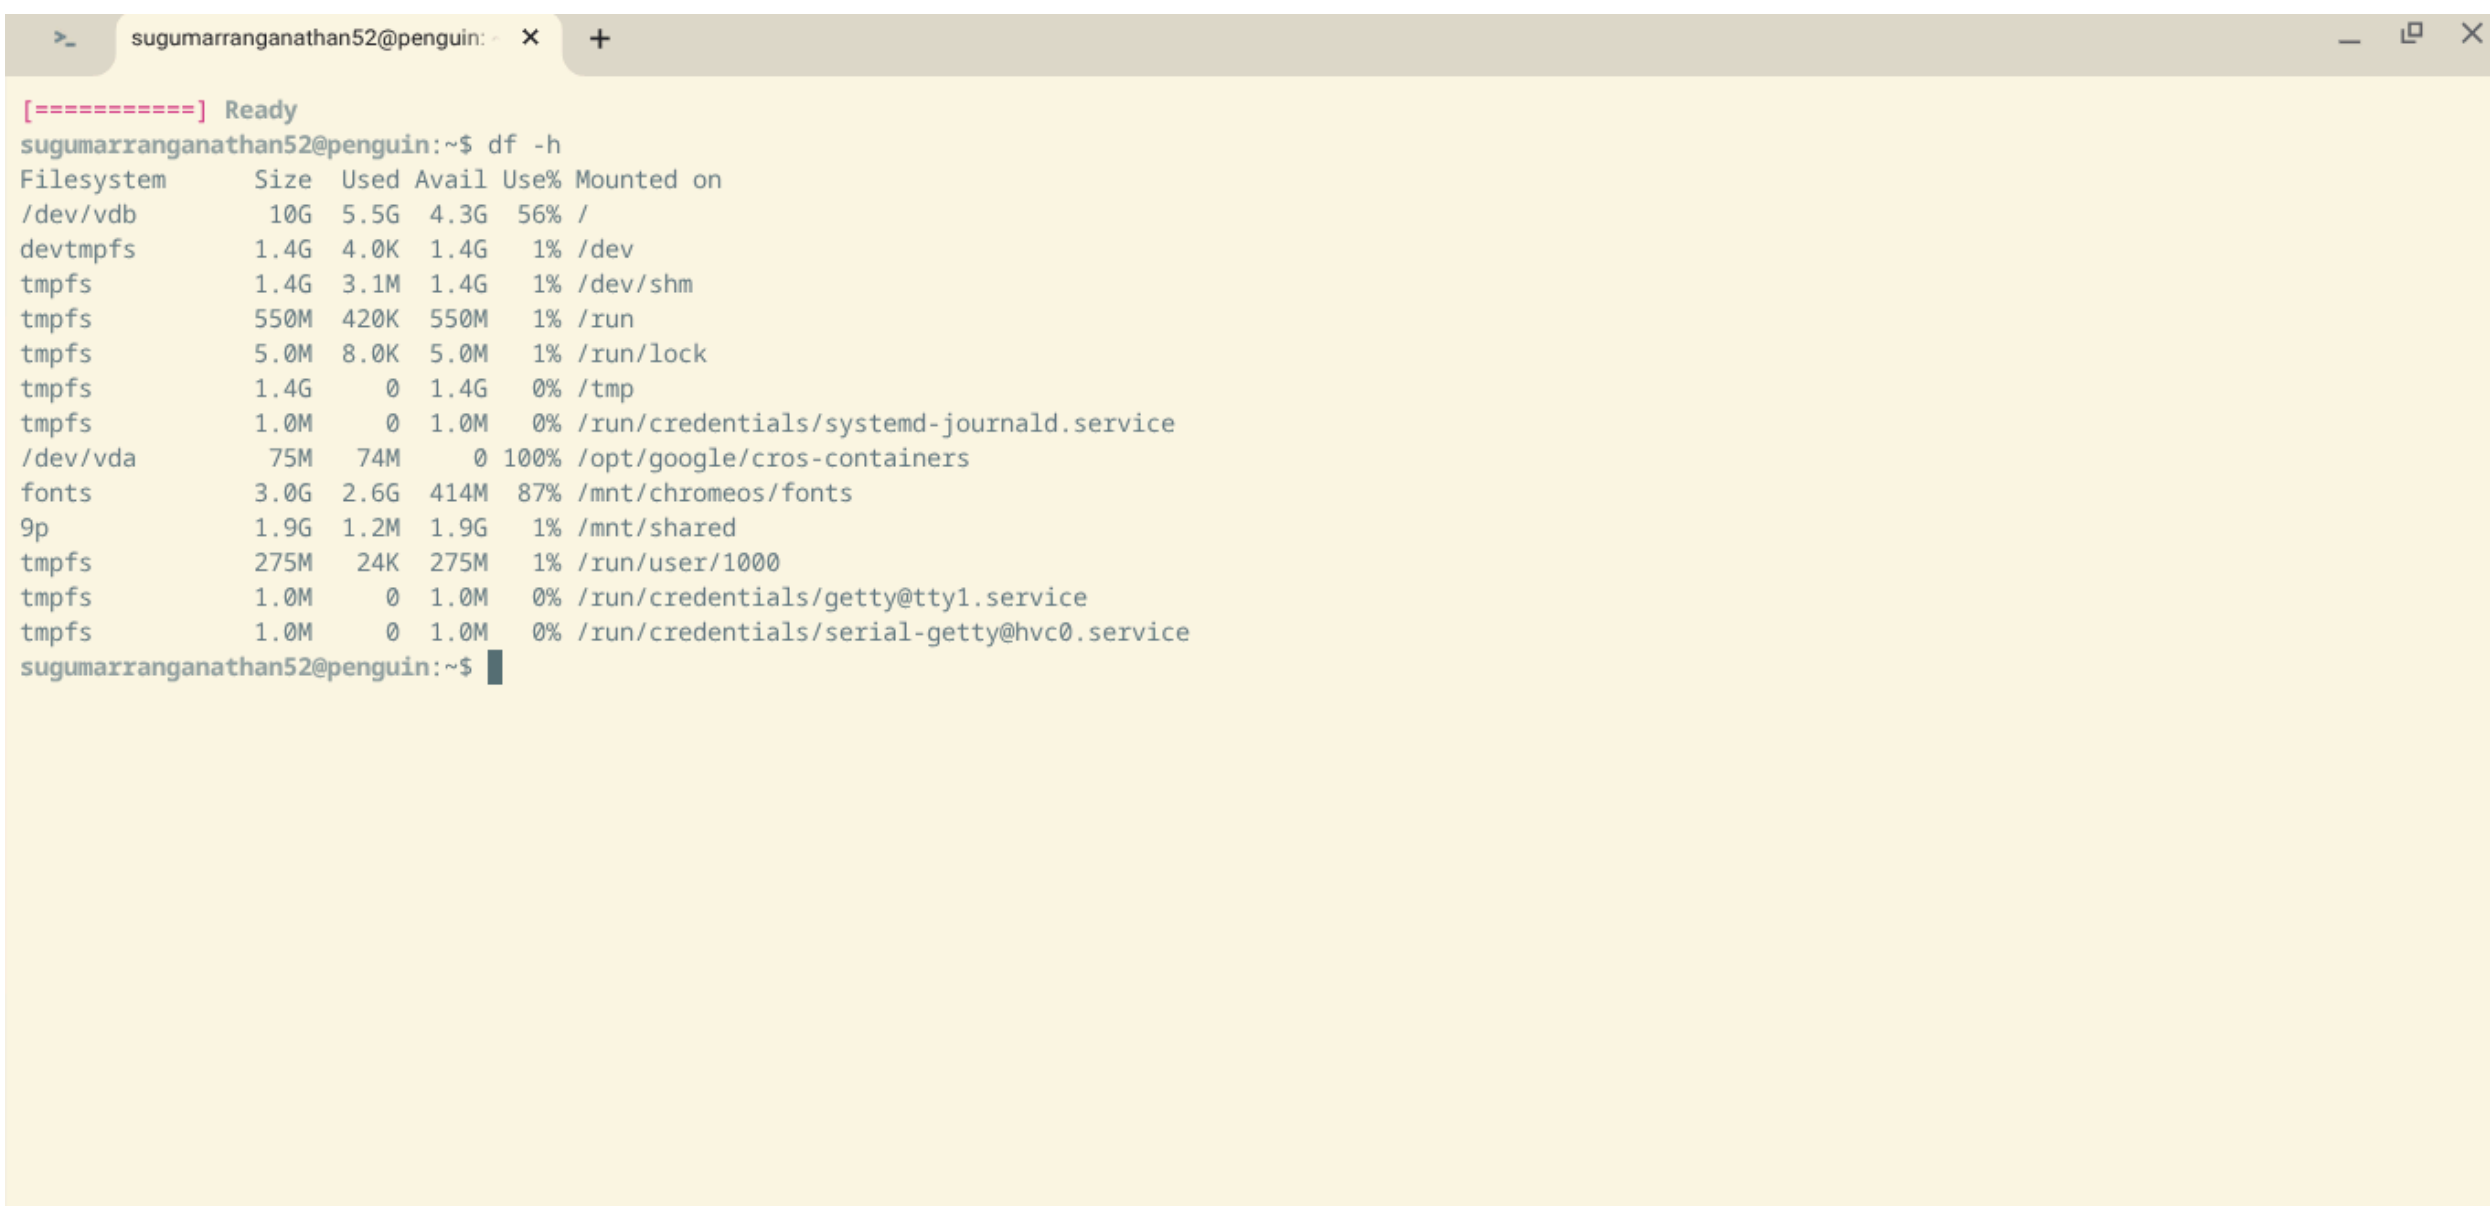

Step 1: Enable Linux (if not already)

1. Open **Settings**
2. Go to **About ChromeOS**
3. Click **Developers**
4. Enable **Linux Development Environment**
5. Allocate at least:
    - **20 GB** storage (recommended)
    - **8 GB RAM** or more (recommended)

Step 2: Open Linux Terminal

Open the **Terminal** app.

Update the system:

sudo apt update
sudo apt upgrade -y

Step 3: Install curl

sudo apt install curl -y

Check:

curl --version

Step 4: Install Ollama

Run:

curl -fsSL https://ollama.com/install.sh | sh

Wait a few minutes.

Step 5: Verify Installation

ollama --version

Example:

ollama version 0.x.x

Step 6: Start Ollama

Run:

ollama serve

You should see something similar to:

Listening on 127.0.0.1:11434

Leave this terminal open.

Step 7: Open Another Terminal

Open a second Linux terminal.

Step 8: Download Llama 3

Small model (recommended):

ollama pull llama3

or the latest:

ollama pull llama3.2

This may download several GB, so it can take some time.

Step 9: Check Installed Models

ollama list

Example:

NAME SIZE
llama3 4.7 GB

Step 10: Chat in Terminal

ollama run llama3

Then:

>>> Explain Python

Exit:

/bye

Step 11: Install Python Package

pip install ollama

or

python3 -m pip install ollama

Step 12: Python Test

Create `test.py`:

```
import ollama

response = ollama.chat(
    model="llama3",
    messages=[
        {
            "role": "user",
            "content": "Explain AI."
        }
    ]
)

print(response["message"]["content"])
```

Run:

```
python3 test.py
```

Step 13: Gradio Example

```
pip install gradio ollama
import gradio as gr
import ollama

def chat(message):
    response = ollama.chat(
        model="llama3",
        messages=[
            {"role": "user", "content": message}
        ]
    )
    return response["message"]["content"]

demo = gr.Interface(
    fn=chat,
    inputs="text",
    outputs="text",
    title="Llama3 Chatbot"
)

demo.launch()
```

Useful Ollama Commands

List models:

```
ollama list
```

Delete model:

```
ollama rm llama3
```

Run model:

```
ollama run llama3
```

Download model:

ollama pull llama3

Show model info:

ollama show llama3

Recommended Models

Model	Size	Recommended
llama3.2:1b	~1 GB	⭐ Best for 4 GB RAM Chromebooks
llama3.2:3b	~2 GB	⭐ Best for 8 GB RAM Chromebooks
llama3	~4.7 GB	Good if you have 16 GB RAM
gemma3	~3–5 GB	Google's open model
qwen3	~4 GB	Excellent coding and reasoning

Before you install

Please tell me:

1. **How much RAM does your Chromebook have?** (4 GB, 8 GB, or 16 GB?)
2. **How much free Linux storage do you have?**
3. **What is the output of:**

free -h

and

df -h

With that information, I can recommend the best model (for example, `llama3.2:1b` for lower-memory devices or a larger model if your Chromebook can handle it).