

P2000 Storage Array Administration

Document Revision History

Project Name: P2000 Storage Array Administration

Document Status (e.g. Draft, Final, Release #): Final

Change Request# (Optional)	Document Version	Date	Prepared / Modified by	Reviewed by	Approved by	Section and Text Revised
Release	R.01.00	1/07/2020	Sulthan Sharief K S	Babu, Mahesh	S, Sankar Ganesh	
Review	R.01.01	12/05/2030	Sulthan Sharief K S	Babu, Mahesh	S, Sankar Ganesh	




P2000 Storage Array Administration

The P2000 storage has dual controllers as shown in the figure below. Total 4 FC host ports (2 on each controller). Each controller has management network port for accessing the Storage management utility. We can add the disk enclosures in this if we need to expand the disk capacity.




The SMU can access from any host which is in the same network as P2000. We need to open the internet explorer and type the IP of the controller A or B. The login page will appear and provide the User ID and password.

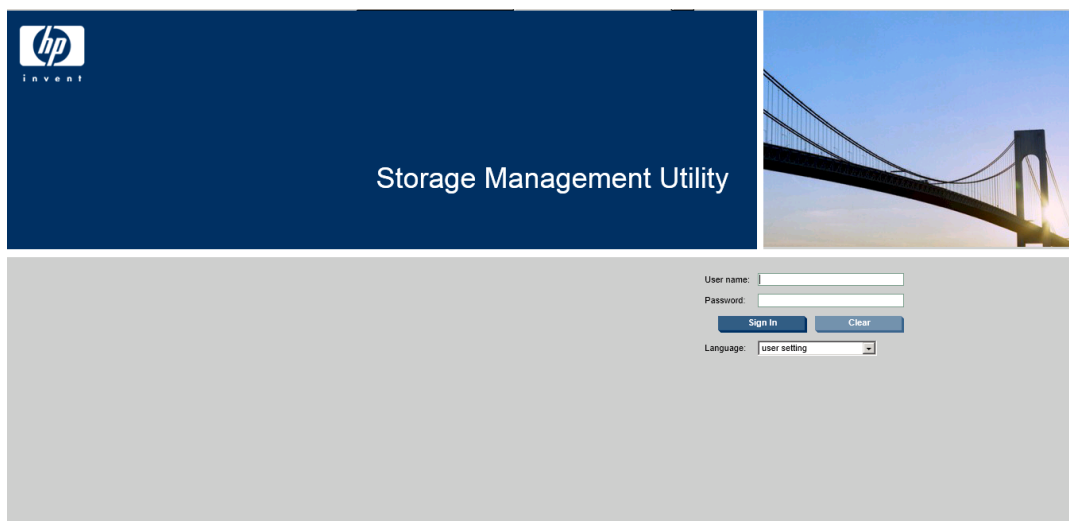


The basic operation steps are given below with screens shots.

Adding the Host.

To add the host first we need to complete the zone for the host from the SAN switch side. Once the zone is done successfully, we will be able to see both the WWN of the host under the "Host" section in SMU. To rename the host, right click on the WWN and select the "Rename Host" as shown in the figure.

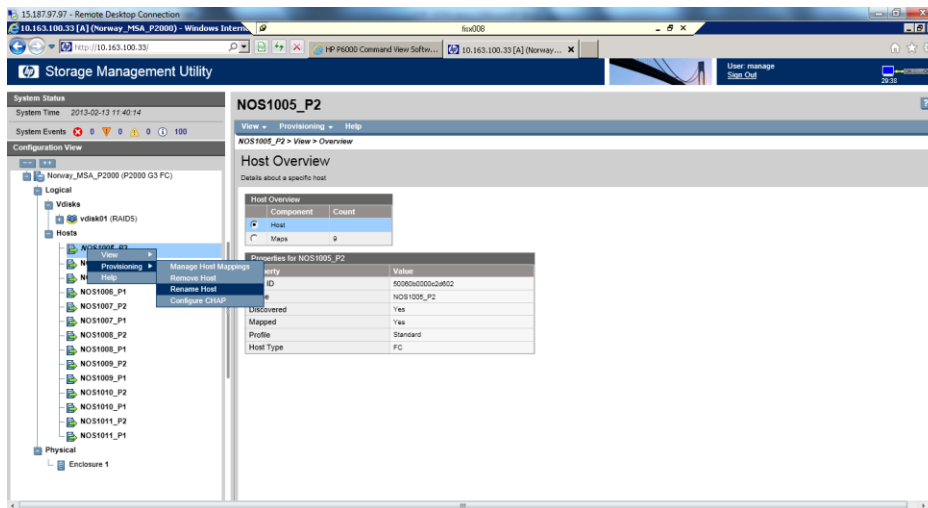


Give the name according to the Host port (e.g. NOS1005_P2 for second HBA port). Also select the profile. (For Windows, VMware and Linux use "Standard".)

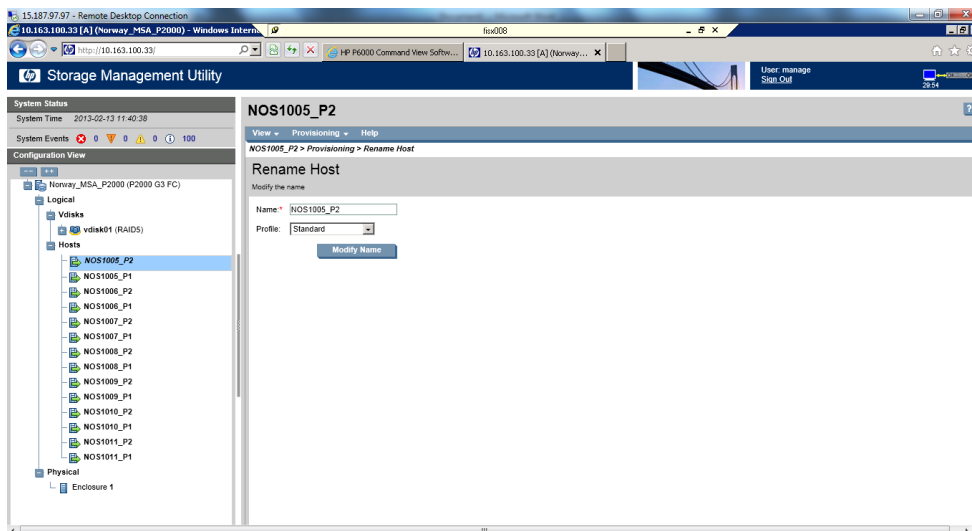


VDSIK creation.

To create the VDISK, right click on VDISK in SMU and select the "Create Vdisk" option.

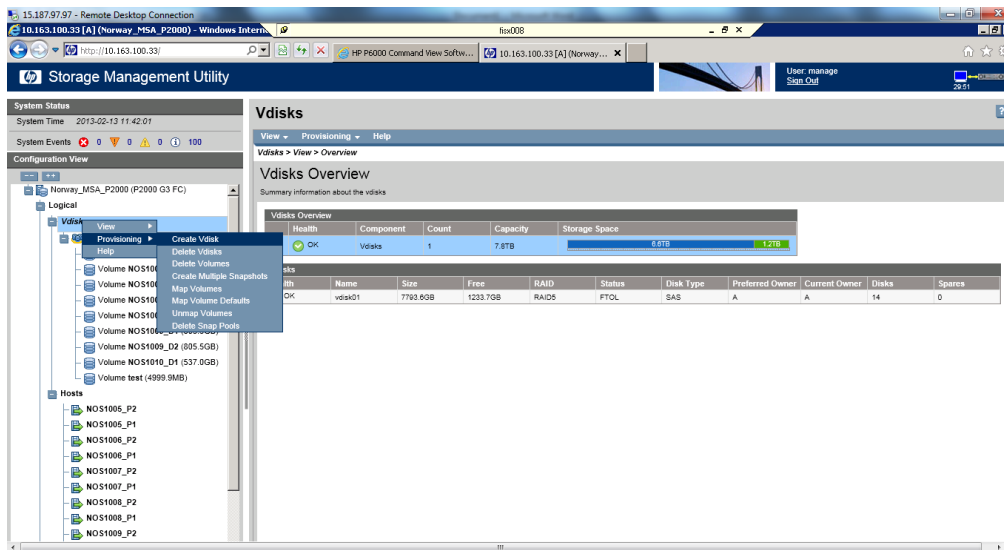


Provide the Vdisk name, RAID level. Then select the disk which needs to add in the Vdisk.

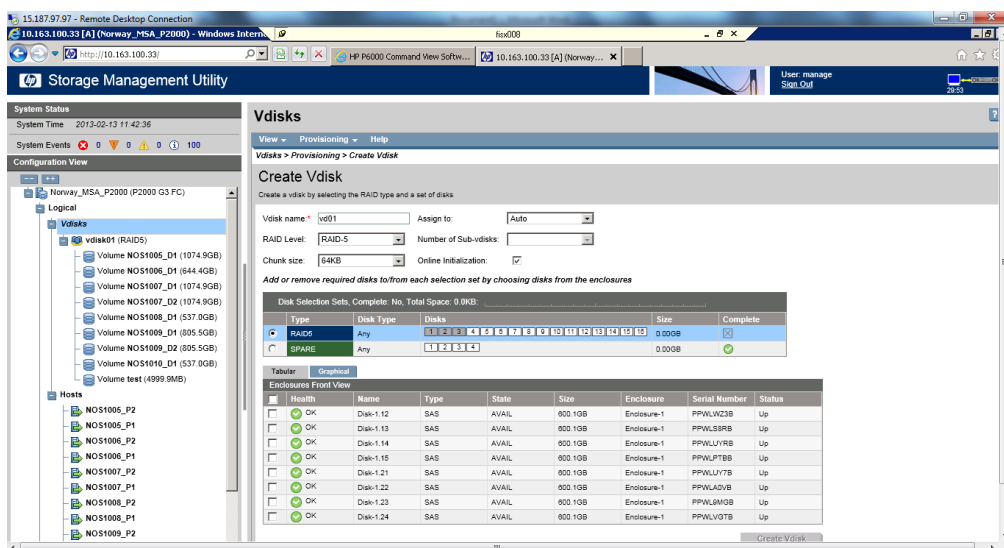



Volume Creation

To create Volume, select the “Create Volume “option from the SMU as shown below.

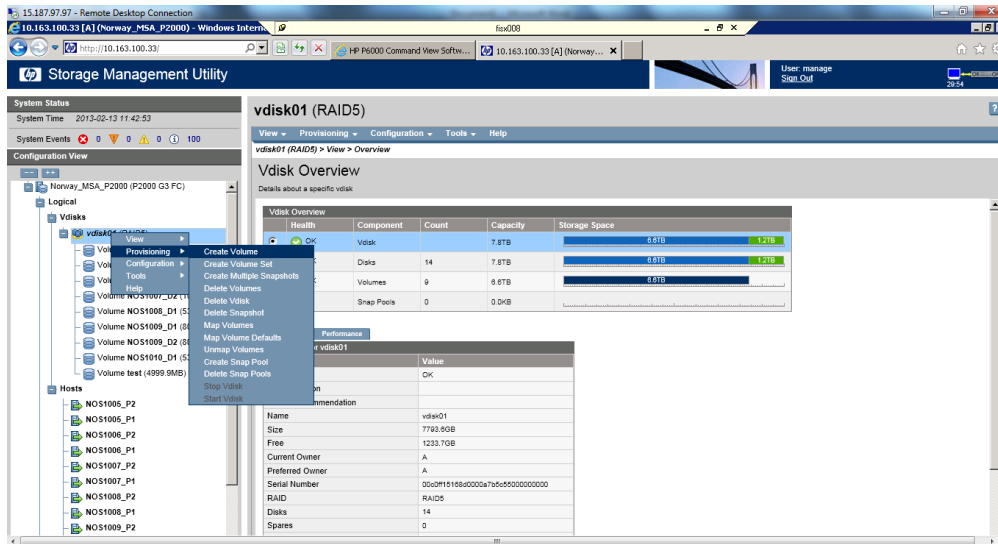


Give the Volume name and the size . Remove the tick mark from the “Map” and apply for Volume creation as shown in the below screen shot.

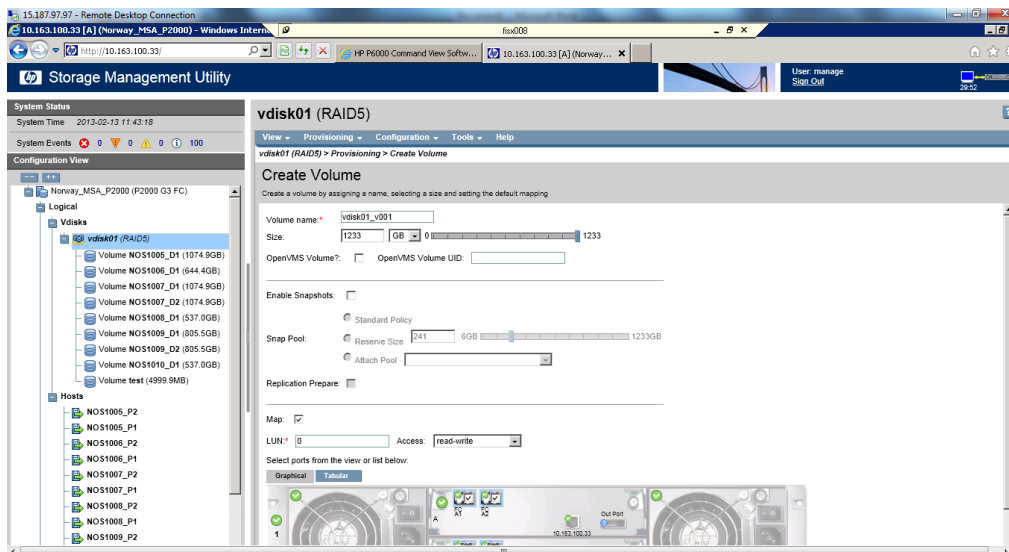


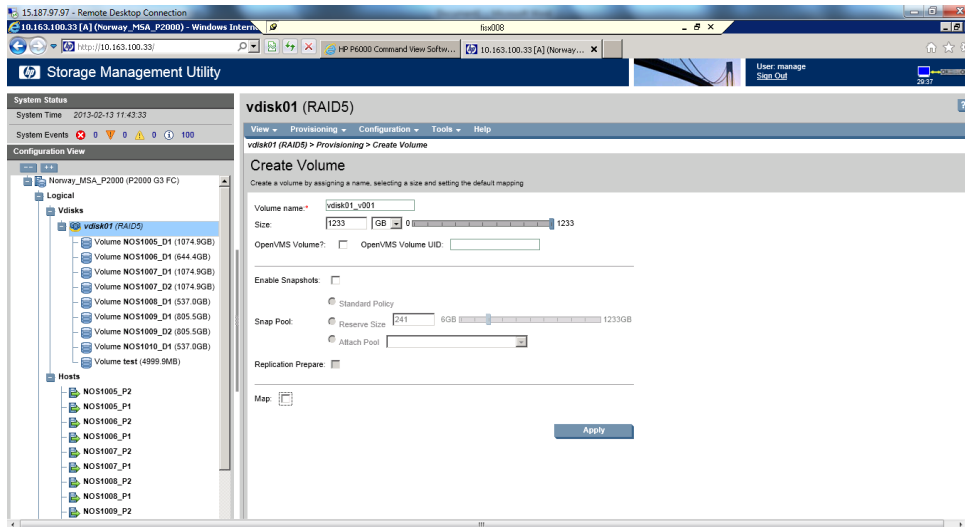

Volume set creation


To create a volume set, right click on the Vdisk and select the “Create Volume set”. Enter the volume set name, size and then enter how many volumes required. For e.g. if we need 10GB Volume of 5 No, then we can use this option .

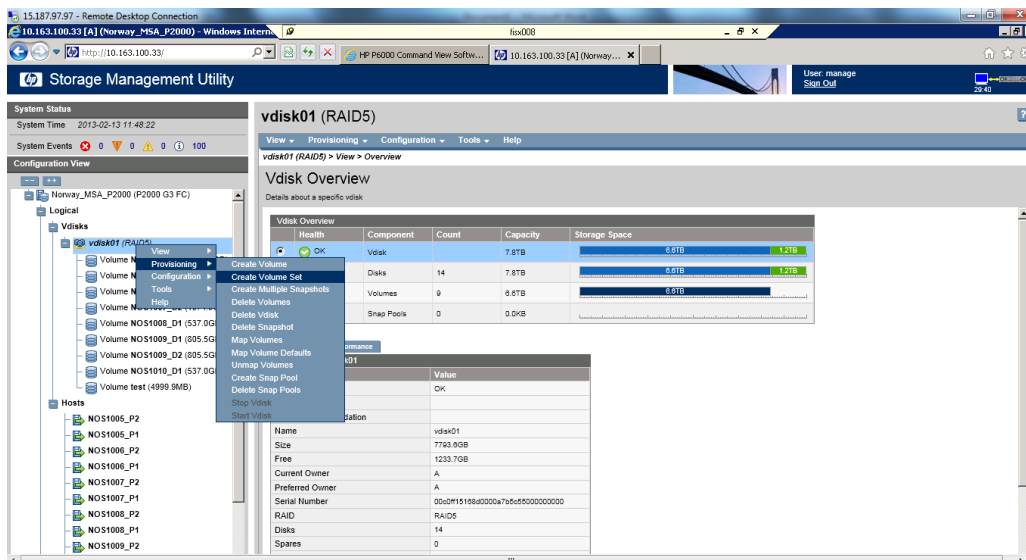


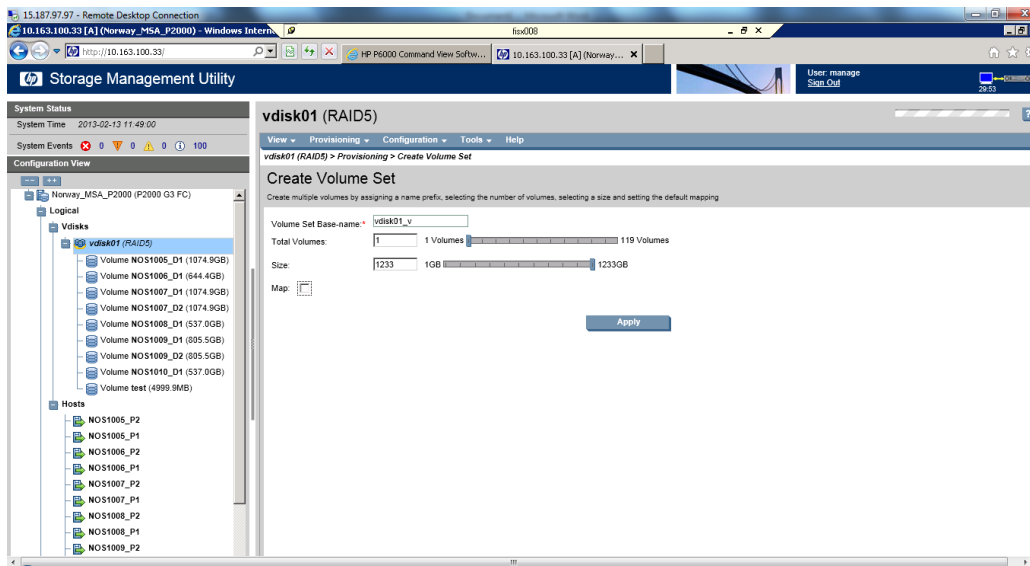

Volume mapping to the Host.


Once the volume and Host is created, we need to map that volume to the host. Select the particular volume and right click and select the “Explicit Mappings”. Once it is opened, select the Host port (Needs to map on both the HBA ports separately.) and select the” Map” and provide the LUN ID. Once it is done , the volume will appear on the host.

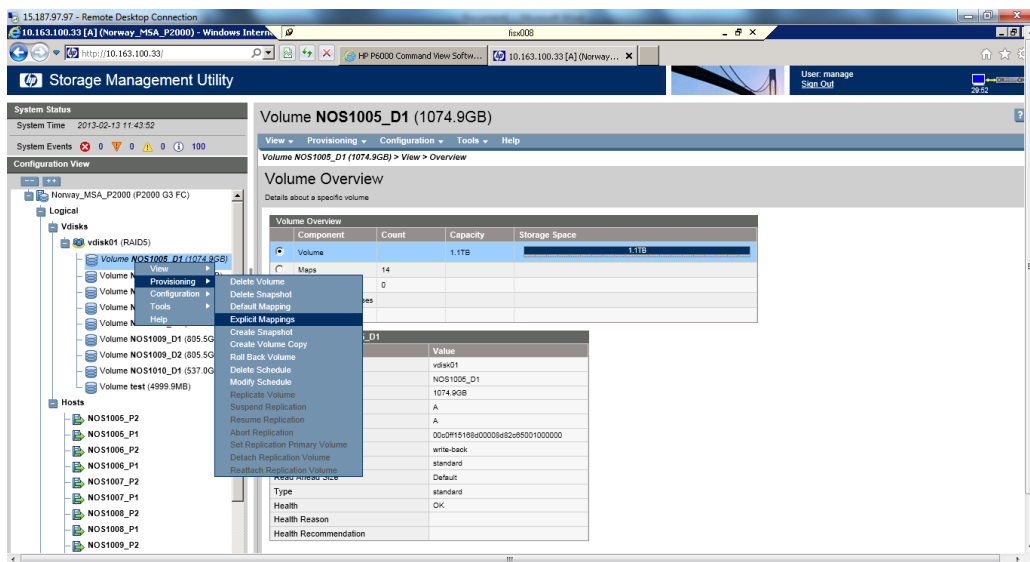


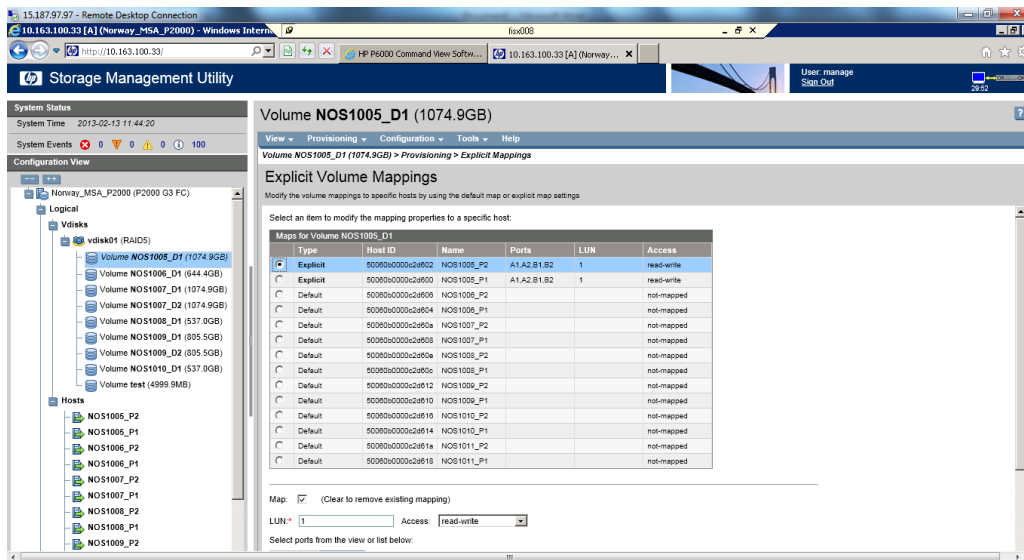

Volume expansion


The volume expansion step is shown below in the screen shot.

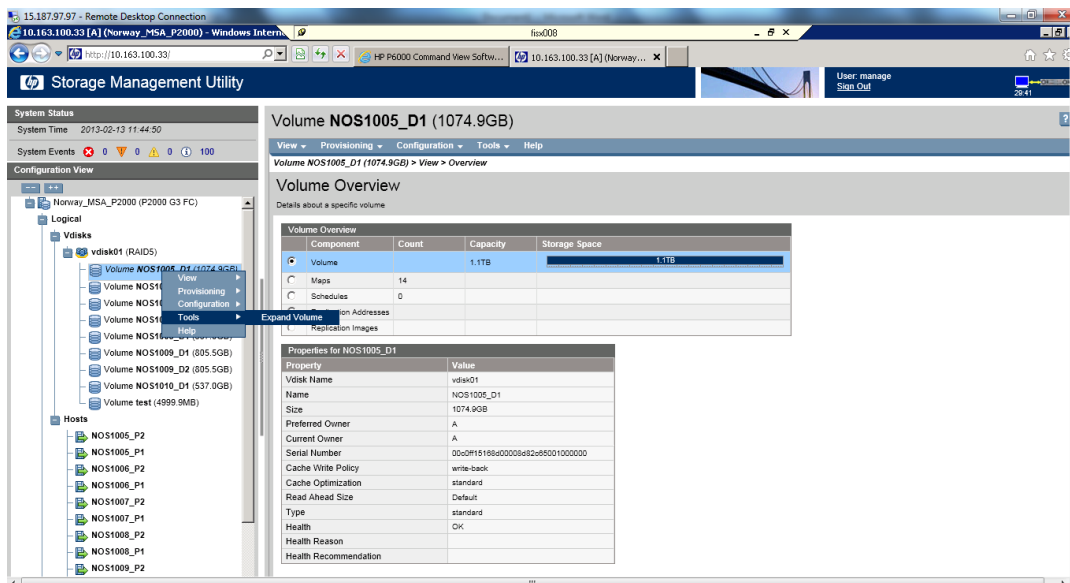


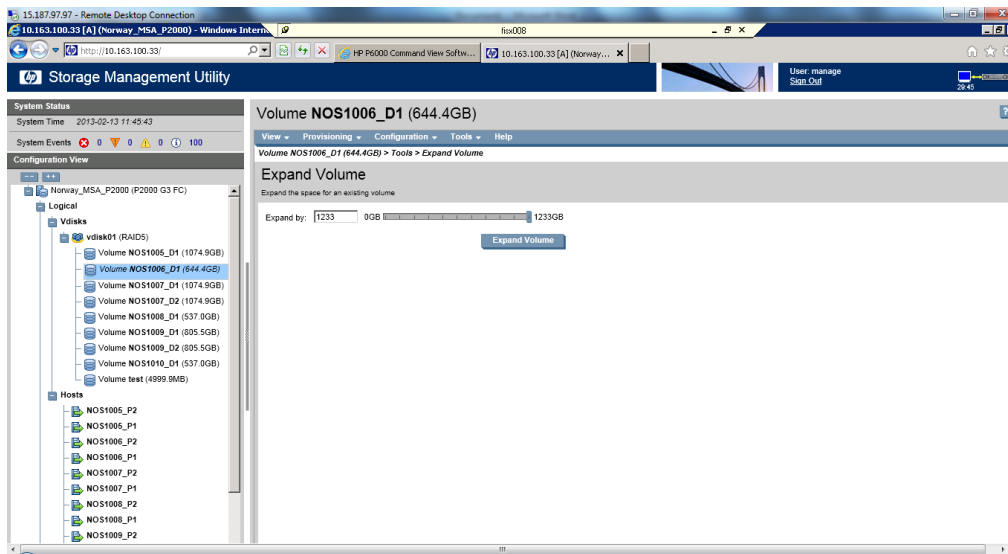

Verify the Event logs

Select the storage and click on View menu. Select the Event log.

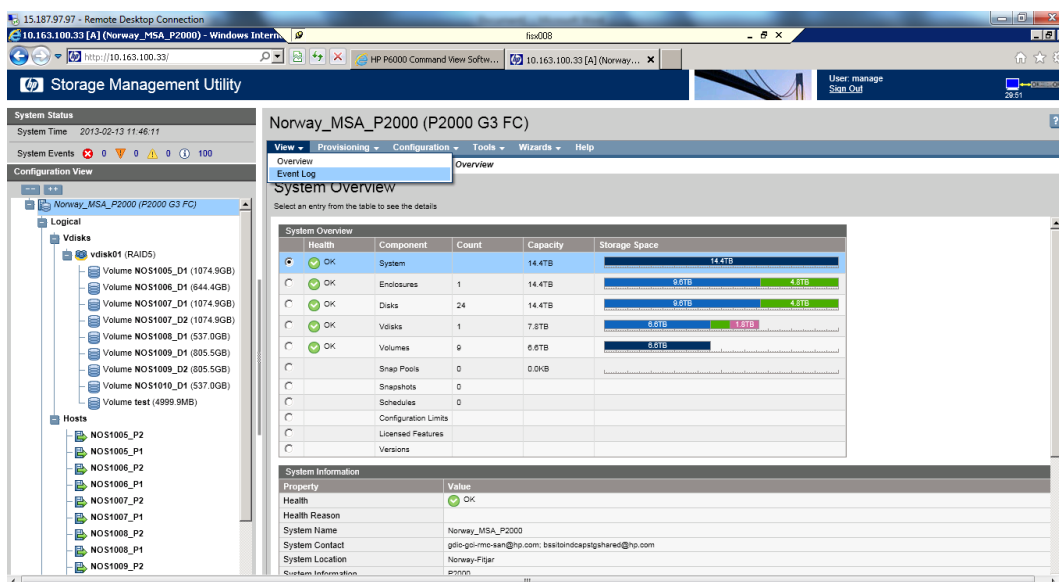

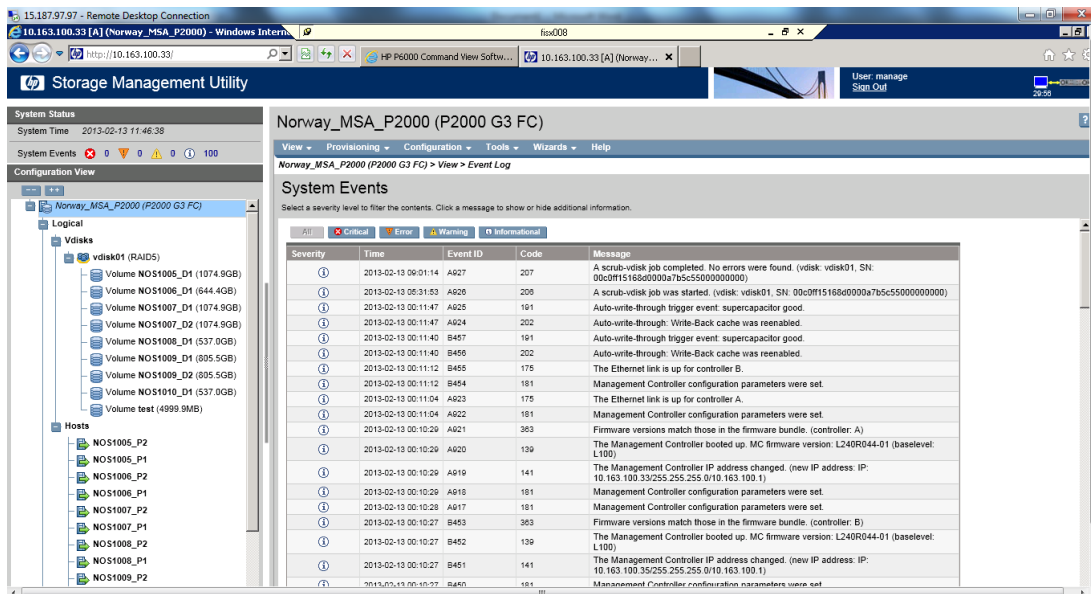

How to collect the support logs

To collect the support logs for HPRC team, select the “Tools” menu and then “Save logs”. Enter the name and click on save logs. This will collect all the logs including the P2000 Hardware configuration and we can save it on the local server disk.

