

Using Single-Row Functions to Customize Output

Working with Dates

- The Oracle Database stores dates in an internal numeric format: century, year, month, day, hours, minutes, and seconds.
- The default date display format is DD-MON-RR.
 - Enables you to store 21st-century dates in the 20th century by specifying only the last two digits of the year
 - Enables you to store 20th-century dates in the 21st century in the same way

```
SELECT last_name, hire_date
FROM   employees
WHERE  hire_date < '01-FEB-88';
```

	LAST_NAME	HIRE_DATE
1	Whalen	17-SEP-87
2	King	17-JUN-87

RR Date Format

Current Year	Specified Date	RR Format	YY Format
1995	27-OCT-95	1995	1995
1995	27-OCT-17	2017	1917
2001	27-OCT-17	2017	2017
2001	27-OCT-95	1995	2095

		If the specified two-digit year is:	
		0–49	50–99
If two digits of the current year are:	0–49	The return date is in the current century	The return date is in the century before the current one
	50–99	The return date is in the century after the current one	The return date is in the current century

Using the SYSDATE Function

SYSDATE is a function that returns:

- Date
- Time

```
SELECT sysdate  
FROM dual;
```

	SYSDATE
1	10-JUN-09

Arithmetic with Dates

- Add or subtract a number to or from a date for a resultant date value.
- Subtract two dates to find the number of days between those dates.
- Add hours to a date by dividing the number of hours by 24.

Using Arithmetic Operators with Dates

```
SELECT last_name, (SYSDATE-hire_date)/7 AS WEEKS  
FROM employees  
WHERE department_id = 90;
```

	LAST_NAME	WEEKS
1	King	1147.102432208994708994708994708995
2	Kochhar	1028.959575066137566137566137566138
3	De Haan	856.102432208994708994708994708995

Using Date Functions

Function	Result
MONTHS_BETWEEN ('01-SEP-95', '11-JAN-94')	19.6774194
ADD_MONTHS ('31-JAN-96', 1)	'29-FEB-96'
NEXT_DAY ('01-SEP-95', 'FRIDAY')	'08-SEP-95'
LAST_DAY ('01-FEB-95')	'28-FEB-95'

Using ROUND and TRUNC Functions with Dates

Assume SYSDATE = '25-JUL-03':


Function	Result
ROUND (SYSDATE, 'MONTH')	01-AUG-03
ROUND (SYSDATE , 'YEAR')	01-JAN-04
TRUNC (SYSDATE , 'MONTH')	01-JUL-03
TRUNC (SYSDATE , 'YEAR')	01-JAN-03

Implicit Data Type Conversion

For expression evaluation, the Oracle server can automatically convert the following:

From	To
NUMBER	VARCHAR2 or CHAR
DATE	VARCHAR2 or CHAR

Explicit Data Type Conversion

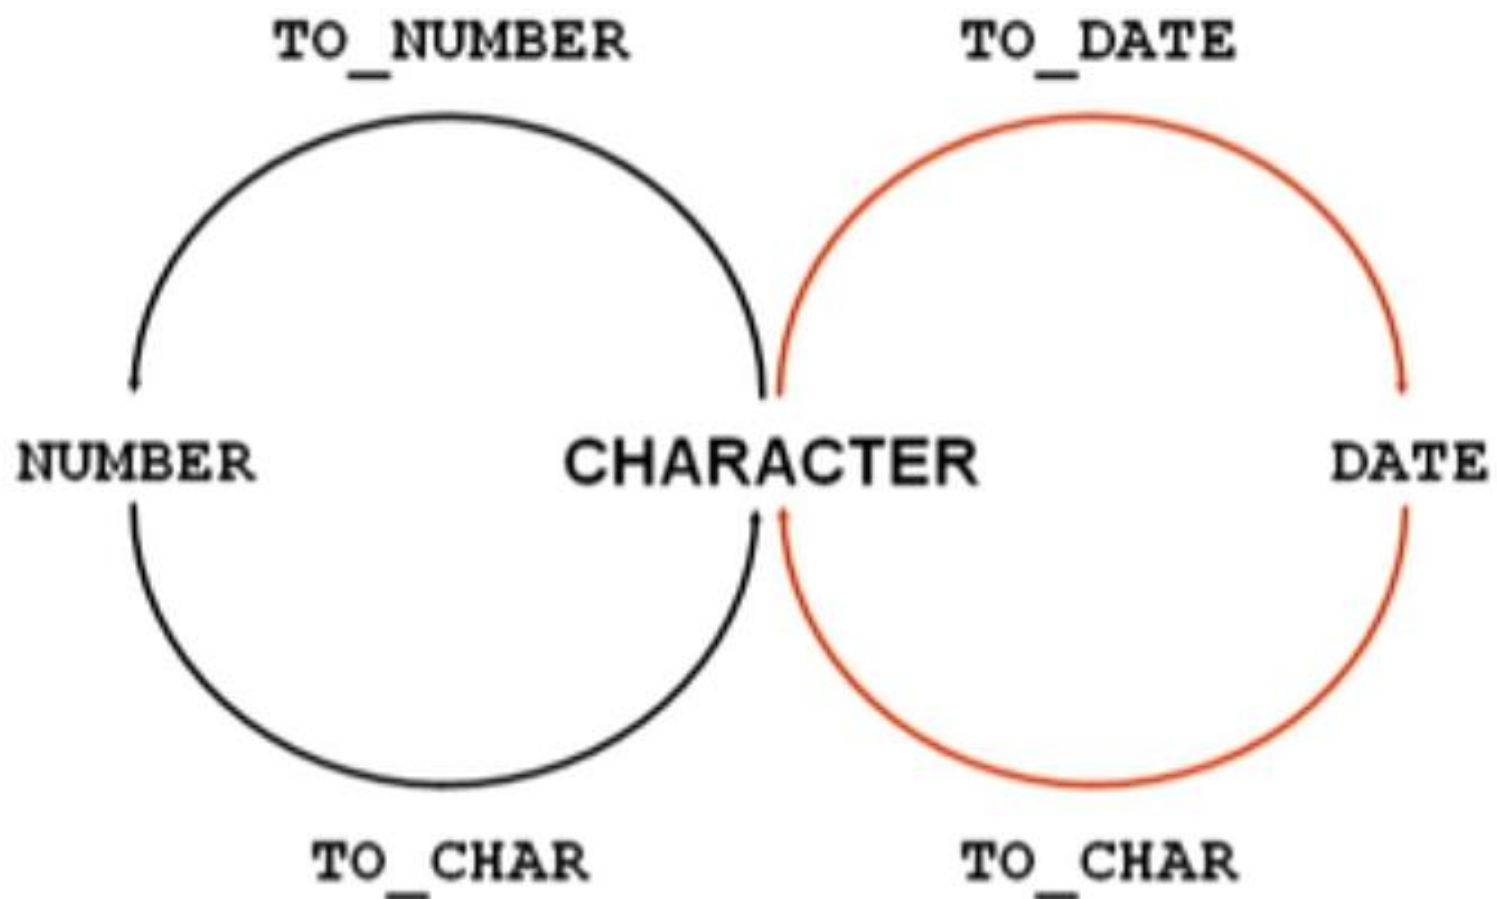

Using the TO_CHAR Function with Dates

```
TO_CHAR(date, 'format_model') 
```

The format model:

- Must be enclosed with single quotation marks
- Is case-sensitive
- Can include any valid date format element
- Has an `fm` element to remove padded blanks or suppress leading zeros
- Is separated from the date value by a comma

Elements of the Date Format Model

Element	Result
YYYY	Full year in numbers
YEAR	Year spelled out (in English)
MM	Two-digit value for the month
MONTH	Full name of the month
MON	Three-letter abbreviation of the month
DY	Three-letter abbreviation of the day of the week
DAY	Full name of the day of the week
DD	Numeric day of the month

Elements of the Date Format Model

- Time elements format the time portion of the date:

HH24:MI:SS AM	15:45:32 PM
---------------	-------------

- Add character strings by enclosing them with double quotation marks:

DD "of" MONTH	12 of OCTOBER
---------------	---------------

- Number suffixes spell out numbers:

ddspth	fourteenth
--------	------------

Using the TO_CHAR Function with Dates

```
SELECT last_name,  
       TO_CHAR(hire_date, 'fmDD Month YYYY')  
       AS HIREDATE  
FROM   employees;
```

	LAST_NAME	HIREDATE
1	Whalen	17 September 1987
2	Hartstein	17 February 1996
3	Fay	17 August 1997
4	Higgins	7 June 1994
5	Gietz	7 June 1994
6	King	17 June 1987
7	Kochhar	21 September 1989
8	De Haan	13 January 1993
9	Hunold	3 January 1990
10	Ernst	21 May 1991

...

Using the TO_CHAR Function with Numbers

```
TO_CHAR(number, 'format_model')  


```

These are some of the format elements that you can use with the TO_CHAR function to display a number value as a character:

Element	Result
9	Represents a number
0	Forces a zero to be displayed
\$	Places a floating dollar sign
L	Uses the floating local currency symbol
.	Prints a decimal point
,	Prints a comma as a thousands indicator

Using the TO_CHAR Function with Numbers

```
SELECT TO_CHAR(salary, '$99,999.00') SALARY  
FROM   employees  
WHERE  last_name = 'Ernst';
```

	 SALARY
1	\$6,000.00

Using the TO_CHAR and TO_DATE Function with the RR Date Format

To find employees hired before 1990, use the RR date format, which produces the same results whether the command is run in 1999 or now:

```
SELECT last_name, TO_CHAR(hire_date, 'DD-Mon-YYYY')  
FROM employees  
WHERE hire_date < TO_DATE('01-Jan-90', 'DD-Mon-RR');
```

	LAST_NAME	TO_CHAR(HIRE_DATE,'DD-MON-YYYY')
1	Whalen	17-Sep-1987
2	King	17-Jun-1987
3	Kochhar	21-Sep-1989