

Table with 4 columns: 1. BBGRXXX, 2. Hæka?, 3. Rúnnað, 4. 1.0000000. Rows include binary values and hex registers like %rax, %rcx, %rdx, %rbx, %rsi, %rdi, %rsp, %rbp, %r8, %r9, %r10, %r11, %r12, %r13, %r14, %r15.

Table with 4 columns: cmpq b, a, eins og að reikna a-b án skilagildis, %rcx, 0xf000, 0x0100. Rows include instructions like jmp, je, jne, js, jns, jg, jge, jle, ja, jb and their descriptions.

Table with 3 columns: Segð, Vistfangsútreikningur, Vistfang. Rows include instructions like movb, movw, movl, movq, movzsd, movssd and their bit/byte calculations.

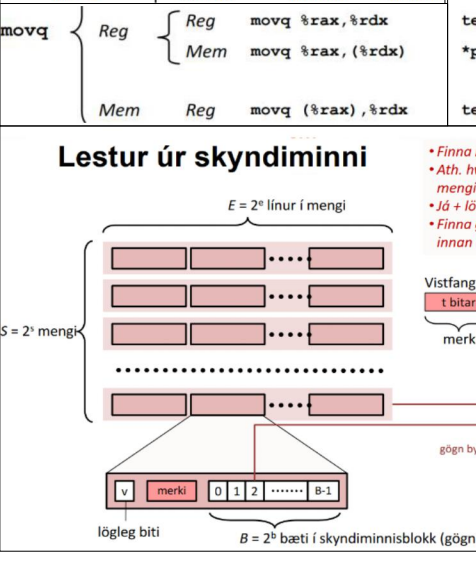


Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

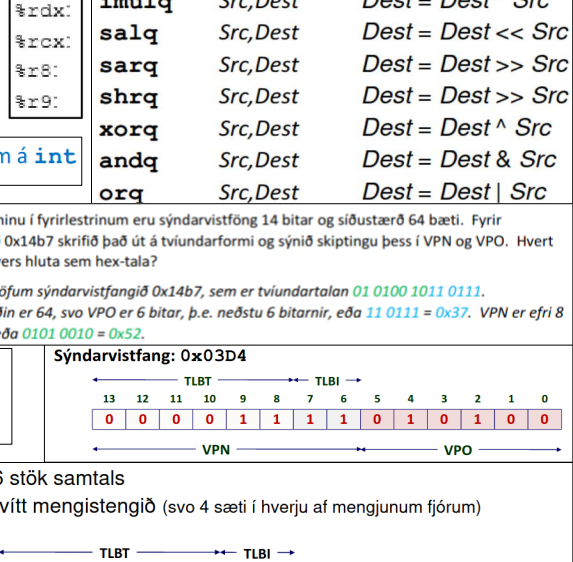


Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.

Table with 2 columns: int (*p)[3], p er 13 staka fylki af bendum á int. Rows include instructions like movq, movzsd, movssd and their bit/byte calculations.