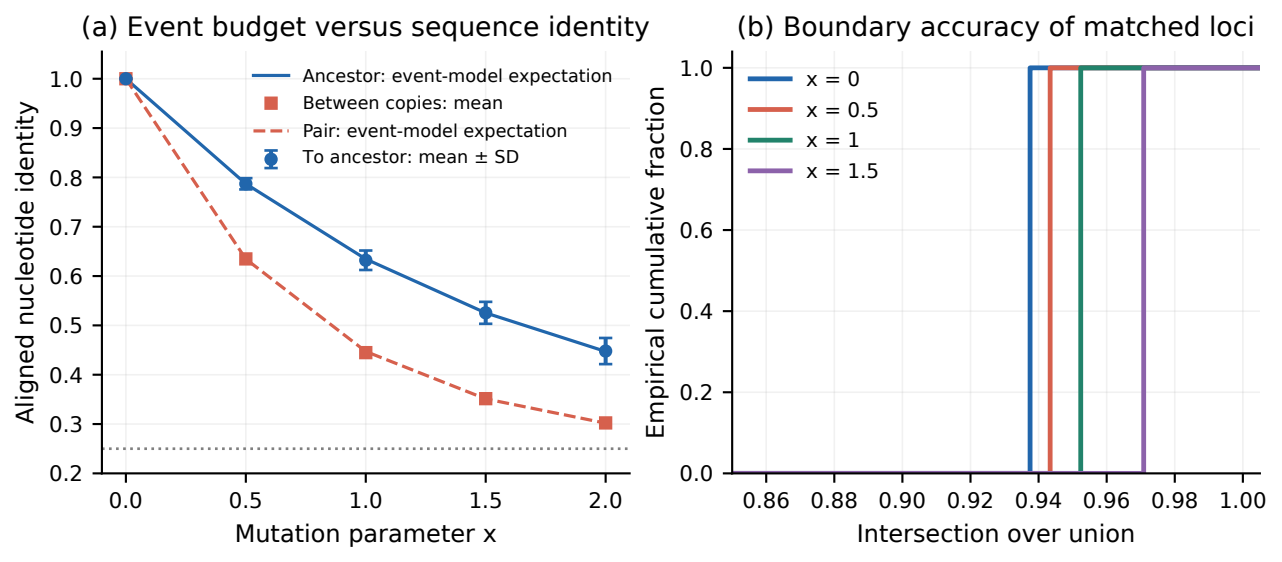
(a) Event budget versus sequence identity
Aligned nucleotide identity
Mutation parameter x
Ancestor: event-model expectation
Between copies: mean
Pair: event-model expectation
To ancestor: mean ± SD
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.0
0.5
1.0
1.5
2.0
(b) Boundary accuracy of matched loci
Empirical cumulative fraction
Intersection over union
x = 0
x = 0.5
x = 1
x = 1.5
1.0
0.8
0.6
0.4
0.2
0.0
0.86
0.88
0.90
0.92
0.94
0.96
0.98
1.00