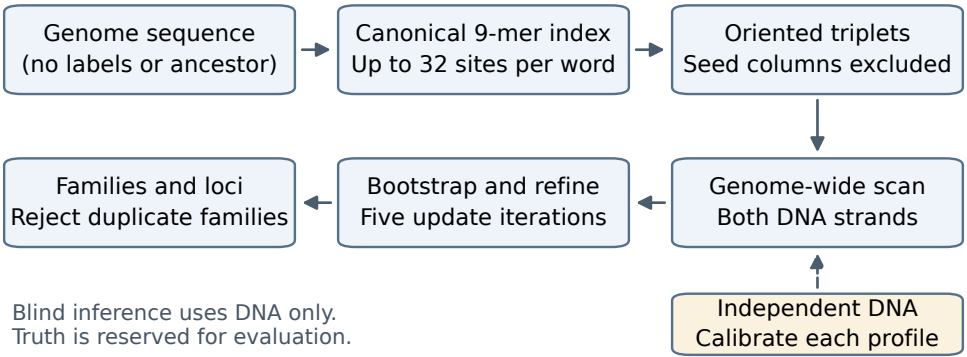
Genome sequence
(no labels or ancestor)
Canonical 9-mer index
Up to 32 sites per word
Oriented triplets
Seed columns excluded
Genome-wide scan
Both DNA strands
Bootstrap and refine
Five update iterations
Families and loci
Reject duplicate families
Independent DNA
Calibrate each profile
Blind inference uses DNA only.
Truth is reserved for evaluation.