
# System architecture


Linked profiles and available sensors enter fitted models through causal features.

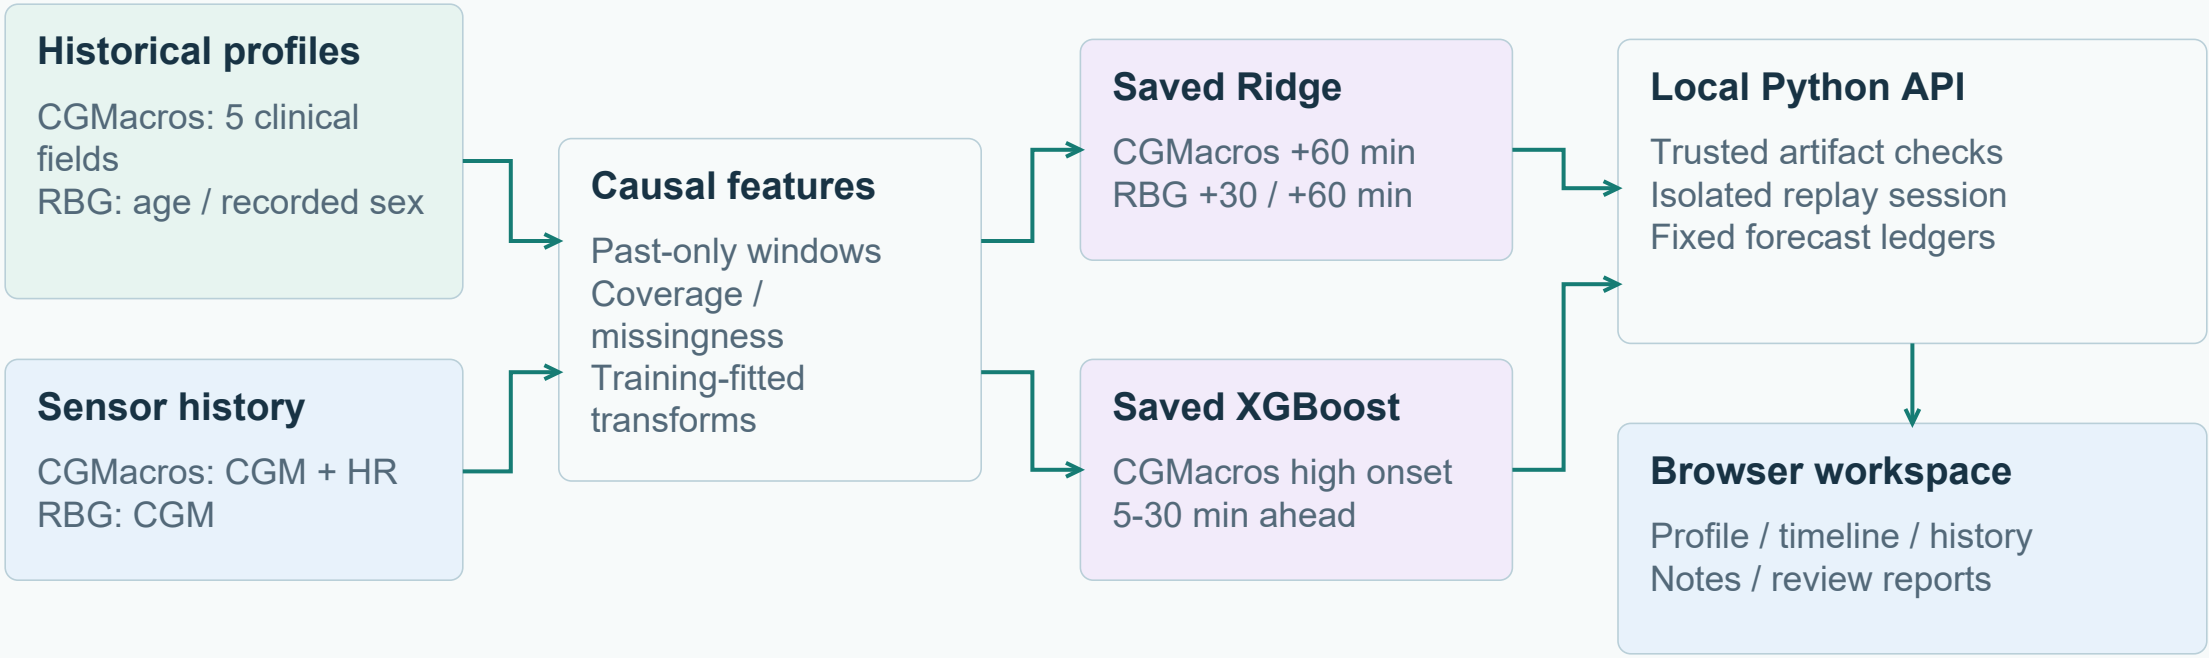


Source records and models stay local. Public code, protocols and aggregate results are shared.

# Clinical and sensor fusion


CGMacros links both streams by patient ID; historical profile availability is assumed.

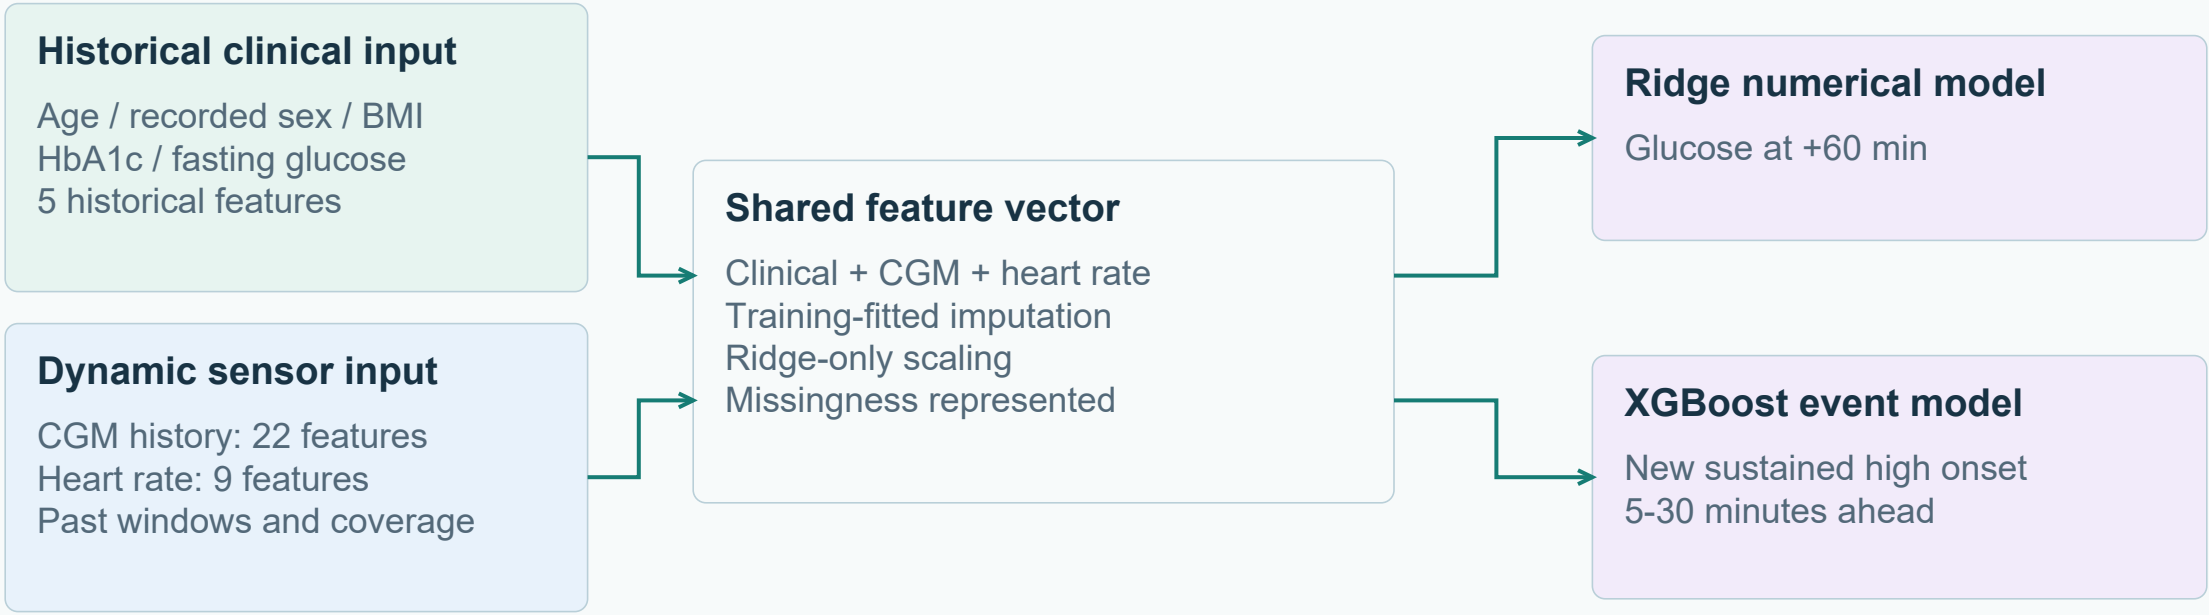


Fusion is implemented. A useful predictive advantage from clinical inputs has not been established.

# Forecast timing and outcome reveal

Inputs are past-only; predictions stay fixed and future target readings remain hidden.

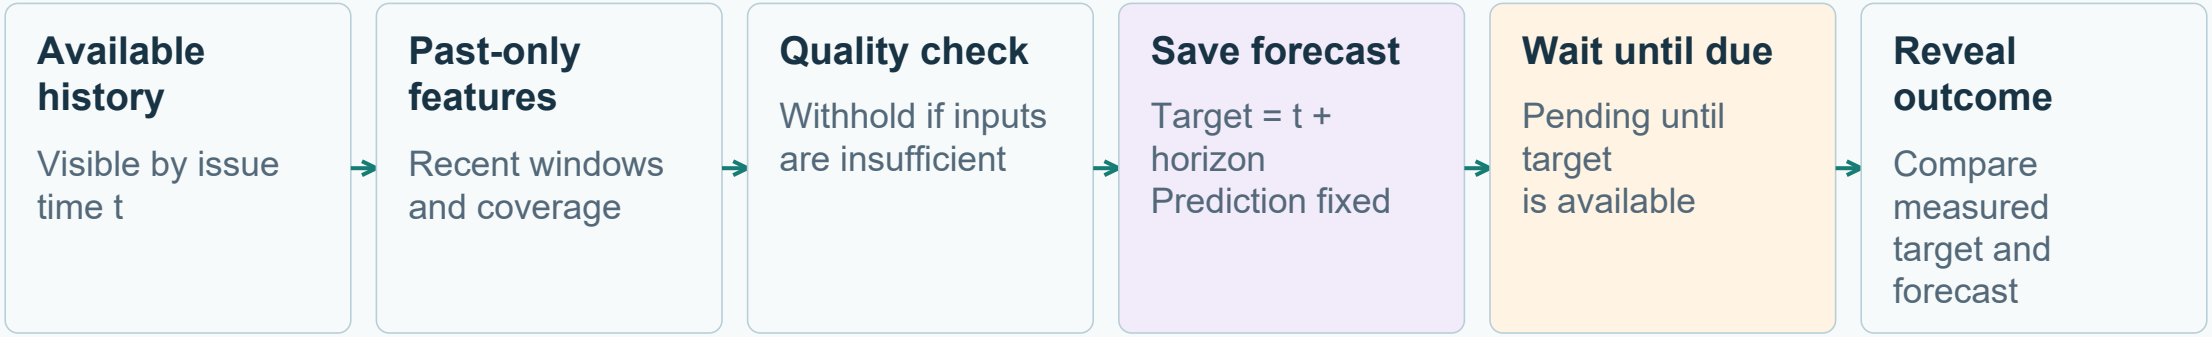



## Availability rules

CGMacros: input cutoff t; target revealed at t + horizon
RBG: input cutoff t - 5 min; target revealed at t + horizon + 5 min

Withheld forecasts are not evaluated. Missing targets stay missing. Event research has a separate +45-minute outcome rule.

# Clinician review workflow

Inspect available evidence, record questions and retain user-entered follow-up tasks.

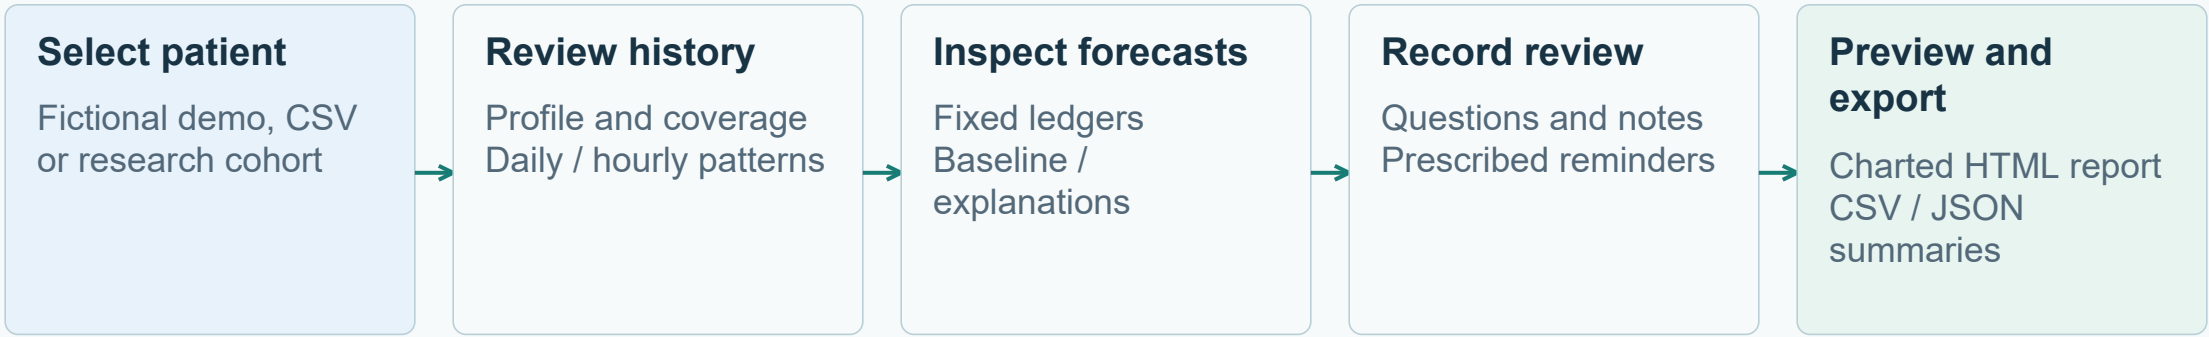


## Available in the current build

Synthetic worked example / Local CSV import / Sensor gap inspection
Observed day comparisons / User-entered plans / Printable review reports

Notes do not enter inference. The three-day plan is user-entered; medication times and doses are not predicted.