
If there was a server, loginStatus could be switched to loginSessionID (make it -1 for no active session) and whatever id else

+ EXPORT\_Lates()

+ EXPORT\_Sanctions()

bit with Format:
+ CREATE\_Sanction()
name, surname, className, classDegree, townshipName, cardUID, sanctionType, sanct

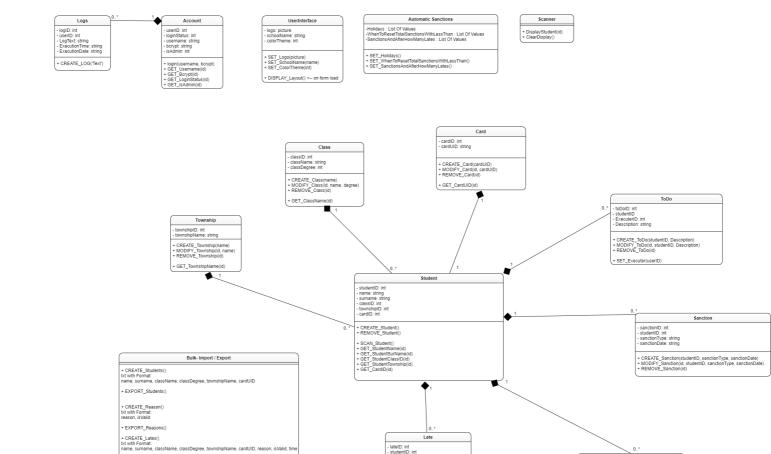

- lateID: int - studentID: int - reasonID: int - lateTime: string - lateDate: string

- reasonID: int - reason: string - isValid: int

CREATE\_Late(studentID, reasonID)
 MODIFY\_Late(id, studentID, reasonID)
 REMOVE\_Late(id)

Reason

CREATE\_Reason(reason, isValid)
 MODIFY\_Reason(id, reason, isValid)
 REMOVE\_Reason(id)
 GET\_isValid(id)

EarlyOn School

CREATE\_EarlyOnSchool(studentID, DaysLeft)
 MODIFY\_EarlyOnSchool(id, studentID, DaysLeft)
 REMOVE\_EarlyOnSchool(id)

earlyOnSchoolID: int
 studentID: int
 DaysLeft: int

présent: string
 startingDate: string

+ SET\_Present(id) + SET\_Abscent(id)