

Phys499A Report

Thomas Belvin

October 2023

Introduction

In this dissertation [1], they use a matrix of sensor nodes to detect massive particles by measuring and mapping the displacement of the nodes. The goal of this report is to see if a similar concept is achievable by detecting waves on a wire. This could potentially allow for a much simpler sensing matrix as each row of individual nodes would be replaced with a single wire. A massive particle passing by a wire with sufficient speed will provide an impulse which will create wave pulses along the wire that may be detectable by force sensors. By analyzing these wave pulses we may be able to determine properties of the inciting particle.

This could definitely be written better xd

Coordinate System

A massive particle moving past a wire will apply a force, \mathbf{F} , to the wire

$$\mathbf{F} = \frac{GM\partial m}{r^2} \hat{\mathbf{r}} \quad (1)$$

where M is the mass of the inciting particle, ∂m is the mass of a small segment of the wire, and \mathbf{r} is the vector between the particle and wire segment.

If the particle is moving at a sufficiently fast speed, v , the interaction will apply an impulse to the wire, with the particle track able to be approximated as a straight line. We can define the coordinate system such that the wire lies on the $\hat{\mathbf{z}}$ axes and the distance of closest approach between the wire and the particle track, b , is centered at $z = 0$.

The vector, \mathbf{r} , is the distance between the particle at a time, t , and a point on the wire, z .

$$\begin{aligned} \mathbf{r} = & (b \cos(\phi) + tv \sin(\theta) \sin(\phi)) \hat{\mathbf{x}} \\ & + (b \sin(\phi) - tv \sin(\theta) \cos(\phi)) \hat{\mathbf{y}} \\ & + (tv \cos(\theta) - z) \hat{\mathbf{z}} \end{aligned} \quad (2)$$

where b is the distance of closest approach between the wire and the particle, ϕ is the angle between particle track and the $\hat{\mathbf{x}}$ axes, and θ is the angle between the particle track and the $\hat{\mathbf{z}}$ axes.

Insert figure of wire and track with coord system labeled?

Impulse and Kinematics

Taking the force, \mathbf{F} (1), applied to a segment of wire by the particle, and integrating over all time gives the impulse, \mathbf{I} ,

$$\begin{aligned}\mathbf{I} = & \frac{2GM\partial m}{v} \frac{(b \cos(\phi) + z \sin(\theta) \cos(\theta) \sin(\phi))}{(b^2 - z^2 \cos^2(\theta) + z^2)} \hat{\mathbf{x}} \\ & + \frac{2GM\partial m}{v} \frac{(b \sin(\phi) - z \sin(\theta) \cos(\theta) \cos(\phi))}{(b^2 - z^2 \cos^2(\theta) + z^2)} \hat{\mathbf{y}} \\ & - \frac{2GM\partial m}{v} \frac{z \sin^2(\theta)}{(b^2 - z^2 \cos^2(\theta) + z^2)} \hat{\mathbf{z}}\end{aligned}\quad (3)$$

Dividing this impulse by the mass of the wire segment, ∂m , we get an equation for initial velocity at every point along the wire, $\dot{\psi}(z, 0)$. We can use this as the initial velocity to solve the wave equation, and doing so yields two travelling wave pulses of equal magnitude moving in opposite directions.

Insert image from animation?

Because of this, we can separate $\dot{\psi}(z, 0)$ into left and right travelling waves moving along the wire with speed w resulting in

$$\dot{\psi}(z, t) = \dot{\psi}(z, t)_L + \dot{\psi}(z, t)_R \quad (4)$$

$$\begin{aligned}\dot{\psi}_x(z, t)_R &= \frac{GM}{v} \frac{b \cos(\phi) + (z + wt) \sin(\theta) \cos(\theta) \sin(\phi)}{b^2 - (z + wt)^2 \sin^2(\theta)} \\ \dot{\psi}_y(z, t)_R &= \frac{GM}{v} \frac{(b \sin(\phi) - (z - wt) \sin(\theta) \cos(\theta) \cos(\phi))}{(b^2 - (z - wt)^2 \sin^2(\theta))} \\ \dot{\psi}_z(z, t)_R &= \frac{GM}{v} \frac{(z - wt) \sin^2(\theta)}{(b^2 - (z - wt)^2 \sin^2(\theta))}\end{aligned}$$

Where the left moving wave pulse has the same form but w has the opposite sign. It should be kept in mind that $\dot{\psi}_x$ and $\dot{\psi}_y$ are transverse/shear waves and may have a different wavespeed, w , than the longitudinal/pressure waves ($\dot{\psi}_z$).

Taking the time derivatives of $\dot{\psi}$ gives us the accelerations of the wavepulses,

$\ddot{\psi}$

$$\ddot{\psi}(z, t) = \ddot{\psi}(z, t)_L + \ddot{\psi}(z, t)_R \quad (5)$$

$$\begin{aligned} \ddot{\psi}_x(z, t)_R = & - \frac{GMw \sin(\theta) \cos(\theta) \sin(\phi)}{v \left(b^2 + \sin^2(\theta)(z - wt)^2 \right)} \\ & + \frac{2GMw \sin^2(\theta)(z - wt)(b \cos(\phi) + \sin(\theta) \cos(\theta) \sin(\phi)(z - wt))}{v \left(b^2 + \sin^2(\theta)(z - wt)^2 \right)^2} \end{aligned} \quad (6)$$

$$\begin{aligned} \ddot{\psi}_y(z, t)_R = & \frac{GMw \sin(\theta) \cos(\theta) \cos(\phi)}{v \left(b^2 + \sin^2(\theta)(z - wt)^2 \right)} \\ & + \frac{2GMw \sin^2(\theta)(z - wt)(b \sin(\phi) - \sin(\theta) \cos(\theta) \cos(\phi)(z - wt))}{v \left(b^2 + \sin^2(\theta)(z - wt)^2 \right)^2} \end{aligned} \quad (7)$$

$$\ddot{\psi}_y(z, t)_R = \frac{GMw \sin^2(\theta)}{v \left(b^2 + \sin^2(\theta)(z + wt)^2 \right)} - \frac{2GMw \sin^4(\theta)(z - wt)^2}{v \left(b^2 + \sin^2(\theta)(z + wt)^2 \right)^2} \quad (8)$$

The left wave pulse accelerations are the same as the right with the signs of each fraction and w inverted.

Force Detection

Acceleration on a point

Since the force is directly proportional to the acceleration on a point of the wire, analyzing the acceleration profiles should give insight on what properties of the particle we might be able to determine from measuring the magnitude and direction of the force on a point of the wire. It should be noted that $\frac{GM}{v}$ has been factored out to prevent IEEE imprecision due to the incredibly small numbers.

With $\phi = 90^\circ$ and $\theta = 45^\circ$ we get the following acceleration profiles.

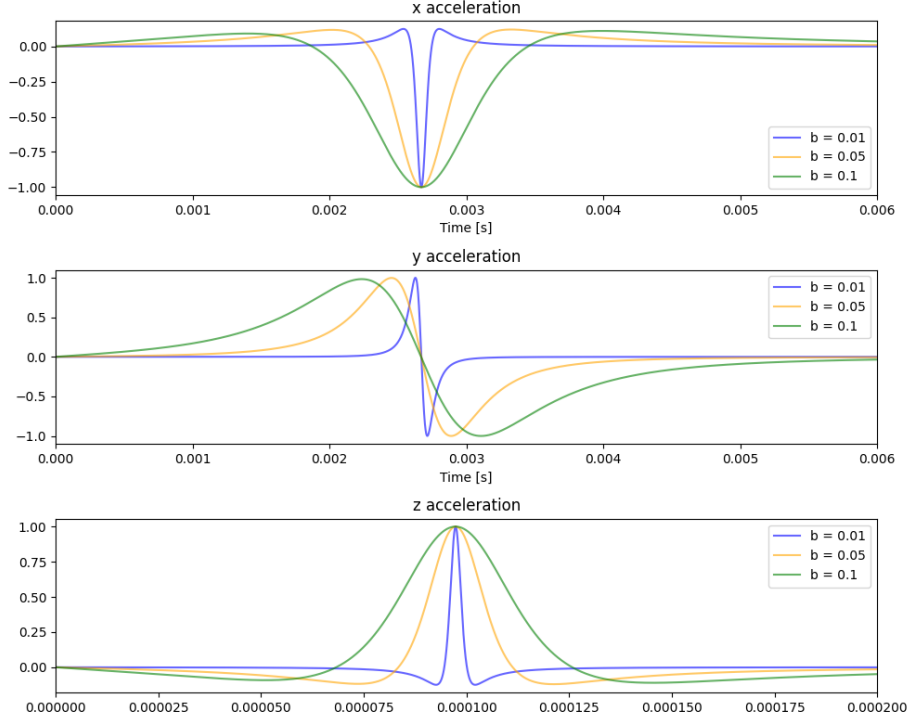


Figure 1: Acceleration normalized to a maximum magnitude of 1.

The unique shape of the accelerations at different values of b means we could fit b , ϕ , and θ from the shape of the curve and find the $\frac{M}{v}$ ratio of the particle from the magnitude of the force measured at a point on the wire.

Recovering Force

In order to see if modern force sensing techniques could detect the induced waves, we need to find the force measured on a segment of the wire. By dimensional analysis, we can estimate mass by taking the Full Width Half Max of the acceleration pulse \times the linear mass density of the wire \times the wavespeed, w . The maximum force (without the $\frac{GM}{v}$ factor) can then be approximated by multiplying this mass with the maximum acceleration in the unnormalized data from 1. This combined with the magnitude of the $\frac{GM}{v}$ component can give us an estimation for how sensitive our force sensors would have to be to detect the waves incited by a massive particle.

Based on a 2015 review [3] most force sensors have a maximum sensitivity of milli-Newtons, with a few being able to detect micro-Newtons. This article from 2017 [2] states that a sensitivity of tens of zepto-Newtons can be achieved using carbon nanotubes and capacitive sensing.

Applying this to figure 1 gives the maximum detected force as around the order of 10^2 to $10^4 \times \frac{GM}{v}$ Newtons or around 10^{-9} to $10^{-7} \times \frac{M}{v}$ once we factor in G . The inciting particle is likely to be travelling somewhere between $220 \frac{km}{s}$ and $3e5 \frac{km}{s}$ leaving us with a force of approximately 10^{-17} to $10^{-12} \times M$ Newtons.

Is there something I can reference for these particle speeds?

In order for this to be detectable with one of the detectors mentioned in [3] we would need a particle mass somewhere on the order of 10^{14} to 10^6 kilograms. With a more detector such as the one from [2] we could perhaps allow particle mass to be as low as 10^{-6} to 10^{-3} kilograms.

Optimizable Parameters

I will tentatively claim that by choosing a wire that maximizes cross-sectional area (increasing Tension and linear mass density) as well as wave speed we can increase the force applied and thus what is detectable, however this requires more analysis to be done next semester.

Other Methods

After reexamination of the project force detection requires displacement and thus analyzing the displacements caused is more likely to lead to a definitive conclusion.

There are also other set ups that could potentially be used to detect the massive particles, though how they could be analyzed would require further examination. These include capacitive sensing between two wires or of a single wire (such as the set up in [2])

Conclusion

It is unlikely that modern force sensing techniques are precise enough to detect the waves incited on a wire by a massive particle.

Bibliography

- [1] Sohitri Gosh. “QUANTUM ENHANCED IMPULSE MEASUREMENTS AND THEIR APPLICATIONS IN SEARCHES FOR DARK MATTER”. PhD thesis. University of Maryland, College Park, 2023.
- [2] J. Moser et al. “Ultrasensitive force detection with a nanotube mechanical resonator”. In: *Nature Nanotechnology* 8.7 (June 2013), pp. 493–496. DOI: 10.1038/nnano.2013.97. URL: <https://doi.org/10.1038/nnano.2013.97>.
- [3] Yuzhang Wei and Qingsong Xu. “An overview of micro-force sensing techniques”. In: *Sensors and Actuators A: Physical* 234 (2015), pp. 359–374. ISSN: 0924-4247. DOI: <https://doi.org/10.1016/j.sna.2015.09.028>. URL: <https://www.sciencedirect.com/science/article/pii/S092442471530145X>.