

ctys-uc-X11(7) Use-Cases for X11

June 28, 2010

Contents

| | | |
|----------|---|----------|
| 1 | Xterm with Interactive bash | 2 |
| 2 | Gnome-Terminal with Interactive bash | 2 |
| 3 | Emacs Session in shell-mode | 3 |
| 4 | Emacs Session with cd | 3 |
| 5 | Single XClock | 3 |
| 6 | SEE ALSO | 4 |
| 7 | AUTHOR | 4 |
| 8 | COPYRIGHT | 4 |

1 Xterm with Interactive bash

This opens a Xterm window with an interactive bash. The "SH" suboption is here mandatory, because the Xterm emulation requires a single-hyphen for it's options, default is "DH".

The default behaviour concerning the terminal emulation is to scan for a gnome-terminal first and prefer it if found, else an xterm emulation will be started by default.

```
ctys -t x11 -a create=l:tstx11 lab00
```

The same by call `CONSOLE:XTERM` alias.

```
ctys -t x11 -a create=l:tstx11,console:xterm lab00
```

The same by call args.

```
ctys -t x11 -a create=l:tstx11,cmd:xterm,sh lab00
```

The same by call args with explicit shell.

```
ctys -t x11 -a create=l:tstx11,cmd:xterm,c:bash\%-i,sh lab00
```

2 Gnome-Terminal with Interactive bash

This opens a Gnome-Terminal window with an interactive bash. The "DH" suboption is here mandatory but the default. This is required because the gnome-terminal emulation requires a double-hyphen for it's options. The the default behaviour is to open a gnome-terminal when detected.

```
ctys -t x11 -a create=l:tstx11 lab00
```

The same by call `CONSOLE:GTERM` alias.

```
ctys -t x11 -a create=l:tstx11,console:gterm lab00
```

The same as the default behaviour.

```
ctys -t x11 -a create=l:tstx11,dh lab00
```

The same as the default behaviour.

```
ctys -t x11 -a create=l:tstx11,cmd:gnome-terminal,c:bash\%-i,dh lab00
```

3 Emacs Session in shell-mode

Starts an remote Emacs in

```
ctys -t x11 -a create=l:tstx11,cmd:emacs\%-f\%shell,s:bash\%-i lab00
```

The same by call CONSOLE:EMACS alias.

```
ctys -t x11 -a create=l:tstx11,console:emacs lab00
```

4 Emacs Session with cd

Starts an remote Emacs:

```
ctys -t x11 -a create=l:tstx1,console:emacs,cd:/var/tmp app1
```

The result is:

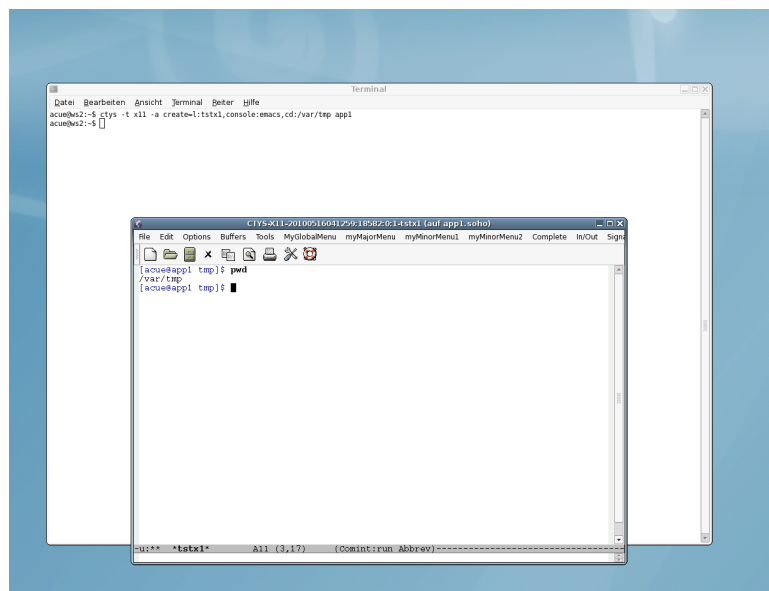


Figure 12: Emacs-Console with 'cd /var/tmp'

5 Single XClock

This starts an Xclock with an altered options keyword for windows title, additionally the "SH" key is required for using single-hyphens.

```
ctys -t x11 -a create=l:tstx11,cmd:xclock,titlekey:name,sh lab00
```

Similar, but not the same. This starts an Xclock with NOTITLE, which suppresses the setting of the title for a window by the LABEL string. Thus this window is no longer recognized by LIST, or just with limits.

```
ctys -t x11 -a create=l:tstx11,cmd:xclock,notitle lab00
```

6 SEE ALSO

ctys(1), *ctys-X11(7)*, *ctys-plugins(1)*, *bash(1)*, *xterm(1)*

7 AUTHOR

Written and maintained by Arno-Can Uestuensoez:

Maintenance: <acue_sf1@sourceforge.net>
Homepage: <<http://www.UnifiedSessionsManager.org>>
Sourceforge.net: <<http://sourceforge.net/projects/ctys>>
Berlios.de: <<http://ctys.berlios.de>>
Commercial: <<http://www.i4p.com>>

8 COPYRIGHT

Copyright (C) 2008, 2009, 2010 Ingenieurbuero Arno-Can Uestuensoez
This is software and documentation from **BASE** package,

- for software see GPL3 for license conditions,
- for documents see GFDL-1.3 with invariant sections for license conditions.

The whole document - all sections - is/are defined as invariant.
For additional information refer to enclosed Releasenotes and License files.

