T3000 Engineering


Compiling T3000 and making the setup file · built Nov 13, 2026

Compiling T3000 and making the setup file

The build and the installer are one job here: compile the solution, then assemble the setup that ships it. The screens are in the order the process runs.

Compile T3000

1. Download the repo from github to your local working folder.

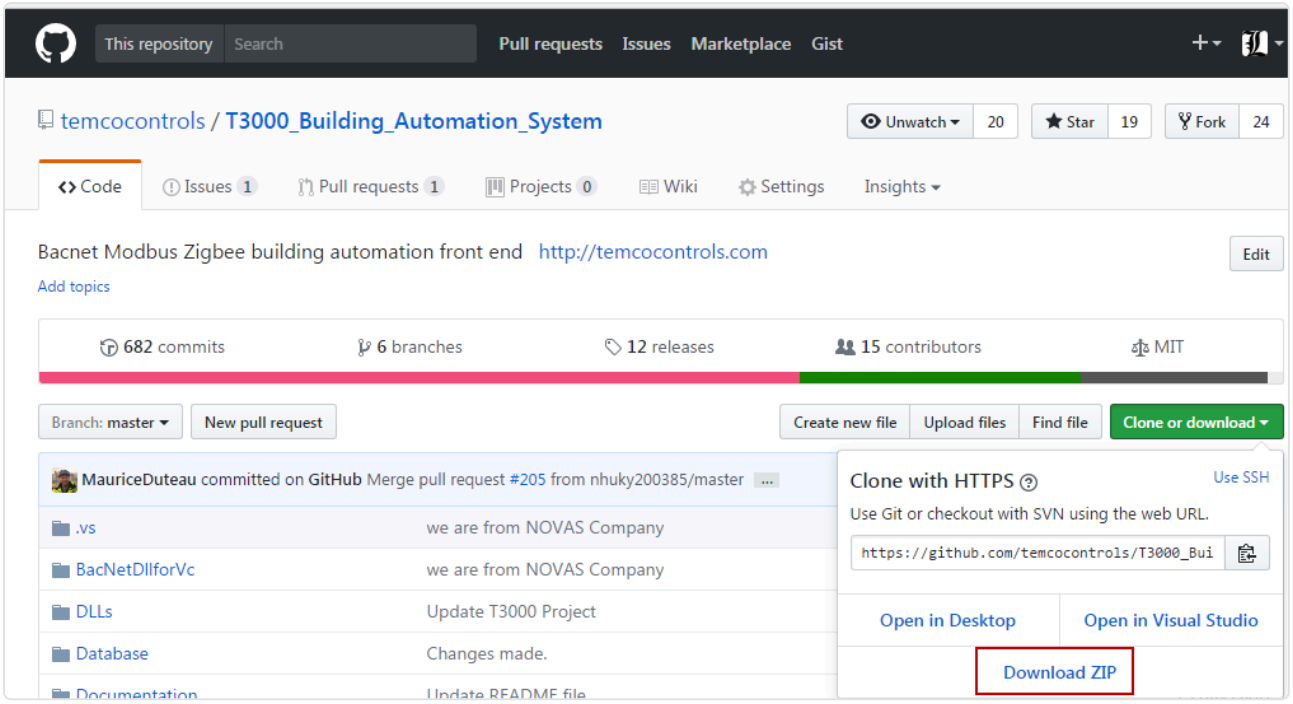

While cloning the repository of T3000, make sure to get the submodules too. On a command line, here is how to do it:

git clone --recurse-submodules

This would get the T3000_CrossPlatform project as a submodule of T3000_Building_Automation_System project.

Whenever you update your local repository, make sure to update the submodules too.

git pull --recurse-submodules


Note: You can download the git command line client for windows from

https://git-scm.com/downloads

If you plan to download the zip file, the submodule won't be included in the download. To cleanly compile the T3000 solution, you need to bring T3000_CrossPlatform project also in the folder where you extracted T3000_Building_Automation_System project. For this go to the T3000_Crossplatform project and download the zip. Extract this zip inside T3000_Building_Automation_System so that it comes as a child to this folder:

T3000_Building_Automation_System


├——T3000_CrossPlatform

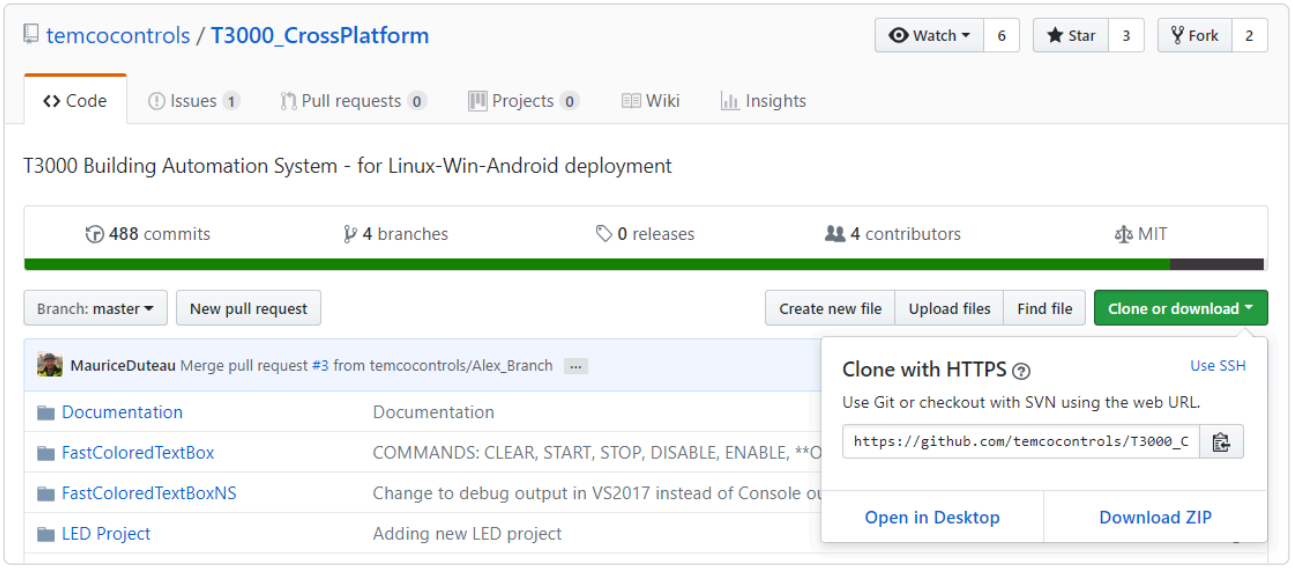


Note: We went by a submodule approach because the ProgramEditor project under T3000 solution requires FastColoredTextBox, T3000Grammer and PRGReaderLibrary projects in T3000_CrossPlatform project.

Install Microsoft Visual Studio VS2010 and VS2015.


1. OpenT3000Project , using VS2015

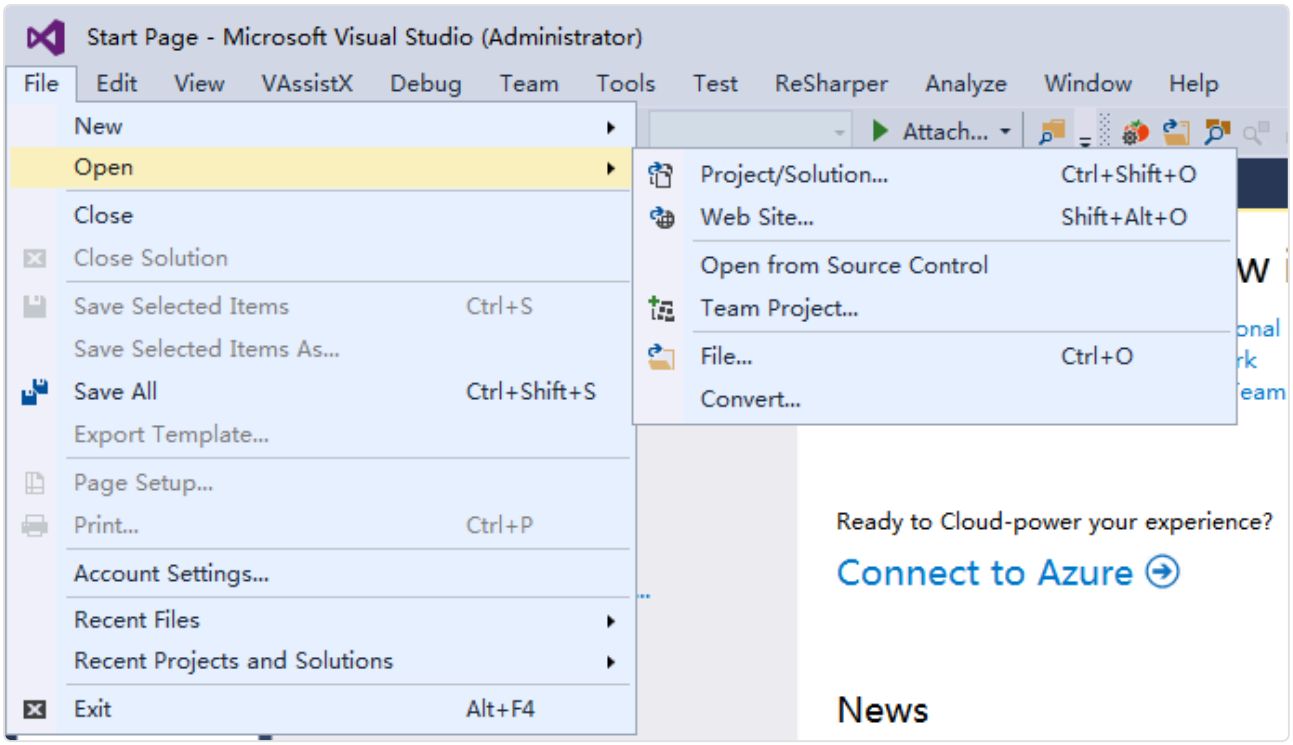
Start Page - Microsoft Visual Studio (Administrator)
File Edit View VAssistX Debug Team Tools Test ReSharper Analyze Window Help
New
Open
Close
Close Solution
Save Selected Items Ctrl+S
Save Selected Items As...
Save All Ctrl+Shift+S
Export Template...
Page Setup...
Print... Ctrl+P
Account Settings...
Recent Files
Recent Projects and Solutions
Exit Alt+F4
Project/Solution... Ctrl+Shift+O
Web Site... Shift+Alt+O
Open from Source Control
Team Project...
File... Ctrl+O
Convert...
Attach...
Ready to Cloud-power your experience?
Connect to Azure
News

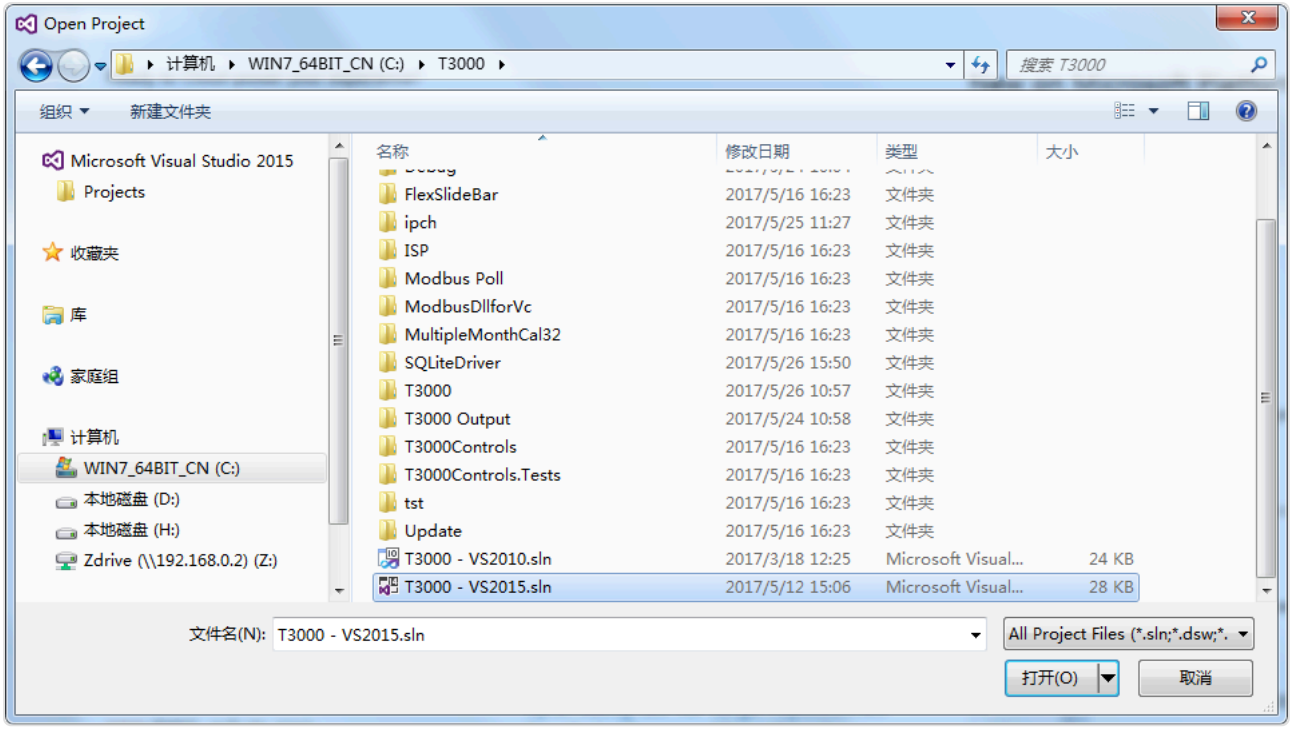

Open Project
计算机 ▸ WIN7_64BIT_CN (C:) ▸ T3000 ▸
搜索 T3000
组织
新建文件夹
Microsoft Visual Studio 2015
Projects
收藏夹
库
家庭组
计算机
WIN7_64BIT_CN (C:)
本地磁盘 (D:)
本地磁盘 (H:)
Zdrive (\\192.168.0.2) (Z:)
名称 修改日期 类型 大小
FlexSlideBar 2017/5/16 16:23 文件夹
ipch 2017/5/25 11:27 文件夹
ISP 2017/5/16 16:23 文件夹
Modbus Poll 2017/5/16 16:23 文件夹
ModbusDllforVc 2017/5/16 16:23 文件夹
MultipleMonthCal32 2017/5/16 16:23 文件夹
SQLiteDriver 2017/5/26 15:50 文件夹
T3000 2017/5/26 10:57 文件夹
T3000 Output 2017/5/24 10:58 文件夹
T3000Controls 2017/5/16 16:23 文件夹
T3000Controls.Tests 2017/5/16 16:23 文件夹
tst 2017/5/16 16:23 文件夹
Update 2017/5/16 16:23 文件夹
T3000 - VS2010.sln 2017/3/18 12:25 Microsoft Visual... 24 KB
T3000 - VS2015.sln 2017/5/12 15:06 Microsoft Visual... 28 KB
文件名(N): T3000 - VS2015.sln
All Project Files (*.sln;*.dsw;*.
打开(O)
取消



Make sure all these project are using Visual Studio VS2010 . VS2015 not completely compatible with VS2010.Many codes were completed by the old compiler.

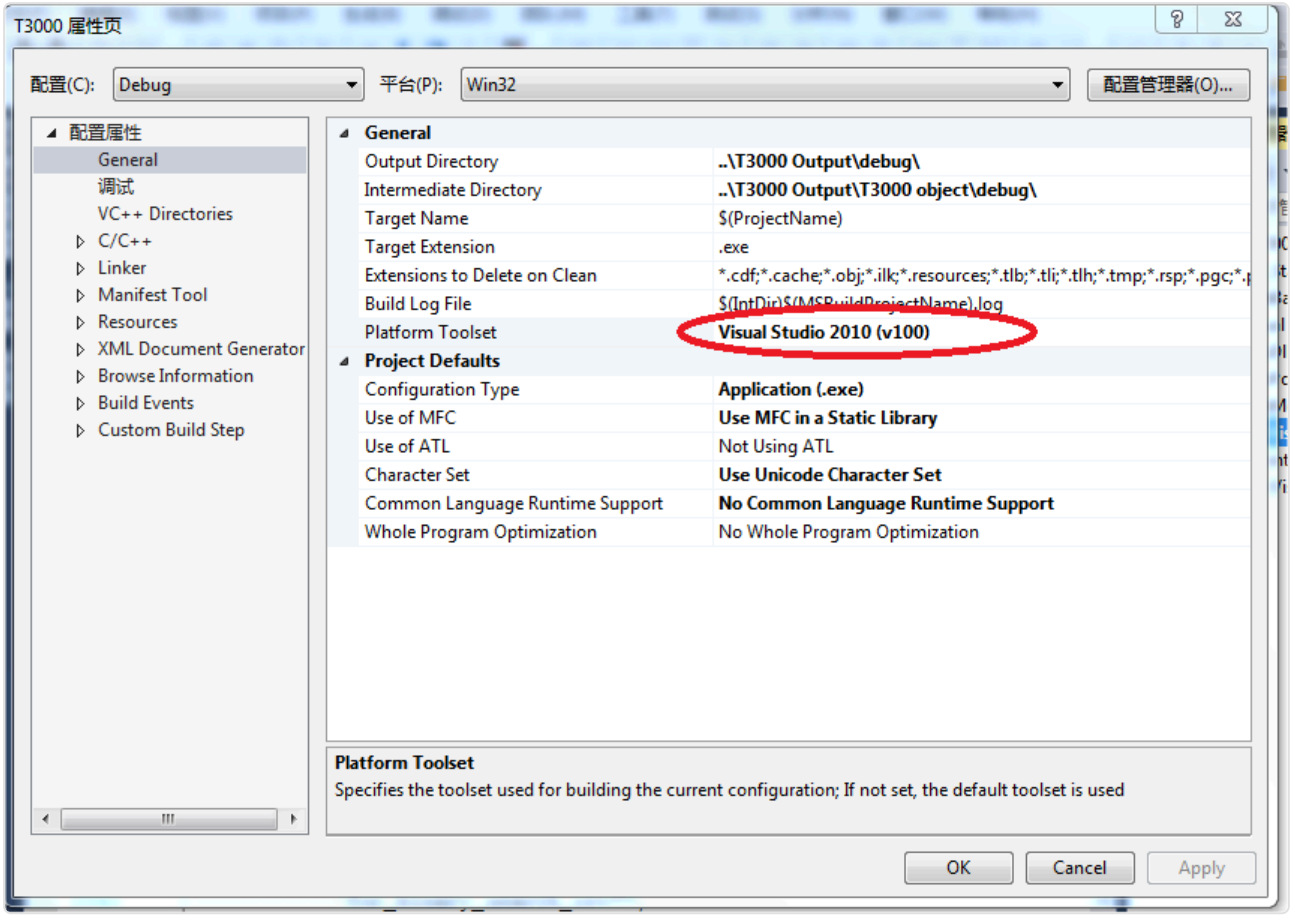

We specify that we will create a Win32 application which can run on both 32 and 64bit Windows installations.

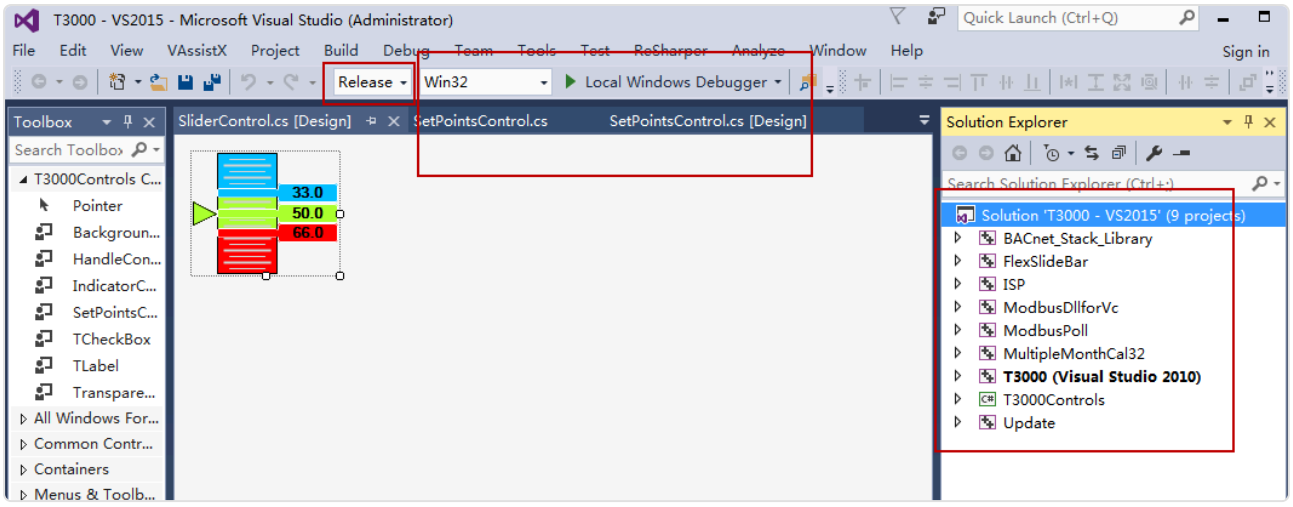

2. Compile T3000

Two Modes ,one is debug ,one is Release .

The platform ,please select Win32 OR x86

The build will rebuild the following items in this order:

BACnet_Stack_Library

FlexSlideBar

ModbusDllforVc

MultipleMonthCal32

T3000Controls


ISP

ModbusPoll

Update


You can select all project to compile .


Notes:

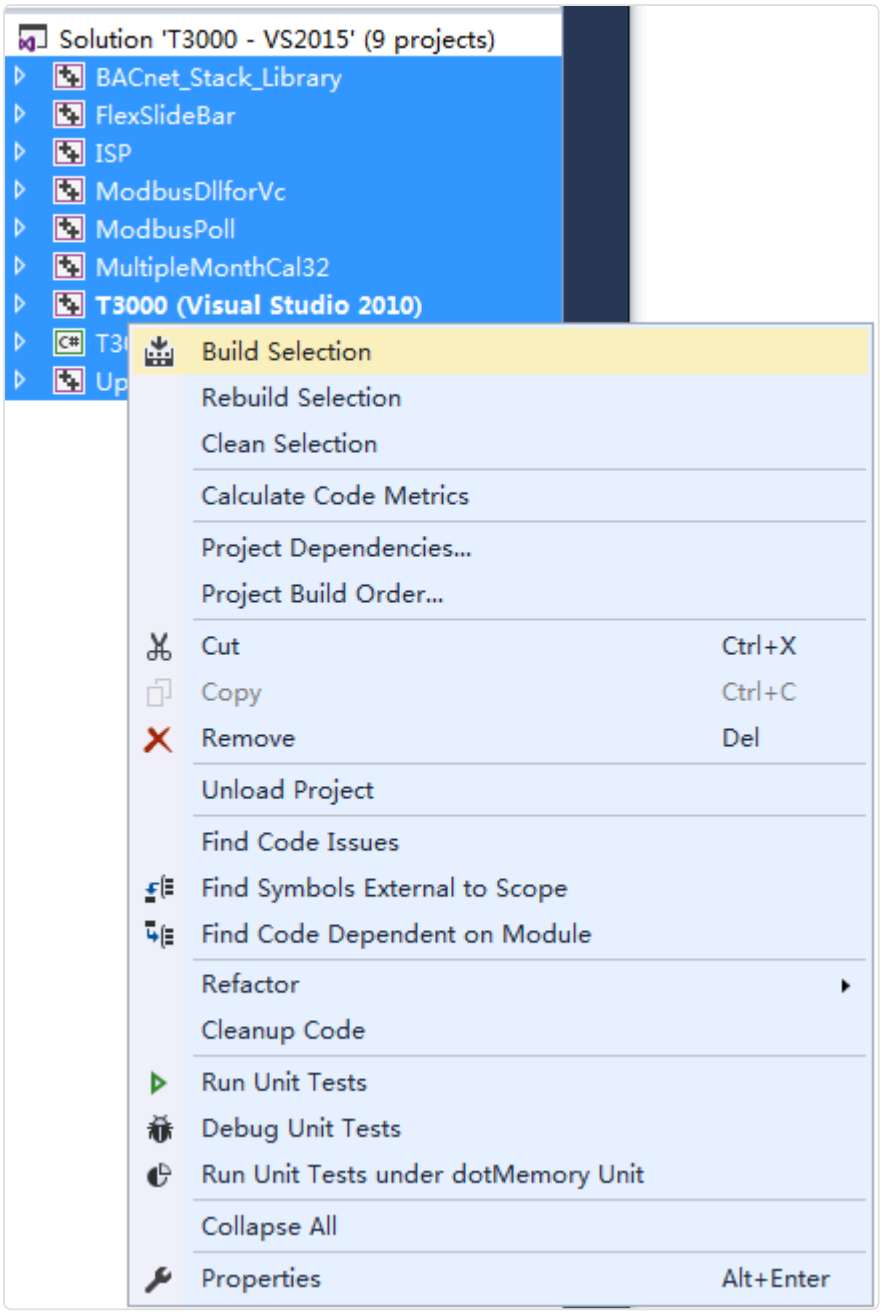

You can rebuild all the project or just parts which you know have changed.


To find your latest release .

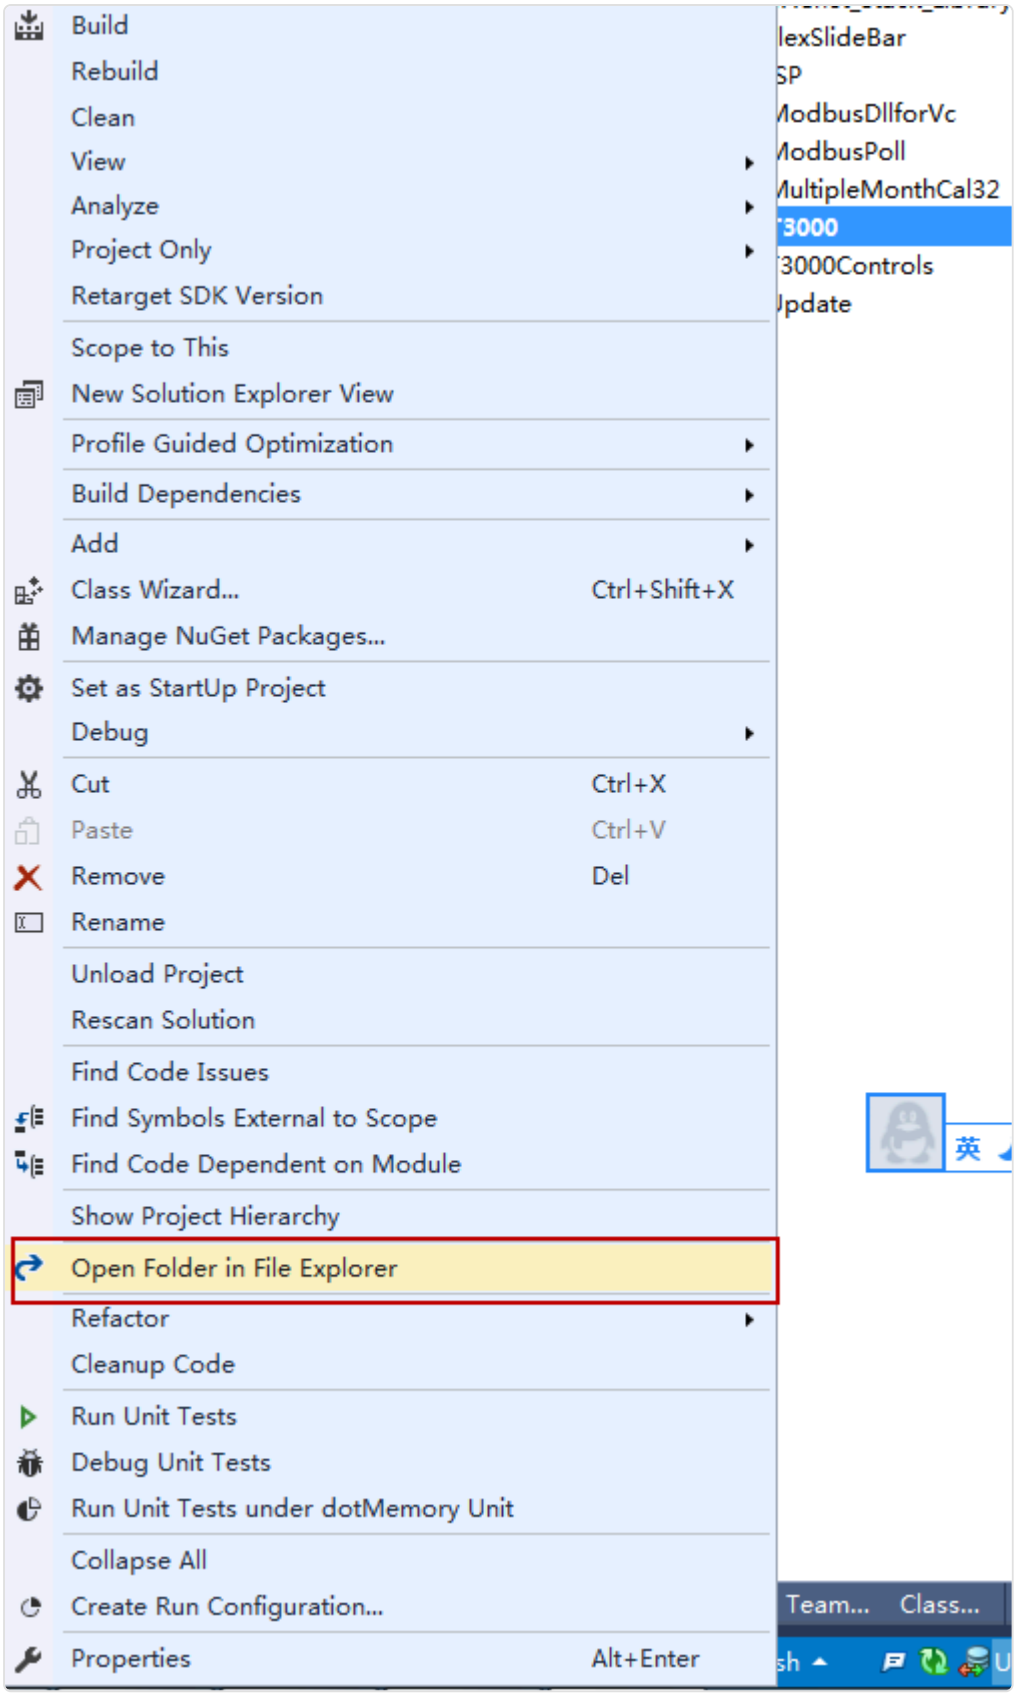
Build
Rebuild
Clean
View
Analyze
Project Only
Retarget SDK Version
Scope to This
New Solution Explorer View
Profile Guided Optimization
Build Dependencies
Add
Class Wizard... Ctrl+Shift+X
Manage NuGet Packages...
Set as StartUp Project
Debug
Cut Ctrl+X
Paste Ctrl+V
Remove Del
Rename
Unload Project
Rescan Solution
Find Code Issues
Find Symbols External to Scope
Find Code Dependent on Module
Show Project Hierarchy
Open Folder in File Explorer
Refactor
Cleanup Code
Run Unit Tests
Debug Unit Tests
Run Unit Tests under dotMemory Unit
Collapse All
Create Run Configuration...
Properties Alt+Enter
lexSlideBar
SP
ModbusDllforVc
ModbusPoll
MultipleMonthCal32
3000
3000Controls
Update
英
Team... Class...

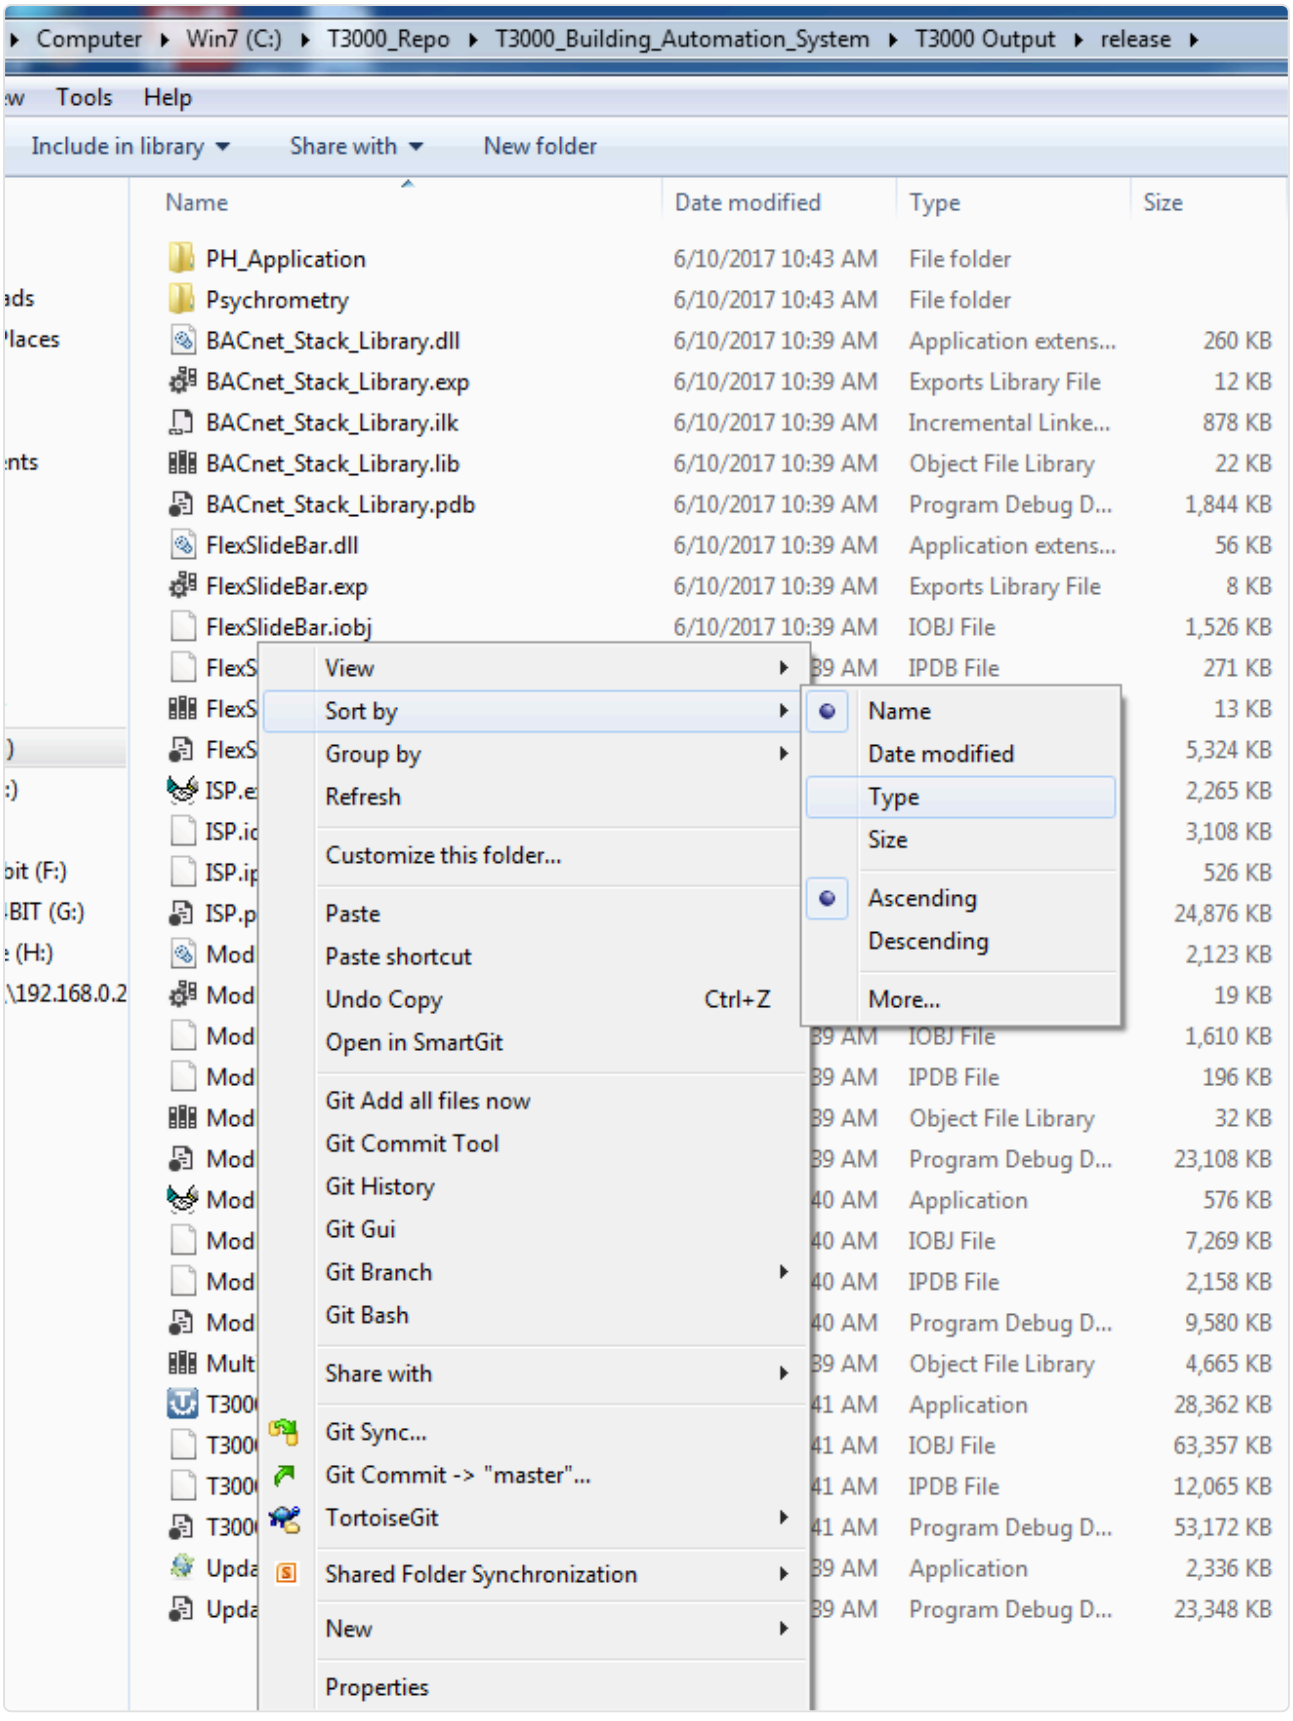

These files should be copied to the Installshield folder on your local machine. Installshield will only look to its local folder for files to be combined into the MSI install file, so this step is necessary.


These are the files which the build will produce, EXE and some DLL's.

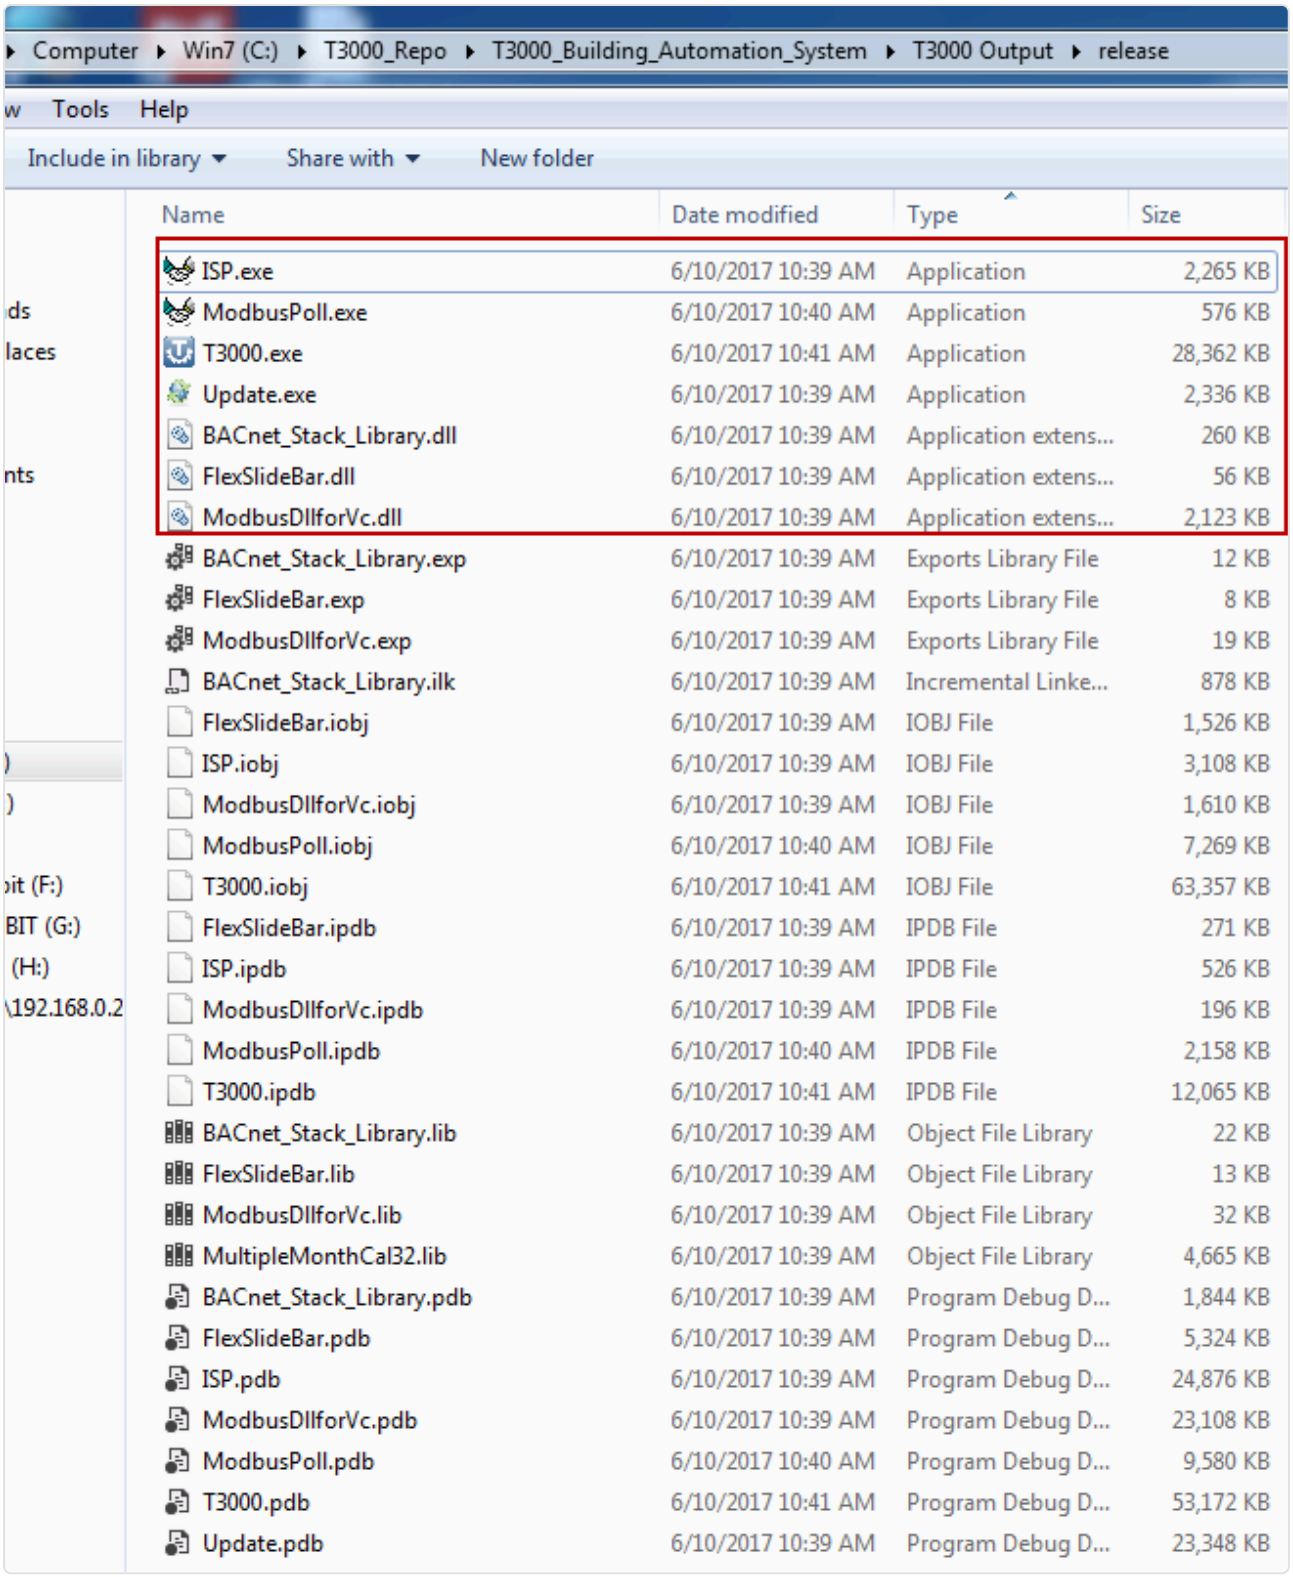


Copy these file to T3000InstallShield , and then replace the old files.

Using the same way to compile Psychrometric Tool && PH_Application

Add these two separate applications as part of the solution, not separate applications like it is now.

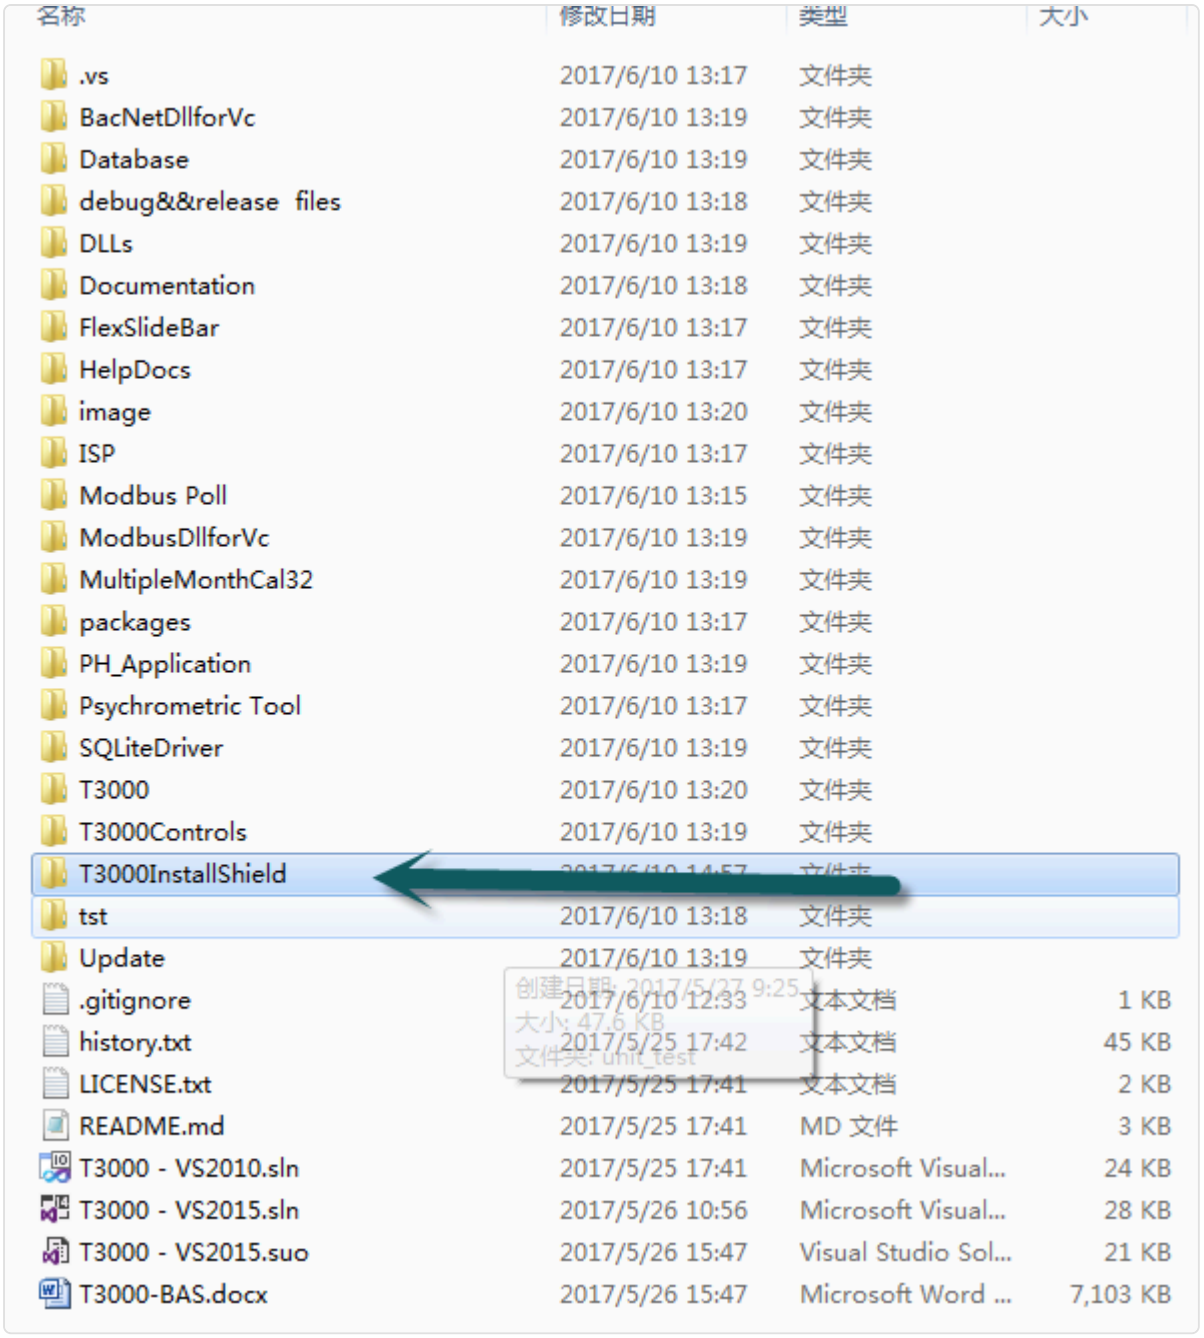
名称
修改日期
类型
大小
.vs 2017/6/10 13:17 文件夹
BacNetDllforVc 2017/6/10 13:19 文件夹
Database 2017/6/10 13:19 文件夹
debug&&release files 2017/6/10 13:18 文件夹
DLLs 2017/6/10 13:19 文件夹
Documentation 2017/6/10 13:18 文件夹
FlexSlideBar 2017/6/10 13:17 文件夹
HelpDocs 2017/6/10 13:17 文件夹
image 2017/6/10 13:20 文件夹
ISP 2017/6/10 13:17 文件夹
Modbus Poll 2017/6/10 13:15 文件夹
ModbusDllforVc 2017/6/10 13:19 文件夹
MultipleMonthCal32 2017/6/10 13:19 文件夹
packages 2017/6/10 13:17 文件夹
PH_Application 2017/6/10 13:19 文件夹
Psychrometric Tool 2017/6/10 13:17 文件夹
SQLiteDriver 2017/6/10 13:19 文件夹
T3000 2017/6/10 13:20 文件夹
T3000Controls 2017/6/10 13:19 文件夹
T3000InstallShield
tst 2017/6/10 13:18 文件夹
Update 2017/6/10 13:19 文件夹
.gitignore 2017/6/10 12:33 文本文档 1 KB
history.txt 2017/5/25 17:42 文本文档 45 KB
LICENSE.txt 2017/5/25 17:41 文本文档 2 KB
README.md 2017/5/25 17:41 MD 文件 3 KB
T3000 - VS2010.sln 2017/5/25 17:41 Microsoft Visual... 24 KB
T3000 - VS2015.sln 2017/5/26 10:56 Microsoft Visual... 28 KB
T3000 - VS2015.suo 2017/5/26 15:47 Visual Studio Sol... 21 KB
T3000-BAS.docx 2017/5/26 15:47 Microsoft Word ... 7,103 KB

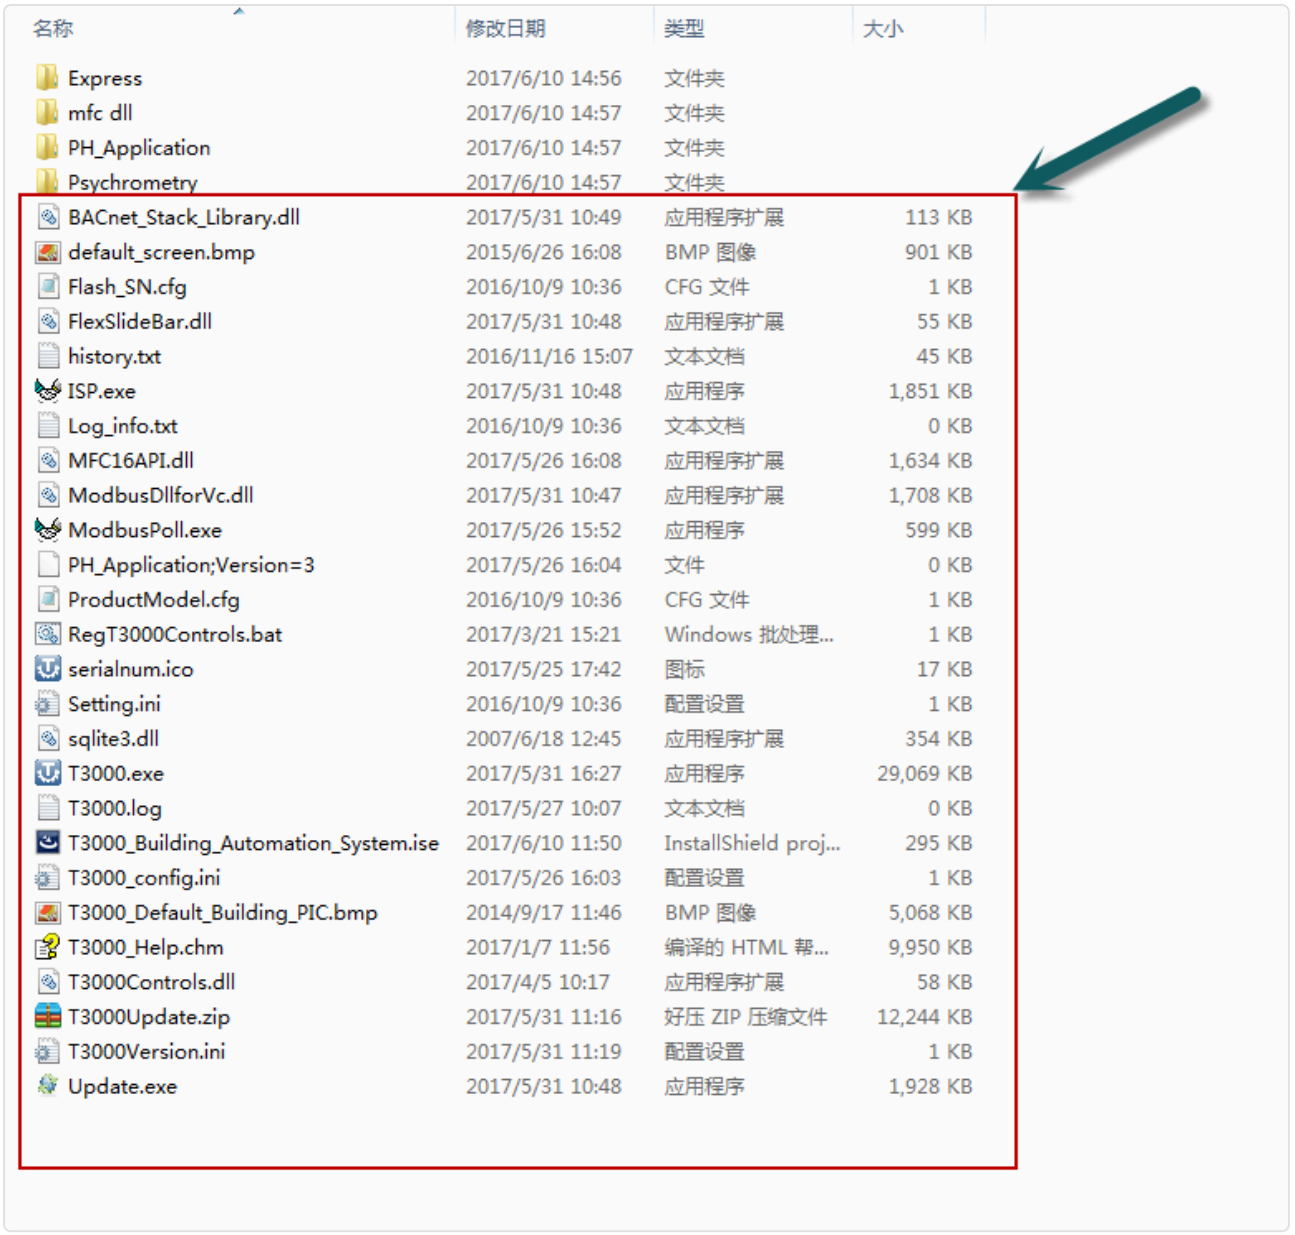


名称	修改日期	类型	大小
Express	2017/6/10 14:56	文件夹	
mfc dll	2017/6/10 14:57	文件夹	
PH_Application	2017/6/10 14:57	文件夹	
Psychrometry	2017/6/10 14:57	文件夹	
BACnet_Stack_Library.dll	2017/5/31 10:49	应用程序扩展	113 KB
default_screen.bmp	2015/6/26 16:08	BMP 图像	901 KB
Flash_SN.cfg	2016/10/9 10:36	CFG 文件	1 KB
FlexSlideBar.dll	2017/5/31 10:48	应用程序扩展	55 KB
history.txt	2016/11/16 15:07	文本文档	45 KB
ISP.exe	2017/5/31 10:48	应用程序	1,851 KB
Log_info.txt	2016/10/9 10:36	文本文档	0 KB
MFC16API.dll	2017/5/26 16:08	应用程序扩展	1,634 KB
ModbusDllforVc.dll	2017/5/31 10:47	应用程序扩展	1,708 KB
ModbusPoll.exe	2017/5/26 15:52	应用程序	599 KB
PH_Application;Version=3	2017/5/26 16:04	文件	0 KB
ProductModel.cfg	2016/10/9 10:36	CFG 文件	1 KB
RegT3000Controls.bat	2017/3/21 15:21	Windows 批处理...	1 KB
serialnum.ico	2017/5/25 17:42	图标	17 KB
Setting.ini	2016/10/9 10:36	配置设置	1 KB
sqlite3.dll	2007/6/18 12:45	应用程序扩展	354 KB
T3000.exe	2017/5/31 16:27	应用程序	29,069 KB
T3000.log	2017/5/27 10:07	文本文档	0 KB
T3000_Building_Automation_System.ise	2017/6/10 11:50	InstallShield proj...	295 KB
T3000_config.ini	2017/5/26 16:03	配置设置	1 KB
T3000_Default_Building_PIC.bmp	2014/9/17 11:46	BMP 图像	5,068 KB
T3000_Help.chm	2017/1/7 11:56	编译的 HTML 帮...	9,950 KB
T3000Controls.dll	2017/4/5 10:17	应用程序扩展	58 KB
T3000Update.zip	2017/5/31 11:16	好压 ZIP 压缩文件	12,244 KB
T3000Version.ini	2017/5/31 11:19	配置设置	1 KB
Update.exe	2017/5/31 10:48	应用程序	1,928 KB

2.How to make an MSI for T3000


Download Installshield2019 ,and install it.

This MSI will include all the proejcts, T3000 as well as the separate Psychrometric and PH applications.

1. double click installshield project file

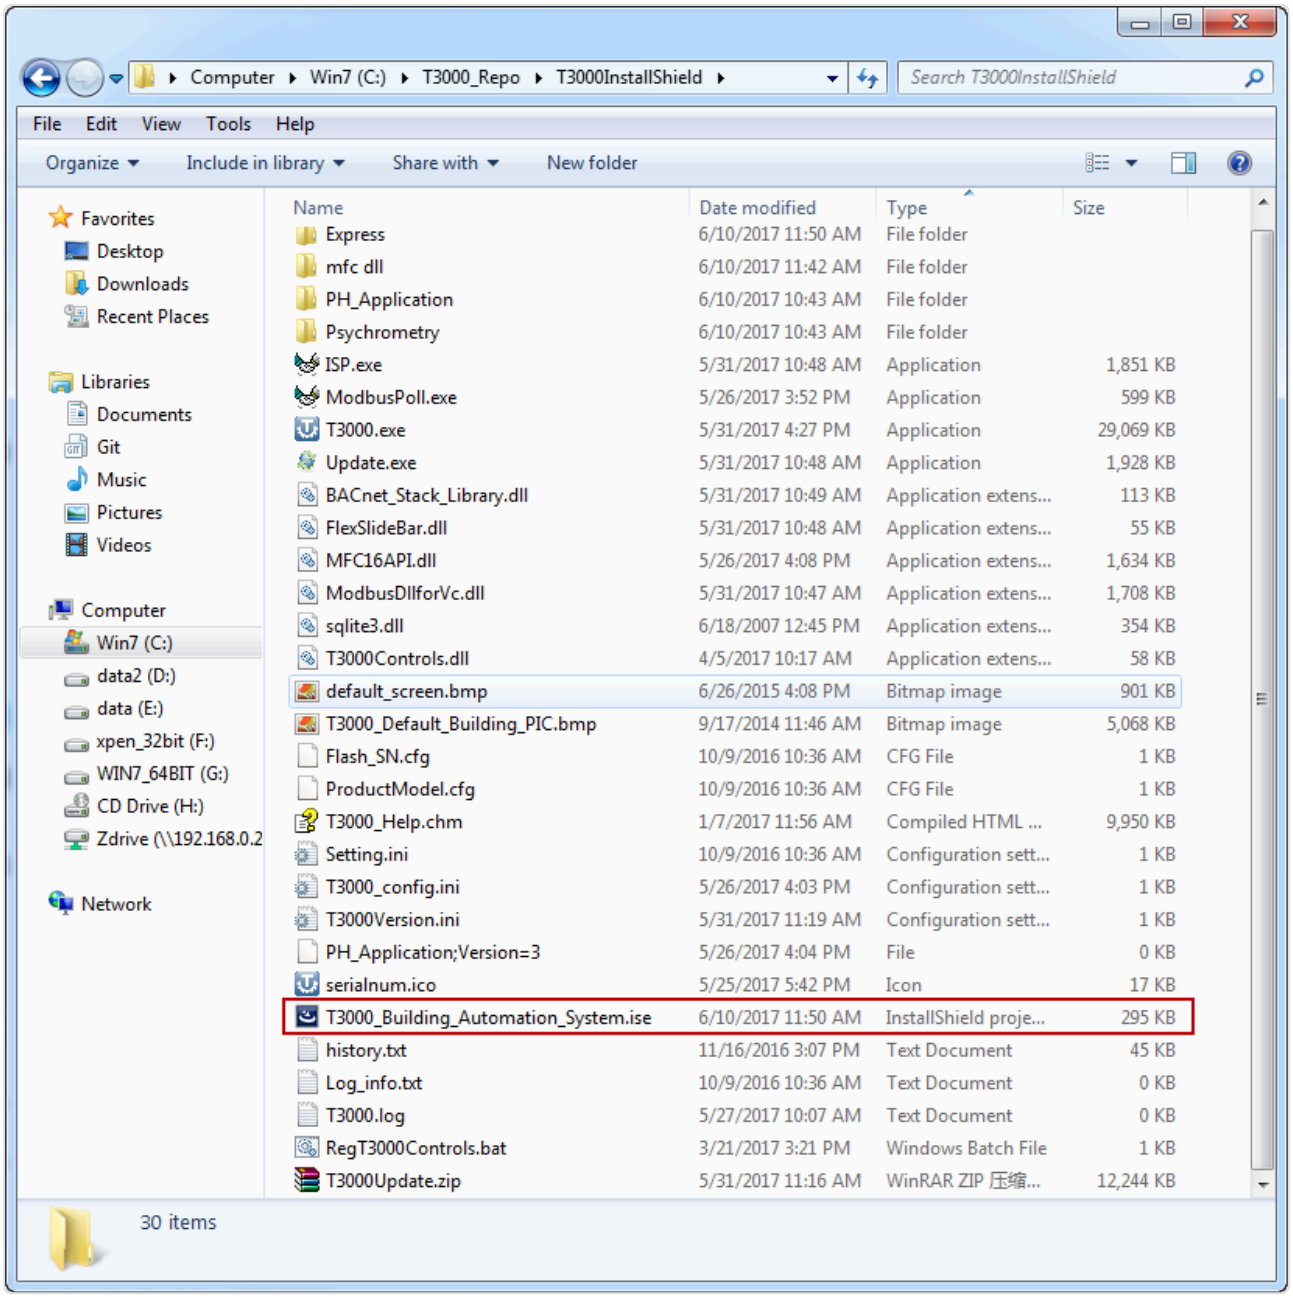


2. InstallSheild showing

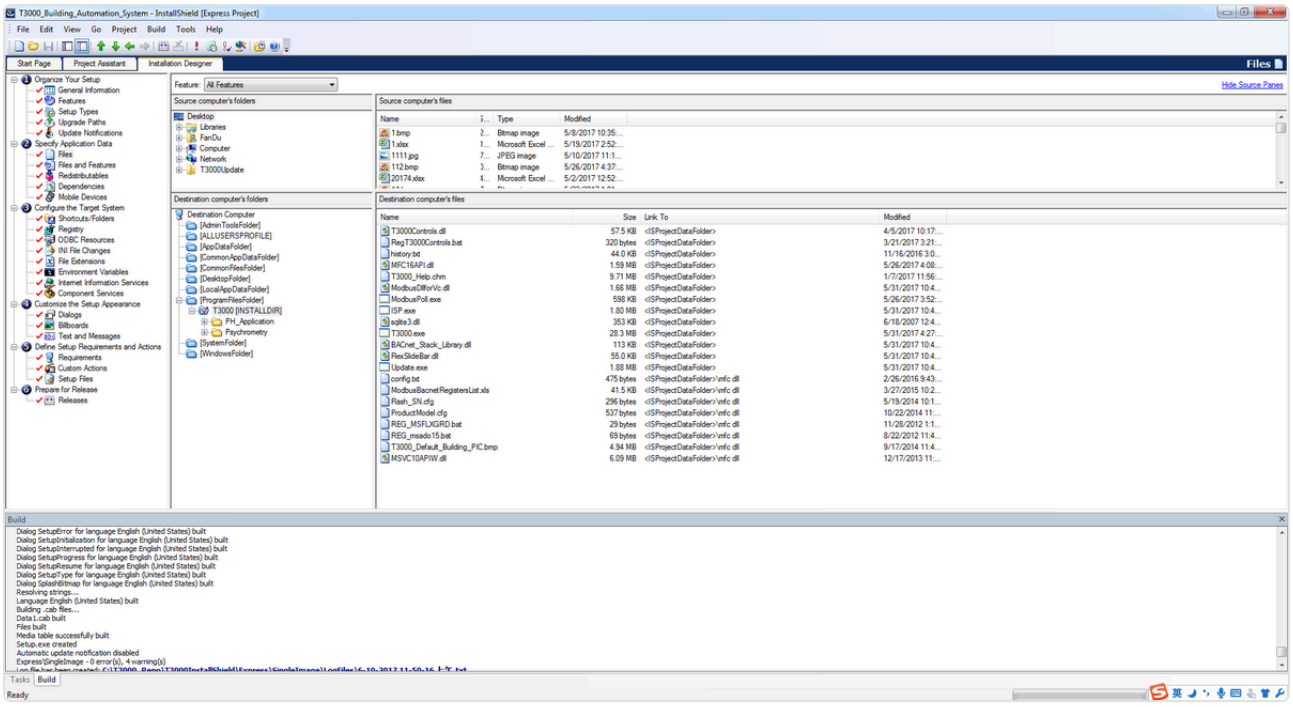


2.Click on the “General Information’ tab, then on the ‘Prooduct Code” cell to generate a GUID which is a code for the application.



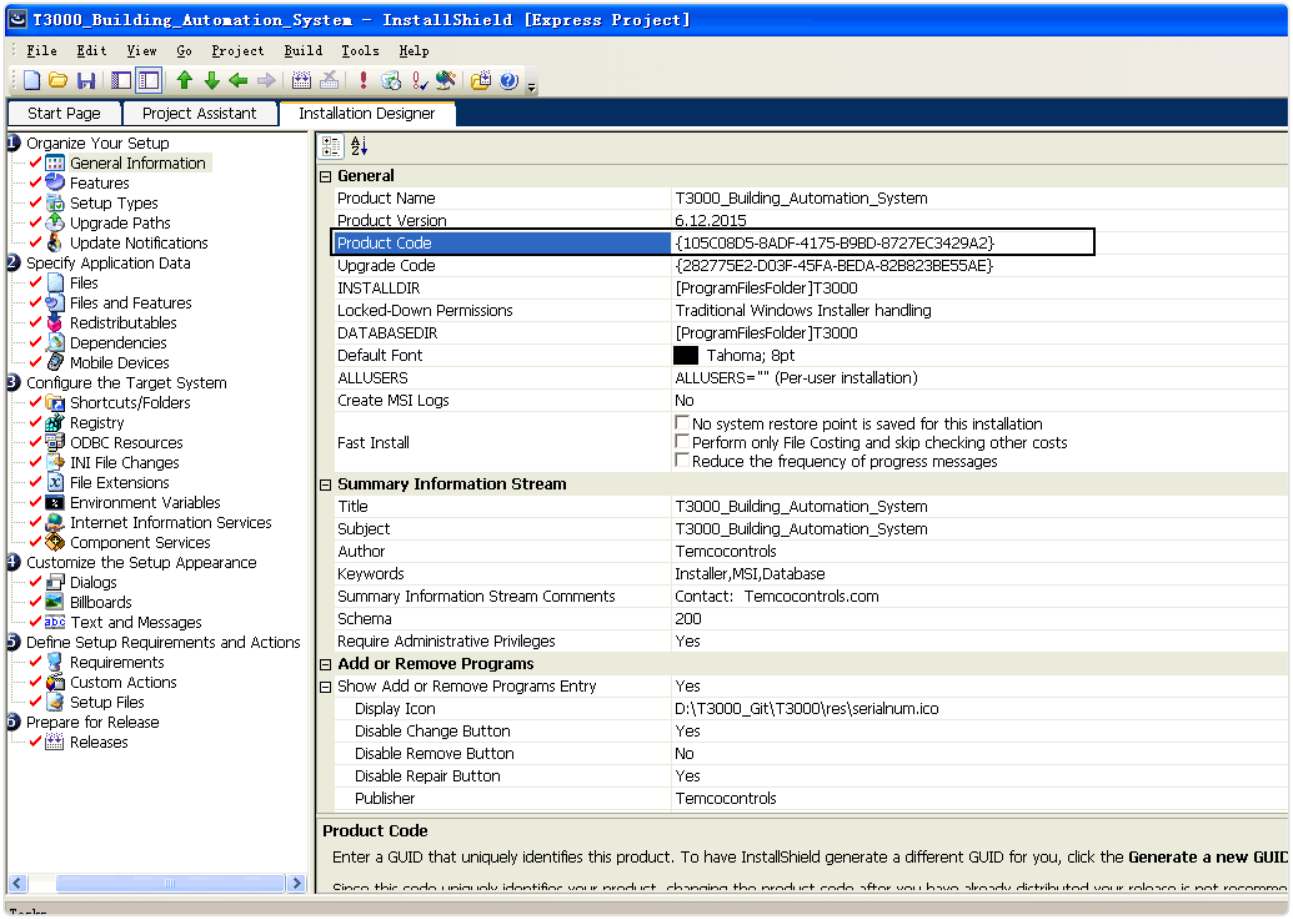


3. Click on the Prepare for release tab, ‘Releases’ itms which generates another GUID, these are just codes which are automatically generated.



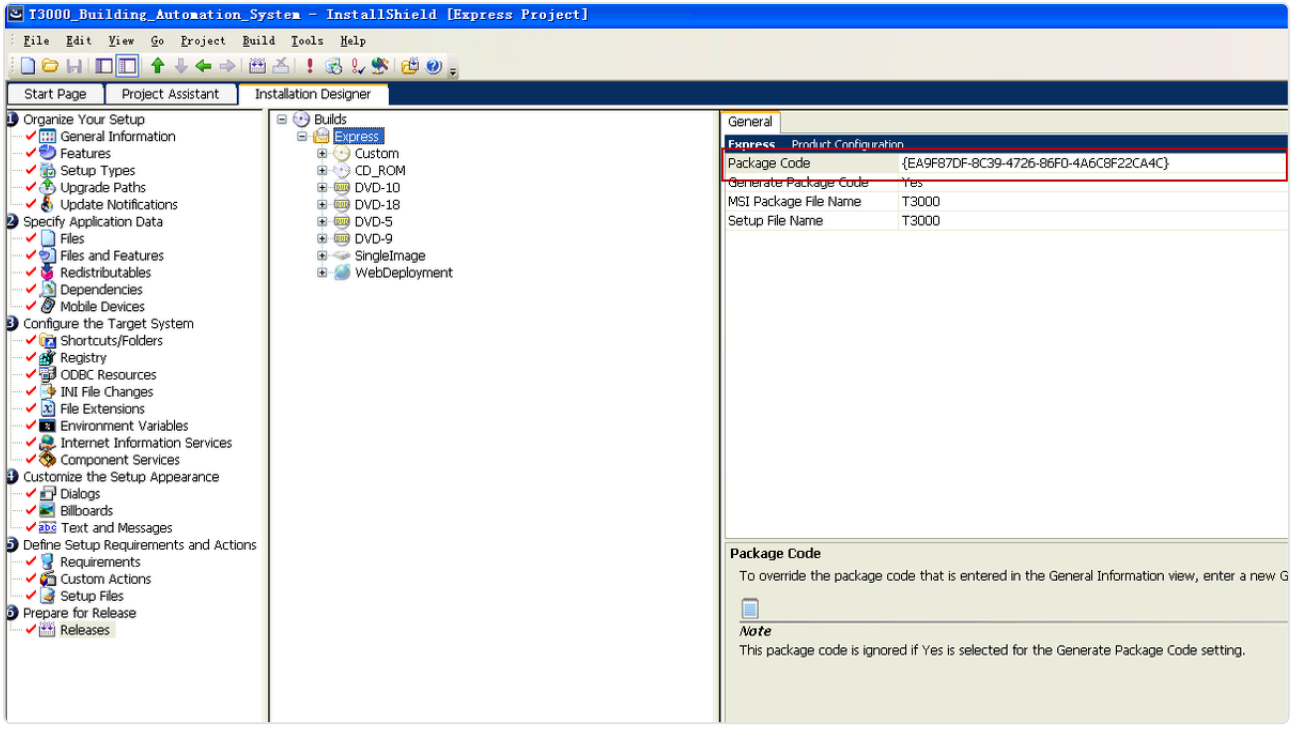

4.Sleect what type of image to generate, in our case SingleImage

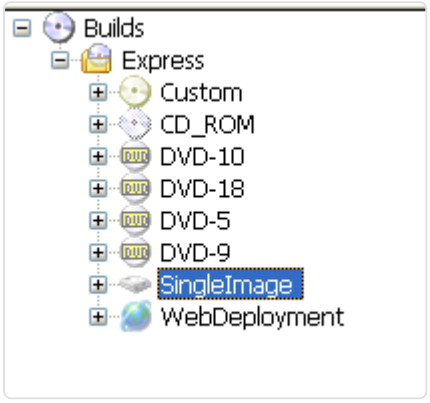


5. Build






6.Open the setup exe file




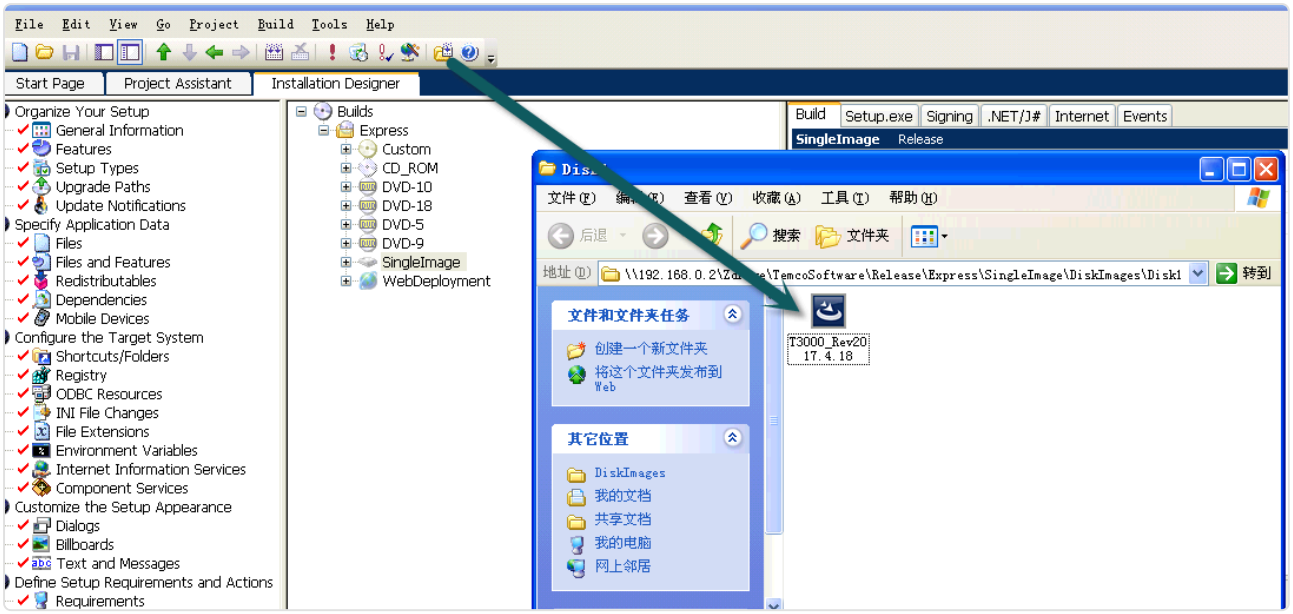

For generating the smaller EXE for updates from within T3000, just copy these files to the a zip file and load the following files to the temco FTP folder.

The files can be found in the T3000 output folder, only the DLL and exe files need to be sent there.

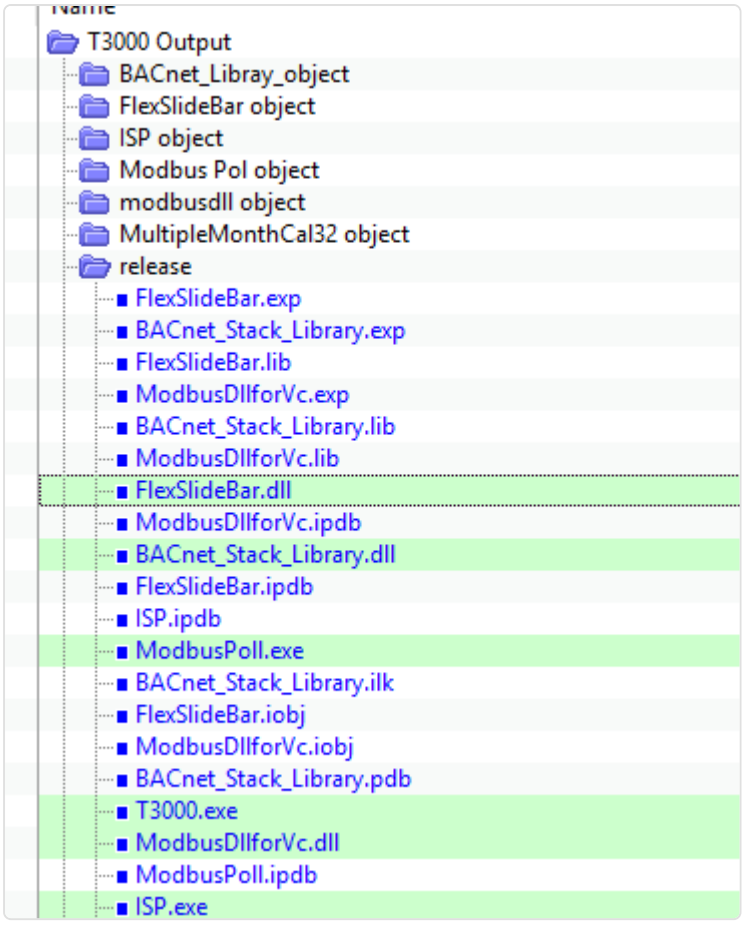
Name
T3000 Output
BACnet_Libray_object
FlexSlideBar object
ISP object
Modbus Pol object
modbusdll object
MultipleMonthCal32 object
release
FlexSlideBar.exp
BACnet_Stack_Library.exp
FlexSlideBar.lib
ModbusDllforVc.exp
BACnet_Stack_Library.lib
ModbusDllforVc.lib
FlexSlideBar.dll
ModbusDllforVc.ipdb
BACnet_Stack_Library.dll
FlexSlideBar.ipdb
ISP.ipdb
ModbusPoll.exe
BACnet_Stack_Library.ilk
FlexSlideBar.iobj
ModbusDllforVc.iobj
BACnet_Stack_Library.pdb
T3000.exe
ModbusDllforVc.dll
ModbusPoll.ipdb
ISP.exe

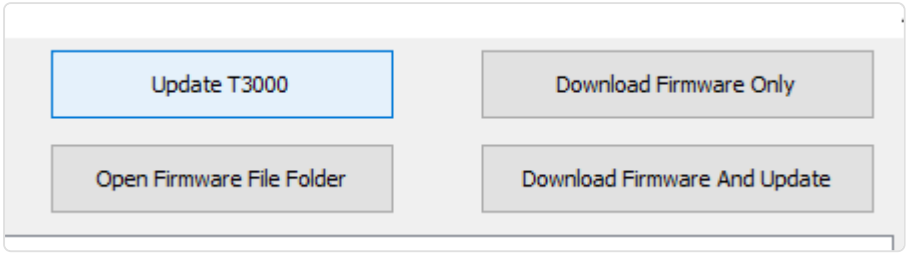
Update T3000
Download Firmware Only
Open Firmware File Folder
Download Firmware And Update