


Step by Step Example


This example will demonstrate how to import weather data for a column of valid locations in a CSV file. The CSV used in this example can be found in the example folder of this extensions GitHub Repository.

User Input

1. In the sources palette, add a Var File node to the stream and read Airport_Code.csv. The locationID column of this dataset has the valid location identifier required for this extension.

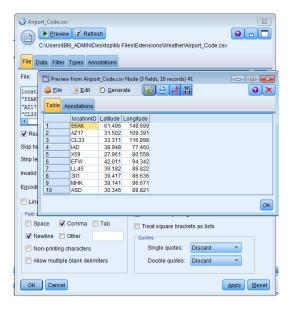

Add the Weather Underground Import extension from the Field Ops palette and connect it to the Var File
node. Select locationID for the City/Airport Code/Station ID field, and enter a date in the format YYYYMM-DD. Finally, choose the type of data to import in the Data field or leave as the default Last Record.





- 3. From the Output palette, connect a Table to the extension
- 4. Click on the Table and run the stream




Results

This extension imports the following fields into IBM SPSS Modeler.

- Time
- Temperature
- Dew.Point
- Humidity
- Sea Level Pressure
- Visibility
- Wind Direction
- Wind Speed

- Gust Speed
- Precipitation
- Events
- Conditions
- Wind Dir Degrees
- DateUTC
- DateTime

If you used the sample data provided, your results should match the table below:

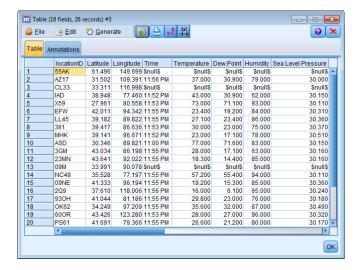

This weather data can be used to build models or do analysis involving data from different sources.