

CPEN 400Q Lecture 05

Our first quantum algorithms


Monday 23 January 2023

Announcements

- Literacy assignment 1 due Wednesday 23:59
- Quiz 2 at the *end* of class today

Last time

We took single-qubit measurements in different orthonormal bases.



```
def convert_to_y_basis():  
    qml.Hadamard(wires=0)  
    qml.S(wires=0)  
  
def my_quantum_function():  
    ...  
    qml.adjoint(convert_to_y_basis)()  
    ...
```

Measuring in a different basis can help us distinguish states.

Example: Prepare $|+\rangle$ or $|-\rangle$, then measure in the comp. basis.

$$\text{For } |+\rangle : \quad \Pr(0) = \Pr(1) = \frac{1}{2}$$

$$\text{For } |-\rangle : \quad \Pr(0) = \Pr(1) = \frac{1}{2}$$

Example: Prepare $|+\rangle$ or $|-\rangle$, then measure in the Hadamard ($|+\rangle/|-\rangle$) basis.

$$\text{For } |+\rangle : \quad \Pr(+)=1, \quad \Pr(-)=0$$

$$\text{For } |-\rangle : \quad \Pr(+)=0, \quad \Pr(-)=1$$

Last time

We began working with more than one qubit.

Hilbert spaces combine under the *tensor product*. If

$$|\psi\rangle = \alpha|0\rangle + \beta|1\rangle, \quad |\varphi\rangle = \gamma|0\rangle + \delta|1\rangle,$$

then


$$|\psi\rangle \otimes |\varphi\rangle = \alpha\gamma|00\rangle + \alpha\delta|01\rangle + \beta\gamma|10\rangle + \beta\delta|11\rangle$$

But not all multi-qubit states are tensor products:


$$|\psi\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle),$$

Last time

We saw a couple common multi-qubit gates.

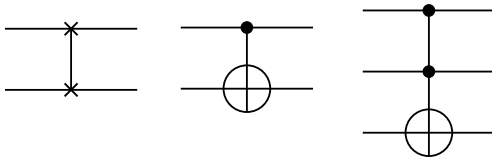


We saw that CNOT is an *entangling gate*.



Last time

Any unitary operation can be turned into a controlled operation, controlled on any state.

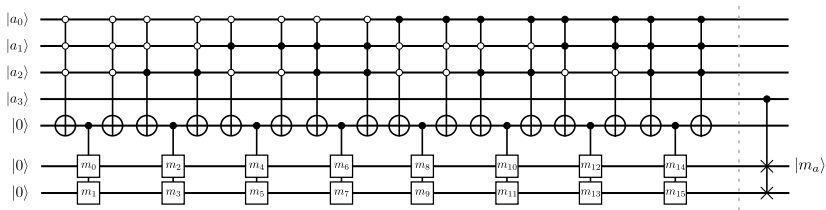

Most common controls are controlled-on- $|1\rangle$ (filled circle), and controlled-on- $|0\rangle$ (empty circle).

```
qml.ctrl(qml.RX, control=0)(x, wires=1)
qml.CRX(x, wires=[0, 1])
```

Learning outcomes


- Express two-qubit controlled gates as matrices
- Perform measurements on multiple qubits
- Measure a two-qubit state in the Bell basis

If we get there:

- Outline and implement the superdense coding algorithm
- Prove that arbitrary quantum states cannot be cloned
- Teleport a quantum state

Example: controlled- Z (CZ)

What does this operation do?



PennyLane: `qml.CZ`


Image credit: Codebook node I.13

Example: controlled rotations (RX , RY , RZ)

Or this one?

$$CRY(\theta) = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & \cos \frac{\theta}{2} & -\sin \frac{\theta}{2} \\ 0 & 0 & \sin \frac{\theta}{2} & \cos \frac{\theta}{2} \end{pmatrix}$$

Circuit elements:



PennyLane: `qml.CRX`, `qml.CRY`, `qml.CRZ`

Controlled- U

There is a pattern here:

$$CNOT = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}, \quad CRY(\theta) = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & \cos \frac{\theta}{2} & -\sin \frac{\theta}{2} \\ 0 & 0 & \sin \frac{\theta}{2} & \cos \frac{\theta}{2} \end{pmatrix}$$

More generally,

$$CU = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & U_{00} & U_{01} \\ 0 & 0 & U_{10} & U_{11} \end{pmatrix} = \begin{pmatrix} I_2 & \mathbf{0}_2 \\ \mathbf{0}_2 & U \end{pmatrix}$$

Universal gate sets

In lecture 3, we learned that with just

- H and T
- any two of RX , RY , and RZ ,

we can implement *any* single-qubit unitary operation up to arbitrary precision.

What about for two qubits?

Universal gate sets

What about for two qubits?

- H , T , and $CNOT$
- any two of RX , RY , RZ , and $CNOT$
- H and TOF

With just 2-3 gates, we can implement *any* two-qubit unitary operation up to arbitrary precision.



What about three or more qubits? (Same thing!)

In general, finding such an implementation (*quantum circuit synthesis*, part of the quantum compilation pipeline) is computationally hard.

- sometimes we can do so for small cases (PennyLane has many decompositions pre-programmed)
- sometimes having **auxiliary** qubits around can simplify the decomposition

Auxiliary qubits

Auxiliary qubits are like “scratch”, or “work” qubits. They start in state $|0\rangle$, and must be returned to state $|0\rangle$, but can be used to store intermediate results in a computation.



Review: single-qubit measurements

Given a state

$$|\psi\rangle = \alpha|0\rangle + \beta|1\rangle$$

- the probability of measuring and observing the qubit in state $|0\rangle$ is $|\alpha|^2 = \alpha\alpha^* = |\langle 0|\psi\rangle|^2$
- the probability of measuring and observing the qubit in state $|1\rangle$ is $|\beta|^2 = |\langle 1|\psi\rangle|^2$
- we can measure in different bases by “remapping” those basis states to the computational basis

We can do all this in the multi-qubit case as well.

Multi-qubit measurement outcome probabilities

Let

$$|\psi\rangle = \alpha|00\rangle + \beta|01\rangle + \gamma|10\rangle + \delta|11\rangle$$

If we measure in the computational basis, the outcome probabilities are:

- $|\alpha|^2 = |\langle 00|\psi\rangle|^2$ for $|00\rangle$
- $|\beta|^2 = |\langle 01|\psi\rangle|^2$ for $|01\rangle$
- ...

Multi-qubit measurement outcome probabilities

Let

$$|\psi\rangle = \alpha|00\rangle + \beta|01\rangle + \gamma|10\rangle + \delta|11\rangle$$

We can measure *just one qubit*:

- The probability of the first qubit being in state $|0\rangle$ is $|\alpha|^2 + |\beta|^2$
- The probability of the second qubit being in state $|1\rangle$ is $|\beta|^2 + |\delta|^2$

We can also measure multiple qubits in other bases.

The Bell basis

This entangled state,

$$|\psi_{00}\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle),$$

has 3 siblings:

$$|\psi_{01}\rangle = \frac{1}{\sqrt{2}} (|10\rangle + |01\rangle)$$

$$|\psi_{10}\rangle = \frac{1}{\sqrt{2}} (|00\rangle - |11\rangle)$$

$$|\psi_{11}\rangle = \frac{1}{\sqrt{2}} (-|10\rangle + |01\rangle)$$

The Bell basis

These 4 entangled states form an *orthonormal basis* for 2 qubits.

$$|\Psi_{00}\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$

$$|\Psi_{01}\rangle = \frac{1}{\sqrt{2}} (|10\rangle + |01\rangle)$$

$$|\Psi_{10}\rangle = \frac{1}{\sqrt{2}} (|00\rangle - |11\rangle)$$


$$|\Psi_{11}\rangle = \frac{1}{\sqrt{2}} (-|10\rangle + |01\rangle)$$

The Bell basis

Remember how we created


$$|\psi_{00}\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle),$$

from the $|00\rangle$ state:



The Bell basis

We can undo this by applying the operations in reverse:

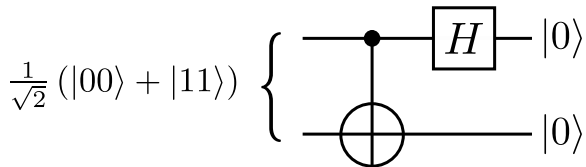

This sequence of operations actually corresponds to a basis rotation from the Bell basis to the computational basis...

The Bell basis

$$\frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \left\{ \begin{array}{c} \text{---} \bullet \text{---} \boxed{H} \text{---} |0\rangle \\ | \\ \text{---} \oplus \text{---} |0\rangle \end{array} \right.$$

$$\frac{1}{\sqrt{2}}(|01\rangle + |10\rangle) \left\{ \begin{array}{c} \text{---} \bullet \text{---} \boxed{H} \text{---} |0\rangle \\ | \\ \text{---} \oplus \text{---} |1\rangle \end{array} \right.$$

$$\frac{1}{\sqrt{2}}(|00\rangle - |11\rangle) \left\{ \begin{array}{c} \text{---} \bullet \text{---} \boxed{H} \text{---} |1\rangle \\ | \\ \text{---} \oplus \text{---} |0\rangle \end{array} \right.$$

$$\frac{1}{\sqrt{2}}(|01\rangle - |10\rangle) \left\{ \begin{array}{c} \text{---} \bullet \text{---} \boxed{H} \text{---} |1\rangle \\ | \\ \text{---} \oplus \text{---} |1\rangle \end{array} \right.$$

Two quantum algorithms, **superdense coding** and **teleportation** work by performing a measurement in the Bell basis (or, performing the above basis rotation, and measuring in the computational basis).

Suppose Alice wants to send Bob two classical bits of information, say '1' and '0'.

Q1: How many classical bits must she send to Bob to do this?

Suppose Alice wants to send Bob two classical bits of information, say '1' and '0'.

Q1: How many classical bits must she send to Bob to do this?

A1: 2.

Suppose Alice wants to send Bob two classical bits of information, say '1' and '0'.

Q1: How many classical bits must she send to Bob to do this?

A1: 2.

Q2: How many *qubits* must she send to Bob to do this?

Suppose Alice wants to send Bob two classical bits of information, say '1' and '0'.

Q1: How many classical bits must she send to Bob to do this?

A1: 2.

Q2: How many *qubits* must she send to Bob to do this?

A2: Only 1!

Alice and Bob start the protocol with this shared entangled state:

$$|\Phi\rangle_{AB} = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$

Next, depending on her bits, Alice performs one of the following operations on her qubit:

00	\rightarrow	I
01	\rightarrow	X
10	\rightarrow	Z
11	\rightarrow	ZX

Superdense coding

What happened to the entangled state?

$$|\Phi\rangle_{AB} = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$

It will transform to:

$$00 \rightarrow I \quad \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$

$$01 \rightarrow X \quad \frac{1}{\sqrt{2}} (|10\rangle + |01\rangle)$$

$$10 \rightarrow Z \quad \frac{1}{\sqrt{2}} (|00\rangle - |11\rangle)$$

$$11 \rightarrow ZX \quad \frac{1}{\sqrt{2}} (-|10\rangle + |01\rangle)$$

Bob can now perform a measurement to determine with certainty which state he has, and correspondingly which bits Alice sent him.

Alternatively, Bob can perform a basis transformation from the Bell basis back to the computational basis:

$$(H \otimes I) \text{CNOT} \cdot \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) = |00\rangle$$


$$(H \otimes I) \text{CNOT} \cdot \frac{1}{\sqrt{2}} (|10\rangle + |01\rangle) = |01\rangle$$

$$(H \otimes I) \text{CNOT} \cdot \frac{1}{\sqrt{2}} (|00\rangle - |11\rangle) = |10\rangle$$

$$(H \otimes I) \text{CNOT} \cdot \frac{1}{\sqrt{2}} (|01\rangle - |10\rangle) = |11\rangle$$

Hands-on: superdense coding

Let's go implement it!

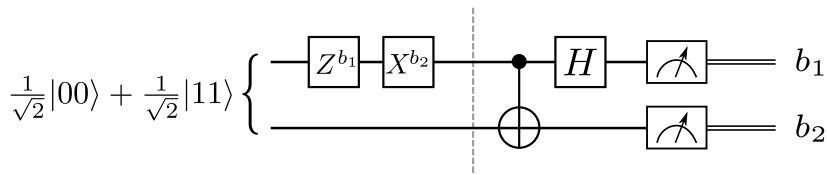

Next time

Content:

- Teleportation
- Our first variational algorithm: the variational quantum classifier

Action items:

1. Assignment 1
2. Literacy assignment 1

Recommended reading:

- Codebook nodes I.15,
- Nielsen & Chuang 1.3.5-1.3.7, 1.4.2-1.4.4, 2.3