

No. of Functional Features Included in the Solution

Phase 5 · Project Development Phase

Arockia Rajamanickam (Team Lead) · John Richardson Dyriaraj C · Saravana Kumar S · Balaji S · Geethesh B S

This document enumerates the functional features delivered by the Script-Controlled ACL project on the custom table u_institution_details. Each feature is a distinct, testable access-control behaviour that was configured on ServiceNow instance dev443713.service-now.com and confirmed by impersonation on 2026-09-28.

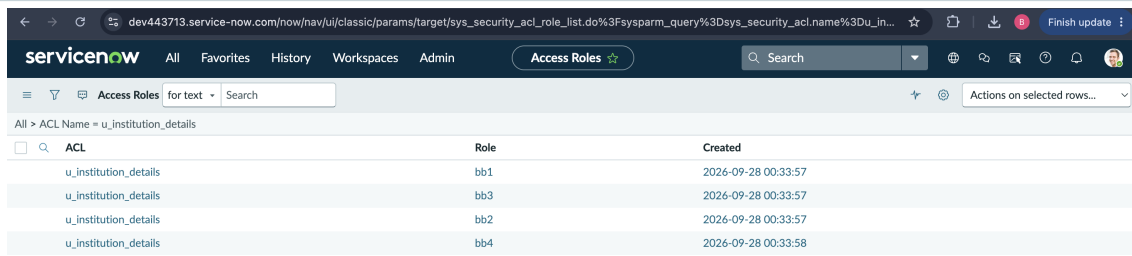
Functional features

No.	Feature	How it is implemented	Verified result
1	Role-based read access	Read ACL requires role bb1	A user without bb1 cannot read any Institution Details record.
2	Field-value read condition	Read ACL data condition u_branch=EEE	A bb1 read is limited to records whose Branch is EEE.
3	Scripted admin override on read	Advanced Read ACL script returns true for admin and for bb1	Admin keeps full read access through one explicit, auditable override point.
4	Role-based create	Create ACL requires role bb2	Only holders of bb2 can insert a new record.
5	Role-based write / update	Write ACL requires role bb3	Only holders of bb3 can edit an existing record.
6	Role-based delete	Delete ACL requires role bb4	Only holders of bb4 can delete a record.
7	Impersonation-verified branch isolation	Impersonate EEE User holding bb1 to bb4	List shows only EEE001 and EEE002 (2 of 2); New button visible; EEE001 opens as an editable form with Update and Delete.
8	Admin full access	System Administrator (admin) bypasses the row condition	List shows all four records: ECE001, EEE001, EEE002, CSE001.

Coverage summary

Total functional features	8
Records visible to EEE User (bb1 to bb4)	2 of 4 (EEE001, EEE002)
Records visible to System Administrator (admin)	4 of 4
Records visible to a user with no bb roles	0 (Security constraints prevent access)

Evidence (from the ServiceNow instance)

A screenshot of the ServiceNow 'Access Roles' page. The browser address bar shows a URL with parameters for sys_security_acl_role_list. The page header includes the ServiceNow logo and navigation tabs like 'All', 'Favorites', 'History', 'Workspaces', and 'Admin'. Below the header, there's a search bar and a filter dropdown set to 'for text'. The main content area displays a table with columns 'ACL', 'Role', and 'Created'. The table lists four entries, all with 'u_institution_details' as the ACL name and various roles (bb1, bb3, bb2, bb4) as the role, all created on 2026-09-28 at 00:33:57. An 'Actions on selected rows...' dropdown is visible on the right side of the table.

ACL	Role	Created
u_institution_details	bb1	2026-09-28 00:33:57
u_institution_details	bb3	2026-09-28 00:33:57
u_institution_details	bb2	2026-09-28 00:33:57
u_institution_details	bb4	2026-09-28 00:33:58

ACL → role links bb1–bb4