

Question 1

Incorrect

Mark 0.00 out of 1.00

 Flag question

What will be output when you will execute following C code?

```
int main()
{
    int a = 5 , b = 10 , c = 1;
    if (a && b > c)
    {
        printf("Emertxe");
    }
    else
    {
        break;
    }
}
```

- ☐ a. Emertxe
- ☒ b. Nothing (Blank) 
- ☐ c. compiler error
- ☐ d. None of the other options

Your answer is incorrect.

The correct answer is:
compiler error

Question 2

Correct

Mark 1.00 out of 1.00

 Flag question

Which of the following cannot be checked in a switch-case statement?

- ☐ a. Short
- ☒ b. Float 
- ☐ c. Character
- ☐ d. Integer

Your answer is correct.

The correct answer is:
Float

Question 3

Correct

Mark 1.00 out of 1.00

 Flag question

How many times will the loop execute in the following program:

```
int main()
{
    char c = 85;
    while(c = 25)
    {
        printf("everything must come to an end");
    }
}
```

- ☐ a. one
- ☐ b. zero
- ☐ c. compilation error
- ☒ d. infinite times ✓

Your answer is correct.

The correct answer is:
infinite times

Question 4

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the following code :

```
int main()
{
    int a = 0;
    if (a-- <= 0)
        printf("TRUE");
    else
        printf("FALSE");
}
```

- ☐ a. Compiler error
- ☐ b. FALSE
- ☒ c. TRUE ✓
- ☐ d. 0

Your answer is correct.

The correct answer is:
TRUE

Question 5

Incorrect

Mark 0.00 out of 1.00

 Remove flag

How many time loop will run?

```
int main()
{
    int i = 2, j;
    for(j = i == 2; j <= 2; j++)
    {
        printf("Hello\n");
    }
}
```

- ☒ a. Doesn't enter the loop ✗
- ☐ b. 2
- ☐ c. 3
- ☐ d. 1

Your answer is incorrect.

The correct answer is: 2

Question 6

Correct

Mark 1.00 out of 1.00

 Remove flag

What is output of the following code?

```
int main()
{
    int i;
    int power_of_ten[2] = {0001, 0010, 0100, 1000};
    for (i = 0; i < 4; ++i)
        printf("%d ", power_of_ten[i]);
    printf("\n");
    return 0;
}
```

- ☐ a. 1 8 64 512
- ☐ b. 1 8 64 1000
- ☐ c. 1 10 100 1000
- ☒ d. 1 8 Junk Junk ✓

Your answer is correct.

The correct answer is:

1 8 Junk Junk

Question 7

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the return value of sizeof() in 64-bit machine

- ☐ a. unsigned long int
- ☐ b. long int
- ☐ c. int
- ☒ d. unsigned int 

Your answer is incorrect.

The correct answer is:
unsigned long int

Question 8

Incorrect

Mark 0.00 out of 2.00

 Remove flag

What is the output of this C code?

```
int main()
{
    int i = 0;
    do
    {
        i++;
        if (i == 2)
            continue;
        printf("In while loop ");
    } while (i < 2);
    printf("%d\n", i);
}
```

- ☒ a. In while loop in while loop 3 
- ☐ b. In while loop 2
- ☐ c. Infinite loop
- ☐ d. In while loop 3

Your answer is incorrect.

The correct answer is:
In while loop 2


Question 9

Incorrect

Mark 0.00 out of 3.00

 Flag question

What is the output of the algorithm in the flowchart below for the input $k=3$ and $I = \{10, 7, 1\}$?

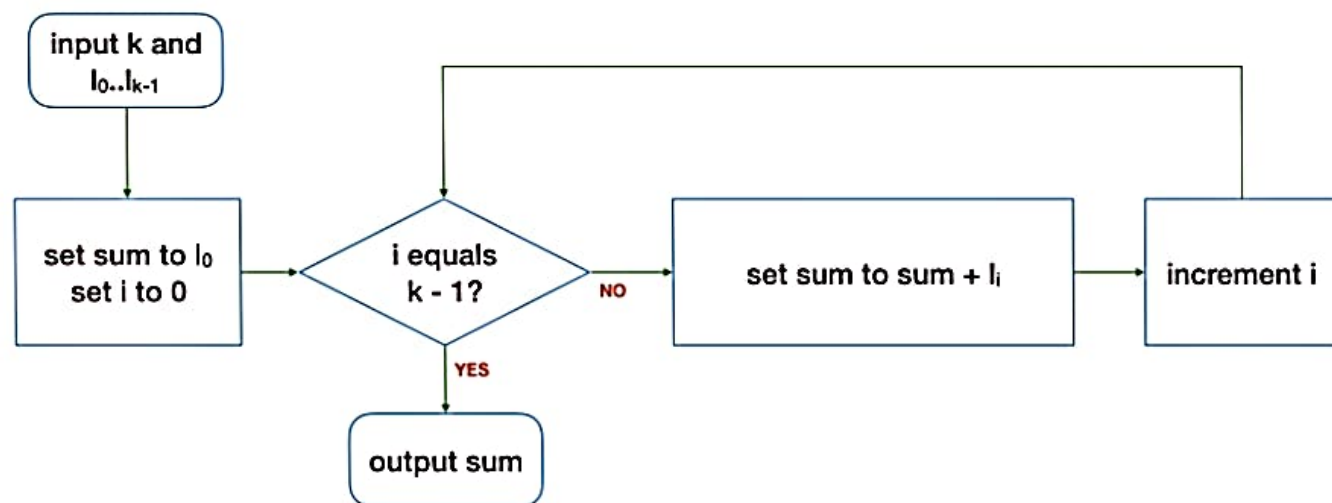

- ☒ a. 17 
- ☐ b. 18
- ☐ c. 8
- ☐ d. 27

Your answer is incorrect.

The correct answer is:

27

Question 10

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    int num1 = 0x8000;
    short int num2 = 0x8000;
    if (num1 == (unsigned)num2)
    {
        printf("It's Equal\n");
    }
    else
    {
        printf("It's not Equal\n");
    }
}
```

- ☒ a. It's Equal 
- ☐ b. None of the Above
- ☐ c. Compiler Error
- ☐ d. It's not Equal

Your answer is incorrect.

The correct answer is:

It's not Equal

Question 11

Correct

Mark 2.00 out of 2.00

 Flag question

Which of the following is an invalid if-else statement?

- ☐ a. if ((char) a){}
- ☐ b. if (func1 (a)){}
- ☐ c. if (a){}
- ☒ d. if (if (a == 1)){ } 

Your answer is correct.

The correct answer is:

if (if (a == 1)){ }

Question 12

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of the following code

```
int main()
{
    int i;
    for(i = 0; i < 3; i++)
    {
        int i=6;
        i--;
        printf("%d..", i);
    }
}
```

- ☐ a. 0..1..2..
- ☐ b. 5..5..5..
- ☒ c. 6..5..4.. 
- ☐ d. None

Your answer is incorrect.

The correct answer is: 5..5..5..

Question 13

Correct

Mark 1.00 out of 1.00

 Flag question

What are the different ways to represent a design?

- ☒ a. Algorithm, Flowchart and Pseudo Code ☑
- ☐ b. Algorithm and Flowchart
- ☐ c. Algorithm
- ☐ d. Algorithm and Pseudo Code

Your answer is correct.

The correct answer is:

Algorithm, Flowchart and Pseudo Code

Question 14

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the code?

```
int main()
{
    int val = 10;
    if (val = 5)
        printf ("Hello");
    else
        printf ("World");
}
```

- ☐ a. Hello World
- ☐ b. World
- ☐ c. Compilation error
- ☒ d. Hello ☑

Your answer is correct.

The correct answer is:

Hello

Question 15

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    char ch;
    for(ch = 'a';ch <= 127;ch++)
        printf("%d", ch);
    return 0;
}
```

- ☐ a. Prints from 65 to 127
- ☒ b. prints from 97 to 127 
- ☐ c. Infinite loop
- ☐ d. Run time error

Your answer is incorrect.

The correct answer is:

Infinite loop

Question 16

Incorrect

Mark 0.00 out of 3.00

 Flag question

Which for loop will run faster

```
// Code A
for(int i = 0; i < 100; i++)
for(int j = 0; j < 10; j++)

// Code B
for(int j = 0; j < 10; j++)
for(int i = 0; i < 100; i++)
```

- ☒ a. Code A 
- ☐ b. Code B
- ☐ c. Both are same

Your answer is incorrect.

The correct answer is:

Code B

Question 17

Incorrect

Mark 0.00 out of 2.00

 Flag question

What is the output of the following code

```
int main()
{
    int a = 4;
    printf("%d %d %d", a, ++a, a++);
    return 0;
}
```

- ☐ a. 6 6 4
- ☐ b. 5 5 6
- ☐ c. Undefined Behaviour
- ☒ d. None of the above 

Your answer is incorrect.

The correct answer is: Undefined Behaviour

Question 18

Incorrect

Mark 0.00 out of 2.00

 Flag question

What is the output of the following code

```
int main()
{
    char ch;
    for(ch='0';ch <= 127;ch++)
        printf("%d", ch);
    return 0;
}
```

- ☐ a. Prints from 0 to 127
- ☒ b. prints from 48 to 127 
- ☐ c. Infinite loop
- ☐ d. None

Your answer is incorrect.

The correct answer is:

Infinite loop

Question 19

Correct

Mark 2.00 out of 2.00

 Flag question

What is the output of the following code

```
int main()
{
    int x = 3, y = 9;
    if (x == 3 && y++)
    {
        if (y == 10 || ++x)
        {
            printf("x=%d, y=%d", x, y);
        }
    }
}
```

- ☒ a. x=3, y=10 ☑
- ☐ b. x=3, y=9
- ☐ c. x=4, y=10
- ☐ d. None

Your answer is correct.

The correct answer is: x=3, y=10

Question 20

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of following program?

```
int main()
{
    int a = 4;
    while(a-- >= 1)
        while(a-- >= 0);
    printf("%d\n", a);
}
```

- ☐ a. -3
- ☐ b. -2
- ☒ c. -1 ☒
- ☐ d. 0

Your answer is incorrect.

The correct answer is: -3

Question 21

Incorrect

Mark 0.00 out of 2.00

 Flag question

What is the output of the following program assuming 32-bit system?

```
int main()
{
    printf("%d\t", sizeof(6.5));
    printf("%d\t", sizeof(9000));
    printf("%d\t", sizeof('A'));
}
```

- ☐ a. 4 2 1
- ☐ b. 8 4 2
- ☐ c. 8 4 4
- ☒ d. 4 4 1 

Your answer is incorrect.

The correct answer is:

8 4 4

Question 22

Incorrect

Mark 0.00 out of 2.00

 Flag question

What will be the output of the program?

```
int main()
{
    int i = 1;
    if(i = !i)
        printf("Hi");
    else if (i = !i)
        printf("Bye");
    else if (1)
        printf("Tata");
    else
        printf("Enough Man!!");
    return 0;
}
```

- ☐ a. Enough Man!!
- ☒ b. Tata 
- ☐ c. Hi
- ☐ d. Bye

Your answer is incorrect.

The correct answer is:

Bye

Question 23

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the code?

```
int main()
{
    int zed = 0;
    if (zed == 5)
    {
        printf ("Hello");
    }
    else
    {
        printf ("World");
    }
}
```

- ☒ a. World 
- ☐ b. Hello
- ☐ c. Compilation error
- ☐ d. HelloWorld

Your answer is correct.

The correct answer is:

World

Question 24

Correct

Mark 1.00 out of 1.00

 Flag question

What will be output when you will execute following C code?

```
int main()
{
    switch(6)
    {
        case 6.0f:    printf("Hello");
                      break;
        case 6.0:     printf("World");
                      break;
        case 6.0L:    printf("Emertxe");
                      break;
        default:      printf("Technologies");
    }
}
```

- ☐ a. Hello
- ☐ b. Emertxe
- ☒ c. compiler error 
- ☐ d. Technologies

Your answer is correct.

The correct answer is:
compiler error

Question 25

Correct

Mark 2.00 out of 2.00

Flag question

What is the output of the following code

```
int main()
{
    int a=0, b=4, c=3, d=0;
    if(a, b, c, d)
        printf("Hello");
}
```

- ☒ a. Nothing is printed ✓
- ☐ b. Hello
- ☐ c. Compilation error
- ☐ d. 0

Your answer is correct.

The correct answer is:
Nothing is printed

Question 26

Incorrect

Mark 0.00 out of 2.00

Flag question

What is the output of the following code?

```
int main()
{
    int a = 0X00000000;
    int b = 0X00000001;
    if ((a & b) || (a = b = 0))
    {
        printf("Hello a=%d b=%d\n", a, b);
    }
    printf("World a=%d b=%d\n", a, b);
}
```

- ☐ a. World a=0 b=1
- ☒ b. compiler error ✗
- ☐ c. Hello a=0 b=0
- ☐ d. World a=0 b=0

Your answer is incorrect.

The correct answer is: World a=0 b=0

Question 27

Correct

Mark 2.00 out of 2.00

 Flag question

What is the output of the following code

```
int main()
{
    signed char c = 140;
    c = 140 + 9;
    printf("%d", c);
    return 0;
}
```

- ☐ a. 149
- ☐ b. Runtime error
- ☒ c. -107 ✓
- ☐ d. None of the above

Your answer is correct.

The correct answer is: -107

Incorrect

Mark 0.00 out of 1.00

 Flag question

What will be output of following program?

```
int main()
{
    int a,b,c,d,e,f,g,h,k;
    a=8, b=3, c=2, d=3, e=2, f=11;
    printf("%d\n", a-b || (a-b*c) + d && e - f % 3);
}
```

- ☐ a. 5
- ☐ b. 10
- ☒ c. 0 
- ☐ d. 1

Your answer is incorrect.

The correct answer is:

1

Question 29

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of the following code

```
int main()
{
    char c = 222;
    switch(c) {
        case 222 : printf("222");
            break;
        case -34: printf("-34");
            break;
        default: printf("No surprises");
            break;
    }
}
```

- ☐ a. 222
- ☐ b. -34
- ☒ c. No surprises 
- ☐ d. None

Your answer is incorrect.

The correct answer is: -34

Question 30


Correct

Mark 1.00 out of 1.00

 Remove flag

Analyze the given flowchart. What is the value in Box 6?

Box No.	1	2	3	4	5	6	7	8	9	10	11	12
	1	2	0	3	7	5	24	7	11	6	1	5

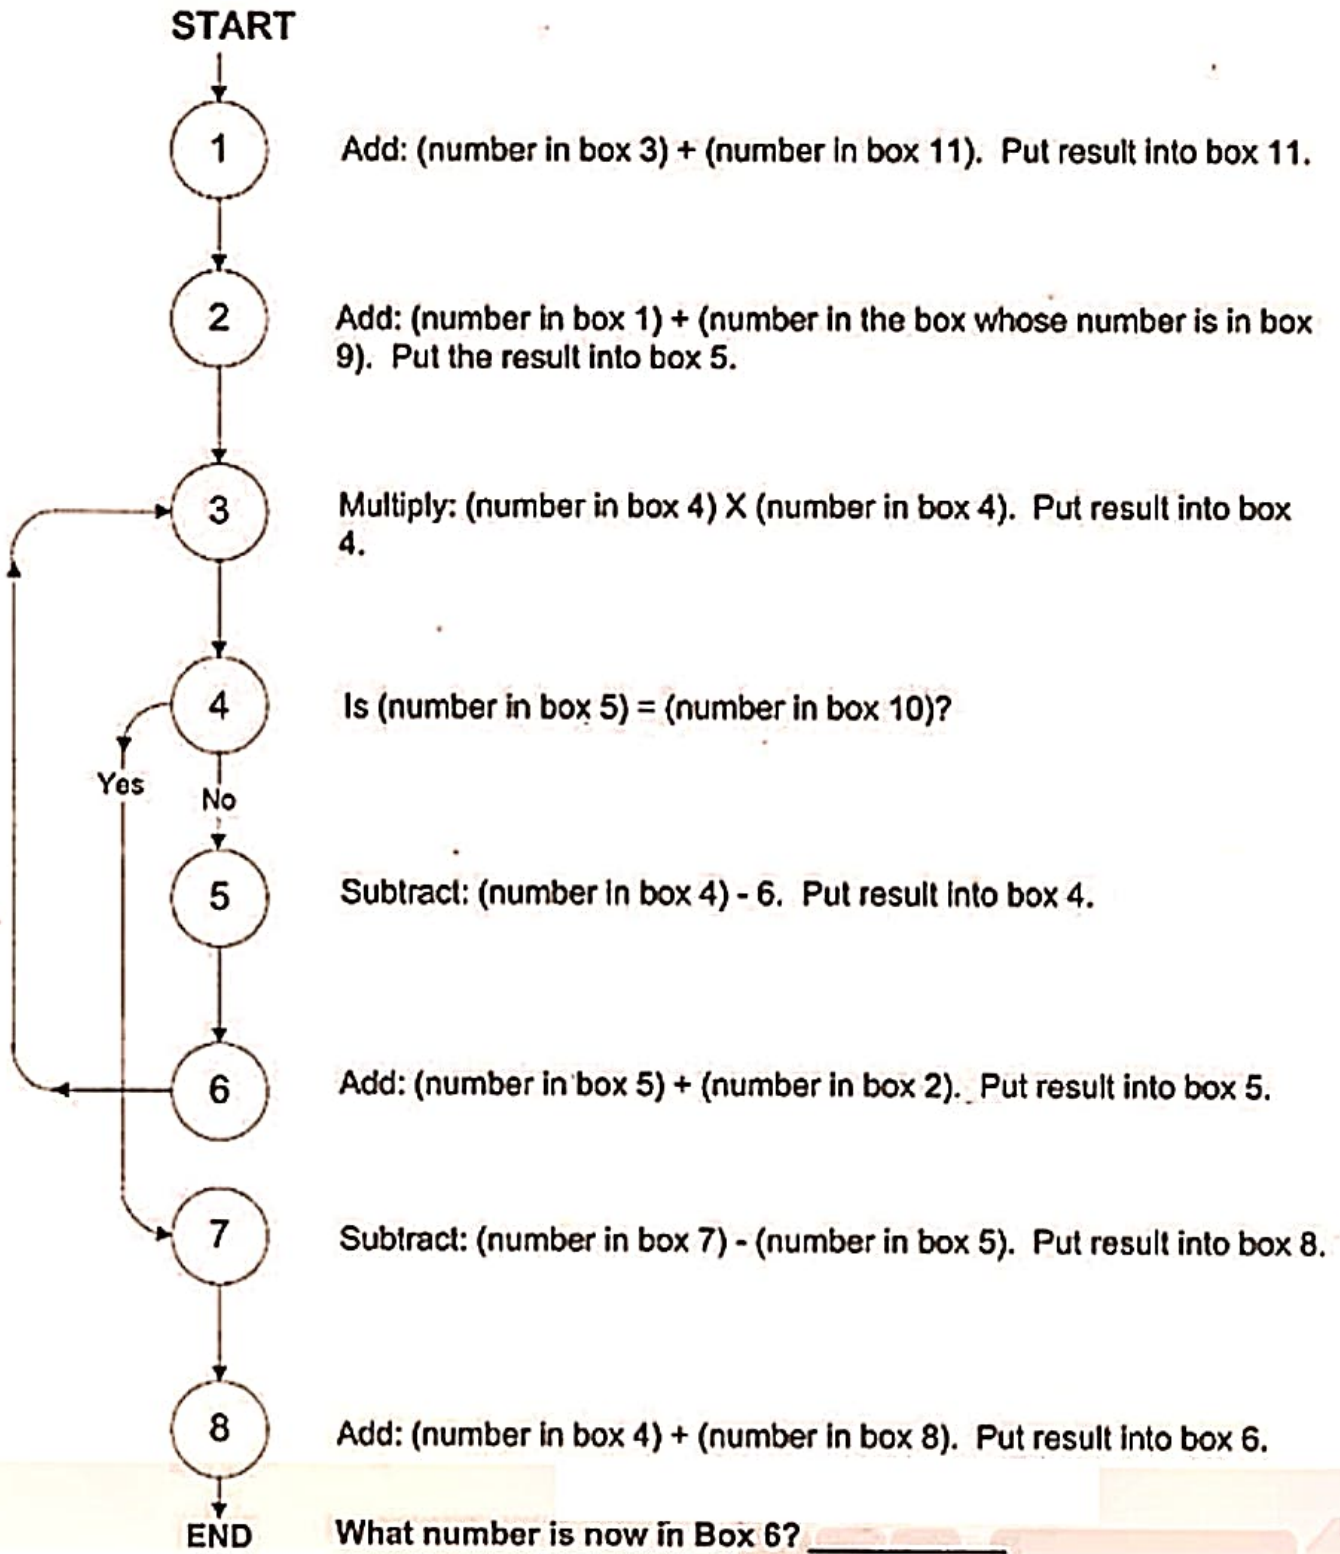

- ☐ a. 34
- ☐ b. 23
- ☒ c. 27 ✓
- ☐ d. 12

Your answer is correct.

The correct answer is:

27

Question 31

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of this C code?

```
int main()
{
    int y = 2, z;
    z = (y + (y = 10));
    printf("%d", z);
}
```

- ☐ a. 4
- ☒ b. Compilation error 
- ☐ c. 12
- ☐ d. 20

Your answer is incorrect.

The correct answer is:

20

Question 32

Incorrect

Mark 0.00 out of 2.00

 Flag question

How many times will printf be called?

```
int main()
{
    int i;
    for (i = 0; i < 10; i++)
    {
        if (i > 02) break;
        printf("A\n");
    }
}
```

- ☒ a. 2 times 
- ☐ b. 3 times
- ☐ c. compilation error
- ☐ d. None of the above

Your answer is incorrect.

The correct answer is: 3 times

Question 33

Correct

Mark 2.00 out of 2.00

 Flag question

Find out the output of the following program?

```
int main()
{
    int a[5] = {5, 1, 15, 20, 25};
    int i, j, m;
    i = ++a[1];
    j = a[1]++;
    m = a[i++];
    printf("%d, %d, %d", i, j, m);
    return 0;
}
```

- ☐ a. 2, 1, 15
- ☒ b. 3, 2, 15 ✓
- ☐ c. 1, 2, 5
- ☐ d. 2, 3, 20

Your answer is correct.

The correct answer is:

3, 2, 15

Question 34

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of the following code?

```
int main()
{
    char a,b,c;

    a = 103;

    b = 93;

    c = a+b;

    printf("%d",c);
}
```

- ☐ a. -60
- ☐ b. 196
- ☒ c. -59 
- ☐ d. None of the above

Your answer is incorrect.

The correct answer is: -60

Question 35

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the following code :

```
int main()
{
    int x = 2;

    switch(x)
    {
        case 1: printf("A");

            break;

        case 3: printf("B");

            break;

        case default: printf("C");

        case 4: printf("D");

            break;

    }
}
```

- ☐ a. C
- ☐ b. C D
- ☐ c. A
- ☒ d. Compiler error 

Your answer is correct.

The correct answer is:

Compiler error

Question 36

Correct

Mark 1.00 out of 1.00

Flag question

What is the output of the following code?

```
int main()
{
    int x;
    for(x = 1; x <= 5; x++)
    {
        switch(x)
        {
            case 1:
                printf("www.");
                continue;

            case 2:
            case 3:
            case 4:
                continue;

            case 5:
                printf("Emertxe");
        }
        printf(".com");
    }
    return 0;
}
```

- ☒ a. [www.Emertxe.com](#) ✓
- ☐ b. Emertxe.com
- ☐ c. www.com
- ☐ d. Emertxe

Your answer is correct.

The correct answer is:

[www.Emertxe.com](#)

Question 37

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of below code?

```
int main()
{
    int x, a = 5, b = 6, c = 2;
    x = a > b ? a > c ? a : c : b > c ? b : c;
    printf("%d", x);
}
```

- ☐ a. 5
- ☒ b. 6 
- ☐ c. 2
- ☐ d. 0

Your answer is correct.

The correct answer is: 6

Question 38

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of this C code?

```
int main()
{
    int x = 0, y;
    y = (x++, x);
    printf("%d", y);
}
```

- ☒ a. Compilation Error 
- ☐ b. 0
- ☐ c. 1
- ☐ d. None of the above

Your answer is incorrect.

The correct answer is: 1

Question 39

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the following code :

```
int main()
{
    int i = 4;
    switch (i)
    {
        case '4' : printf("Yes it is character 4");
                    break;
        case 4 : printf("Yes it is number 4");
                 break;
        default : printf("Terminated");
                 break;
    }
}
```

- ☒ a. Yes it is number 4 
- ☐ b. Yes it is character 4
- ☐ c. Terminated
- ☐ d. Compiler error

Your answer is correct.

The correct answer is: Yes it is number 4

Question 40

Correct

Mark 1.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    int ary[9] = {8};
    printf("%d %d %d", ary[0], ary[1], ary[2]);
}
```

- ☒ a. 8 0 0 
- ☐ b. 8 Junk Junk
- ☐ c. Segmentation fault
- ☐ d. None of the Above

Your answer is correct.

The correct answer is: 8 0 0

Question 41

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is the output of the following program:

```
int main()
{
    int a = 9, b = 9, c = 4, x;
    x = a + (--b - c);
    printf("x = %d", x);
    return 0;
}
```

- ☐ a. 13
- ☐ b. 15
- ☐ c. 14
- ☒ d. None of the above 

Your answer is incorrect.

The correct answer is: 13

Question 42

Correct

Mark 1.00 out of 1.00

 Flag question

How many times will the loop execute :

```
int main()
{
    int i;
    for (i = 10 == 0; i <= 10; i++)
    {
        printf("Hello");
    }
}
```

- ☒ a. 11 
- ☐ b. 10
- ☐ c. 0
- ☐ d. 1

Your answer is correct.

The correct answer is:

11

Question 43

Correct

Mark 1.00 out of 1.00

Flag question

Select the correct order for SDLC phases

- ☐ a. Requirements Analysis -> Design -> Testing -> Implementation
- ☐ b. Requirements Analysis -> Implementation -> Design -> Testing
- ☐ c. Requirements Analysis -> Implementation -> Testing-> Design
- ☒ d. Requirements Analysis -> Design -> Implementation -> Testing ☑

Your answer is correct.

The correct answer is:

Requirements Analysis -> Design -> Implementation -> Testing

Question 44

Correct

Mark 1.00 out of 1.00

Flag question

What is output of the following code?

```
void main()
{
    int num = 100;
    printf("%d %o %x", num, num, num);
}
```

- ☐ a. 100 144 32
- ☐ b. 100 256 128
- ☒ c. 100 144 64 ☑
- ☐ d. 100 164 64

Your answer is correct.

The correct answer is:

100 144 64

Question 45

Correct

Mark 2.00 out of 2.00

 Flag question

What is the output of this C code?

```
int main()
{
    printf("before continue ");
    continue;
    printf("after continue\n");
}
```

- ☐ a. After continue
- ☐ b. Before continue after continue
- ☐ c. Before continue
- ☒ d. Compile time error 

Your answer is correct.

The correct answer is:

Compile time error

Question 46

Incorrect

Mark 0.00 out of 1.00

Flag question

What will be printed as the result of the operation below:

```
main()
{
    int x = 6, y = 19;

    int a, b;

    a = x++;

    b = ++y;

    printf("%d %d", a, b);
}
```

- ☒ a. 7 20
- ☐ b. 7 19
- ☐ c. 6 19
- ☐ d. None of the Above

Your answer is incorrect.

The correct answer is: None of the Above

Question 47

Incorrect

Mark 0.00 out of 1.00

Flag question

What will be printed as the result of the operation below:

```
int main()
{
    int i = 2, j = 3, k, l;
    double a, b;
    k = i / j * j;
    l = j / i * j;
    a = i / j * i;
    b = j / i * i;
    printf("%d\n%d\n", k, l);
    printf("%f\n%f\n", a, b);
}
```

- ☐ a. 0 3 0 2
- ☐ b. 0 3 0.000000 2.000000
- ☒ c. 0 0 0 0
- ☐ d. 2 3 1.333333 2.000000

Your answer is incorrect.

The correct answer is:
0 3 0.000000 2.000000

Question 48

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of this C code?

```
void main()
{
    int i = 0;
    do
    {
        printf("Hello");
    } while (i != 0);
}
```

- ☒ a. Hello ✓
- ☐ b. Run time error
- ☐ c. H is printed infinite times
- ☐ d. Nothing

Your answer is correct.

The correct answer is:

Hello

Question 49

Correct

Mark 1.00 out of 1.00

 Flag question

What will be output of following program?

```
int main()
{
    int k=1;
    printf("%d==1 is ""%s", k, k==1? "TRUE" : "FALSE" );
}
```

- ☐ a. 0 == 1 is TRUE
- ☐ b. compiler error
- ☐ c. 0 == 1 is FALSE
- ☒ d. 1 == 1 is TRUE ☑

Your answer is correct.

The correct answer is:

1 == 1 is TRUE

Question 50

Incorrect

Mark 0.00 out of 3.00

 Flag question

What will be the output of the following algorithm?

STEP 1: Start

STEP 2: Let a = 1

STEP 3: Print a

STEP 4: Let b = 1

STEP 5: Print b

>STEP 6: Let i = 5

STEP 7: Let the value of c = a + b

STEP 8: Let the value of i = i - 1

STEP 9: If the value of i = 0 then goto STEP 14

STEP 10: Print the value of c

STEP 11: Let the value of a = b

STEP 12: Let the value of b = c

STEP 13: Goto STEP 7

STEP 14: Stop

- ☐ a. 1 1 2 3 5 8
- ☐ b. 1 1 3 2 5 8
- ☐ c. 1 1 2 3 5
- ☒ d. 1 1 2 3 5 8 13 ☒

Your answer is incorrect.

The correct answer is:

1 1 2 3 5 8

Question 51

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of this C code?

```
void main()
{
    int lookup[100] = {0, 1, 2, 3, 4, 5, 6, 7, 8, 9};
    printf("%d", lookup[6]);
}
```

- ☐ a. 5
- ☐ b. 7
- ☐ c. Compile time error
- ☒ d. 6 

Your answer is correct.

The correct answer is: 6

Question 52

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the following program?

```
int main()
{
    int a = 100;
    if (a > 10)
        printf("Saina Nehwal");
    else if (a > 20)
        printf("Jwala Gutta");
    else if (a > 30)
        printf("Sania Mirza");
}
```

- ☒ a. Saina Nehwal ✓
- ☐ b. Jwala Gutta
- ☐ c. Sania Mirza
- ☐ d. All of the above

Your answer is correct.

The correct answer is: Saina Nehwal

Question 53

Incorrect

Mark 0.00 out of 3.00

 Flag question

What will be output when you will execute following C code?

```
int main()
{
    char a = 250;
    int expr;
    expr = a + !a + a + ++a;
    printf("%d", expr);
    return 0;
}
```

- ☐ a. 249
- ☐ b. logical error
- ☐ c. -17
- ☒ d. syntax error ✕

Your answer is incorrect.

The correct answer is:

-17

Question 54

Correct

Mark 1.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    int i = 10;
    goto label2;
    while(i)
    {
        switch(i-1)
        {
            case 1:
label2:
                printf("%d\n", i);
        }
    }
}
```

- ☐ a. Compiler error
- ☐ b. Infinite loop (Print's nothing)
- ☒ c. Prints 10 and Infinite loop ✓
- ☐ d. Prints 10 Infinite time's

Your answer is correct.

The correct answer is:

Prints 10 and Infinite loop

Question 55

Incorrect

Mark 0.00 out of 1.00

 Flag question

What will happen if you assign a value to an array element whose subscript exceeds the size of array?

- ☒ a. The compiler would report an error. 
- ☐ b. The element will be set to 0.
- ☐ c. It may overwrite other variables.
- ☐ d. The array size would appropriately grow.

Your answer is incorrect.

The correct answer is:

It may overwrite other variables.

Question 56

Correct

Mark 1.00 out of 1.00

 Flag question

sizeof is

- ☒ a. an operator 
- ☐ b. a function
- ☐ c. a macro
- ☐ d. None of the other options

Your answer is correct.

The correct answer is:

an operator

Question 57

Incorrect

Mark 0.00 out of 2.00

 Flag question

How many time will the loop execute

for (x = 0; x++;);

- ☐ a. compilation error
- ☒ b. Infinite 
- ☐ c. 1
- ☐ d. 0

Your answer is incorrect.

The correct answer is:

0

Question 58

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    int arr[] = {};
    printf("%zu \n", sizeof(arr));
}
```

- ☐ a. Compiler error
- ☐ b. 4
- ☐ c. 0
- ☒ d. Segmentation fault 

Your answer is incorrect.

The correct answer is:

0

Question 59

Incorrect

Mark 0.00 out of 1.00

 Flag question

What is output of the following code?

```
int main()
{
    int num1 = 0x8000;
    short int num2 = 0x8000;
    if (num1 == num2)
    {
        printf("It's Equal\n");
    }
    else
    {
        printf("It's not Equal\n");
    }
}
```

- ☒ a. It's Equal 
- ☐ b. It's not Equal
- ☐ c. Compiler Error
- ☐ d. None of the Above

Your answer is incorrect.

The correct answer is: It's not Equal

Question 60

Incorrect

Mark 0.00 out of 1.00

Flag question

What is output of the following code?

```
int main()
{
    int i;
    int power_of_ten[4] = {0001, 0010, 0100, 1000};
    for (i = 0; i < 4; ++i)
        printf("%d ", power_of_ten[i]);
    printf("\n");
    return 0;
}
```

- ☒ a. 1 10 100 1000 
- ☐ b. 1 8 64 1000
- ☐ c. 1 8 64 512
- ☐ d. Compiler Error

Your answer is incorrect.

The correct answer is:

1 8 64 1000

Question 61

Correct

Mark 3.00 out of 3.00

 Flag question

What is the output of the following code

```
int main()
{
    int a = -60, b = -34;
    unsigned int c = 8;
    printf("%d", c);
    return 0;
}
```

- ☒ a. 8 
- ☐ b. Runtime Error
- ☐ c. -8
- ☐ d. None

Your answer is correct.
The correct answer is: 8

Question 62

Correct

Mark 1.00 out of 1.00

 Flag question

What is the output of the following code?

```
int main()
{
    int x=5;
    switch(x*2)
    {
        case 15:
            printf("One");
            break;
        case 10:
            continue;
            printf("Two");
        default:
            printf("Three");
    }
    return 0;
}
```

- ☐ a. Compilation Error: x*2 cannot be used
- ☒ b. Compilation Error. Cannot use continue 
- ☐ c. Three
- ☐ d. Infinite Loop

Your answer is correct.
The correct answer is:
Compilation Error. Cannot use continue

Question 63

Incorrect

Mark 0.00 out of 2.00

 Flag question

What is the output of the following code

```
int main()
{
    int i = 0X53F;
    printf ("%X", i + 1);
}
```

- ☐ a. 540
- ☐ b. 53G
- ☐ c. Compiler Error
- ☒ d. None 

Your answer is incorrect.

The correct answer is:

540

Question 64

Incorrect

Mark 0.00 out of 2.00

 Flag question

What will be the output of the following C code?

```
int main()
{
    int a, b;
    a = 17, 3, 4;
    b = (2, 10, 11);
    printf("%d ", a+b);
}
```

- ☐ a. Syntax or Run-time Error
- ☒ b. 15 
- ☐ c. 6
- ☐ d. 28

Your answer is incorrect.

The correct answer is: 28

Question 65

Incorrect

Mark 0.00 out of 1.00

 Flag question

How many time will the loop execute?

```
for (; );
```

- ☒ a. Zero 
- ☐ b. Infinite
- ☐ c. One
- ☐ d. Compilation error.

Your answer is incorrect.

The correct answer is:

Infinite