


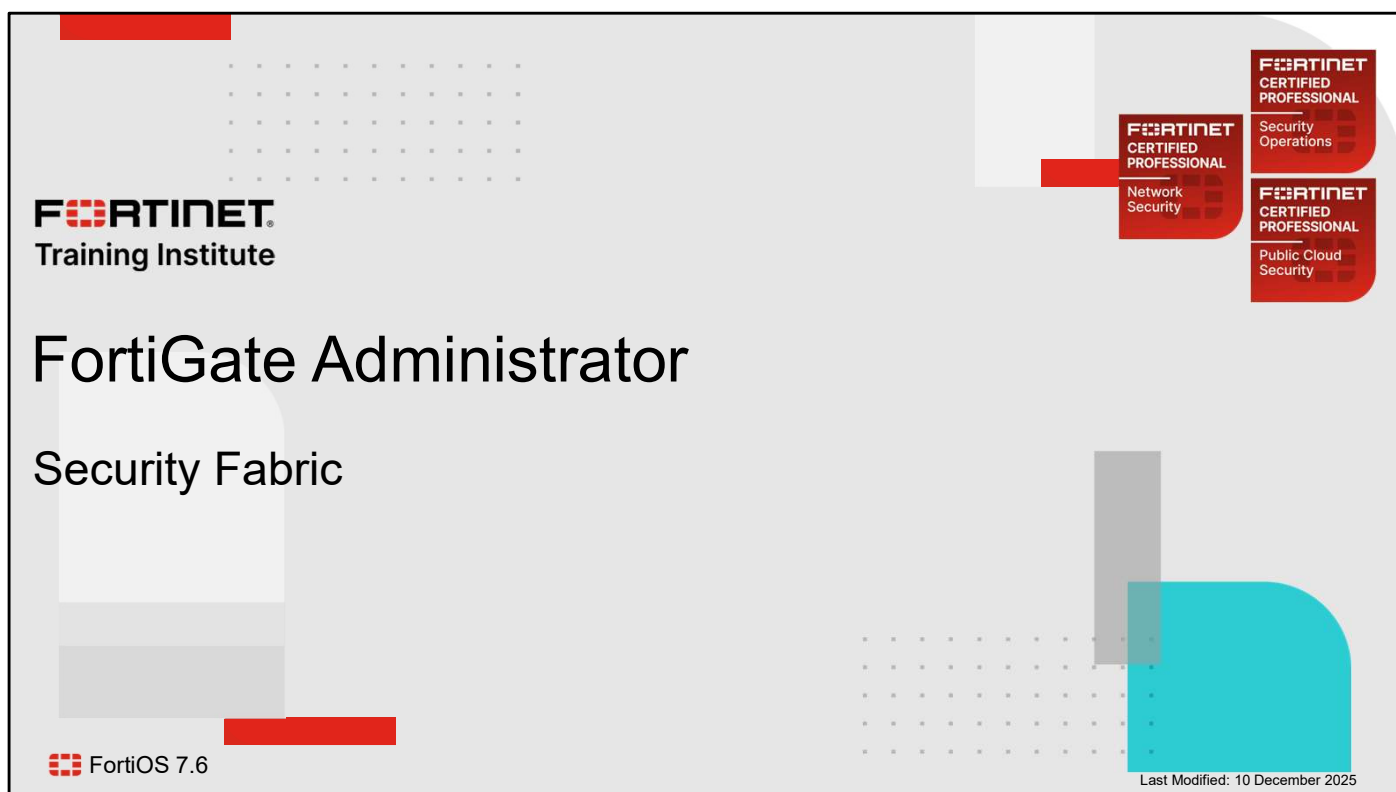

The slide features a light gray background with abstract geometric shapes in red, gray, and teal. A grid of small dots is visible in the upper left and lower right areas. The Fortinet logo is in the top left, and three certification badges are in the top right. The main title 'FortiGate Administrator' is in large black font, with 'Security Fabric' below it. The bottom left shows 'FortiOS 7.6' and the bottom right shows the date 'Last Modified: 10 December 2025'.

FORTINET
Training Institute

FortiGate Administrator

Security Fabric

FORTINET
CERTIFIED PROFESSIONAL
Network Security

FORTINET
CERTIFIED PROFESSIONAL
Security Operations


FORTINET
CERTIFIED PROFESSIONAL
Public Cloud Security

 FortiOS 7.6


Last Modified: 10 December 2025

In this lesson, you will learn about the Fortinet Security Fabric.


Lesson Overview



Fortinet Security Fabric Basics



Deploying the Security Fabric



Extending the Security Fabric and Features

In this lesson, you will learn about the topics shown on this slide.

Fortinet Security Fabric Basics

Objectives

- Define the Fortinet Security Fabric
- Identify the Fortinet devices that participate in the Security Fabric

After completing this section, you should be able to achieve the objectives shown on this slide.

By demonstrating a competent understanding of key concepts of the Fortinet Security Fabric, you will gain deeper insight into its value, and the servers that comprise it.

What Is the Fortinet Security Fabric?

- An enterprise solution that enables a holistic approach to network security, whereby the network landscape is visible through a single console and all network devices are integrated into a centrally managed and automated defense
- The Security Fabric has these attributes:
 - Broad
 - Integrated
 - Automated
- The API allows for third-party device integration



What is the Fortinet Security Fabric?

It is a Fortinet enterprise solution that enables a holistic approach to network security, whereby the network landscape is visible through a single console and all network devices are integrated into a centrally managed and automated defense.

The network devices include all components, from physical endpoints to virtual devices in the cloud. Because devices are centrally managed and are sharing threat intelligence with one another in real time, and are receiving updates from Fortinet at the macro level, your network can quickly identify, isolate, and neutralize threats as they appear.


The Security Fabric has the following attributes:

- **Broad:** It provides visibility of the entire digital attack surface to better manage risk
- **Integrated:** It provides a solution that reduces the complexity of supporting multiple point products
- **Automated:** Threat intelligence is exchanged between network components in real-time allowing for automated response to threats

A fourth attribute could be added to this description of the Security Fabric: *open*. The API and protocol are available for other vendors to join and for partner integration. This allows for communication between Fortinet and third-party devices.

Why a Security Fabric?

- Many administrators lack visibility into their network defenses, making their networks more susceptible to undetected network infiltration
- Network complexity and sophisticated malware (enhanced by AI), necessitates a centralized and holistic approach to security

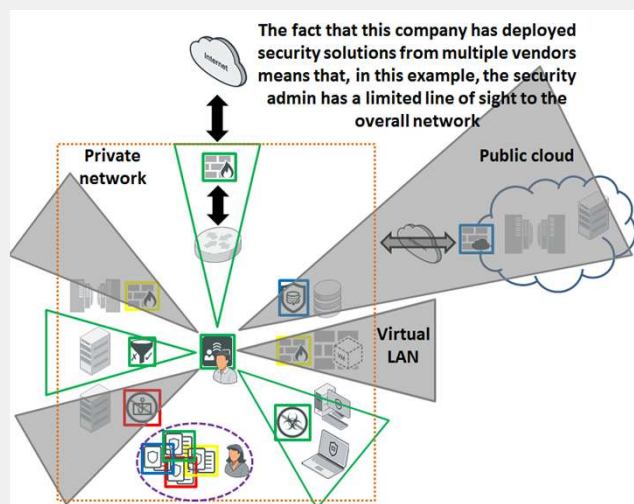

Why has Fortinet deemed the Security Fabric an essential solution for a robust network defense?

As networks evolved and various new types of threats surfaced, point security products were deployed to address these emerging threats. Often, these piecemeal solutions were effective, but deploying products using different standards and protocols meant that defense assets could not be effectively coordinated.

The illustration on the slide tells the story of a network that has deployed security solutions from different vendors. The administrator at the center, working from the security console, has visibility into only some of the security solutions. This lack of visibility of the entire network defense is a serious flaw, and could allow a foreign infiltrator to breach network defenses undetected.

The sheer complexity of today's networks compounds this problem. In addition, increasingly sophisticated malware has an expanding attack surface to exploit because networks have moved beyond the confines of a traditional perimeters, extending into virtualized environments and public clouds. Add to this mix the ever-growing numbers of unmanaged devices resulting from BYOD programs, and you have the perfect security storm.

The most feasible solution is to build a centrally managed, holistic approach to security, whereby you have a clear line of sight to all potential infiltration points and can coordinate defenses to contain and neutralize network breaches.

Security Fabric Products

- Different consumption models available

Appliance Virtual Machine Cloud Security-as-a-Service Software




As shown on this slide, the Fortinet Security Fabric offers eight solutions: network access, security WLAN/LAN, public and private cloud infrastructure, applications, endpoint, security operations, open fabric ecosystem, and fabric management center. Each of these solutions is based on specific use cases and involve the integration of specific Fortinet products.

The Fortinet Security Fabric offers network security with FortiGate, IPS, VPN, SD-WAN. It also offers multi-cloud strategy across public clouds, private clouds, hybrid clouds, and software as a service (SaaS). It also offers quite a sophisticated endpoint offering ranging from the Fabric Agent all the way up to full endpoint protection, email security, web application security, secure access across distributed enterprises and SD-WAN environments, advanced threat protection, management and analytics, and security information and event management (SIEM).

All of these are underscored and supported by FortiGuard Services, which deliver AI-powered intelligence and protection across the Security Fabric.

Devices That Comprise the Security Fabric

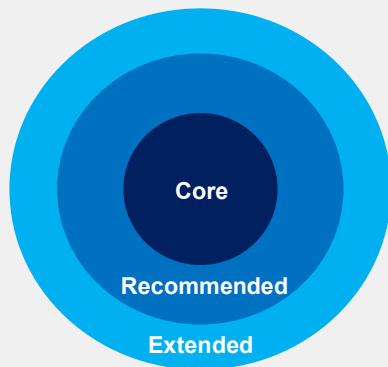

- **Core:**
 - FortiGate devices are core: one root, and one or more downstream
 - At least one of: FortiAnalyzer, FortiAnalyzer Cloud, or FortiGate Cloud
- **Recommended—Adds significant visibility or control:**
 - FortiManager, FortiAP, FortiSwitch, FortiClient, FortiClient EMS, FortiSandbox, FortiMail, FortiWeb, FortiNDR, FortiDeceptor
- **Extended—Integrates with the Security Fabric, but may not apply to everyone:**
 - Other Fortinet products and third-party products using the API

FortiGate devices are the core of the Security Fabric, plus one FortiAnalyzer or cloud logging solution. FortiAnalyzer Cloud or FortiGate Cloud can act as the cloud logging solution. The FortiGate devices must be running in NAT mode and can have one of the following roles:

- Root
- Downstream

Root FortiGate is the main component in the Security Fabric. It is typically located on the edge of the network and connects the internal devices and networks to the internet through your ISP. From the root FortiGate, you can see information about the entire Security Fabric on the Physical and Logical Topology pages in the GUI.

After a root FortiGate is installed, all other downstream FortiGate devices in the Security Fabric act as Internal Segmentation Firewalls (ISFWs), located at strategic points in your internal network, rather than on the network edge. This allows extra security measures to be taken around key network components, such as servers that contain valuable intellectual property. ISFW FortiGate devices create network visibility by sending traffic and information about the devices that are connected to them to the root FortiGate.


To add more visibility and control, Fortinet recommends adding FortiManager, FortiAP, FortiClient, FortiClient EMS, FortiSandbox, FortiMail, FortiWeb, FortiNDR, FortiDeceptor, and FortiSwitch.

The solution can be extended by adding other network security devices, including several third-party products.


Lesson Progress



Fortinet Security Fabric Basics



Deploying the Security Fabric



Extending the Security Fabric and Features

Good job! You now understand the basics of the Fortinet Security Fabric.

Now, you will learn how to deploy the Security Fabric in your network environment..

Deploying the Security Fabric

Objectives


- Understand how to implement the Security Fabric
- Configure the Security Fabric
- Understand how device detection works

After completing this section, you should be able to achieve the objectives shown on this slide.

By demonstrating competence in the deployment of the Fortinet Security Fabric, you will better understand how it helps to manage all your network devices more efficiently.

How Do You Implement the Security Fabric?

This is an example of a simple network using only the core components of the Security Fabric

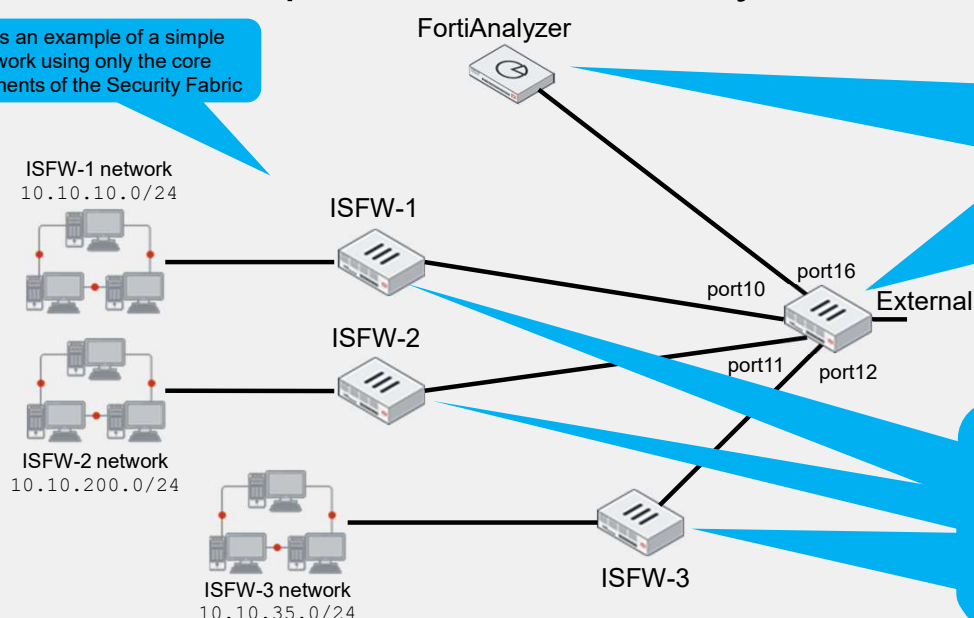

There is a FortiAnalyzer and one next-generation firewall (NGFW). This FortiGate is configured as the *root* firewall. In this example, the alias for the firewall is *External*.

There are three internal segmentation firewalls (ISFWs) that segregate the WAN into logical components and allow your network to contain a threat, should a breach occur.

Implementing a Security Fabric involves at least the following steps:


1. Design the network topology, including the root firewall (upstream) and the other devices (downstream), the configuration of FortiAnalyzer, and the network implementation.
2. Configure the root FortiGate device to serve as the Fabric root.
3. Enable the Security Fabric on the interfaces used for connections between devices.
4. Configure any other connectors needed (like FortiManager) on the root FortiGate device.
5. Configure downstream devices to reach the root FortiGate device and authorize it.
6. Configure local or default for the synchronization of objects across the Security Fabric.

As an example, this slide shows a simple network that comprises only the core devices of a Security Fabric, including one FortiAnalyzer and four NGFW FortiGate devices.

The FortiGate device named External is acting as the edge firewall and is configured as the *root* firewall within the Security Fabric.

Downstream from the root firewall, three internal segmentation firewalls compartmentalize the WAN in order to contain breaches and control access to various LANs. This example uses ISFW-1, ISFW-2, and ISFW-3 LANs.

General Steps to Configure the Security Fabric

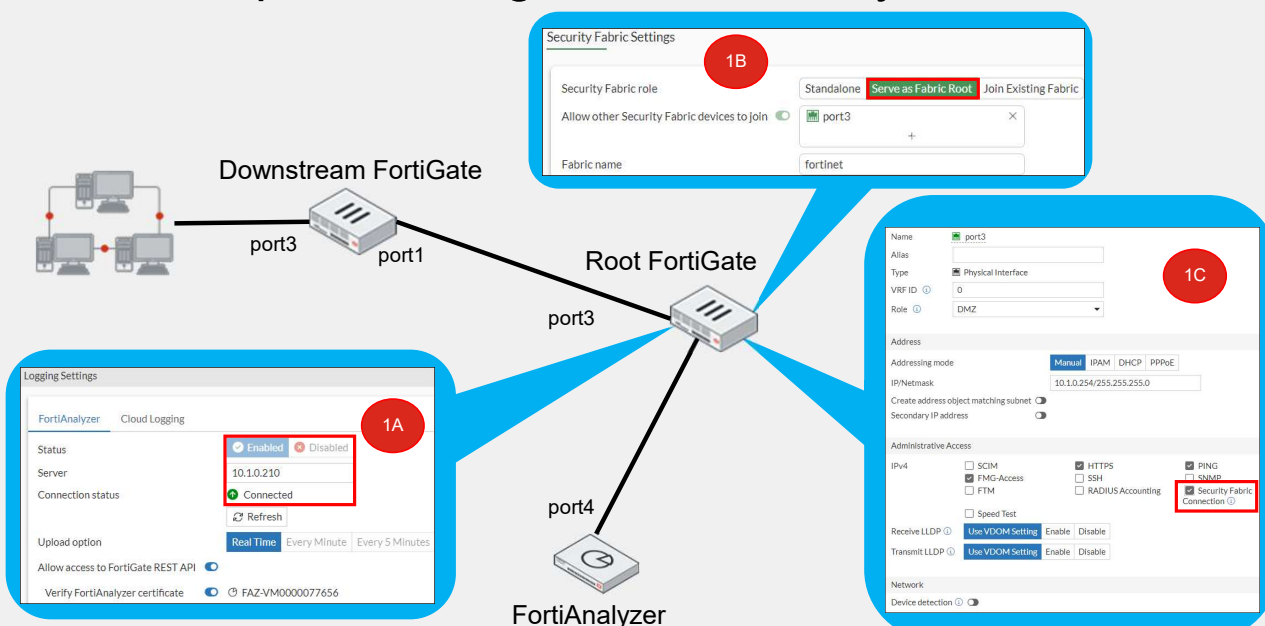


To configure a new Security Fabric, consider the general steps that follow:

You must configure FortiAnalyzer or a cloud logging solution. This logging configuration is pushed to all the downstream FortiGate devices when they join the root FortiGate device. Then, on the root FortiGate device, you must enable the Security Fabric connector, and then select **Serve as Fabric Root**. You can also confirm that **Security Fabric Connection** is enabled on the interfaces configured in the **Allow other Security Fabric devices to join**. These interfaces are facing any downstream FortiGate device.

Optionally, you can preauthorize your downstream devices by adding their serial numbers. When you add the serial number of a Fortinet device to the trusted list on the root FortiGate device, the device can join the Security Fabric as soon as it connects. After you authorize the new FortiGate, additional connected FortiAP and FortiSwitch devices automatically appear in the topology tree.

General Steps to Configure the Security Fabric (Contd)

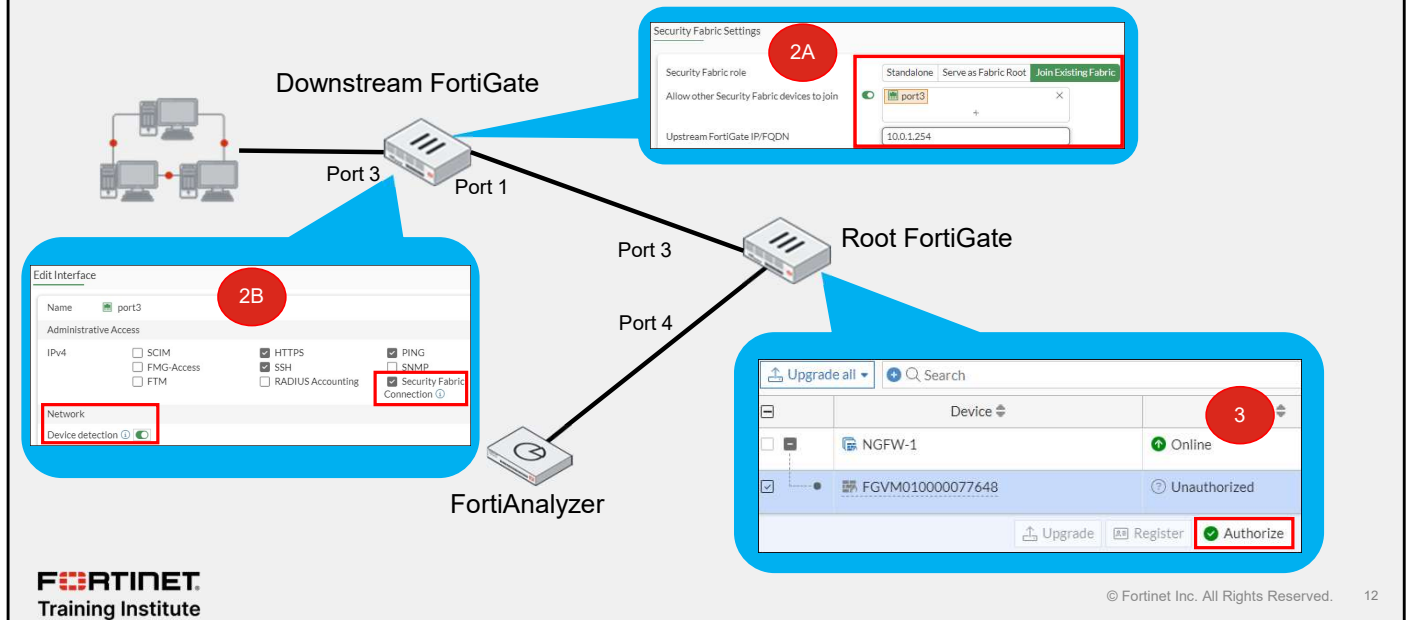

The second step in implementing the Security Fabric is configuring the downstream Fortinet devices. On the **Fabric Connectors** page, select **Join Existing Fabric** and add the root (upstream) FortiGate IP address. Then, you can confirm that **Security Fabric Connection** is enabled on the interfaces configured in the **Allow other Security Fabric devices to join**. On the downstream FortiGate devices, you can also enable **Device Detection** on the interfaces facing the downstream FortiGate devices.

The third step in implementing the Security Fabric is to authorize the downstream FortiGate devices on the root FortiGate.

Synchronizing Objects Across the Security Fabric

- By default, object synchronization is enabled in fabric settings

```
config system csf
set configuration-sync default
set fabric-object-unification default
end
```

Parameter	Description
<code>fabric-object-unification</code> (for the root FortiGate)	default: Global CMDB objects are synchronized in the Security Fabric. local: Global CMDB objects are not synchronized to and from this device. This command is available only on the root FortiGate. If set to <code>local</code>, the device does not synchronize objects to downstream devices.
<code>configuration-sync</code> (for the downstream FortiGate)	default: Synchronize objects from the root FortiGate and the configuration for FortiAnalyzer, FortiSandbox, and FortiManager. local: Do not synchronize configuration with the root node. If downstream FortiGate devices are set to <code>local</code>, the synchronized objects from the root to downstream are not applied locally. However, the downstream FortiGate device sends the objects to FortiGate devices further downstream.
<pre>config firewall <object> edit <name> set fabric-object {enable disable} end</pre>	<code><object></code> can be <code>address</code>, <code>address6</code>, <code>addrgrp</code>, <code>addrgrp6</code>, <code>service category</code>, <code>service custom</code>, <code>service group</code>, and so on. <code>enable</code>: sets the object as a Security Fabric-wide global object that is synchronized to downstream FortiGate devices. <code>disable</code>: sets the object as local to this Security Fabric member.

When the Security Fabric is enabled, settings to sync various objects, such as addresses, services, and schedules, from the upstream FortiGate device to all downstream FortiGate devices are enabled by default. Synchronization always happens from the root FortiGate to downstream FortiGate devices. Any object that can be synced will be available on downstream FortiGate devices after synchronization.

The CLI command `fabric-object-unification` is available only on the root FortiGate device. When set to `local`, global objects are not synchronized to downstream devices in the Security Fabric. The default value is `default`.

The CLI command `configuration-sync local` is used when a downstream FortiGate device doesn't need to participate in object synchronization. When set to `local` on a downstream FortiGate device, the device does not synchronize objects from the root, but still participates in sending the synchronized object downstream. When set to `default` on a downstream FortiGate device, the device synchronizes objects from the root, including the configuration for FortiAnalyzer, FortiSandbox, and FortiManager.

You can also enable or disable per-object synchronization in the Security Fabric. This option is not available for objects you create on a downstream FortiGate device. Security Fabric synchronization is disabled by default for supported Security Fabric objects, and these Security Fabric objects are kept as locally created objects on all the FortiGate devices in the Security Fabric. If object synchronization is disabled on the root FortiGate device, using the command `set fabric-object disable`, firewall addresses and address groups are not synchronized to downstream FortiGate devices.

Note that if a device in the Security Fabric is in multi-VDOM mode, the GUI does not display the Security Fabric synchronization option. Even if this is enabled on the CLI, the object is not synchronized to any downstream devices.

Synchronizing Objects Across the Security Fabric (Contd)

Root FortiGate

1 Firewall object is in conflict with other FortiGates in the fabric.

The following objects require manual intervention in order to synchronize them with the fabric. Click "Rename All Objects" to automatically resolve all conflicts by renaming them.

Strategy: **Automatic** Manual

Automatically rename on: Root FortiGate Downstream FortiGates

Rename All Objects Search

Fabric Object	Status	Conflicting FortiGate
test	Content mismatch	DCFW

Objects can be synchronized by Automatic or Manual mode

One downstream FortiGate device is not synced with the Fabric

test_DCFW Resolved DCFW

No notifications at this time

FORTINET
Training Institute


© Fortinet Inc. All Rights Reserved. 14

If an object conflict occurs during synchronization, you will get a message in the notification center.

The process to resolve a synchronization conflict is as follows:

1. Click the notification message: **1 Firewall object is in conflict with other FortiGates in the fabric.**
2. On the **Firewall Object Synchronization** page, you can see that both the root FortiGate and downstream FortiGate devices contain the **test** object (with a different IP address/subnet schema on each device), causing a status of **Content mismatch**. The **Strategy** field displays two options to resolve the conflict: **Automatic** and **Manual**. Select **Automatic**, as shown in this example, and then click **Rename All Objects**.
3. **DCFW** is appended to the name of the downstream FortiGate device **test** address object and the status changes to **Resolved**.
4. The conflict message disappears.

Multi-VDOM in the Security Fabric

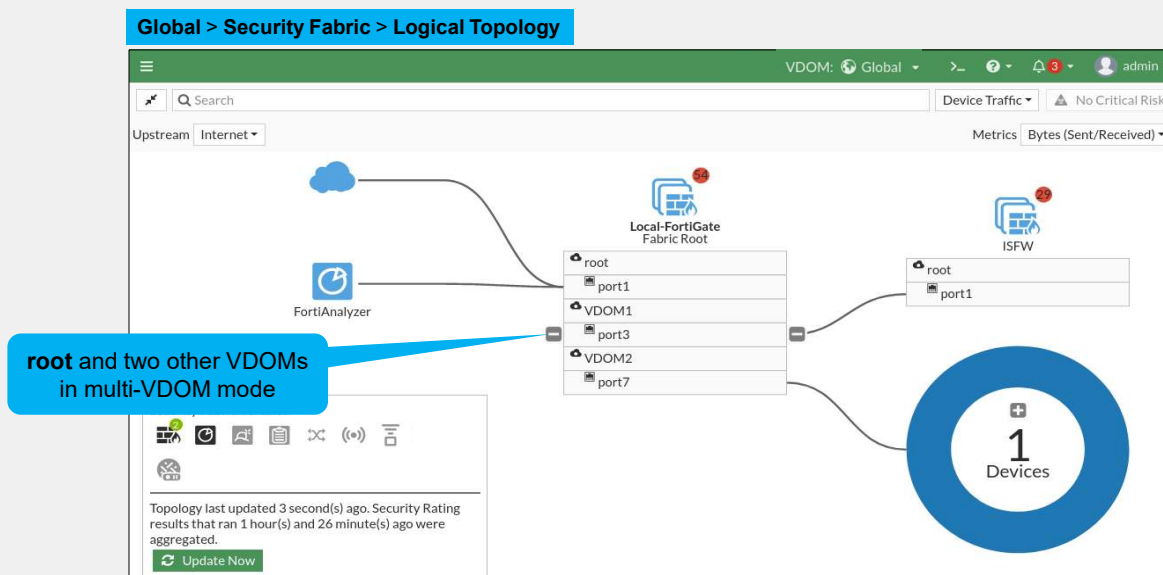

When you configure FortiGate devices in multi-vdom mode and add them to the Security Fabric, each VDOM with its assigned ports is displayed when one or more devices are detected. *Only* the ports with discovered and connected devices appear in the Security Fabric view and, because of this, you must enable **Device Detection** on ports you want to have displayed in the **Security Fabric**. VDOMs without ports with connected devices are not displayed. All VDOMs configured must be part of a single **Security Fabric**. In the example shown on this slide, the Local-FortiGate is configured in multi-VDOM mode, and has three VDOMs (root, VDOM1, and VDOM2), each with ports that have connected devices.


Device Identification—Agentless vs. Agent

Agentless

- Useful feature for the Security Fabric topology view
- Requires direct connectivity to FortiGate
- Detection methods include:
 - HTTP user agent
 - TCP fingerprinting
 - MAC address vendor codes
 - DHCP
 - Microsoft Windows browser service (MWBS)
 - SIP user agent
 - Link Layer Discovery Protocol (LLDP)
 - Simple Service Discovery Protocol (SSDP)
 - QUIC
 - FortiOS-VM detection
 - FortiOS-VM vendor ID in IKE messages
 - FortiOS-VM vendor ID in FortiGuard web filter and spam filter requests

Agent (FortiClient)

- Location and infrastructure independent

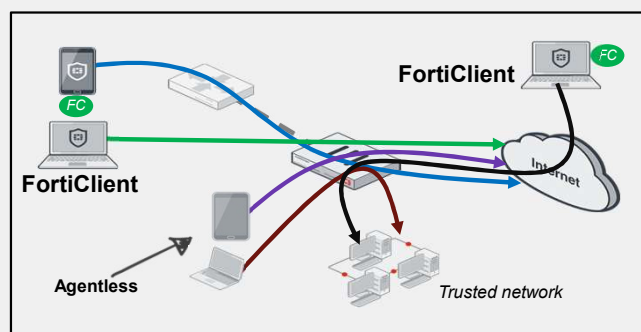

Device identification is an important component in the Security Fabric. FortiGate detects most of the third-party devices in your network and add them into the topology view in the Security Fabric. There are two device identification techniques: with an agent and without an agent (agentless).

Agentless identification uses traffic from the device. Devices are indexed by their MAC address and there are various ways to identify devices, such as HTTP user-Agent header, TCP fingerprint, MAC address OUI, and FortiOS-VM detection methods, to name a few. Agentless device identification is only effective if FortiGate and the workstations are directly connected network segments, where traffic is sent directly to FortiGate, and there is no intermediate router or Layer 3 device between FortiGate and the workstations.

Note that FortiGate uses a *first come, first served* approach to determine the device identity. For example, if a device is detected by the HTTP user agent, FortiGate updates its device table with the detected MAC address and scanning stops as soon as the type has been determined for that MAC address.

Agent-based device identification uses FortiClient. FortiClient sends information to FortiGate, and the device is tracked by its unique FortiClient user ID (UID).

Device Identification

Enable **Device Detection** on interface(s)

Network > Interfaces

Edit Interface

Name:

Alias:

Type: ☒ Physical Interface

VRF ID:

Virtual domain:

Role:

Address

Addressing mode: ☒ Manual ☐ IPAM ☐ DHCP ☐ PPPoE

IP/Netmask:

Create address object matching subnet: ☐

Secondary IP address: ☐

Administrative Access

IPv4

☐ SCIM ☐ HTTPS ☒ PING

☐ FMG-Access ☐ SSH ☐ SNMP

☐ FTM ☐ RADIUS Accounting ☐ Security Fabric Connection

☐ Speed Test


Receive LLDP: ☒ Use VDOM Setting ☐ Enable ☐ Disable

Transmit LLDP: ☒ Use VDOM Setting ☐ Enable ☐ Disable

Network

Device detection: ☒

Security Fabric > Logical Topology

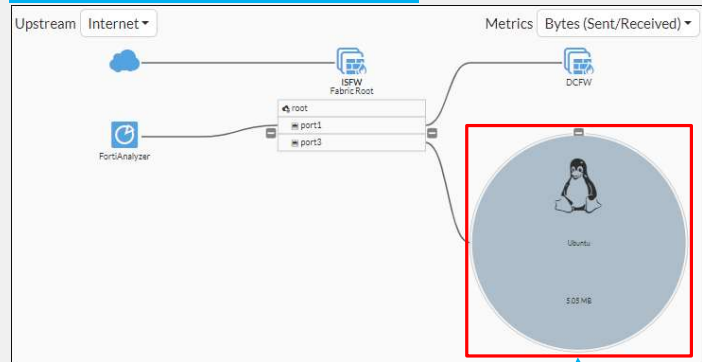

Enable **Device Detection**

Ubuntu machine detected upon traffic from the PC to the FortiGate

By default, FortiGate uses device detection (passive scanning), which runs scans based on the arrival of traffic.


Lesson Progress



Fortinet Security Fabric Basics



Deploying the Security Fabric



Extending the Security Fabric and Features

Good job! You now understand how to deploy the Security Fabric.

Now, you will learn about Security Fabric features and how to extend the Security Fabric in your network environment.

Extending the Security Fabric and Features

Objectives

- Extend the Security Fabric across your network
- Understand automation stitches
- Run and analyze the Security Fabric rating
- Monitor physical and logical topology views

After completing this section, you should be able to achieve the objectives shown on this slide.

By demonstrating competence in extending the Fortinet Security Fabric, you will better understand its ability to streamline the management of all your network devices from a single point of view.

Extending the Security Fabric

Security Fabric > Fabric Connectors

Compatible Fabric Connectors

The following devices support full Security Fabric integration by joining a downstream device. Consult the documentation for the individual products to learn how to have them join the Security Fabric.

Supported Connectors

 FortiDeceptor Deception-based breach protection ↗	 FortiMail Advanced, multi-layer protection against the full spectrum of email-borne threats ↗	 FortiMonitor Enables end-to-end user experience visibility ↗
 FortiNAC Security for networks with IoT ↗	 FortiINDR Sub-second threat investigation ↗	 FortiPolicy Containerized security platform that implements security orchestration ↗
 FortiTester Comprehensive network device performance testing ↗	 FortiVoice Integrated calling, conferencing, chat, and fax ↗	 FortiWeb Web application and API protection ↗

The main network security connectors include FortiManager, FortiAnalyzer, FortiClient EMS, FortiAP, FortiSwitch, and FortiExtender. This slide shows the list of other products that have full Security Fabric integration.

For example, Fortinet recommends using FortiManager for centralized management of all FortiGate devices and to access devices in the Security Fabric. You can also extend the Security Fabric down to the access layer by integrating FortiNAC devices.

External Connectors

- Security Fabric multi-cloud support adds external connectors to the Security Fabric configuration

Edit External Connector

Private SDN

Application Centric Infrastructure (ACI)

Connector Settings

Name: ACI

Status: ☒ Enabled ☐ Disabled

Cisco ACI Connector

Type: **FortiSDN Connector** Direct Connection

IP: 178.18.64.31

Port: Use Default **Specify** 5671

Username: admin

Password: •••••••• **Change**

Security Fabric > External Connectors

New External Connector

Public SDN

aws, Microsoft Azure, Google Cloud Platform (GCP), Oracle Cloud Infrastructure (OCI), IBM Cloud, AliCloud

Private SDN

Kubernetes, VMware ESXi, VMware NSX, OpenStack (Horizon), **Application Centric Infrastructure (ACI)**, Nuage Virtualized Services Platform, Nutanix, SAP

Endpoint/Identity

FSSO Agent on Windows AD, Symantec Endpoint Protection, Poll Active Directory Server, RADIUS Single Sign-On Agent, Exchange Server

Threat Feeds

FortiGuard Category, IP Address, Domain Name, MAC Address, Malware Hash

External connectors allow you to integrate multi-cloud support, such as Microsoft Azure and AWS, among others.


In an application-centric infrastructure (ACI), the SDN connector serves as a gateway bridging SDN controllers and FortiGate devices. For example, the SDN connector can register itself to APIC in the Cisco ACI fabric, polls objects of interest, and translates them into address objects. The translated address objects and associated endpoints populate on FortiGate.

Automation Stitches

AUTOMATION STITCHES



- Consist of a trigger and one or more configurable actions
- Can be created only on the root FortiGate in the Security Fabric
- Are available as predefined stitches, or you can create custom ones
- Can run actions sequentially or in parallel
- Some actions include a minimum **Minimum interval** setting to make sure they don't run more often than needed

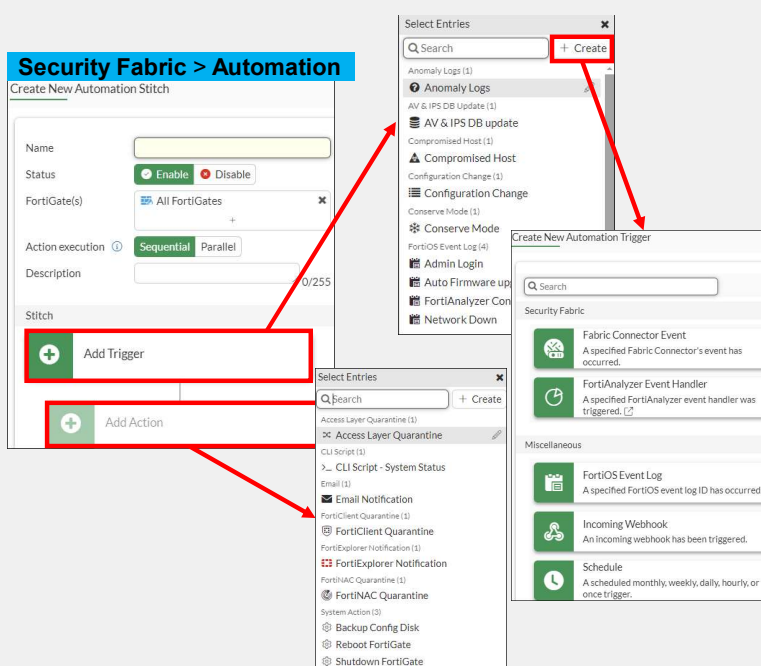


Administrator-defined automated workflows (called stitches) cause FortiOS to automatically respond to an event in a preprogrammed way. Because this workflow is part of the Security Fabric, you can set up automation stitches for any device in the Security Fabric. However, the Security Fabric is not required to use stitches.

Each automation stitch pairs a trigger and one or more actions. FortiOS has several predefined stitches, triggers and actions. However, you can create custom automation based on the available options.

Automation stitches allow you to monitor your network and take appropriate action when the Security Fabric detects a threat. You can use automation stitches to detect events from any source in the Security Fabric and apply actions to any destination.

You can configure the **Minimum interval (seconds)** setting on some of the available actions to make sure they don't run more often than needed.

Automation Stitches (Contd)

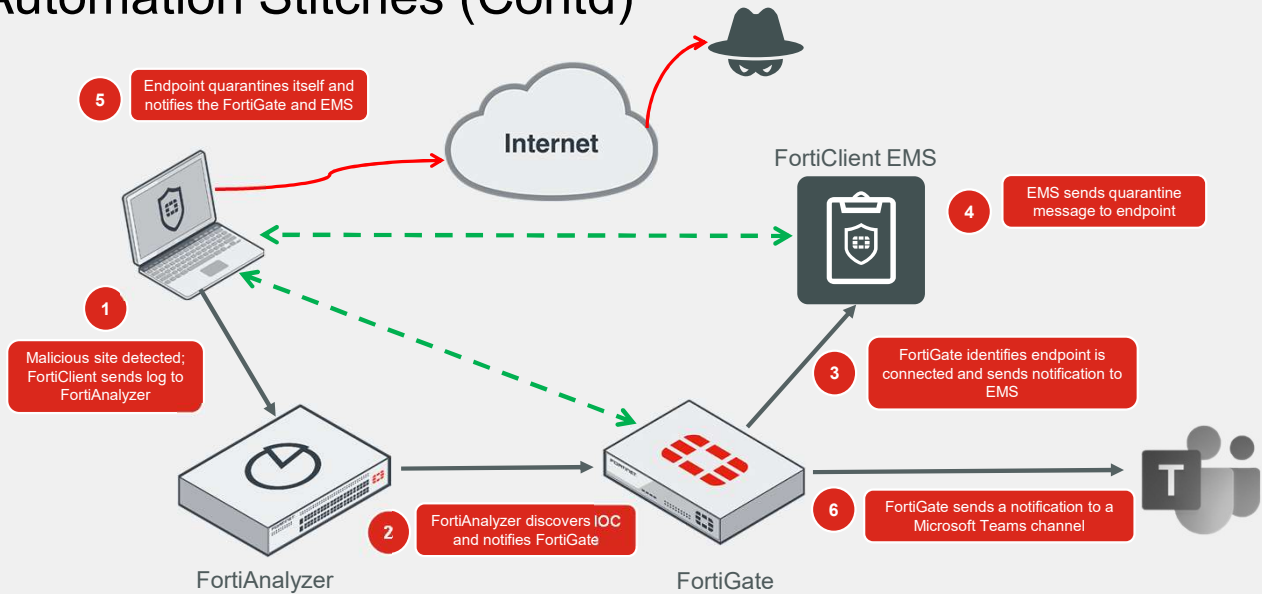


This slide shows an example of how automation stitches can be configured to work in the Security Fabric:

1. FortiClient sends logs to FortiAnalyzer.
2. FortiAnalyzer discovers IoCs in the logs and notifies FortiGate.
3. FortiGate identifies whether FortiClient is a connected endpoint, and whether it has the login credentials for the FortiClient EMS that FortiClient is connected to. With this information, FortiGate sends a notification to FortiClient EMS to quarantine the endpoint.
4. FortiClient EMS searches for the endpoint and sends a quarantine message to it.
5. The endpoint receives the quarantine message and quarantines itself, blocking all network traffic. The endpoint notifies FortiGate and EMS of the status change.
6. FortiGate sends a notification to a Microsoft Teams channel to alert the administrators about the event.

The Security Fabric Status Widget

- The summary of your Security Fabric
- Icons indicating the other devices in the Security Fabric
- Click on the expand button to view the topology

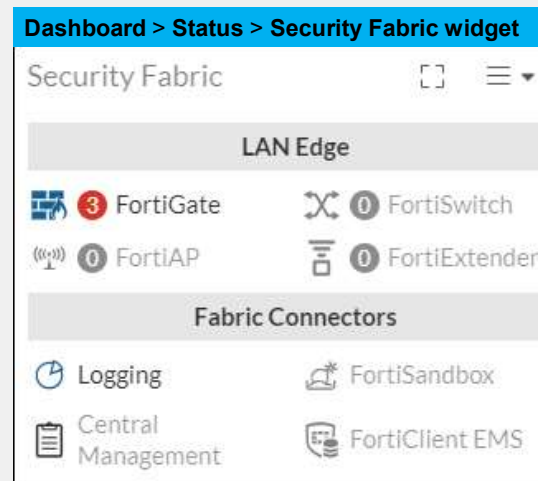

The **Security Fabric Status** widget shows a summary of the devices in the Security Fabric.

You can hover over the icons at the top of the widget to display a quick view of their statuses. From here, you can click to authorize FortiAP and FortiSwitch devices that are connected to an authorized FortiGate.

Icons represent the other Fortinet devices that can be used in the Security Fabric:

- Devices in blue are connected in your network.
- Devices in gray are not configured, or not detected in your network.
- Devices in red are no longer connected, or not authorized in your network.

Security Rating

- One scorecard (**Security Controls**) provides an executive summary

The screenshot displays the 'Security Fabric > Security Rating' page. At the top, a blue banner reads 'Security Fabric > Security Rating'. Below this, the 'Security Controls' tab is active, showing a donut chart with a total score of 148. The chart is divided into three segments: Passed (green, 106), Failed (red, 25), and Exempt (blue, 17). To the right of the chart, a grid of 12 security control categories is displayed, each with a letter grade and a count. A blue callout box points to the 'All FortiGates' option in the top right dropdown menu, with the text 'Select a Security Fabric device'. Another blue callout box points to the 'FortiGuard Outbreak Detection' category, with the text 'Click to filter a specific category'. A third blue callout box points to the 'Uncategorized' category in the left sidebar, with the text 'Click to expand a specific category'. The bottom of the page features the Fortinet Training Institute logo and a copyright notice: '© Fortinet Inc. All Rights Reserved. 25'.

Security Fabric > Security Rating

Security Controls Vulnerabilities

Result: 148 Total

- Passed: 106
- Failed: 25
- Exempt: 17

Security control categories:

- A Uncategorized
- A Audit Logging & Monitoring
- A Data Protection
- C Endpoint Management
- E Fabric Security Hardening
- A Firmware & Subscriptions
- B Network Design & Policies
- F Threat & Vulnerability Management
- C Performance Optimization
- A FortiGuard Outbreak Detection

Device selection: ISFW, All FortiGates, ISFW (Fabric Root), DCFW

Search: [Search]

Export: [Export]

FSBP: [FSBP]

Details: [Details]

Security control: Fabric Coverage (10), Optimization (45), Security Posture (69), Uncategorized (24)

Device: [Device]

Scope: [Scope]

Result: [Result]

Severity: [Severity]

Compliance: [Compliance]

Click to expand a specific category

Click to filter a specific category

Fortinet Training Institute

© Fortinet Inc. All Rights Reserved. 25

The **Security Rating** section provides an executive summary of all the security rating checks. By default, it is available with a base set of free checks, otherwise a licensed set is available with a subscription service that requires a FortiGuard Security Rating Service subscription.

You can view the score card for each Security Fabric device, or have a comprehensive view by selecting **All FortiGates**.

Security Posture

Security Fabric > Security Rating

Security control	Device	Scope	Result	Severity	Compliance	Test details
Security Posture 132						
+ Rogue AP WIDS Signatures Ensure that every FortiAP profile is using a WIDS profile with all signature types enabled.	2 Devices	3 Scopes	Passed	High	FSBP ND01.4	Results Info & Compliances ISFW Global Visit the following page(s) to remediate: Network > Interfaces
+ Administrative Access Interfaces which are classified as "WAN" should have administrative access disabled.	2 Devices	2 Scopes	Failed	High	FSBP SH01.9	
+ VLAN Management Non-FortiLink interfaces should not have multiple VLANs configured on them.	2 Devices	2 Scopes	Passed	Medium	FSBP ND05.2	
+ USB Auto Configuration Automatic USB firmware and configuration provisioning features should be disabled during normal operation.	2 Devices	2 Scopes	Failed	High	FSBP SH15.1	
+ Unsecure Protocol - Telnet Interfaces should not allow TELNET administrative access.	2 Devices	2 Scopes	Passed	High	FSBP SH01.1	
+ Unsecure Protocol - HTTP Interfaces should not allow HTTP administrative access.	2 Devices	2 Scopes	Passed	High	FSBP SH01.2	
+ Two Factor Authentication Every administrator should have two factor authentication enabled.	2 Devices	2 Scopes	Failed	Medium	FSBP SH09.5	

Identifies critical security gaps

The **Results** tab provides the location where you can resolve the security issue

The **Security Rating Severity** helps you to identify the security issues in your network and prioritize your tasks

On the **Security Rating** page, you can click a specific category to see more details. For example, you can click the **Security Posture** category on the **Security Rating** page to expand it.

Like other categories, the **Security Posture** category provides the references to specific FSBP, PCI, or CIS compliance policies. The **Security Posture** category also provides security checks that can help you make improvements to your organization's network. These results include enforcing password security, applying recommended login attempt thresholds, encouraging two-factor authentication, and more.

Security Rating Notifications

- Display recommendations determined by security rating
- Appear on various setting pages

The screenshot shows the Fortinet GUI with two panels. The left panel, titled 'Physical Interface', lists interfaces from port1 to port8. The right panel, titled 'Interface Classification', shows a table with columns: Name, Type, IP/Netmask, Administrative access, Virtual Domain, and Ref. A red arrow points from the 'Interface Classification' notification in the bottom left of the left panel to the 'Interface Classification' tab in the right panel. A blue callout box points to the 'Interface Classification' tab with the text 'Click to filter a specific notification'. Another blue callout box points to the 'Interface Classification' notification in the bottom left of the left panel with the text 'Notifications at the bottom of the GUI'.

Name	Type	IP/Netmask	Administrative access	Virtual Domain	Ref
Security Rating Insights: Interfaces that do not have a role assigned to them. X					
Physical Interface 1/3					
port1	Physical Interface	10.1.0.1/255.255.255.0	PING HTTPS SSH FMG-Access Security Fabric Connection	root	4

Security ratings provide recommendations for and highlight issues with the configuration of the FortiGate settings. These recommendations and issues appear as notifications on the **Settings** page.

Notifications appear at the bottom of the GUI. You can click a specific notification to display the page where you can fix the setting. This prevents you from having to go back and forth between the **Security Fabric > Security Rating** page and the various settings pages.


In the example shown on this slide, the security rating check recommends that you assign a role to the **port1** interface.

Topology Views

- Some device management tasks:

- Login
- Configure devices
- Authorize or deauthorize devices
- Register devices
- Ban compromised clients
- Quarantine hosts

- Full view available only at the root FortiGate

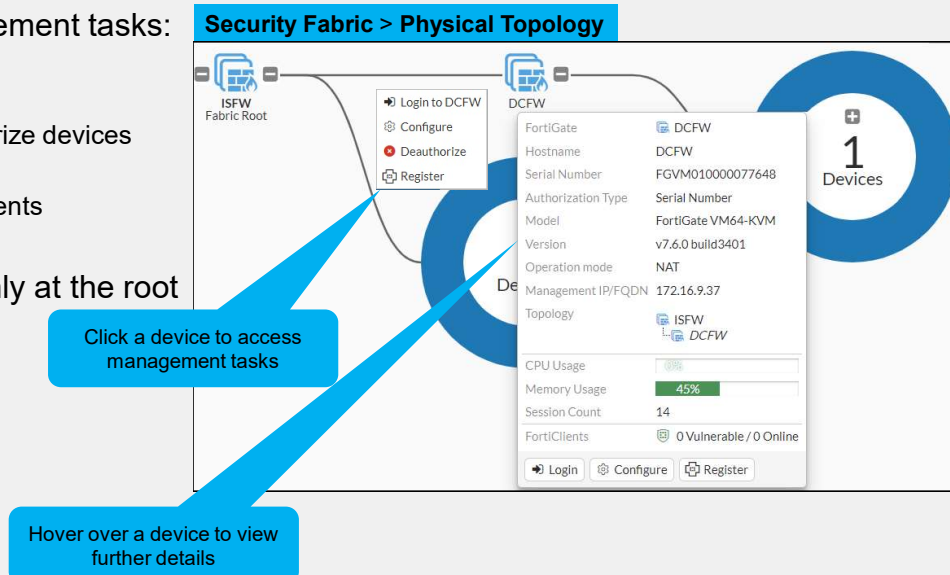


You can view the Security Fabric topology on the FortiGate GUI, from the **Security Fabric** menu. You can select the **Physical Topology** or **Logical Topology** view. To view the complete network, you must access the topology views on the root FortiGate in the Security Fabric.

The **Physical Topology** view displays your network as a bubble chart of interconnected devices. These devices are grouped based on the upstream device they are connected to. The bubbles appear smaller or larger, based on their traffic volume. You can double-click any bubble to resize it and view more information about the device.

The **Logical Topology** view is similar to the **Physical Topology** view, but it shows the network interfaces, logical or physical, that are used to connect devices in the Security Fabric.


Topology Views (Contd)

Security Fabric > Physical Topology

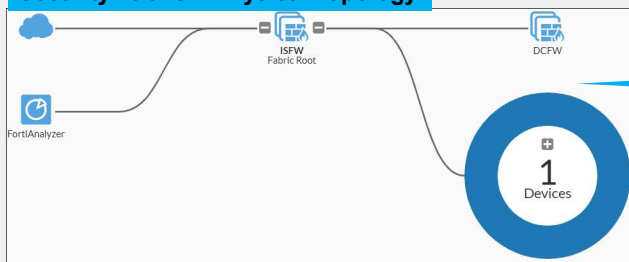

Visualization of access layer devices in the Security Fabric

Security Fabric > Logical Topology

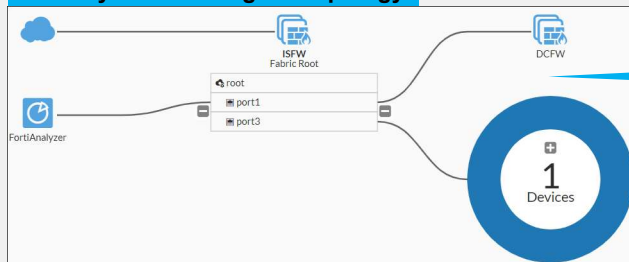

Information about the interfaces that each device in the Security Fabric connects

This slide shows the difference between the **Physical Topology** view and the **Logical Topology** view.

Knowledge Check

1. What is the Fortinet Security Fabric?
 - ✓ A. A Fortinet solution that enables communication and visibility among devices in your network
 - B. A device that can manage all your firewalls

2. What is the purpose of Security Fabric external connectors?
 - ✓ A. External connectors allow you to integrate multicloud support with the Security Fabric.
 - B. External connectors allow you to connect the FortiGate CLI.

Lesson Progress



Fortinet Security Fabric Basics



Deploying the Security Fabric



Extending the Security Fabric and Features

Congratulations! You have completed this lesson.

Now, you will review the objectives covered in this lesson.

Review

- ✓ Configure the Security Fabric
- ✓ Monitor physical and logical topology views
- ✓ Run and analyze the Security Fabric rating

This slide shows the objectives that you covered in this lesson.

By mastering the objectives covered in this lesson, you learned how to configure and use the Fortinet Security Fabric.