Station: building warehouse pallets

This is an informational translation. The Russian edition is authoritative. For Markiro Autonom operators, administrators and technologists. Build a pallet from closed boxes, check its label and reconcile its contents in the office.

Document code	MKR-INS-15
Revision	2026.11/01
Effective from	13 November 2026
Revision verification	https://markiro.app/d/MKR-INS-15/2026.11/01/13.11.2026
Language	EN
Operator	Индивидуальный предприниматель Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@markiro.app · +7 934 355-14-90

1. Prepare the two workstations

At the first workstation, the operator scans products and closes boxes in a production shift. At the second workstation, the operator builds a warehouse pallet from those boxes. When planning the shift in the office, leave “С палетами” (With pallets) off. When creating a shift at the station, select “Без паллет” (Without pallets). This leaves the closed boxes available for the warehouse. You can use available boxes from different shifts, including shifts still in progress.


- Each box has an SSCC label. The first station has sent the box closing record to the host.
- The second station is paired with the host, the license includes pallet assembly, and the operator can sign in.
- In “Рабочее место” (Workstation) → “Принтеры” (Printers), assign a thermal printer to “Этикетка паллеты” (Pallet label). Check the printer and scanner as described in MKR-INS-04. If no template is found, assign a compatible thermal pallet label template to the product in the office.

Note: The screenshots show Markiro Autonom with demo data. For pallet assembly on an Android handheld, see MKR-INS-14.

2. Add the boxes

Step 1. Open warehouse operations


Sign in as an operator. On “Смены линии” (Line shifts), select “Складские операции” (Warehouse operations), then “Открыть режим” (Open mode) on the “Короба в палеты” (Boxes to pallets) card. On first use, wait for the box registry to load. If the registry has not loaded, check the host connection and select “Обновить реестр” (Refresh registry).

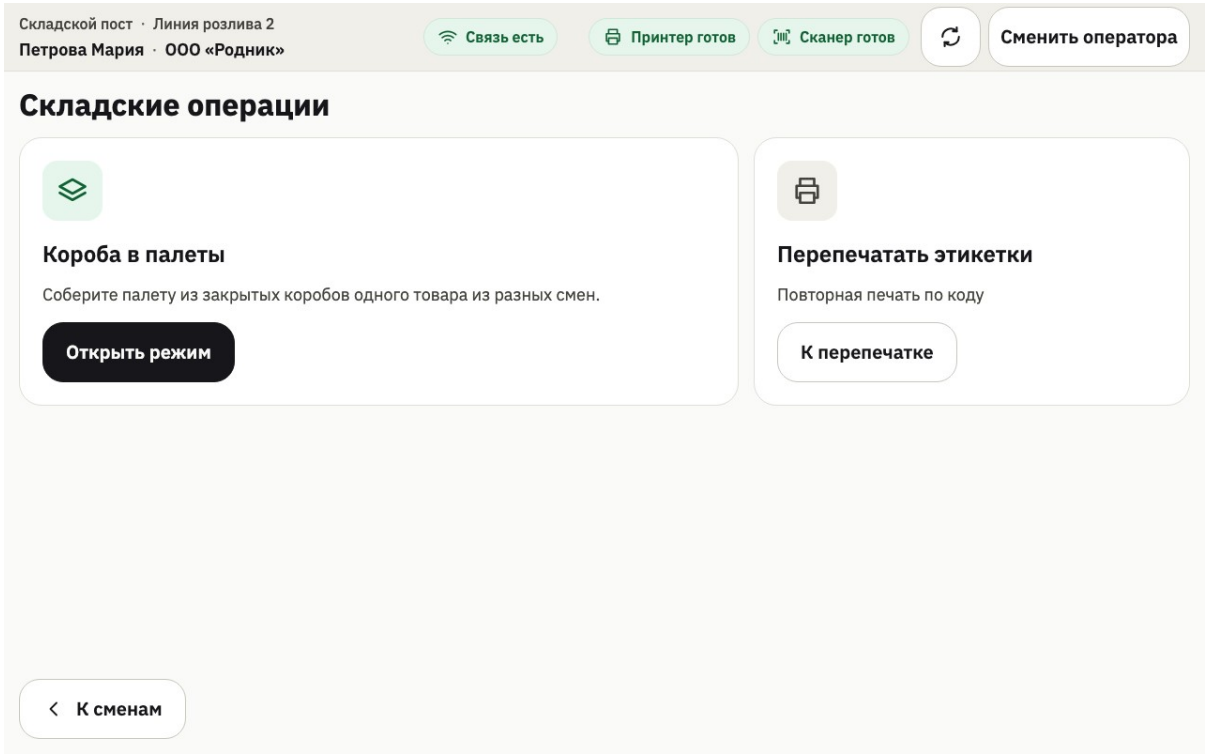

Warehouse operations at the station

Step 2. Scan the labels on the closed boxes

The first box determines the product on the pallet. When you see “Короб добавлен” (Box added), put the box on the pallet and scan the next box. It must be a closed, available box of the same product. Scanning a box again leaves the count unchanged. If the scanner cannot read a label, select “Ввести SSCC” (Enter SSCC), enter the 18 digits from the box label and select “Добавить короб” (Add box).

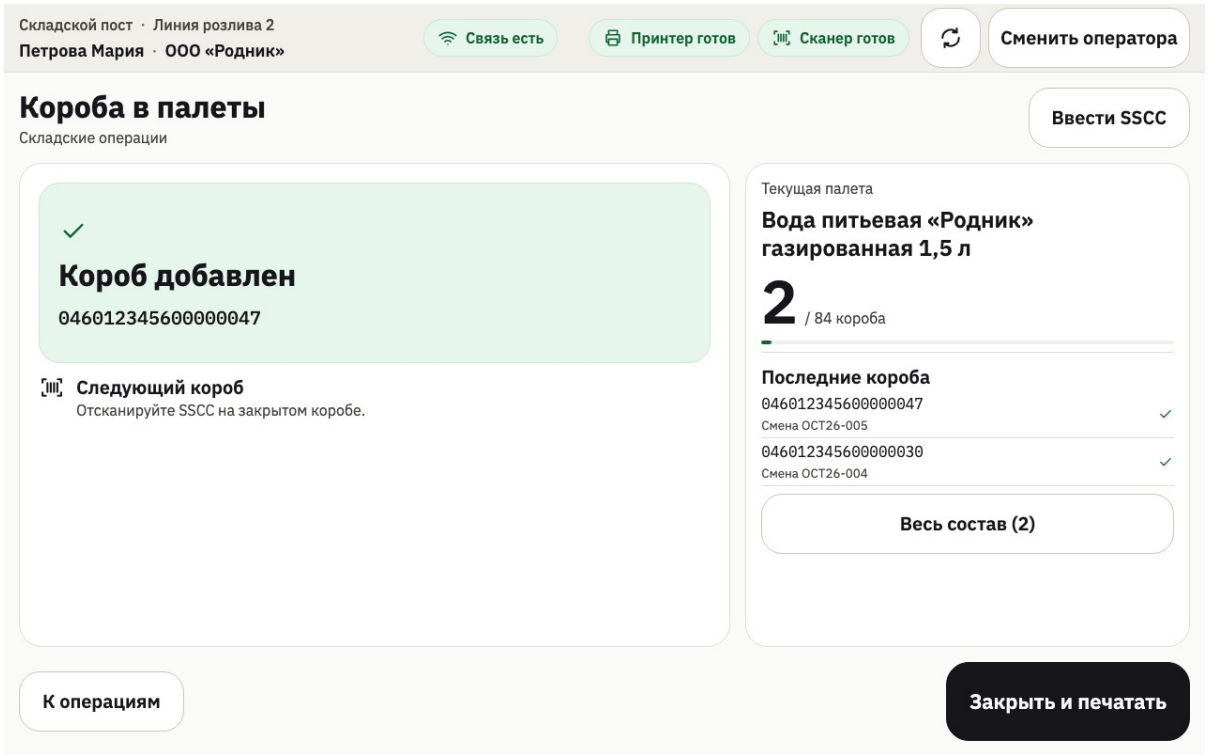

Current pallet contents after scanning boxes


Step 3. Check the contents

Select “Весь состав” (Full contents) and compare the list with the boxes on the pallet. To correct a mistake, select “Убрать” (Remove) next to the SSCC, confirm and take that box off the pallet. If “Открытая палета сохранена” (Open pallet saved) appears after exiting or restarting, check the physical contents before selecting “Продолжить сборку” (Resume assembly).

3. Close the pallet and check its label

Step 1. Confirm closing


At capacity, the station closes the pallet and sends the label to the printer. To close a pallet early, select “Закрыть и печатать” (Close and print). Check the product, box count and printer name, then select “Закрыть и печатать” (Close and print) again. The station assigns an SSCC and sends the label to the printer.

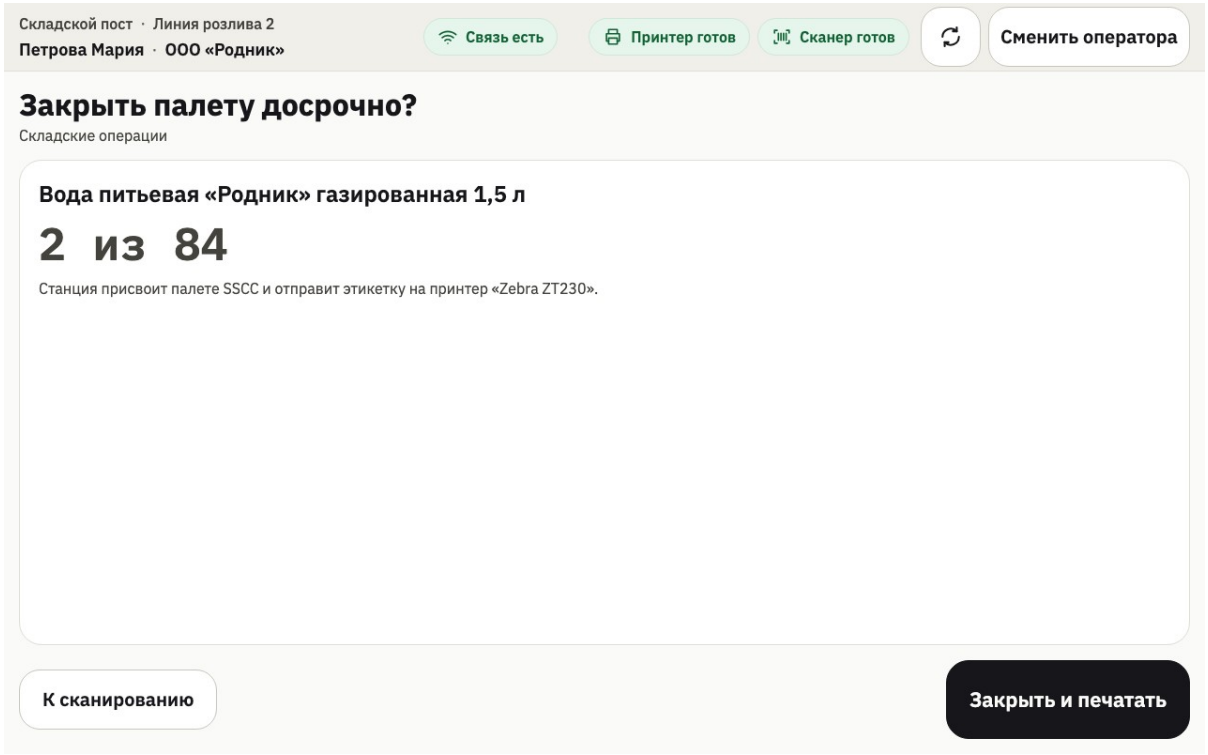

Confirming early closing of a warehouse pallet

Step 2. Attach the label to this pallet

Wait for the label and compare its SSCC with the screen. Select “Проверить сканером” (Check with scanner) and scan the SSCC on the attached label, or select “Этикетка наклеена” (Label attached) after checking it manually. Then select “Следующая палета” (Next pallet).

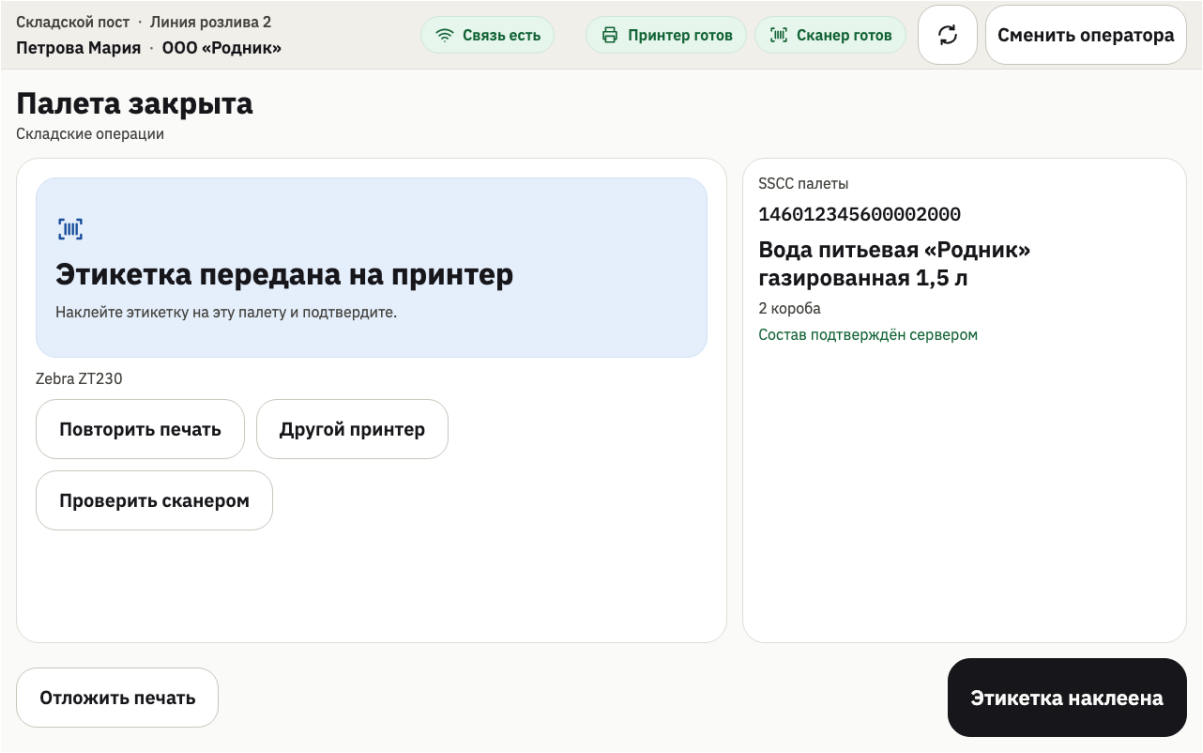

Label sent to the printer and the SSCC of the closed pallet

Important: “Этикетка передана на принтер” (Label sent to printer) means the station has sent the job. If the label is missing or the outcome is unknown, first check the printer and the Windows print queue if a driver is in use. Retry after checking that the first label did not print and its job is no longer pending. “Отложить печать” (Defer printing) keeps the label in “Очередь печати” (Print queue) under the same SSCC.

4. Keep working if the host connection drops


While the host is unreachable, you can add boxes in the registry already loaded on the station. If a box is missing, wait for the connection to return and scan again. The station refreshes the registry when looking for an unknown box. If the station runs out of SSCCs, leave the pallet open and replenish the supply after reconnecting.

After closing, the station may show “Ожидает отправки” (Waiting to send). It sends the pending records when the connection returns. “Состав подтверждён сервером” (Contents confirmed by server) means the host accepted the pallet with those contents. If the station shows “Требуется сверка состава” (Contents need reconciliation), give the office the SSCC and reason.

5. Check the pallet in the office

Step 1. Open the pallet card

In the office, open “Поиск кодов” (Code search) → “Палеты” (Pallets). Under “Складские палеты” (Warehouse pallets), find the SSCC and open its card. It shows the product, source and boxes with their original shifts.

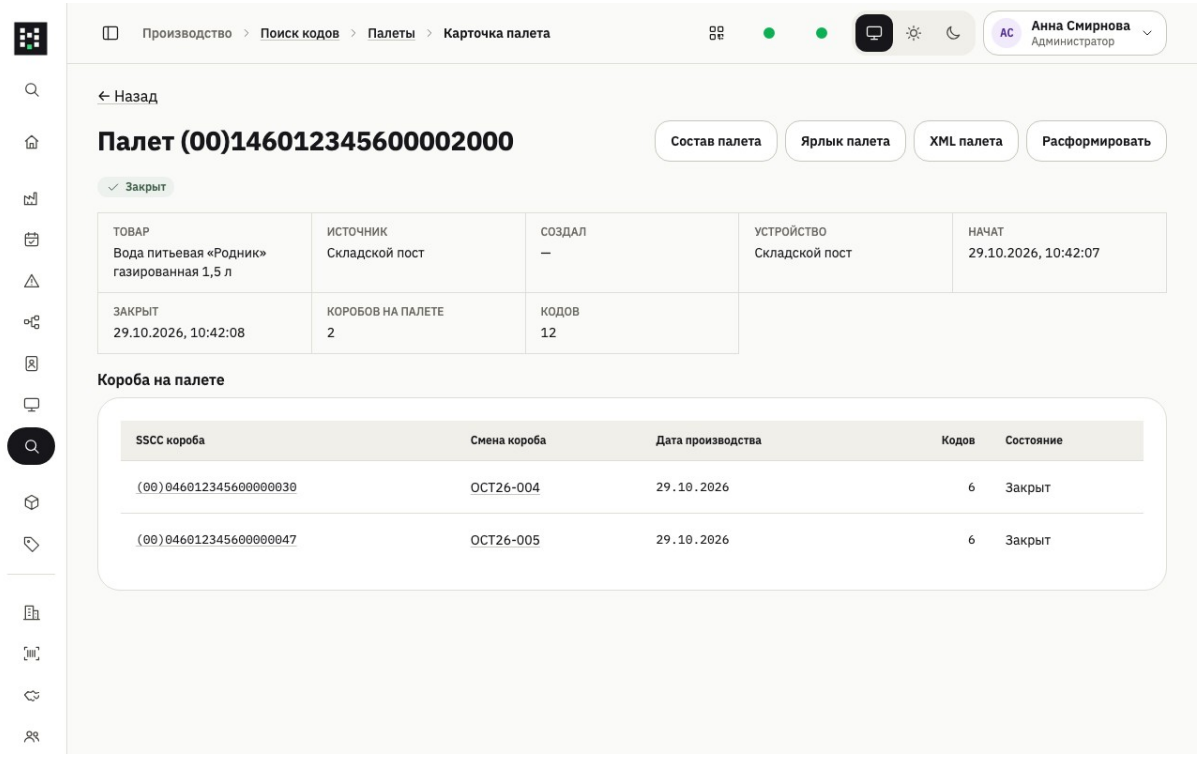

Warehouse pallet card in the office

Step 2. Reconcile the contents if the host rejected closing

At the station, open “Сверка состава” (Reconcile contents). Record the SSCC, reason and reconciliation number, if shown, and pass them to the administrator or technologist. “Подтвердить проверку” (Acknowledge check) records that the operator saw the case. Resolve it in “Сверка складских палет” (Warehouse pallet reconciliation) in the office.

If “Сверить состав” (Review contents) is available, compare the boxes still on the physical pallet with the office list. After checking, select “Физический состав совпадает со списком” (Physical contents match the list) and “Разрешить закрытие” (Allow closing). The station closes the pallet again and prompts you to replace the label with the same SSCC. If the pallet must be rebuilt, the administrator removes the old label and confirms “Аннулировать этикетку” (Cancel label). Available boxes can then be assembled again.