

Scanning station: operator sign-in and shift start

This is an informational translation. The matching Russian revision is authoritative. Step-by-step operator guide: signing in at the station with a badge, selecting or creating a shift, and starting work.

Document code	MKR-INS-01
Revision	2026.09/03
Effective from	26 September 2026
Revision verification	https://markiro.app/d/MKR-INS-01/2026.09/03/26.09.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers the operator's daily sign-in at a Markiro scanning station and the shift start: from scanning the badge to a screen that is ready for work. It is intended for line operators; hardware setup and station pairing are covered by separate documents.

Note: The screenshots use demo data. Product names, shift numbers and operator names on your station will differ.

2. Before you start

- The station is powered on and the station app is running.
- The scanner and the label printer are connected: the status bar shows no hardware error icons.
- You have your personal operator badge and PIN code.


Important: If the station shows the pairing screen (a pairing code) or a connection error, do not continue working — call a technician or an administrator.

3. Signing in with a badge

Step 1. Hold your badge up to the scanner

On the sign-in screen, hold your personal badge up to the barcode scanner. Keep the badge 10–20 cm away from the scanner until you hear the beep.



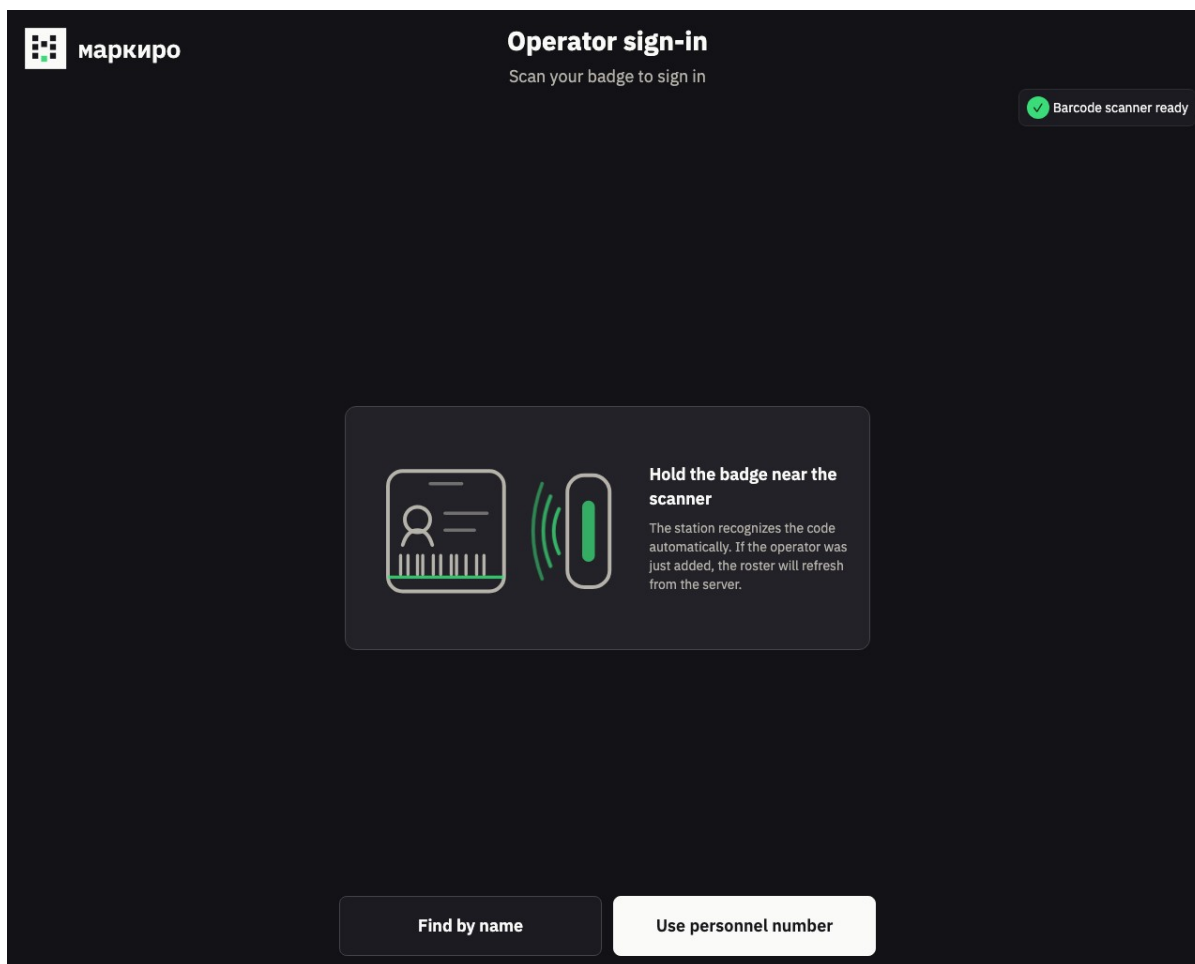


Sign-in screen: the station is waiting for an operator badge

Expected result: The station recognized the badge and showed your name.

Step 2. Enter your PIN code

Type your personal PIN code on the on-screen keyboard and confirm the input.

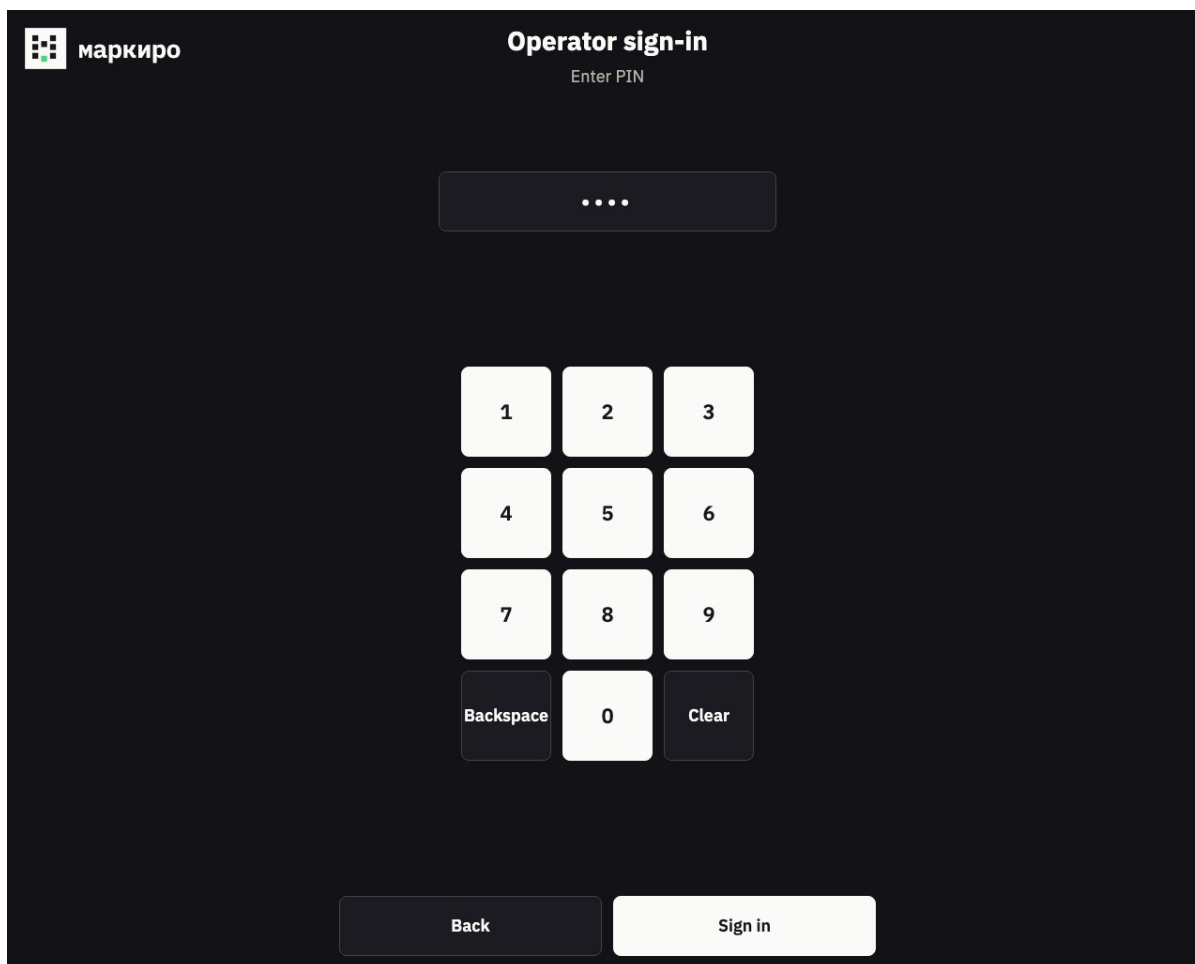

The image shows a dark-themed mobile application interface for operator sign-in. At the top left is the 'маркиро' logo. The title 'Operator sign-in' is centered at the top, with the instruction 'Enter PIN' below it. A PIN input field with four dots is centered. Below it is a numeric keypad with buttons for digits 1-9, 0, a 'Backspace' button, and a 'Clear' button. At the bottom are two buttons: 'Back' and 'Sign in'.


Entering the operator PIN code

Expected result: The shift selection screen opened.

Step 3. If the badge cannot be read, find yourself by name

Tap “Find by name”, start typing your last name and pick yourself from the list, then enter your PIN code. After the shift, report the faulty badge to an administrator.



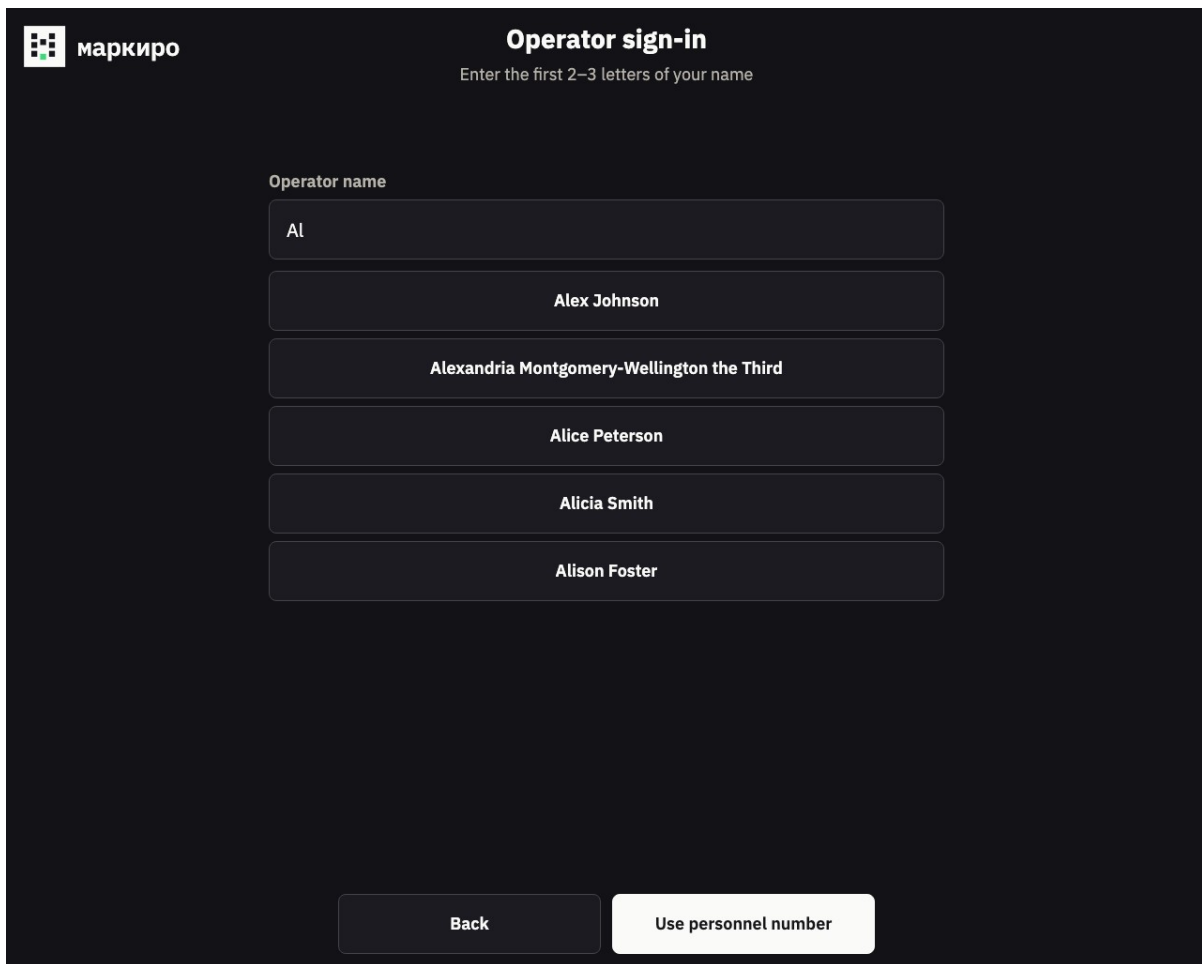

Operator sign-in
Enter the first 2–3 letters of your name

Operator name

Al

Alex Johnson

Alexandria Montgomery-Wellington the Third

Alice Peterson

Alicia Smith

Alison Foster

Back Use personnel number

Finding an operator by name

4. Selecting an existing shift

If a shift already exists (for example, you are returning after a break or a supervisor prepared the shift), select it from the list.

Step 1. Select a shift from the list

On the shift selection screen, find the shift by its number, product and date, and tap “Open” on its card — or “Rejoin” if the shift is already running. Closed shifts are not shown in the list.



Demo station 01 · Test line A

Sample Operator · Shift DEMO-01

Printers 3 / 3

Change operator

Shifts

Warehouse operations 1



AUG26-041

Not started

Lactose-free milk 3.2%

Ultra-pasteurized lactose-free milk enriched with vitamins A and D for children, 3.2% fat, 930 ml

Shift: 08/21/2026 Produced: 08/15/2026

Validation plan 10,000

Open



AUG26-040/S

Shift active

Zhigulevskoye 0.5

Zhigulevskoye light filtered pasteurized beer, 0.5 l

Shift: 08/20/2026

Aggregation Pallets no plan

Rejoin

Previous page

Page 1 of 2

Next page

New shift

Refresh shifts

Workstation setup

Conflicts

Shift list: cards with the number, product and date

Expected result: The work screen of the selected shift opened.

5. Creating a new shift

Step 1. Create a new shift

If the shift you need is not in the list, tap “New shift”. Scan the product code from the packaging or pick the product manually, check the production date and confirm the creation.



Demo station 01 · Test line A

Sample Operator · Shift DEMO-01

● Sync 0 ● Conflicts 0 ●

New shift

Product GTIN

0460700000042

Back

Find product

Creating a shift: choosing the product and the production date

Expected result: The station created the shift and opened the work screen.


Important: Check the product and the production date before confirming: they are printed on box labels. If you made a mistake, close the shift and create a new one, and tell your supervisor.

6. Starting work

Step 1. Check the work screen

Before the first scan make sure: the header shows your line and shift; the shift band at the top of the screen shows the right product and plan; the “In shift” total is zero or matches the work already done in the shift. The status indicators in the header collapse into dots while everything is fine; a problem indicator expands into a caption by itself, and the “Expand” button opens the full status panel.



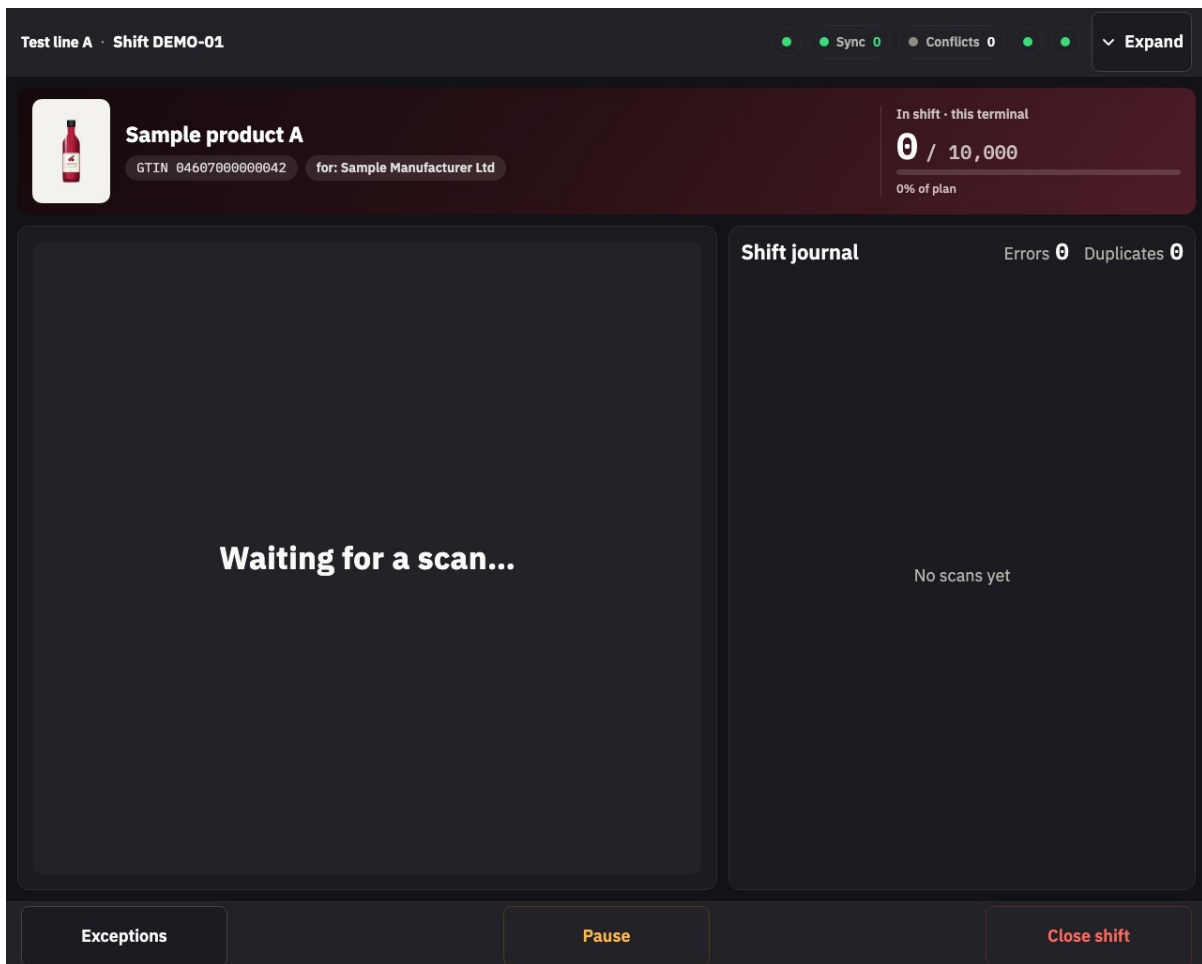

Work screen: the shift is open, the station is ready to scan

Expected result: The station is ready: scan the first marking code — the result will appear on the screen.

7. Common problems

The badge cannot be read — Sign in through the search by name (section 3, step 3) and ask an administrator to replace the badge.

The station rejects the PIN code — Check the keyboard layout and try again. After several failed attempts, contact an administrator to reset the PIN code.

The shift you need is not in the list — Create a new shift (section 5) or check with your supervisor which station the shift was opened on.

The status bar shows a hardware error — Do not start scanning. Check the scanner and printer cables; if the error persists, call a technician.

If your problem is not listed above, contact your organization's administrator or Markiro support: hello@v-b.tech.

