

Cabinet: the line, planning and starting a shift

This is an informational translation. The matching Russian revision is authoritative. Manager's guide to preparing a production shift: the production line, stations on the line, product requirements, shift planning, modes and aggregation, editing and deleting a planned shift.

Document code	MKR-INS-08
Revision	2026.09/02
Effective from	19 September 2026
Revision verification	https://markiro.app/d/MKR-INS-08/2026.09/02/19.09.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers what a cabinet manager does before production starts: how to create a production line, assign stations to it, check the product in the catalog and plan a shift. The shift itself is opened by the operator at the station — that is covered by instruction MKR-INS-01. Running the shift, closing it and the GIS MT reports are outside this document.

A shift goes through three states: “Planned” — the task is ready but production has not started; “Active” — the shift was opened at a station and production is running; “Closed” — production is over. Everything described below is done by the manager in the first state, before the shift is opened.

1. Create a production line and assign stations to it.
2. Make sure the product exists in the catalog and can be selected.
3. Plan the shift: product, mode, quantity, dates, line and — for aggregation — the label template, the box capacity and, if pallets are used, the number of boxes per pallet.
4. Hand the station over to the operator: opening the shift is their job.

Note: The screenshots use demo data. Numbers, quantities and names in your cabinet will differ.

2. The production line

A line is a workplace on the shop floor. The cabinet states its purpose like this: “A production line groups shifts and sets a stationary terminal's default workplace.” Without a line you can still plan a shift, but the station will not get a default workplace and the shifts will not be grouped.

Step 1. Create the line

Open “Production lines” and press “Create line”. The only required field is “Line name”; give the line the name the shop floor uses, so that the operator recognizes it at the station.



маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

IV Igor Volkov
manager@example.test

Marka Co
manager@example.test

Production lines

A production line groups shifts and sets a stationary terminal's default workplace.

3 lines

NAME	LINE STATUS
Bottling line 1	✓ Online · 2 of 3 stations
Bottling line 2	– Offline
Packing line	– No stations assigned

New line

Line name

Enter a line name

Cancel Create

Creating a production line

Expected result: The line appeared in the list.

Step 2. Check the line status

The “Line status” column shows how the line looks right now: “Online · 2 of 3 stations” — some of its stations are connected; “Offline” — stations are assigned but none of them is connected; “No stations assigned” — no station is attached to the line, so there will be nobody to open a shift on it.

маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

IV Igor Volkov
manager@example.test

Marka Co
manager@example.test

☀ RU Sign out

Create line

Production lines

A production line groups shifts and sets a stationary terminal's default workplace.

3 lines

NAME	LINE STATUS	CREATED	ACTIONS
Bottling line 1	✓ Online · 2 of 3 stations	8/1/26, 9:00 AM	Edit Delete
Bottling line 2	– Offline	8/14/26, 9:00 AM	Edit Delete
Packing line	– No stations assigned	8/28/26, 9:00 AM	Edit Delete


The list of lines and their status



Important: Deleting a line is irreversible, and it does not always go through. If the line is already in use, the cabinet refuses: “This line is used by shifts or assigned to one or more stations. Remove those references and try again.” Detach the line from the stations first and make sure no shift refers to it.

Step 3. Do not delete a line while it is in use

The “Delete” button opens the “Delete line?” confirmation with the line name. If the line is busy, the refusal appears right in that dialog — close it and remove the assignments.

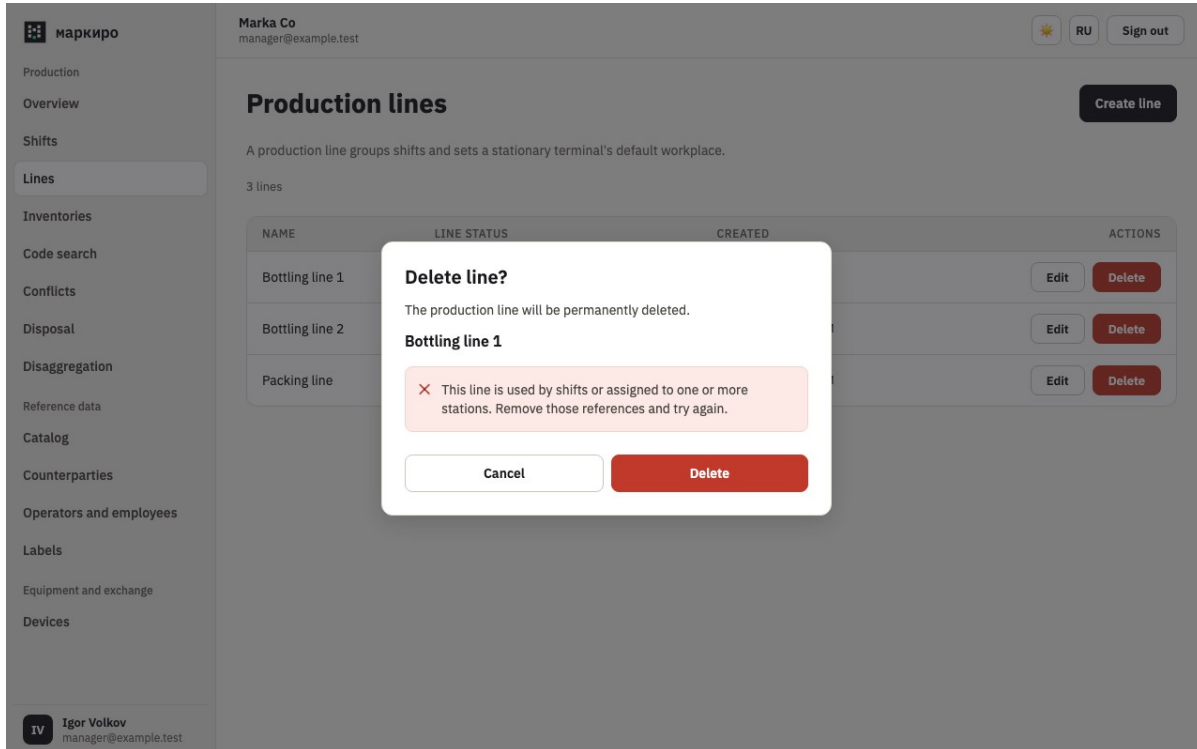

The refusal when deleting a line that is in use

The number of lines is capped by the subscription. If the limit is used up, the cabinet says so when you create a line — free up an unused line or raise the limit.

3. Stations on the line

A line with no stations is useless: there will be nowhere to open a shift on it. Stations are attached to a line in the “Devices” section, which the cabinet describes as “Station, handheld, and kiosk status, connectivity, and licensed slots.” Before a shift a manager needs three things: to find the station, to see that it is online, and to see which line it belongs to.

Step 1. Find the station in the register

The screen has two parts. At the top is the “Working fleet” overview: “Devices found”, “Slot usage”, “On this page” and “Need attention on this page”. It counts what the cabinet sees right now. Below it is the “Organization equipment” register with the table of all the equipment; two filters, “Type” and “Status”, sit above the table. To list stations only, set “Type” to “Station”.



маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co
manager@example.test

RU

Sign out

Devices

Download Station for Windows

Add device

Station, handheld, and kiosk status, connectivity, and licensed slots.

EQUIPMENT / LIVE

Working fleet

Devices found
1

Slot usage
—

On this page
1

Need attention on this page
0

DEVICE REGISTER

Organization equipment

Type
All types

Status
All statuses

NAME	WORKING-DEVICE SLOT	TYPE	PLACE	STATUS	ACTIONS
Bottling station 1	—	Station	Bottling line 1	✓ Online	

1 / 1

The “Working fleet” overview and the “Organization equipment” register

Expected result: The station you need is visible in the register table.

Step 2. Check that the station is online and knows its line

The “Status” column shows the connection: “Online”, “Offline”, “Awaiting pairing” or “Revoked”. A shift is only opened on a station whose status is “Online”; “Awaiting pairing” means the device record exists in the cabinet but the code has not been entered on the machine itself yet. The line is shown in the “Place” column — there is no separate “Line” column in the table.

Step 3. Assign a line to a station

The line is picked in the device card with the “Line” field; the default value is “No line”. The cabinet explains the choice like this: “The selected line becomes the station's default workplace and groups its shifts.” The “Manage lines” link leads to the lines section if the line you need does not exist yet. A new station gets its line right in the “New device” dialog; an existing one is moved with the “Reassign” action in the “Actions” column.



The screenshot shows the Markiro application interface. On the left is a sidebar menu with options like Production, Overview, Shifts, Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, Devices (selected), Integrations, Organization, Cabinet access, Billing, and Settings. The main content area is titled 'Devices' and shows 'Station, handheld, and kiosk status, connectivity, and licensed slots.' It includes a 'Working fleet' card with '1' device found and a 'DEVICE REGISTER' table for 'Organization equipment'.

NAME	WORKING-DEVICE SLOT	TYPE	PLACE
Bottling station 1	Occupied	Station	Bottlin

Below the table is a 'Device licensing and replacement' section. On the right, the 'New device' dialog is open, showing instructions to install the station on a production PC and a 'Download Station for Windows' button. It includes dropdowns for 'Type' (Station) and 'Line' (No line), and a 'Manage lines' link. At the bottom are 'Cancel' and 'Create' buttons.

Choosing the line in the device card

Expected result: The line name appeared in the “Place” column.

The “Working-device slot” column answers a subscription question rather than a shift one: whether the device holds a slot in the plan — “Reserved”, “Occupied”, “Released” or “Needs review”. For a production manager the cabinet leaves that column unfilled: every row shows a dash. The reservations themselves, freeing a slot and preparing a replacement are gathered lower down, in the “Device licensing and replacement” block, and are outside this document. If a station has to be replaced, or a slot freed for it, ask a cabinet administrator.

Important: Adding a station and choosing its line require cabinet administrator rights. For a production manager this section is read-only: they see the register, the status and the “Place” column but cannot change the assignment, and the “Device licensing and replacement” block is not in their cabinet at all. The device-card screenshot was taken as an administrator — in a manager's cabinet the side menu is shorter.

4. What the catalog has to provide

A shift is planned against a product from the catalog, and not every product will do. The picker lists every product, but the unavailable ones are labeled and cannot be chosen.

Step 1. Check that the product can be selected

Open “Select a product”. A draft product is labeled “draft — unavailable”, and a product marked as not in use is labeled “not in use”. Both are shown dimmed and cannot be picked: first bring the product in the catalog to a working state, or clear the “Do not use” checkbox on its card.



The screenshot displays the Markiro application interface. On the left is a sidebar menu with options: Production, Overview, Shifts (selected), Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, and Devices. The main area shows the 'Shifts' section for 'Marka Co' (manager@example.test). It includes filters for Status (All statuses) and From (Select a date), and a table with 1 shift. The table has columns for SHIFT and PRODUCT. The first shift is AUG26-002, Shift: 08/30/2026, Production: 08/30/2026, and the product is Cranberry syrup, 0.5 L (1,836 pcs - 153 bx for: Berry House LLC).

The 'New shift' modal is open, showing the 'Product and mode' section. The 'Product' dropdown is open, showing a search bar and a list of products: 'Cranberry syrup, 0.5 L', 'Raspberry syrup, 0.5 L (draft — unavailable)', and 'Pear syrup, 0.5 L (not in use)'. The 'Mode' section has radio buttons for 'Validation' (selected) and 'Aggregation'. Below this is a 'Production date (for reports)' dropdown with a calendar icon. A note states: 'If omitted, labels and reports keep the previous date rule.' The 'Production assignment' section has dropdowns for 'Line' (None selected) and 'For counterparty (tolling)' (None selected), and an 'SSCC issuer' dropdown (Our organization). A note states: 'Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.' The 'Templates' section has a 'Box label template' dropdown (Select a product first). At the bottom right are 'Cancel' and 'Plan' buttons.

Unavailable products in the picker

Note: The rule is different in an inventory: there a product marked “Do not use” can be selected — the stock of such a product still has to be counted. In a shift it cannot be selected. If you have worked with inventories, do not carry that habit over.

5. Planning a shift

Step 1. Open the “Shifts” section

The list shows every task and its state. The filters at the top select shifts by status and by two periods at once — by shift date and by production date — so a shift planned in advance is easier to find by production. Under the product name the cabinet shows the actual output: for aggregation, how many units were packed and how many boxes were closed; for validation, how many codes were accepted. The only button in the row is “Details”: it opens the shift panel, which holds both the shift data and every action on it.



маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co
manager@example.test

RU

Sign out

Shifts

Plan a shift

Status: All statuses ▼ From: Select a date To: Select a date Production from: Select a date Production to: Select a date

1 shift

SHIFT	PRODUCT	PRODUCTION	PLAN AND STATUS	ACTIONS
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs · 153 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units ✓ Active	Details

The shift list and its filters

Step 2. Open the shift form

Press “Plan a shift” — “New shift” opens. The form is split into the “Product and mode”, “Planning”, “Production assignment” and “Templates” sections and — for aggregation only — “Aggregation”. If duplicate printing is enabled for the shift, the “Templates” section is replaced by “Duplicate printing” (section 8).



The shift form after a product is chosen

Choosing a product fills in values from its card: the counterparty in “For counterparty (tolling)”, the box capacity and the number of boxes per pallet. Stacking onto pallets is not switched on by that: it is turned on separately, among the aggregation parameters. This is neither a bug nor an accident — it is how the cabinet saves you typing. The prefilled values can be changed: what counts is what is saved in the shift, not what is written on the product.

- “Planned quantity, units” — how many units are planned. A positive whole number.
- “Shift date” — the day the task belongs to.
- “Production date (for reports)” — the date that goes onto the labels and into the reports. The cabinet warns: “If omitted, labels and reports keep the previous date rule.”
- “Line” — the workplace where production will run. “None selected” by default.

Note: The two dates do not duplicate each other. “Shift date” is about planning the work; “Production date (for reports)” is about what gets printed and filed. If production runs overnight and formally belongs to another day, fill in both.

6. Tolling and the SSCC issuer

Two fields in the “Production assignment” section are easy to mix up, and the cabinet warns about it right on the form.

Who the goods are produced for — The “For counterparty (tolling)” field. It is filled in from the product if the product has a default counterparty; the default value is “None selected”.



Whose numbers go on the boxes — The “SSCC issuer” field, “Our organization” by default. The hint on the form: “Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.”

Important: A mistake in the issuer does not show up at once: the shift is planned, production runs, and the wrong numbers are already on the printed box labels. Check this field before the shift is opened at the station.

7. Mode and aggregation

The mode is set by the “Mode” field and decides what the operator does at the station. “Validation” — the codes are only checked. “Aggregation” — the codes are additionally packed into boxes, and the boxes get labels. A new form opens in “Validation” mode.

Step 1. Fill in the aggregation parameters

Choose “Aggregation” — a section with the same name appears in the form. “Box capacity, units” is filled in from the product. In the “Templates” section choose the “Box label template” — aggregation requires it, and the shift will not save without it.

The screenshot shows the MARKIRO application interface. On the left is a sidebar with navigation links: Production, Overview, Shifts (selected), Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, and Devices. The main area is titled 'Shifts' and shows a table with columns 'SHIFT' and 'PRODUCT'. The table contains one row: 'AUG26-002' for 'Cranberry syrup, 0.5 L'. The 'SHIFT' column also shows 'Shift: 08/30/2026' and 'Production: 08/30/2026'. The 'PRODUCT' column shows '1,836 pcs - 153 bx' and 'for: Berry House LLC'. On the right is the 'New shift' form. The form has a title bar with a close button. The 'Product and mode' section has a 'Product' dropdown set to 'Cranberry syrup, 0.5 L' and a 'Mode' section with radio buttons for 'Validation' and 'Aggregation' (selected). The 'Planning' section has 'Planned quantity, units' and 'Shift date' fields, both with 'Select a date' buttons. The 'Production date (for reports)' field also has a 'Select a date' button. A note below says 'If omitted, labels and reports keep the previous date rule.' The 'Production assignment' section has a 'Line' dropdown set to 'None selected' and a 'For counterparty (tolling)' dropdown set to 'Berry House LLC'. The 'SSCC issuer' dropdown is set to 'Our organization'. A note below says 'Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.' The 'Templates' section has a 'Box label template' dropdown set to 'Use organization setting — Box 100x150'. A note below says 'No enabled templates for the product's category'. The 'Aggregation' section has a 'Box capacity, units' field set to '12' and a 'Use pallets' checkbox. At the bottom right are 'Cancel' and 'Plan' buttons.

SHIFT	PRODUCT
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs - 153 bx for: Berry House LLC

New shift

Product and mode

Product: Cranberry syrup, 0.5 L

Mode: ☐ Validation ☒ Aggregation

Planning

Planned quantity, units: Shift date:

Production date (for reports):

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: None selected For counterparty (tolling): Berry House LLC

SSCC issuer: Our organization

Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.

Templates

Box label template: Use organization setting — Box 100x150

No enabled templates for the product's category

Aggregation

Box capacity, units: 12 ☐ Use pallets

Cancel Plan

The “Templates” and “Aggregation” sections

Expected result: The “Aggregation” section is shown and the box capacity is filled in.

Note: There is no “Aggregation” section while “Validation” is selected — that is not a display glitch. If you cannot find the box capacity, check the mode first.



Step 2. Turn pallets on if the shift builds pallets

The “Use pallets” checkbox in the “Aggregation” section opens two fields; while the checkbox is clear, they are not there. “Boxes per pallet” counts boxes, not product units, and the cabinet says so plainly: “How many closed boxes make up one full pallet.” “Pallet label template” can be left on “Organization default” — the hint spells out the order: “Blank — the product category's default is used, then the organization's.”

The screenshot shows the 'New shift' form in the Markiro application. The left sidebar contains a navigation menu with options like Production, Overview, Shifts, Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, and Devices. The 'Shifts' section is active, showing a table with one shift: AUG26-002, Shift: 08/30/2026, Cranberry syrup, 0, 1,836 pcs · 153 bx, Production: 08/30/2026, for: Berry House LLC. The main form is titled 'New shift' and has a close button. It is divided into several sections: 'Product and mode' (Product: Cranberry syrup, 0.5 L, Mode: Aggregation), 'Planning' (Planned quantity, units; Shift date; Production date (for reports)), 'Production assignment' (Line: None selected, For counterparty (tolling): Berry House LLC, SSCC issuer: Our organization), 'Templates' (Box label template: Use organization setting — Box 100×150), and 'Aggregation' (Box capacity, units: 12, Boxes per pallet: 48, Pallet label template: Organization default). The 'Use pallets' checkbox is checked. At the bottom right are 'Cancel' and 'Plan' buttons.

SHIFT	PRODUCT
AUG26-002	Cranberry syrup, 0
Shift: 08/30/2026	1,836 pcs · 153 bx
Production: 08/30/2026	for: Berry House LLC

Product and mode

Product: Cranberry syrup, 0.5 L

Mode: ☐ Validation ☒ Aggregation

Planning

Planned quantity, units:

Shift date:

Production date (for reports):

If omitted, labels and reports keep the previous date rule.

Production assignment

Line:

For counterparty (tolling):

SSCC issuer:

Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.

Templates

Box label template:

No enabled templates for the product's category

Aggregation

Box capacity, units:

☒ Use pallets

Boxes per pallet:

How many closed boxes make up one full pallet.

Pallet label template:

Blank — the product category's default is used, then the organization's.

The “Aggregation” section with pallets turned on

Expected result: The “Boxes per pallet” and “Pallet label template” fields are shown.

Important: Not every plan carries pallets, and the rule here is asymmetric. If the subscription does not have the feature, the line under the checkbox reads: “Pallets are not part of the current plan. Add the feature to the subscription to switch them on in a shift.” — and the checkbox cannot be set. A shift planned with pallets while the feature was still in force keeps a usable checkbox, but only for switching them off: “Pallets are not part of the current plan. This shift was planned with pallets: you can switch them off, but not back on.” So do not clear the checkbox in such a shift until you are sure the pallets are really not needed: you will not get them back.



Step 3. Save the task

Press “Plan”. The shift appears in the list with the “Planned” status. There are no actions in the row itself: open “Details” — the “Shift actions” section of the panel holds “Edit” and “Delete”. For an active shift, “Close shift” takes the place of deletion there — but that is already the next stage of the work.

The screenshot shows the Markiro application interface. On the left is a sidebar with a menu including 'Production', 'Overview', 'Shifts' (selected), 'Lines', 'Inventories', 'Code search', 'Conflicts', 'Disposal', 'Disaggregation', 'Reference data', 'Catalog', 'Counterparties', 'Operators and employees', 'Labels', 'Equipment and exchange', and 'Devices'. The main content area is titled 'Shifts' and includes a 'Plan a shift' button. Below this are filters for Status (set to 'All statuses'), From, To, Production from, and Production to, each with a calendar icon. It indicates '2 shifts' are listed. The table below has columns: SHIFT, PRODUCT, PRODUCTION, PLAN AND STATUS, and ACTIONS. The first row shows shift 'AUG26-003' for 'Cranberry syrup, 0.5 L' on 'Bottling line 1' with 'Aggregation' mode, planned for 4800 units, with a 'Details' button. The second row shows shift 'AUG26-002' for the same product on the same line with 'Aggregation' mode, planned for 4800 units, with a 'Details' button and a green checkmark indicating it is 'Active'.

SHIFT	PRODUCT	PRODUCTION	PLAN AND STATUS	ACTIONS
AUG26-003 Shift: 08/31/2026 Production: 08/31/2026	Cranberry syrup, 0.5 L 0 pcs · 0 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units Planned	Details
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs · 153 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units Active	Details

The shift is planned

Expected result: A row with the “Planned” status appeared in the list.

8. Printing a Data Matrix duplicate

Sometimes the marking code on the product itself cannot be scanned further down the chain — it ends up under a label or on the bottom, for example. A shift in “Validation” mode is then switched to duplicate printing: the station prints a label with the same code, and that label goes onto the outer packaging.

Step 1. Turn the duplicate on in the shift form

In the “Product and mode” section choose “Validation” — a “Label printing” switch appears under the mode with the “No printing” and “Duplicate Data Matrix” options. The second option is not always available: if the equipment or the shift protocol does not support it, it stays disabled.



MARKIRO

Marka Co
manager@example.test

Shifts

Status: All statuses From: Select a date

1 shift

SHIFT	PRODUCT
SEP26-004 Shift: 09/02/2026 Production: 09/02/2026	Cranberry syrup, 0.5 L 1,240 pcs for: Berry House LLC

New shift

Product and mode

Product: Cranberry syrup, 0.5 L Mode: ☒ Validation ☐ Aggregation

Label printing: ☐ No printing ☒ Duplicate Data Matrix

Planning

Planned quantity, units: Shift date: Select a date

Production date (for reports): Select a date

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: None selected For counterparty (tolling): Berry House LLC

SSCC issuer: Our organization

Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.

Duplicate printing

Product label template: Select a template

☐ Allow reprocessing codes from previous shifts

A code may be reprocessed only from a previous closed shift, once per current shift. Codes from active shifts and duplicates within the current shift remain blocked. This setting is frozen when the shift opens.

The server has not confirmed support for reprocessing. You cannot enable this setting or save a planned shift with it enabled.

☒ Require label verification

The operator must scan the new label before accepting the next unit.

The full product code is copied to the outer packaging. The product quantity stays the same.

Cancel Plan

A shift with duplicate printing turned on

Step 2. Choose the template and the verification mode

Turning the duplicate on replaces the “Templates” section with “Duplicate printing”. Choose the “Product label template” — the list shows the size and the resolution of every template. The “Require label verification” checkbox makes the operator scan the printed label: “The operator must scan the new label before accepting the next unit.” Without the checkbox the station lets them continue as soon as the label is sent to the printer.

Expected result: A template is chosen in the section and the verification mode is set.

Note: The duplicate does not change the records: “The full product code is copied to the outer packaging. The product quantity stays the same.” If there is no suitable template for the product, the cabinet says so — add or enable a template in the “Labels” section.

Important: The printing parameters are frozen the moment the shift is opened: for an active shift the cabinet states plainly that the template and the verification were frozen when the shift opened. They cannot be changed on the fly — plan duplicate printing before the start.



9. Editing and deleting

While the shift is planned it can be changed freely and deleted outright. As soon as the shift is opened at a station, the rules change.

Step 1. Editing an active shift is limited

In an open shift the form is called “Edit shift” and shows the shift number. The product, the mode, the line, the counterparty, the issuer, the template and the capacities are locked — only the planned quantity and the dates can be changed.

Edit shift · AUG26-002

Product and mode

Product: Cranberry syrup, 0.5 L

Mode: ☐ Validation ☒ Aggregation

Planning

Planned quantity, units: 4800

Shift date: August 30, 2026

Production date (for reports): August 30, 2026

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: Bottling line 1

For counterparty (tolling): Berry House LLC

SSCC issuer: Our organization

Decides whose numbers appear on the boxes — not the same question as which counterparty the goods are for.

Templates

Box label template: Template unavailable — refresh data

No enabled templates for the product's category

Aggregation

Box capacity, units: 12 ☒ Use pallets

Boxes per pallet: 48

How many closed boxes make up one full pallet.

Pallet label template: Organization default

Blank — the product category's default is used, then the organization's.

Cancel Save

An active shift: most of the fields are locked

Important: The cabinet treats any save of an active shift as critical and asks again: “These changes affect working stations. To apply them, finish work in the shift, leave it, and re-enter it on every station using it. Until then, stations will keep using the previous settings.” Until the operators re-enter the shift, the stations run on the old parameters — warn the line in advance.

Step 2. Confirm the critical change

In the “Critical active shift change” dialog choose “Save changes” if you are ready to ask the line to re-enter, or “Continue editing” to go back to the form.



The screenshot displays the Markiro system interface. On the left is a sidebar with navigation links: Production, Overview, Shifts, Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, and Devices. The main area is titled 'Edit shift · AUG26-002'. It contains sections for 'Product and mode' (Product: Cranberry syrup, 0.5 L; Mode: Aggregation), 'Planning' (Planned quantity: 5200; Shift date: August 30, 2026; Production date: August 30, 2026), 'Production assignment' (For counterparty: Berry House LLC), 'Box label template' (Template unavailable), and 'Aggregation' (Box capacity: 12; Boxes per pallet: 48; Use pallets: checked). A modal dialog box titled 'Critical active shift change' is centered over the form. It contains a warning icon and text: 'These changes affect working stations. To apply them, finish work in the shift, leave it, and re-enter it on every station using it. Until then, stations will keep using the previous settings.' Below the text are two buttons: 'Continue editing' and 'Save changes'.

Critical active shift change

These changes affect working stations. To apply them, finish work in the shift, leave it, and re-enter it on every station using it. Until then, stations will keep using the previous settings.

Continue editing Save changes

Confirming a critical change

Step 3. Deleting is only possible before the start

Open the shift with the “Details” button and press “Delete” in the “Shift actions” section — the cabinet asks “Delete shift?” and shows the product. A deleted shift cannot be restored. An active shift has no such button, and a closed one has no “Shift actions” section at all.



Shift AUG26-003
Cranberry syrup, 0.5 L

Shift output

96 Closed boxes	1,152 Codes in closed boxes	4,800 Plan, units
--------------------	--------------------------------	----------------------

Employees in this shift

4 operations have no employee assigned.

Maria Kuznetsova Line operator Activity: 9/2/26, 7:15 AM — 9/2/26, 2:05 PM	Accepted scans 812	Closed boxes 68
Pyotr Smirnov Role not specified Activity: 9/2/26, 7:20 AM — 9/2/26, 1:40 PM	Accepted scans 340	Closed boxes 28

Pallets

CODES	CLOSED	STATUS
576	8/30/26, 2:20 PM	
564	8/30/26, 3:05 PM	Contents changed after closing
(00) 346006820000000038	8/30/26, 12:40 PM	Taken apart

Shift parameters

Date 08/31/2026	Production date 08/31/2026
Line Bottling line 1	Mode Aggregation
Plan, units 4800	Counterparty Berry House LLC
Boxes per pallet 48	

Shift reports

Reports can be requested and downloaded after the shift is closed.

Shift actions

Edit Delete

Planned

Delete shift?

The shift for "Cranberry syrup, 0.5 L" will be permanently deleted.

AUG26-003 · Cranberry syrup, 0.5 L

Cancel Delete

Confirming the deletion of a shift

10. Common questions

The product cannot be selected — It is either a draft — the “draft — unavailable” label — or marked as not in use: the “not in use” label. Bring the product card in the catalog to a working state, or clear the “Do not use” checkbox.

I cannot find the box and pallet fields — The “Aggregation” section is only shown in “Aggregation” mode. The “Boxes per pallet” field appears once the “Use pallets” checkbox is set.

The shift will not save in aggregation mode — Aggregation requires a “Box label template”. Choose a template in the “Templates” section — either a specific one or the organization setting.

The counterparty filled itself in — It was taken from the card of the product you chose. The value can be changed right in the form: the shift saves what you leave here.



The line will not delete — It is used by shifts or assigned to stations. Detach the line from the stations in the “Devices” section and try deleting again.

I cannot assign a line to a station — The devices section is read-only for a manager. A cabinet administrator assigns the line.

I edited an active shift but the station still runs the old way — That is by design: the station picks up the new parameters only after leaving the shift and entering it again. Until then it uses the previous settings.

If your problem is not described above, contact Markiro support: hello@v-b.tech.

