

Scanning station: exceptions and recovery

This is an informational translation. The matching Russian revision is authoritative. Step-by-step operator guide for unusual situations: reprinting a label, disassembling a box, reprinting and disassembling a pallet, print failures, and codes kept by another terminal.

Document code	MKR-INS-03
Revision	2026.09/04
Effective from	26 September 2026
Revision verification	https://markiro.app/d/MKR-INS-03/2026.09/04/26.09.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers the operator's actions in unusual situations: a damaged or lost box label, a box assembled by mistake, a pallet that needs a reprint or a disassembly, a printer that did not print the label, or the station showing codes kept by another terminal. Signing in is covered by instruction MKR-INS-01, the normal work cycle by MKR-INS-02.


Note: The screenshots use demo data. Box numbers and products on your station will differ.

2. The “Exceptions” screen

Step 1. Open the “Exceptions” screen

Tap the “Exceptions” button on the work screen. The station shows the box actions: for the open box, “Undo last scan” and “Clear box”; for this shift's closed boxes, “Reprint label” and “Disassemble box”; an action that is not available right now is disabled. The “Back” button steps back, and from the first screen it returns to scanning; once an action is completed, the station offers “Back to work”. On a pallet shift, the screen also has a “Pallet actions” button (section 5).



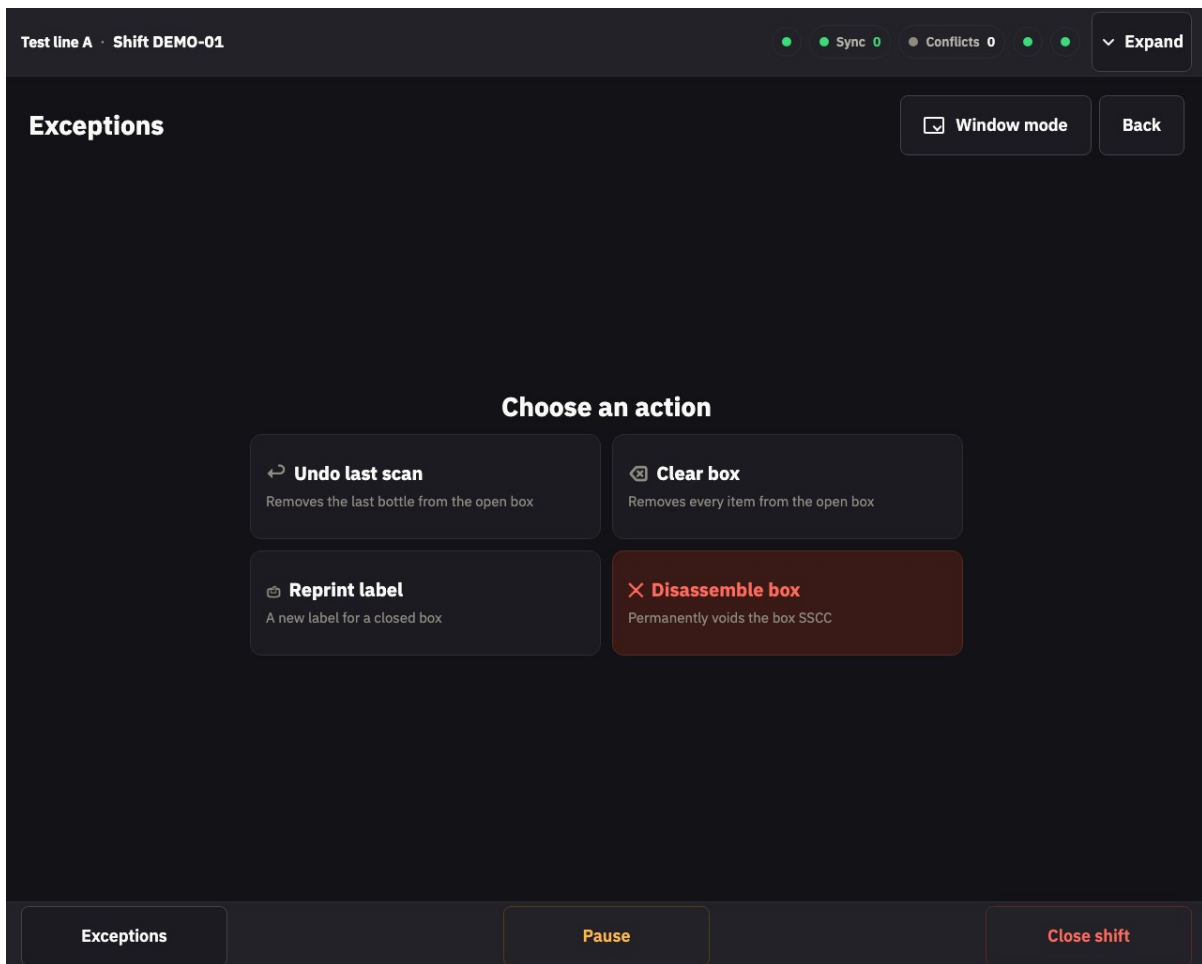

The “Exceptions” screen: choosing an action

3. Reprinting a box label

Reprint the label when it is damaged, cannot be read by the scanner, was spoiled by the printer, or quality control asked for it. The box contents and its SSCC number do not change — the same label is printed again.

Step 1. Point at the box

Choose “Reprint label”. The station asks you to identify the closed box: scan its label or pick the box from the list (SSCC number and item count).



Test line A · Shift DEMO-01

● Sync 0 ● Conflicts 0 ● Expand

Disassemble box

Scan the box label or choose it from the list

Last SSCC digits

1

2

3

4

5

6

7

8

9

⌫

0

✕

Choose a closed box

SSCC 046012345600000016 24 items

SSCC 046012345600000023 18 items

SSCC 046012345600000030 12 items

Previous page

Page 1 of 1

Next page

Exceptions

Pause

Close shift


Choosing a closed box: by scanning its label or from the list

Expected result: The station showed the reason catalog.

Step 2. Choose a reason and confirm

Pick a reason from the list: “Damaged label”, “Unreadable label”, “Printer jam / no output”, “Quality-control request” or “Other reason”. Then confirm with the “Confirm reprint” button.



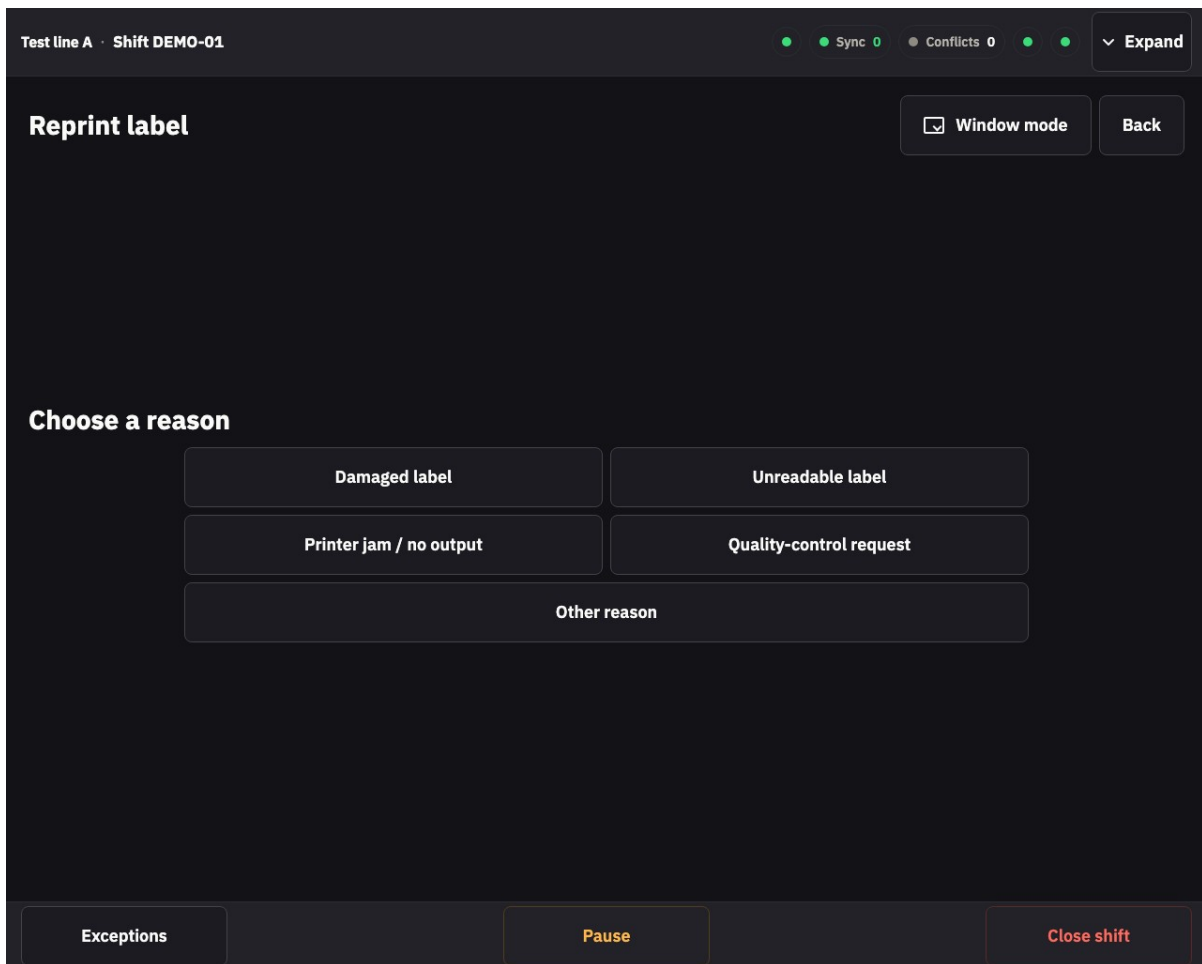

Test line A · Shift DEMO-01

Sync 0 Conflicts 0 Expand

Reprint label

Window mode Back

Choose a reason

Damaged label Unreadable label

Printer jam / no output Quality-control request

Other reason

Exceptions Pause Close shift

The reprint reason catalog

Expected result: The printer printed the label and the station showed “Action completed”.

Important: Remove and destroy the old label. Exactly one label must remain on the box — two identical SSCCs in circulation are not allowed.

4. Disassembling a box

Disassemble a box when it was assembled by mistake: wrong product, wrong quantity, damaged packaging, or the box was rejected by quality control. You pick the reason from the on-screen catalog; for anything unusual there is “Other reason”.

Step 1. Choose the box and the reason

On the “Exceptions” screen choose “Disassemble box”, identify the closed box (by scanning its label or from the list) and pick the reason.

Expected result: The station showed the confirmation screen.

Step 2. Confirm the irreversible action

The station asks: “Disassemble this box permanently?” — the box's SSCC number will be retired and cannot be reused. Check that the right box is selected and tap “Disassemble permanently”.



Disassemble this box permanently?

Back

SSCC 046012345600000016
This SSCC will be retired and cannot be reused.
Wrong product

Disassemble permanently


Double confirmation of the disassembly

Expected result: The station showed “Action completed” and the box disappeared from the closed list.

Step 3. Repack the units

Units from the disassembled box remain verified — scan them into a new box using the normal work cycle. The new box gets a new SSCC number; destroy the disassembled box's label.



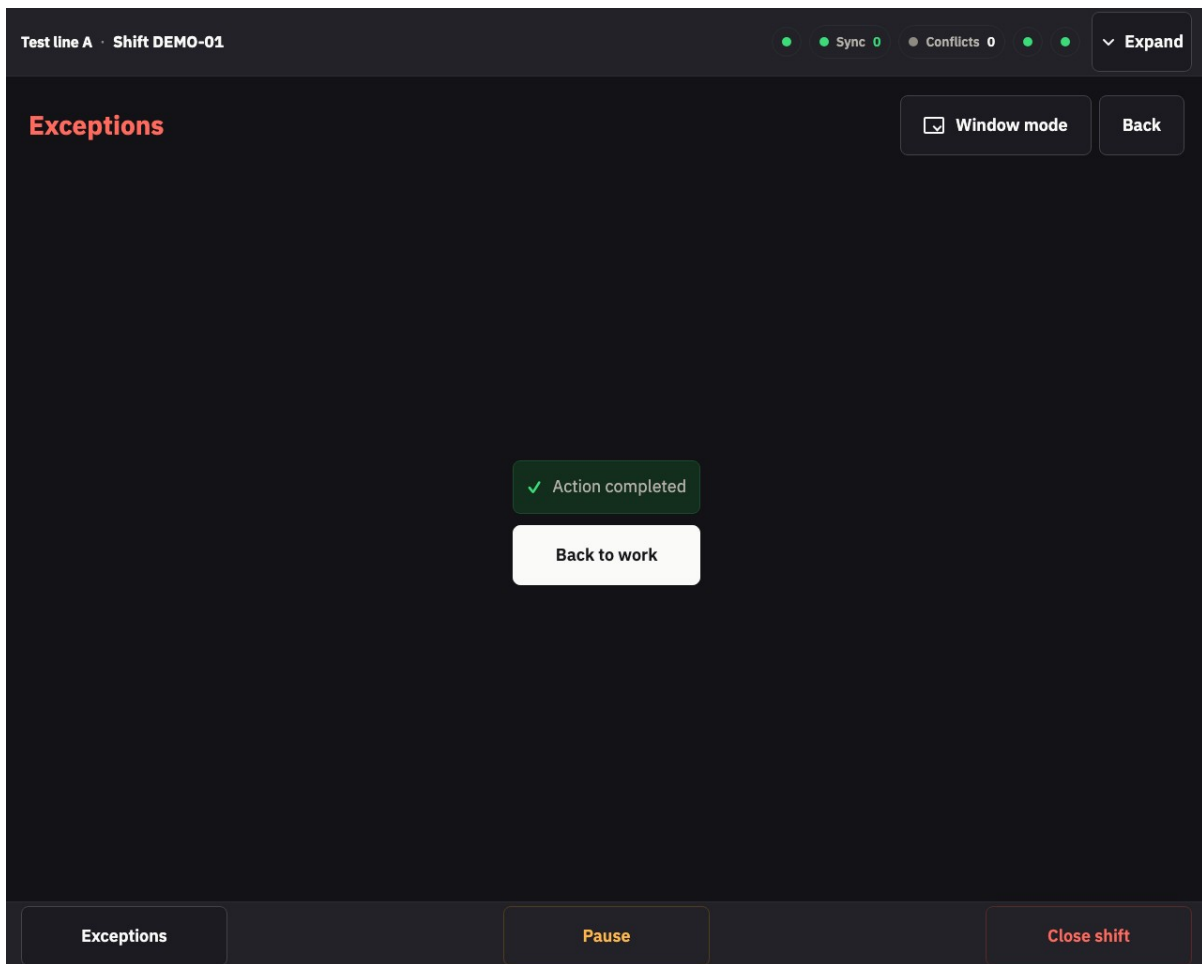

The action result

Important: A voided SSCC cannot be reused, and a disassembly cannot be undone. If a box was disassembled by mistake, tell your supervisor and pack its contents into a new box.

5. Pallet exceptions

On a pallet shift, the “Exceptions” screen has a “Pallet actions” button under the box actions. It opens the actions for this station's closed pallets in the current shift: “Reprint pallet” and “Disassemble pallet”. If there are no closed pallets, the station says “There are no closed pallets right now.” and both buttons are disabled. The “Back” button steps back, and from the first screen it returns to scanning.

Step 1. Reprint a pallet label

Choose “Reprint pallet”. If there are several closed pallets, pick one in the “Select a closed pallet” list, which shows the SSCC number and the box count. Pick a reason — “Label damaged”, “Label unreadable”, “Printer jam / no output”, “Quality control request” or “Other reason” — and tap “Confirm”. The station prints the same label with the same SSCC.

Expected result: The station showed “Action completed” and the printer printed the pallet label.

Important: Make sure the label came out: if the printer did not print it, repeat the reprint. Remove and destroy the old pallet label — exactly one label must remain on the pallet.

Step 2. Disassemble a pallet

Choose “Disassemble pallet”, the pallet and a reason — “Pallet damaged”, “Wrong boxes on pallet”, “Rejected by quality control” or “Other reason” — and tap “Confirm”. The station asks “Disassemble the pallet permanently?”: the pallet's SSCC number will be retired and cannot be reused. Check the number and tap “Disassemble permanently”.



Test line A · Shift DEMO-01

● Sync 0 ● Conflicts 0 ● Expand

Disassemble pallet

Back

Choose a reason

SSCC 146012345600000150

Pallet damaged

Wrong boxes on pallet

Rejected by quality control

Other reason

Confirm

Exceptions

Pause

Close shift

Disassembling a pallet: choosing the reason

Expected result: The station showed “Action completed” and the pallet disappeared from the closed list.


Important: A disassembly cannot be undone. The boxes from a disassembled pallet stay closed and recorded; remove and destroy the pallet label, and your supervisor decides how to stack those boxes next.

6. A print failure while closing a box

Step 1. The “The box label was not printed” screen

If the printer fails while a box is being closed, the station shows a recovery screen with the cause: a printing problem, no label template selected for the shift, or the label could not be prepared. Fix the cause (check the ribbon and for a printer jam) and tap “Retry printing”.



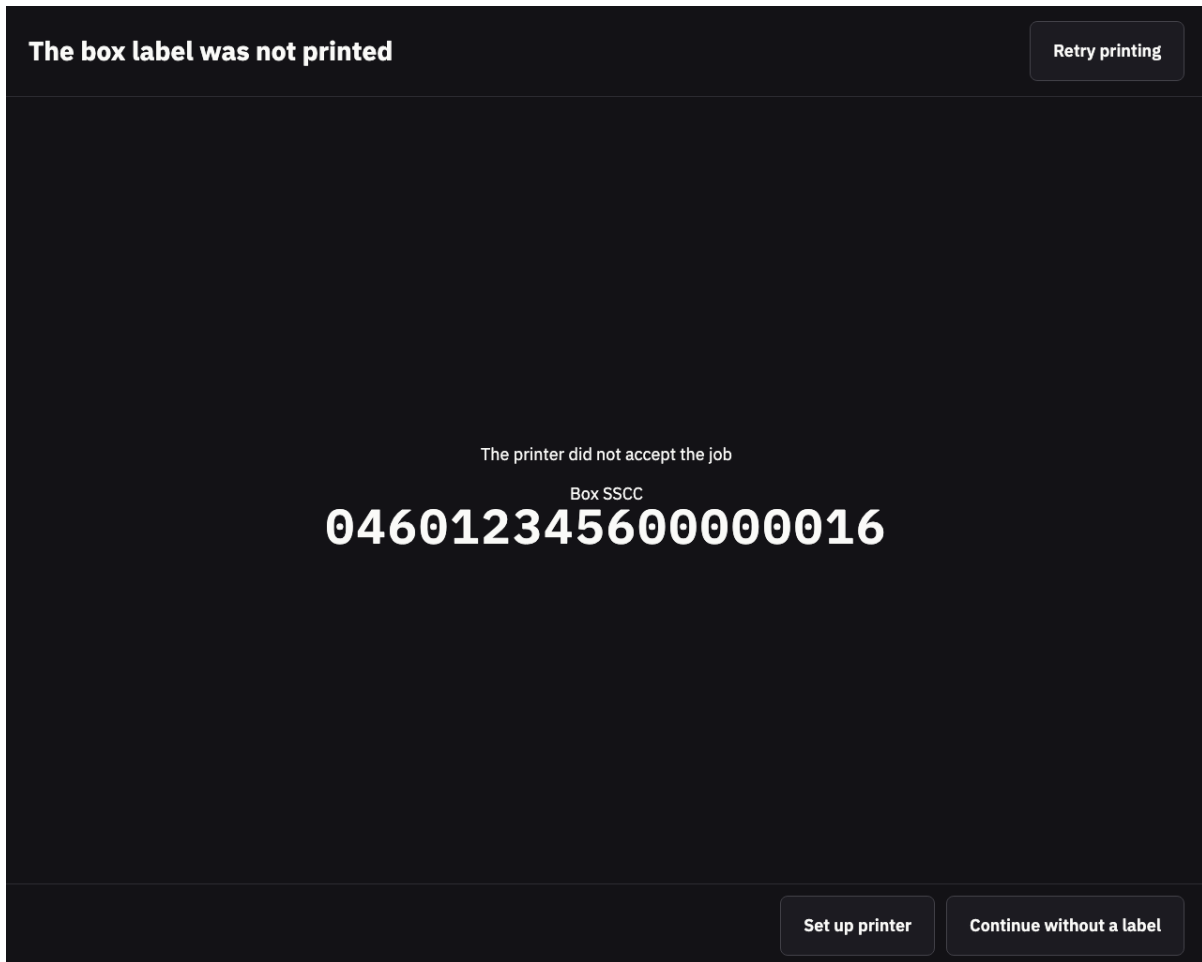

Recovering the box label print

Expected result: The printer printed the label and work continued.


Step 2. The last resort – “Continue without a label”

If printing is impossible right now, tap “Continue without a label” and confirm. The box is already closed and recorded — it will need to be labelled later through a reprint (section 3). Mark such a box so it does not get lost.

Step 3. If the verification does not pass

During printed-label verification, scan the SSCC code from this box's label specifically. “This is a different label” — you are holding a label from another box: find the right one or tap “Print again”. “This is not a group code” — you scanned a unit's marking code, not a box label.



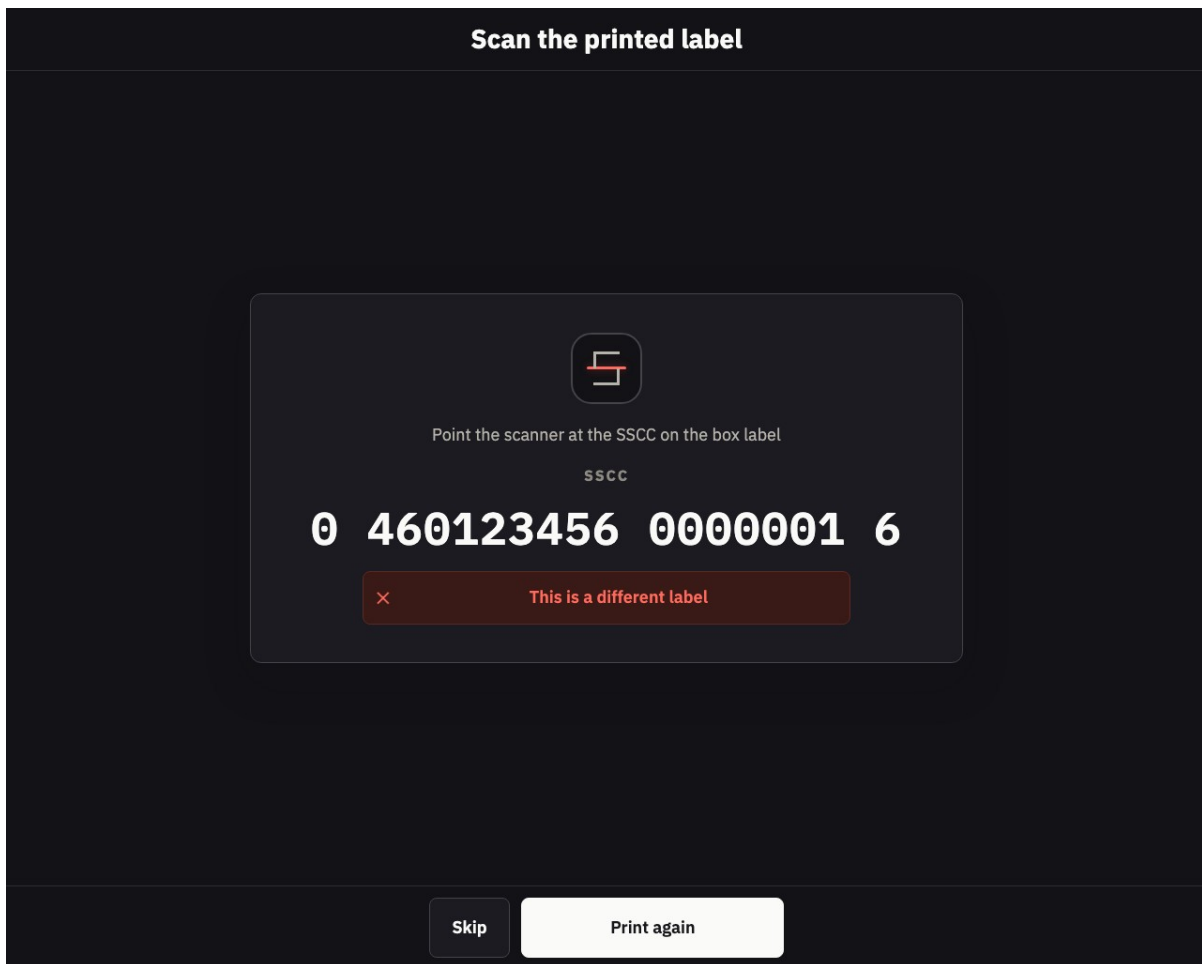

Print verification: the label in hand is from another box

7. Codes kept by another terminal

If the same code passed through two stations, the code is kept by the terminal that scanned it first. On the losing station the code goes into the discrepancy list, and the “Conflicts” counter in the status bar grows. This is not an emergency and not an operator error. Do not confuse it with the “Duplicates” counter in the shift journal: that one counts repeat scans the station itself rejected.

Step 1. Review the discrepancy list

The list opens with the “Conflicts” button on the shift selection screen — the station returns there after “Pause” or after the shift is closed. Each entry shows which terminal keeps the code and when: “Kept by ... at ...”.



Demo station 01 · Test line A

Sample Operator · Shift DEMO-01

Sync 0 Conflicts 4

Codes claimed elsewhere

This device keeps a local copy. The server has already kept the earlier scan; production continues.

04607000000042 DEMO-SERIAL-000128

Kept by DEMO-TERM-11

Do not rescan. Continue production; a manager will review it.

at 8/21/26, 9:14:22 AM

04607000000042 DEMO-SERIAL-000129

Kept by DEMO-TERM-12

Do not rescan. Continue production; a manager will review it.

at 8/21/26, 9:18:47 AM

Previous page

Page 1 of 2

Next page

Back

The list of codes kept by another terminal

Note: Do not rescan these codes. Keep working — a manager will review the discrepancy in the cabinet.

8. Hardware in the middle of a shift

- The scanner shows “No signal” — stop working and check the scanner cable. If the connection does not come back, call a technician.
- “Some scanners disconnected” — the workstation has several scanners and one of them dropped off. Keep working with the connected scanner and check the other one's cable; if the connection does not come back, call a technician.
- “Keyboard” for the scanner — the station receives scans as keyboard input, which is how scanners in keyboard mode work. This is not an error; if scans do not reach the station, call a technician.
- The printer does not print — the station itself shows the recovery screen when a box is closed (section 6). Check the printer's ribbon, power and cable.
- The “Printer” indicator in the status bar shows how many of the three label types (box, code duplicate, pallet) have a printer assigned, for example 2 / 3. Fewer than three is fine if the shift does not print those labels. If a label the shift needs has no printer, the station shows “Printer is not configured” when printing — call a technician.

Connecting and configuring the hardware is the technician's job and is covered by the separate workstation setup instruction.

9. Frequently asked questions

Two labels in hand after a reprint — The new one stays on the box; destroy the old one. Both carry the same SSCC — only one may be in circulation.



Disassembled the wrong box — It cannot be undone. Tell your supervisor and pack the contents into a new box using the normal cycle — the station issues a new SSCC.

A box cannot be found by scanning on the selection screen — “This box is not among this shift's closed boxes” — the label belongs to a box from another shift or station. Pick the box from the list or ask your supervisor.

The “Conflicts” counter grew — This is the list of codes kept by another terminal (section 7). Do not stop working and do not rescan them.

Closed a box without a label and forgot which one — Open “Exceptions” → “Reprint label”: the list shows all of this shift's closed boxes with their item counts.

If your problem is not listed above, contact your organization's administrator or Markiro support: hello@v-b.tech.

