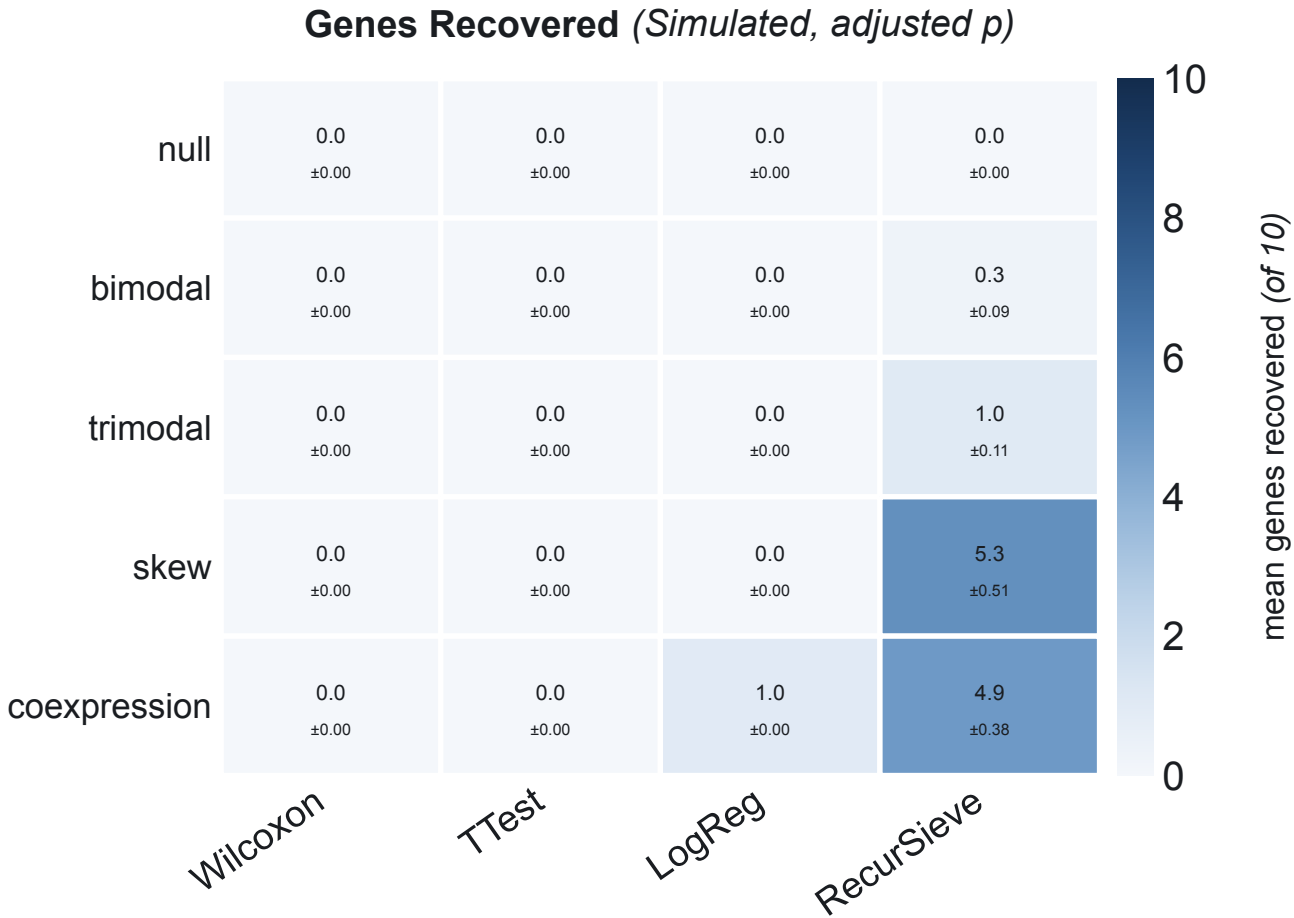


Values are mean ± SEM across 50 RecurSieve seeds on one dataset; DE methods are deterministic, so their SEM is 0. Wilcoxon and t-test panels: genes with Benjamini–Hochberg adjusted p < 0.05 (scanpy rank_genes_groups). LogReg has no p-values (top genes by score). RecurSieve does not filter on p-values.