

Cabinet: the line, planning and starting a shift

This is an informational translation. The matching Russian revision is authoritative. Manager's guide to preparing a production shift: the production line, stations on the line, product requirements, shift planning, modes and aggregation, editing and deleting a planned shift.

Document code	MKR-INS-08
Revision	2026.09/01
Effective from	10 September 2026
Revision verification	https://markiro.app/d/MKR-INS-08/2026.09/01/10.09.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers what a cabinet manager does before production starts: how to create a production line, assign stations to it, check the product in the catalog and plan a shift. The shift itself is opened by the operator at the station — that is covered by instruction MKR-INS-01. Running the shift, closing it and the GIS MT reports are outside this document.

A shift goes through three states: “Planned” — the task is ready but production has not started; “Active” — the shift was opened at a station and production is running; “Closed” — production is over. Everything described below is done by the manager in the first state, before the shift is opened.

1. Create a production line and assign stations to it.
2. Make sure the product exists in the catalog and can be selected.
3. Plan the shift: product, mode, quantity, dates, line and — for aggregation — the label template and the capacities.
4. Hand the station over to the operator: opening the shift is their job.

Note: The screenshots use demo data. Numbers, quantities and names in your cabinet will differ.

2. The production line

A line is a workplace on the shop floor. The cabinet states its purpose like this: “A production line groups shifts and sets a stationary terminal's default workplace.” Without a line you can still plan a shift, but the station will not get a default workplace and the shifts will not be grouped.

Step 1. Create the line

Open “Production lines” and press “Create line”. The only required field is “Line name”; give the line the name the shop floor uses, so that the operator recognizes it at the station.





маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

IV Igor Volkov
manager@example.test

Marka Co
manager@example.test

Production lines

A production line groups shifts and sets a stationary terminal's default workplace.

3 lines

NAME	LINE STATUS
Bottling line 1	✓ Online · 2 of 3 stations
Bottling line 2	– Offline
Packing line	– No stations assigned

New line

Line name

Enter a line name

Cancel

Create

Creating a production line

Expected result: The line appeared in the list.

Step 2. Check the line status

The “Line status” column shows how the line looks right now: “Online · 2 of 3 stations” — some of its stations are connected; “Offline” — stations are assigned but none of them is connected; “No stations assigned” — no station is attached to the line, so there will be nobody to open a shift on it.

маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

IV Igor Volkov
manager@example.test

Marka Co
manager@example.test

RU

Sign out

Create line

Production lines

A production line groups shifts and sets a stationary terminal's default workplace.

3 lines

NAME	LINE STATUS	CREATED	ACTIONS
Bottling line 1	✓ Online · 2 of 3 stations	8/1/26, 9:00 AM	EditDelete
Bottling line 2	– Offline	8/14/26, 9:00 AM	EditDelete
Packing line	– No stations assigned	8/28/26, 9:00 AM	EditDelete

The list of lines and their status






Important: Deleting a line is irreversible, and it does not always go through. If the line is already in use, the cabinet refuses: “This line is used by shifts or assigned to one or more stations. Remove those references and try again.” Detach the line from the stations first and make sure no shift refers to it.

Step 3. Do not delete a line while it is in use

The “Delete” button opens the “Delete line?” confirmation with the line name. If the line is busy, the refusal appears right in that dialog — close it and remove the assignments.

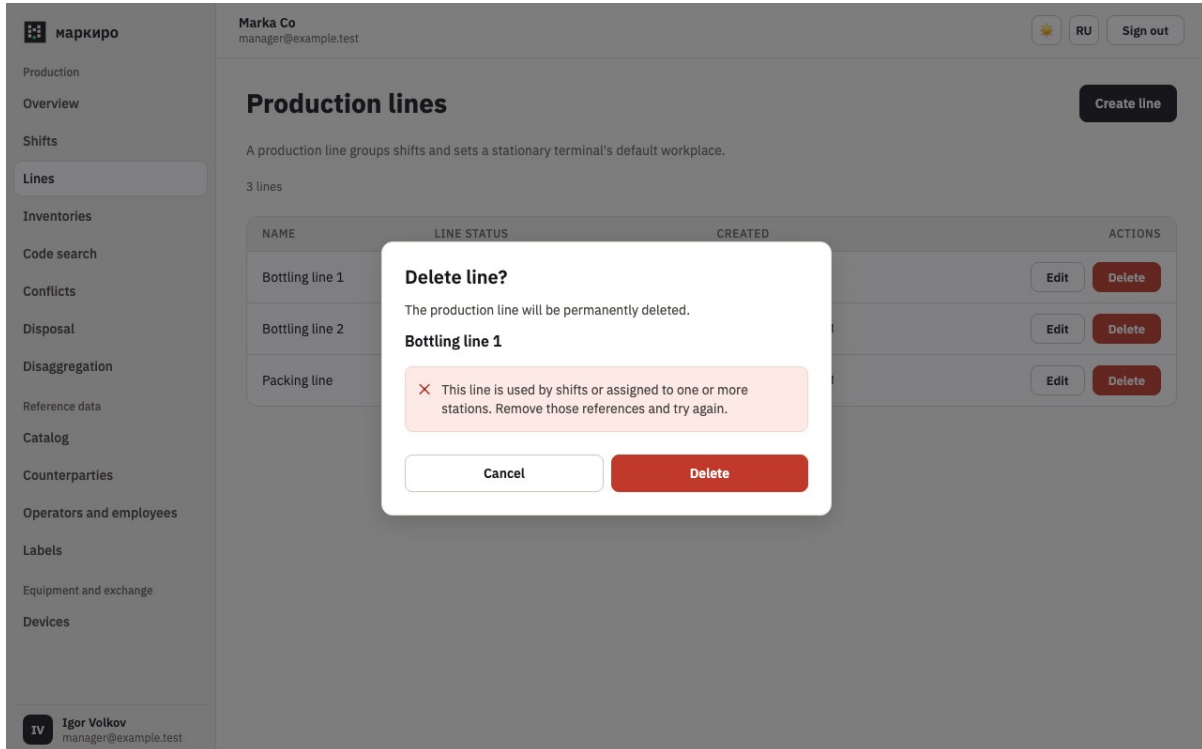

The refusal when deleting a line that is in use

The number of lines is capped by the subscription. If the limit is used up, the cabinet says so when you create a line — free up an unused line or raise the limit.

3. Stations on the line

A line with no stations is useless: there will be nowhere to open a shift on it. Stations are attached to a line in the “Devices” section.

Step 1. See which line a station belongs to

In the device list the line is shown in the “Place” column — there is no separate “Line” column in the list. The same row shows the device type and its current status.





маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co

manager@example.test

RU

Sign out

Devices

Download Station for Windows

Add device

Type

Status

All types

All statuses

NAME	TYPE	PLACE	STATUS	ACTIONS
Bottling station 1	Station	Bottling line 1	✓ Online	

<

1 / 1

>

The device list: the line in the “Place” column

Step 2. Assign a line to a station

The line is picked in the device card with the “Line” field; the default value is “No line”. The cabinet explains the choice like this: “The selected line becomes the station's default workplace and groups its shifts.” The “Manage lines” link leads to the lines section if the line you need does not exist yet.

маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co

manager@example.test

Devices

Download Station for Windows

Type

Status

All types

All statuses

NAME	TYPE	PLACE	STA
Bottling station 1	Station	Bottling line 1	✓

New device

Install Station on the production PC, then pair it with the organization using the code shown after the device is created.

Download Station for Windows

Type

Station

Name

Line

No line

The selected line becomes the station's default workplace and groups its shifts.

Manage lines

Cancel

Create

Choosing the line in the device card





Important: Adding a station and choosing its line require cabinet administrator rights. For a production manager this section is read-only: they see the “Place” column but cannot change the assignment. The screenshot was taken as an administrator — in a manager's cabinet the side menu is shorter.

4. What the catalog has to provide

A shift is planned against a product from the catalog, and not every product will do. The picker lists every product, but the unavailable ones are labeled and cannot be chosen.

Step 1. Check that the product can be selected

Open “Select a product”. A draft product is labeled “draft -- unavailable”, and a product marked as not in use is labeled “not in use”. Both are shown dimmed and cannot be picked: first bring the product in the catalog to a working state, or clear the “Do not use” checkbox on its card.

MARKIRO

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

MARKIRO

Marka Co
manager@example.test

Shifts

Status: All statuses

From: Select a date

1 shift

SHIFT	PRODUCT
AUG26-002	Cranberry syrup, 0.5 L
Shift: 08/30/2026	1,836 pcs · 153 bx
Production: 08/30/2026	for: Berry House LLC

New shift

Product and mode

Product: Select a product

Mode: ☒ Validation ☐ Aggregation

Search products

Cranberry syrup, 0.5 L

Raspberry syrup, 0.5 L (draft -- unavailable)

Pear syrup, 0.5 L (not in use)

Shift date: Select a date

Production date (for reports): Select a date

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: None selected

For counterparty (tolling): None selected

SSCC issuer: Our organization

Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.

Templates

Box label template: Select a product first

Cancel Plan

Unavailable products in the picker

Note: The rule is different in an inventory: there a product marked “Do not use” can be selected — the stock of such a product still has to be counted. In a shift it cannot be selected. If you have worked with inventories, do not carry that habit over.

5. Planning a shift

Step 1. Open the “Shifts” section

The list shows every task and its state. The filters at the top select shifts by status and by two periods at once — by shift date and by production date — so a shift planned in advance is easier to find by production. Under the product name the cabinet shows the actual output: for aggregation, how many units were packed





and how many boxes were closed; for validation, how many codes were accepted. The only button in the row is “Details”: it opens the shift panel, which holds both the shift data and every action on it.

маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co
manager@example.test

🌞

RU

Sign out

Plan a shift

Status

From

To

Production from

Production to

All statuses

Select a date

Select a date

Select a date

Select a date

1 shift

SHIFT	PRODUCT	PRODUCTION	PLAN AND STATUS	ACTIONS
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs · 153 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units ✓ Active	Details

IV

Igor Volkov
manager@example.test

The shift list and its filters

Step 2. Open the shift form

Press “Plan a shift” — “New shift” opens. The form is split into the “Product and mode”, “Planning”, “Production assignment” and “Templates” sections and — for aggregation only — “Aggregation”. If duplicate printing is enabled for the shift, the “Templates” section is replaced by “Duplicate printing” (section 8).





MARKIRO

Marka Co
manager@example.test

Shifts

Status: All statuses (dropdown) From: Select a date (calendar icon)

1 shift

SHIFT	PRODUCT
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs · 153 bx for: Berry House LLC

New shift

Product and mode

Product: Cranberry syrup, 0.5 L (dropdown)

Mode: ☒ Validation ☐ Aggregation

Label printing: ☒ No printing ☐ Duplicate Data Matrix

Planning

Planned quantity, units: (input field)

Shift date: Select a date (calendar icon)

Production date (for reports): Select a date (calendar icon)

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: None selected (dropdown)

For counterparty (tolling): Berry House LLC (dropdown)

SSCC issuer: Our organization (dropdown)

Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.

Templates

Box label template: Use organization setting — Box 100×150 (dropdown)

No enabled templates for the product's category

Cancel Plan

The shift form after a product is chosen

Choosing a product fills in values from its card: the counterparty in “For counterparty (tolling)” and the box and pallet capacities. This is neither a bug nor an accident — it is how the cabinet saves you typing. The prefilled values can be changed: what counts is what is saved in the shift, not what is written on the product.

- “Planned quantity, units” — how many units are planned. A positive whole number.
- “Shift date” — the day the task belongs to.
- “Production date (for reports)” — the date that goes onto the labels and into the reports. The cabinet warns: “If omitted, labels and reports keep the previous date rule.”
- “Line” — the workplace where production will run. “None selected” by default.

Note: The two dates do not duplicate each other. “Shift date” is about planning the work; “Production date (for reports)” is about what gets printed and filed. If production runs overnight and formally belongs to another day, fill in both.

6. Tolling and the SSCC issuer

Two fields in the “Production assignment” section are easy to mix up, and the cabinet warns about it right on the form.

Who the goods are produced for — The “For counterparty (tolling)” field. It is filled in from the product if the product has a default counterparty; the default value is “None selected”.





Whose numbers go on the boxes — The “SSCC issuer” field, “Our organization” by default. The hint on the form: “Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.”

Important: A mistake in the issuer does not show up at once: the shift is planned, production runs, and the wrong numbers are already on the printed box labels. Check this field before the shift is opened at the station.

7. Mode and aggregation

The mode is set by the “Mode” field and decides what the operator does at the station. “Validation” — the codes are only checked. “Aggregation” — the codes are additionally packed into boxes, and the boxes get labels. A new form opens in “Validation” mode.

Step 1. Fill in the aggregation parameters

Choose “Aggregation” — a section with the same name appears in the form. “Box capacity, units” is filled in from the product. The “Use pallets” checkbox adds the “Pallet capacity, units” field: while the checkbox is clear, that field is not there. In the “Templates” section choose the “Box label template” — aggregation requires it, and the shift will not save without it.

The screenshot shows the 'New shift' form in the Markiro application. The left sidebar contains navigation links: Production, Overview, Shifts (selected), Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, and Devices. The main content area is divided into two panels. The left panel, titled 'Shifts', shows a table with columns 'SHIFT' and 'PRODUCT'. The right panel, titled 'New shift', contains several sections: 'Product and mode' with 'Product' set to 'Cranberry syrup, 0.5 L' and 'Mode' set to 'Aggregation'; 'Planning' with 'Planned quantity, units' and 'Shift date' fields; 'Production assignment' with 'Line' set to 'None selected', 'For counterparty (tolling)' set to 'Berry House LLC', and 'SSCC issuer' set to 'Our organization'; 'Templates' with 'Box label template' set to 'Use organization setting — Box 100x150'; and 'Aggregation' with 'Box capacity, units' set to '12' and 'Use pallets' checkbox unchecked. At the bottom right are 'Cancel' and 'Plan' buttons.

SHIFT	PRODUCT
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs - 153 bx for: Berry House LLC

New shift

Product and mode

Product: Cranberry syrup, 0.5 L

Mode: ☐ Validation ☒ Aggregation

Planning

Planned quantity, units:

Shift date:

Production date (for reports):

If omitted, labels and reports keep the previous date rule.

Production assignment

Line:

For counterparty (tolling):

SSCC issuer:

Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.

Templates

Box label template:

No enabled templates for the product's category

Aggregation

Box capacity, units:

☐ Use pallets

Cancel Plan

The “Templates” and “Aggregation” sections

Expected result: The “Aggregation” section is shown and the box capacity is filled in.

Note: There is no “Aggregation” section while “Validation” is selected — that is not a display glitch. If you cannot find the box capacity, check the mode first.





Step 2. Save the task

Press “Plan”. The shift appears in the list with the “Planned” status. There are no actions in the row itself: open “Details” — the “Shift actions” section of the panel holds “Edit” and “Delete”. For an active shift, “Close shift” takes the place of deletion there — but that is already the next stage of the work.

маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

IV Igor Volkov
manager@example.test

Marka Co
manager@example.test

☀️ RU Sign out

Shifts

Plan a shift

StatusFromToProduction fromProduction to

All statusesSelect a dateSelect a dateSelect a dateSelect a date

2 shifts

SHIFT	PRODUCT	PRODUCTION	PLAN AND STATUS	ACTIONS
AUG26-003 Shift: 08/31/2026 Production: 08/31/2026	Cranberry syrup, 0.5 L 0 pcs · 0 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units Planned	Details
AUG26-002 Shift: 08/30/2026 Production: 08/30/2026	Cranberry syrup, 0.5 L 1,836 pcs · 153 bx for: Berry House LLC	Bottling line 1 Aggregation	4800 Plan, units Active	Details

The shift is planned

Expected result: A row with the “Planned” status appeared in the list.

8. Printing a Data Matrix duplicate

Sometimes the marking code on the product itself cannot be scanned further down the chain — it ends up under a label or on the bottom, for example. A shift in “Validation” mode is then switched to duplicate printing: the station prints a label with the same code, and that label goes onto the outer packaging.

Step 1. Turn the duplicate on in the shift form

In the “Product and mode” section choose “Validation” — a “Label printing” switch appears under the mode with the “No printing” and “Duplicate Data Matrix” options. The second option is not always available: if the equipment or the shift protocol does not support it, it stays disabled.





маркиро

Production

Overview

Shifts

Lines

Inventories

Code search

Conflicts

Disposal

Disaggregation

Reference data

Catalog

Counterparties

Operators and employees

Labels

Equipment and exchange

Devices

Marka Co
manager@example.test

Shifts

Status: All statuses From: Select a date

1 shift

SHIFT	PRODUCT
SEP26-004 Shift: 09/02/2026 Production: 09/02/2026	Cranberry syrup, 0 1,240 pcs for: Berry House LLC

IV Igor Volkov
manager@example.test

New shift

Product and mode

Product: Cranberry syrup, 0.5 L Mode: ☒ Validation ☐ Aggregation

Label printing: ☐ No printing ☒ Duplicate Data Matrix

Planning

Planned quantity, units: Shift date: Select a date

Production date (for reports): Select a date

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: None selected For counterparty (tolling): Berry House LLC

SSCC issuer: Our organization

Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.

Duplicate printing

Product label template: Select a template

☒ Require label verification

The operator must scan the new label before accepting the next unit.

The full product code is copied to the outer packaging. The product quantity stays the same.

Cancel Plan

A shift with duplicate printing turned on

Step 2. Choose the template and the verification mode

Turning the duplicate on replaces the “Templates” section with “Duplicate printing”. Choose the “Product label template” — the list shows the size and the resolution of every template. The “Require label verification” checkbox makes the operator scan the printed label: “The operator must scan the new label before accepting the next unit.” Without the checkbox the station lets them continue as soon as the label is sent to the printer.

Expected result: A template is chosen in the section and the verification mode is set.

Note: The duplicate does not change the records: “The full product code is copied to the outer packaging. The product quantity stays the same.” If there is no suitable template for the product, the cabinet says so — add or enable a template in the “Labels” section.

Important: The printing parameters are frozen the moment the shift is opened: for an active shift the cabinet states plainly that the template and the verification were frozen when the shift opened. They cannot be changed on the fly — plan duplicate printing before the start.

9. Editing and deleting

While the shift is planned it can be changed freely and deleted outright. As soon as the shift is opened at a station, the rules change.





Step 1. Editing an active shift is limited

In an open shift the form is called “Edit shift” and shows the shift number. The product, the mode, the line, the counterparty, the issuer, the template and the capacities are locked — only the planned quantity and the dates can be changed.

MARKIRO Marka Co manager@example.test

Shifts

Status: All statuses From: Select a date

1 shift

SHIFT	PRODUCT
AUG26-002	Cranberry syrup, 0.5 L
Shift: 08/30/2026	1,836 pcs - 153 bx
Production: 08/30/2026	for: Berry House LLC

Edit shift · AUG26-002

Product and mode

Product: Cranberry syrup, 0.5 L Mode: ☐ Validation ☒ Aggregation

Planning

Planned quantity, units: 4800 Shift date: August 30, 2026

Production date (for reports): August 30, 2026

If omitted, labels and reports keep the previous date rule.

Production assignment

Line: Bottling line 1 For counterparty (tolling): Berry House LLC

SSCC issuer: Our organization

Decides whose numbers appear on the boxes -- not the same question as which counterparty the goods are for.

Templates

Box label template: Template unavailable — refresh data

No enabled templates for the product's category

Aggregation

Box capacity, units: 12 ☒ Use pallets

Pallet capacity, units: 48

Cancel Save

An active shift: most of the fields are locked

Important: The cabinet treats any save of an active shift as critical and asks again: “These changes affect working stations. To apply them, finish work in the shift, leave it, and re-enter it on every station using it. Until then, stations will keep using the previous settings.” Until the operators re-enter the shift, the stations run on the old parameters — warn the line in advance.

Step 2. Confirm the critical change

In the “Critical active shift change” dialog choose “Save changes” if you are ready to ask the line to re-enter, or “Continue editing” to go back to the form.





The screenshot shows the 'Edit shift' interface for shift AUG26-002. A modal window titled 'Critical active shift change' is displayed in the center. The modal contains a warning icon and text: 'These changes affect working stations. To apply them, finish work in the shift, leave it, and re-enter it on every station using it. Until then, stations will keep using the previous settings.' Below the text are two buttons: 'Continue editing' and 'Save changes'.


The background interface includes a sidebar with navigation links (Production, Overview, Shifts, Lines, Inventories, Code search, Conflicts, Disposal, Disaggregation, Reference data, Catalog, Counterparties, Operators and employees, Labels, Equipment and exchange, Devices) and a main content area with sections for 'Shifts', 'Product and mode', 'Planning', 'Templates', and 'Aggregation'.

Confirming a critical change

Step 3. Deleting is only possible before the start

Open the shift with the “Details” button and press “Delete” in the “Shift actions” section — the cabinet asks “Delete shift?” and shows the product. A deleted shift cannot be restored. An active shift has no such button, and a closed one has no “Shift actions” section at all.



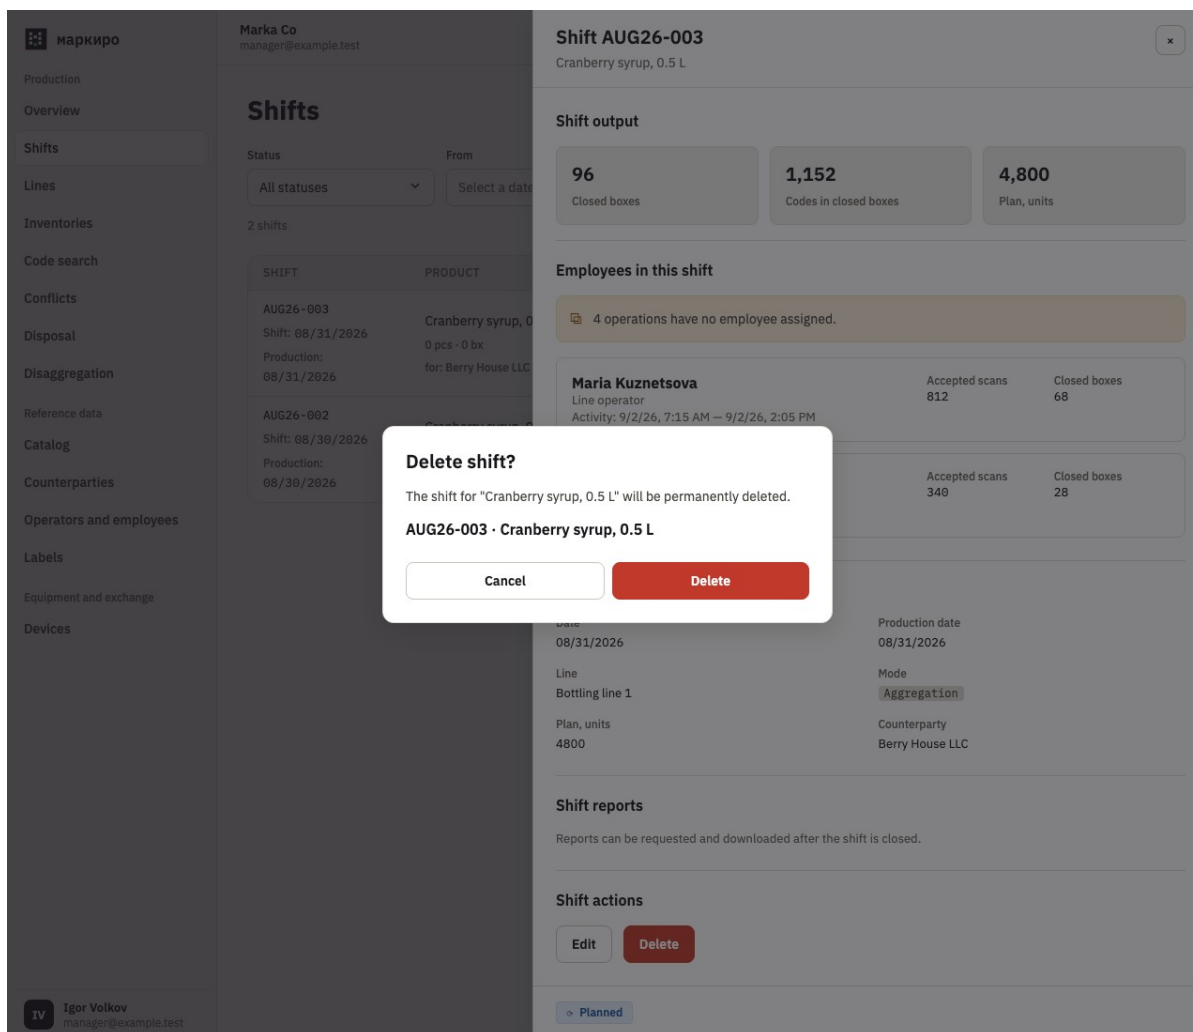

Confirming the deletion of a shift

10. Common questions

The product cannot be selected — It is either a draft — the “draft -- unavailable” label — or marked as not in use: the “not in use” label. Bring the product card in the catalog to a working state, or clear the “Do not use” checkbox.

I cannot find the box and pallet capacities — The “Aggregation” section is only shown in “Aggregation” mode. The “Pallet capacity, units” field appears once the “Use pallets” checkbox is set.

The shift will not save in aggregation mode — Aggregation requires a “Box label template”. Choose a template in the “Templates” section — either a specific one or the organization setting.

The counterparty filled itself in — It was taken from the card of the product you chose. The value can be changed right in the form: the shift saves what you leave here.

The line will not delete — It is used by shifts or assigned to stations. Detach the line from the stations in the “Devices” section and try deleting again.

I cannot assign a line to a station — The devices section is read-only for a manager. A cabinet administrator assigns the line.

I edited an active shift but the station still runs the old way — That is by design: the station picks up the new parameters only after leaving the shift and entering it again. Until then it uses the previous settings.

If your problem is not described above, contact Markiro support: hello@v-b.tech.

