

Scanning station: operator sign-in and shift start

This is an informational translation. The matching Russian revision is authoritative. Step-by-step operator guide: signing in at the station with a badge, selecting or creating a shift, and starting work.

Document code	MKR-INS-01
Revision	2026.09/04
Effective from	26 September 2026
Revision verification	https://markiro.app/d/MKR-INS-01/2026.09/04/26.09.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers the operator's daily sign-in at a Markiro scanning station and the shift start: from scanning the badge to a screen that is ready for work. It is intended for line operators; hardware setup and station pairing are covered by separate documents.

Note: The screenshots use demo data. Product names, shift numbers and operator names on your station will differ.

2. Before you start

- The station is powered on and the station app is running.
- The scanner and the label printer are connected: the status bar shows no hardware error icons.
- You have your personal operator badge and PIN code.


Important: If the station shows the pairing screen (a pairing code) or a connection error, do not continue working — call a technician or an administrator.

3. Signing in with a badge

Step 1. Hold your badge up to the scanner

On the sign-in screen, hold your personal badge up to the barcode scanner. Keep the badge 10–20 cm away from the scanner until you hear the beep.



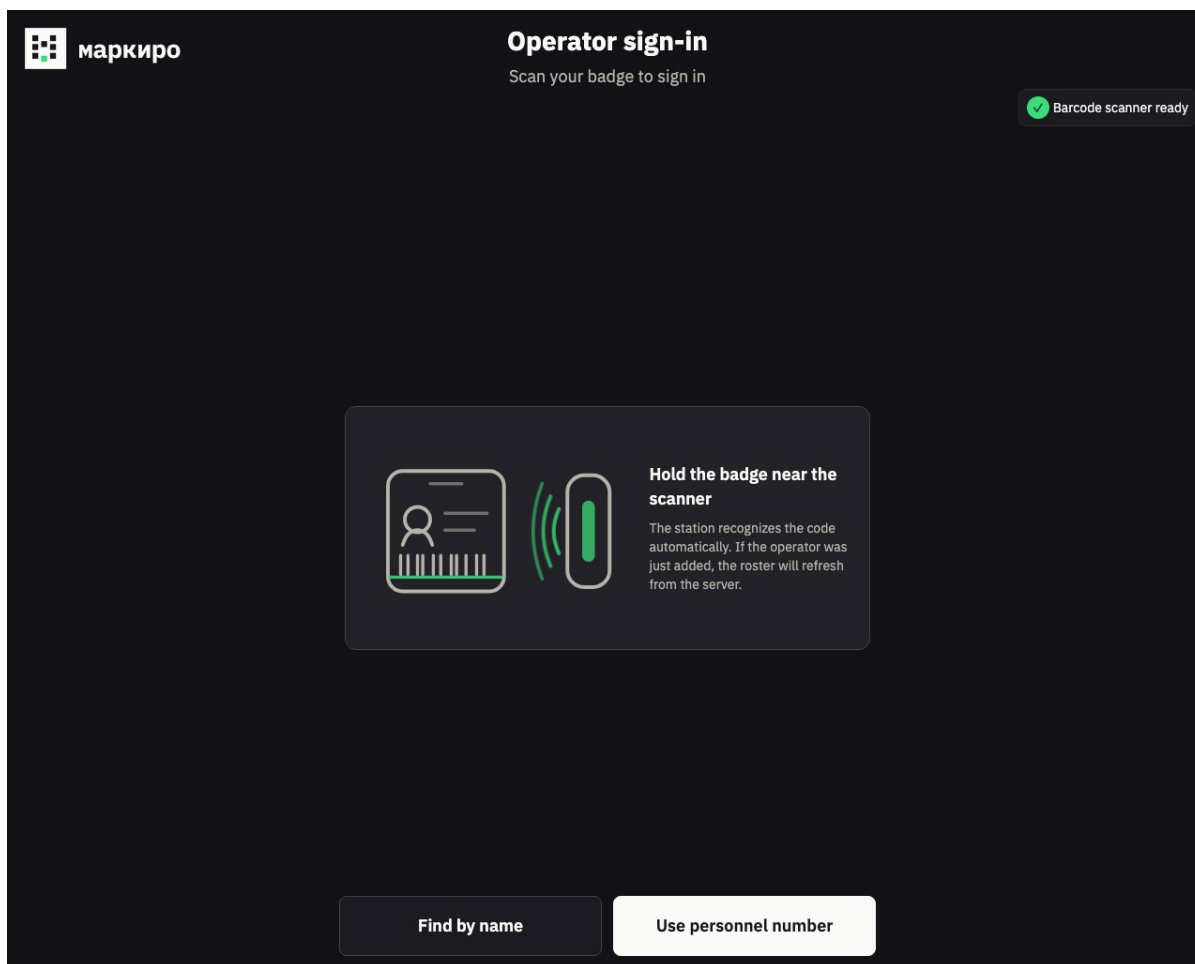


Sign-in screen: the station is waiting for an operator badge

Expected result: The station recognized the badge and showed your name.

Step 2. Enter your PIN code

Type your personal PIN code on the on-screen keyboard and confirm the input.

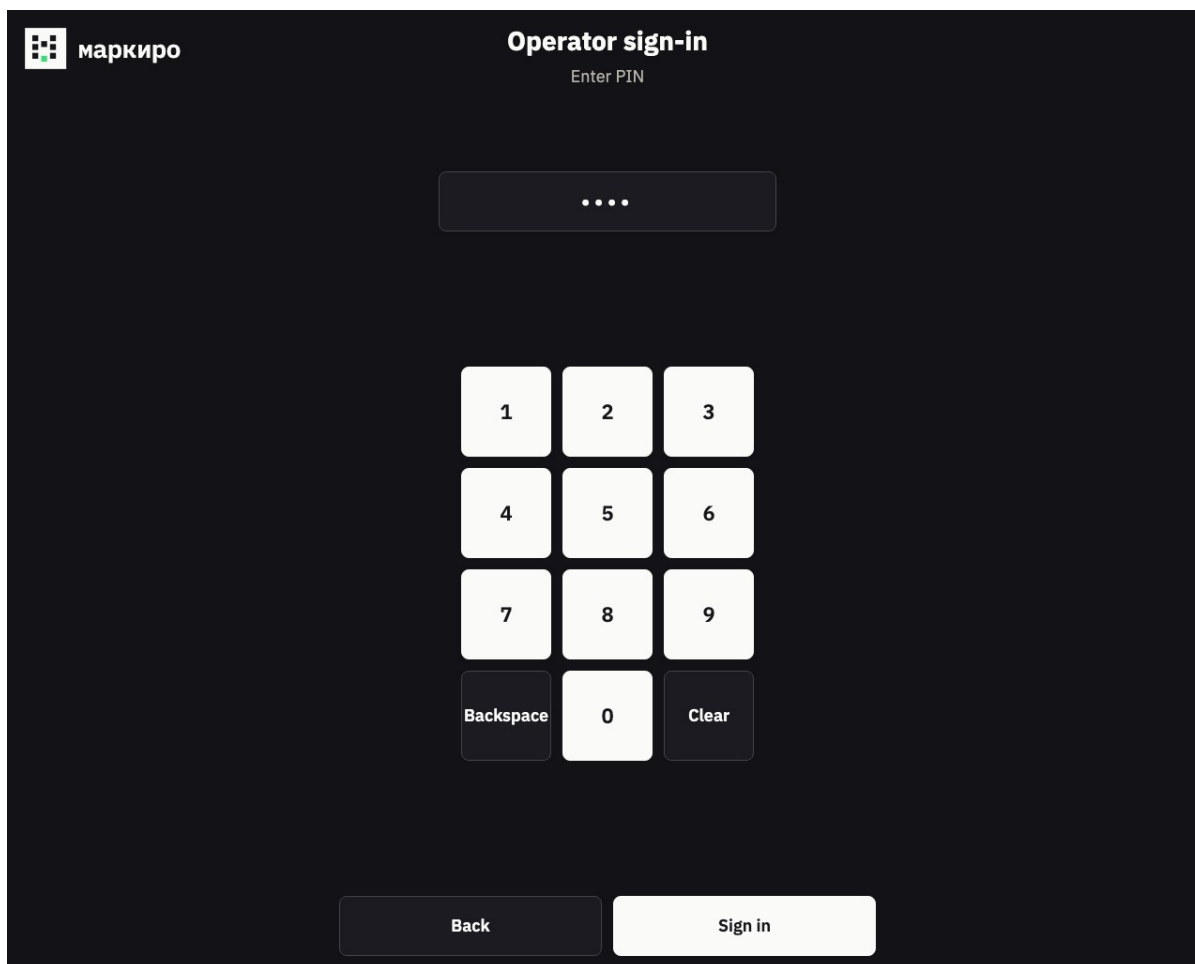

The image shows a dark-themed mobile application interface for operator sign-in. At the top left is the 'маркиро' logo. The title 'Operator sign-in' is centered at the top, with the instruction 'Enter PIN' below it. A PIN input field with four dots is positioned in the upper middle. Below this is a numeric keypad with buttons for digits 1-9, 0, a 'Backspace' button, and a 'Clear' button. At the bottom, there are two buttons: 'Back' on the left and 'Sign in' on the right.


Entering the operator PIN code

Expected result: The shift selection screen opened.

Step 3. If the badge cannot be read, find yourself by name

Tap “Find by name”, start typing your last name and pick yourself from the list, then enter your PIN code. After the shift, report the faulty badge to an administrator.



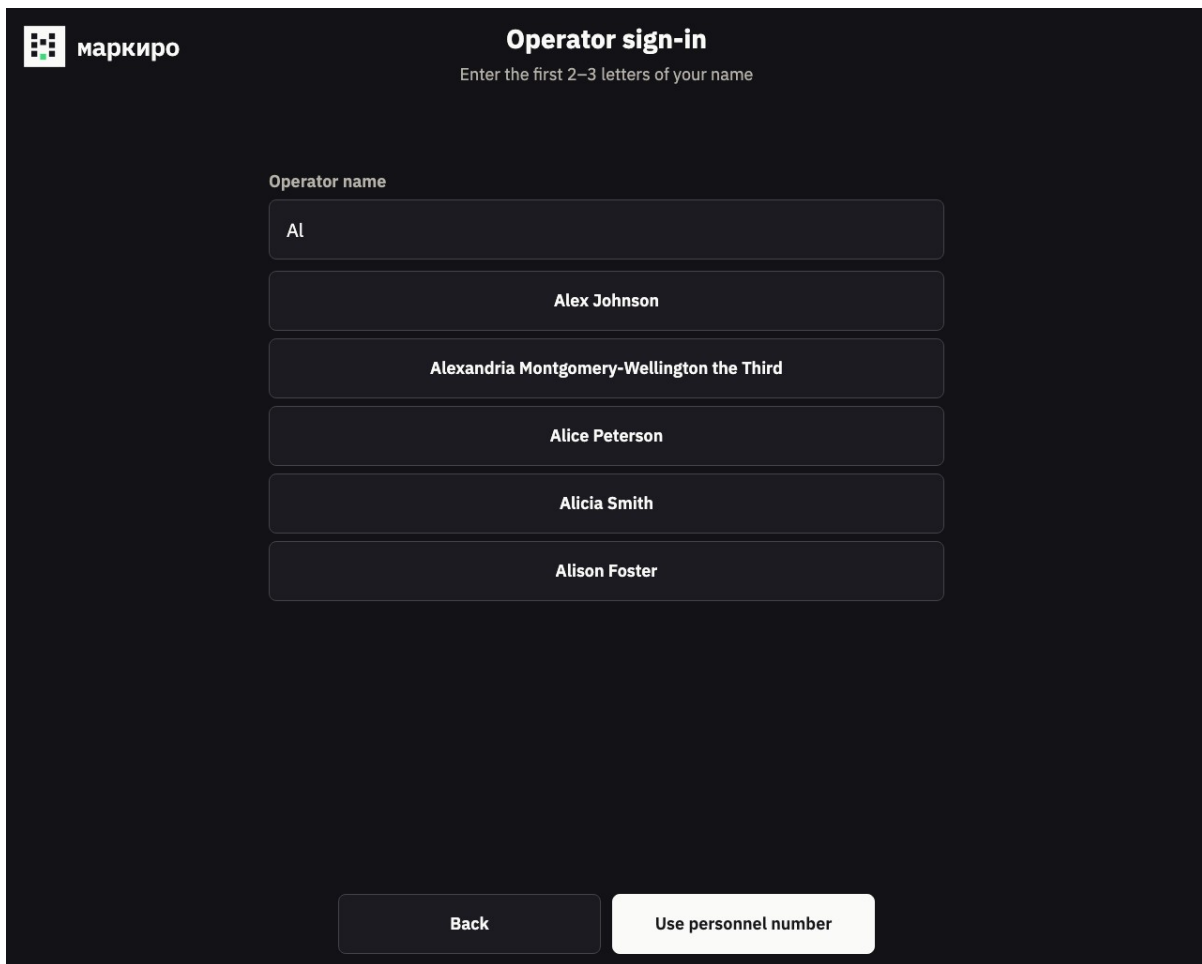

Operator sign-in
Enter the first 2–3 letters of your name

Operator name

Al

Alex Johnson

Alexandria Montgomery-Wellington the Third

Alice Peterson

Alicia Smith

Alison Foster

Back Use personnel number

Finding an operator by name

4. Selecting an existing shift

If a shift already exists (for example, you are returning after a break or a supervisor prepared the shift), select it from the list.

Step 1. Select a shift from the list

On the shift selection screen, find the shift by its number, product and date, and tap “Open” on its card — or “Rejoin” if the shift is already running. Closed shifts are not shown in the list. A shift that builds pallets carries a “Pallets” tag next to its mode on the card.



Demo station 01 · Test line A
Sample Operator

● Sync 0

● Conflicts 0

●

Printers 3 / 3

!

Change operator

☑

Shifts

Warehouse operations 1

AUG26-041
Lactose-free milk 3.2%
Ultra-pasteurized lactose-free milk enriched with vitamins A and D for children, 3.2% fat, 930 ml
Shift: 08/21/2026 Produced: 08/15/2026
Validation plan 10,000

Open

AUG26-040/S
Zhigulevskoye 0.5
Zhigulevskoye light filtered pasteurized beer, 0.5 l
Shift: 08/20/2026
Aggregation Pallets no plan

Rejoin

Previous page

Page 1 of 2

Next page

New shift

Refresh shifts

Workstation setup

Conflicts

Shift list: cards with the number, product and date

Expected result: The work screen of the selected shift opened.

5. Creating a new shift

Step 1. Find the product

If the shift you need is not in the list, tap “New shift”. Scan the product barcode or a marking code from the packaging — or type the GTIN and tap “Open”. If the station reports “Product is not in the catalog”, the product has to be added in the cabinet first — contact an administrator.



Demo station 01 · Test line A
Sample Operator

● Sync 0

● Conflicts 0

Printers 3 / 3

! Change operator

New shift

Type or scan a GTIN

Open

Back

New shift: the product GTIN field

Expected result: The station found the product and showed its name and GTIN.

Step 2. Choose the mode and pallet assembly

Choose the shift mode — “Validation” or “Aggregation”; instruction MKR-INS-02 explains the difference. For “Aggregation”, the “Without pallets” and “With pallets” buttons appear below. Choose “With pallets” if the shift's closed boxes are to be built into pallets. Under the buttons the station shows how many boxes go on a pallet: the number comes from the product card, for example “66 boxes per pallet · from the product card”. If the product card has no such number, “With pallets” is unavailable. Then check the production date — the field is optional, take the date from the product — and tap “Start”.



Demo station 01 · Test line A
Sample Operator

● Sync 0 ● Conflicts 0 ●

Printers 3 / 3

! Change operator

New shift

Sample product A
04607000000045

Validation

Aggregation

Without pallets

With pallets

66 boxes per pallet · from the product card

Production date

Select date

Optional. Use the date printed on the product.

Start

Back

A new shift in “Aggregation” mode with pallet assembly

Step 3. For aggregation, choose the label templates

In “Aggregation” mode the station shows the “Box label template” list. A template marked “Default” is already selected; pick another one if needed. On a shift with pallets the button at the bottom reads “Next”, and after it you choose the “Pallet label template” the same way. Tap “Start”.

Expected result: The station created the shift and opened the work screen.

Note: How the station builds pallets during the shift — it puts every closed box onto the pallet, closes a full pallet and prints its label — is covered in instruction MKR-INS-02, section 5.


Important: Check the product and the production date before confirming: they are printed on box labels. If you made a mistake, close the shift and create a new one, and tell your supervisor.

6. Starting work

Step 1. Check the work screen

Before the first scan make sure: the header shows your line and shift; the shift band at the top of the screen shows the right product and plan; the “In shift” total is zero or matches the work already done in the shift. The status indicators in the header collapse into dots while everything is fine; a problem indicator expands into a caption by itself, and the “Expand” button opens the full status panel.



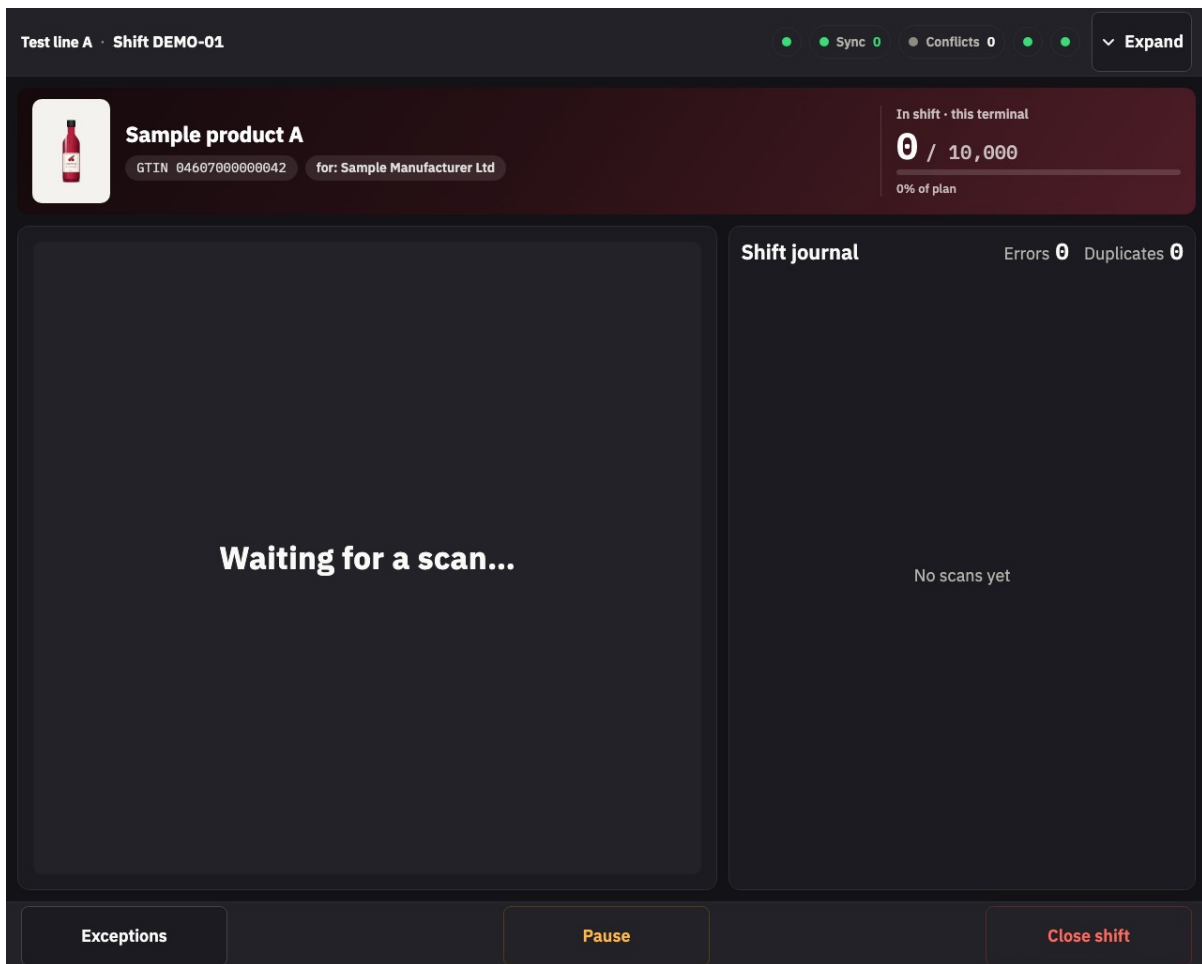

Work screen: the shift is open, the station is ready to scan

Expected result: The station is ready: scan the first marking code — the result will appear on the screen.

7. Common problems

The badge cannot be read — Sign in through the search by name (section 3, step 3) and ask an administrator to replace the badge.

The station rejects the PIN code — Check the keyboard layout and try again. After several failed attempts, contact an administrator to reset the PIN code.

The shift you need is not in the list — Create a new shift (section 5) or check with your supervisor which station the shift was opened on.

The “With pallets” button is unavailable — The product card does not say how many boxes go on a pallet. Ask an administrator to set this number on the product card in the cabinet, then start creating the shift again.

The status bar shows a hardware error — Do not start scanning. Check the scanner and printer cables; if the error persists, call a technician.

If your problem is not listed above, contact your organization's administrator or Markiro support: hello@v-b.tech.

