

LAB 7:Create a sample API using API Gateway-Test,Deploy, GET, Post Operations

Lab Report Submitted to the

DR.Hariharasitaraman , VIT BHOPAL UNIVERSITY

**BACHELOR OF TECHNOLOGY
COMPUTER SCIENCE ENGINEERING**

Name - Arpita Rajput

Reg. No. - 22MIP10001



**School of Computer Science Engineering
VIT Bhopal University, Madhya Pradesh**

Feb, 2026


Practical 6: Create Sample API using GET & POST — Steps (Amazon API Gateway)

Step 1: Open AWS Documentation


1. Open browser.
 2. Go to AWS guide for creating example API.
-

Step 2: Login to AWS Console

1. Login to **Amazon Web Services Console**.

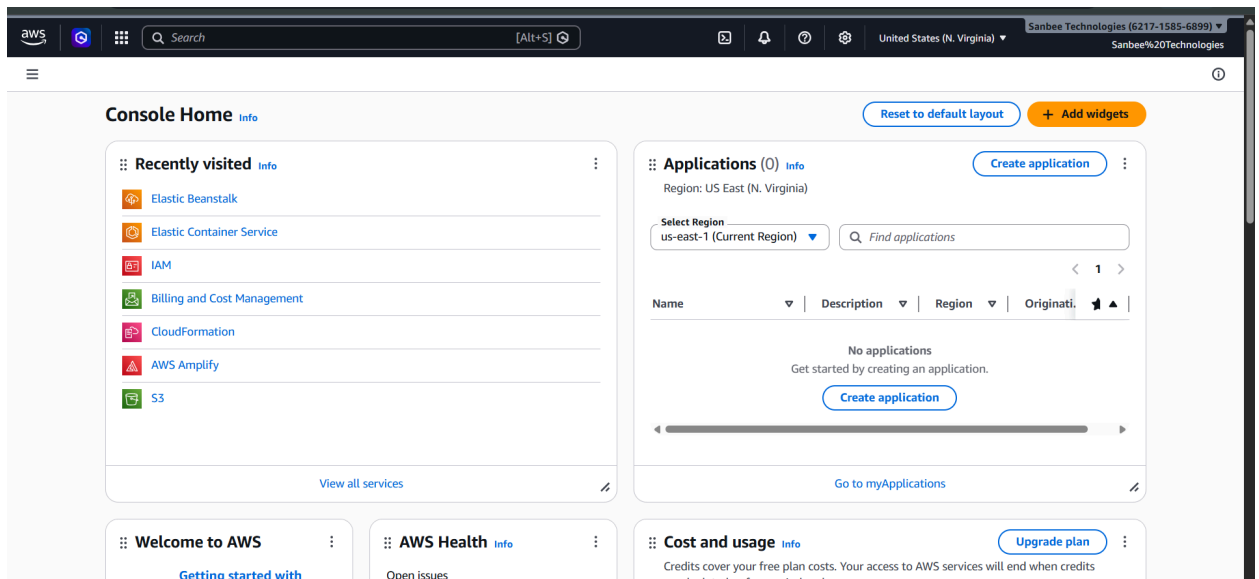


2. Search **API Gateway** in search bar.

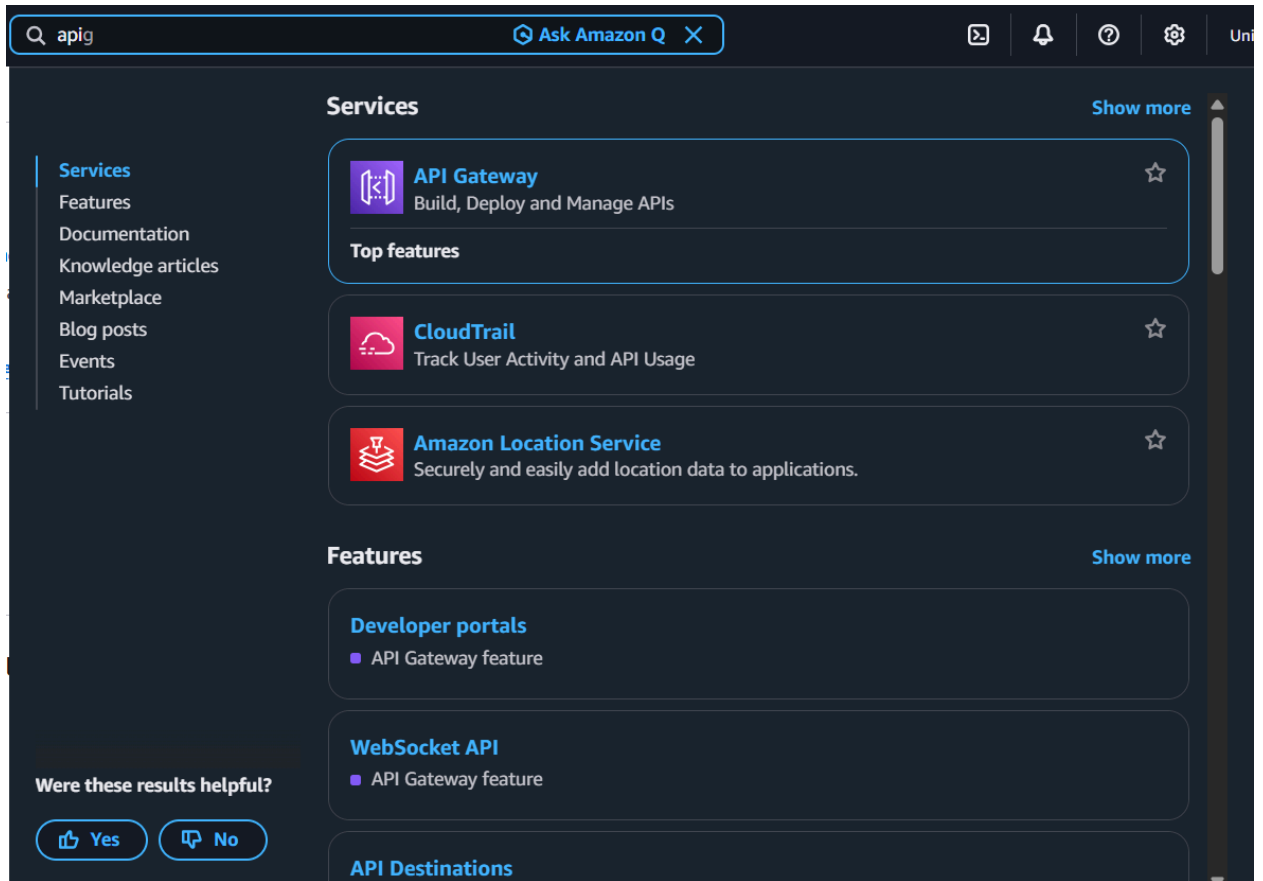


Step 3: Create REST API


1. Click **API Gateway** service.

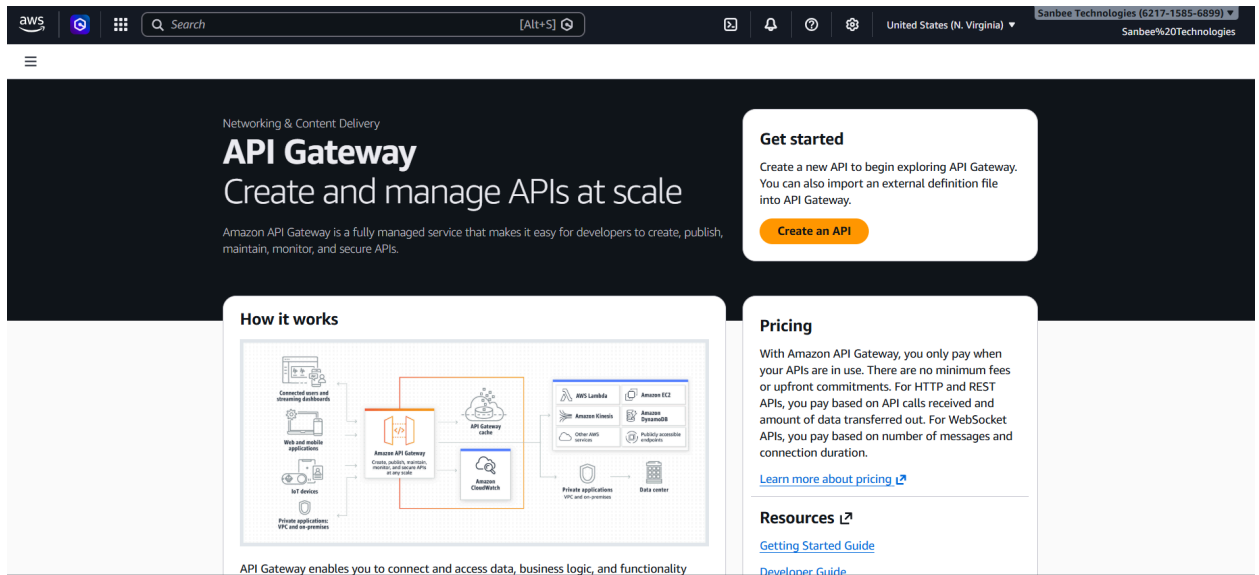


2. Select **API Types** → **REST API**.

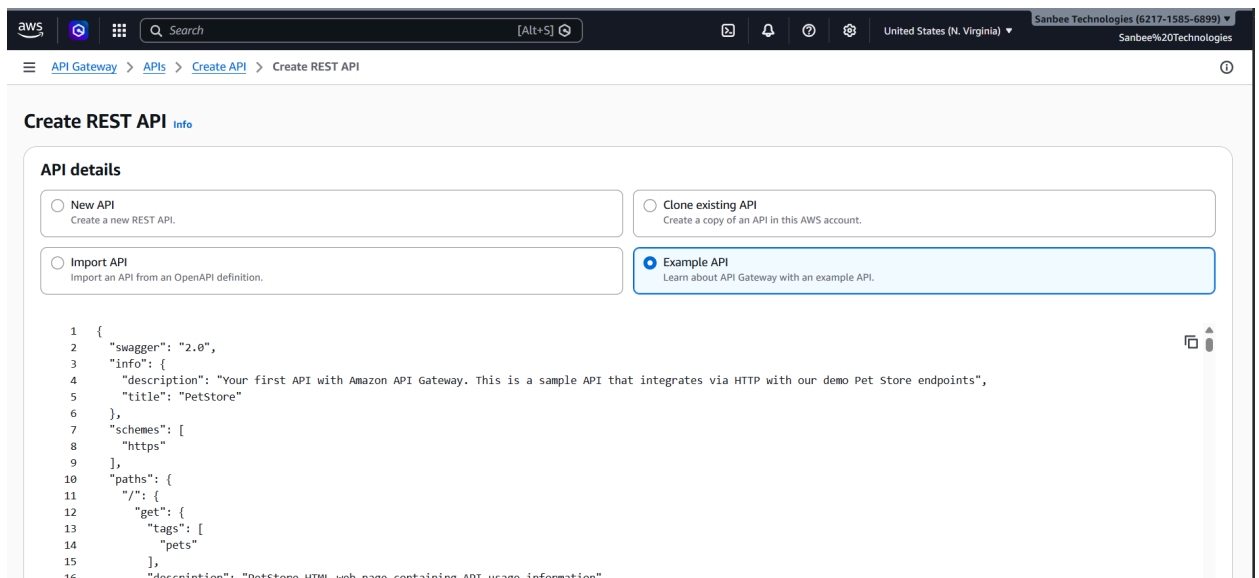


3. Click **Build**.
4. Choose **Example API**.
5. Select **Regional** endpoint type.
6. Click **Create API**.

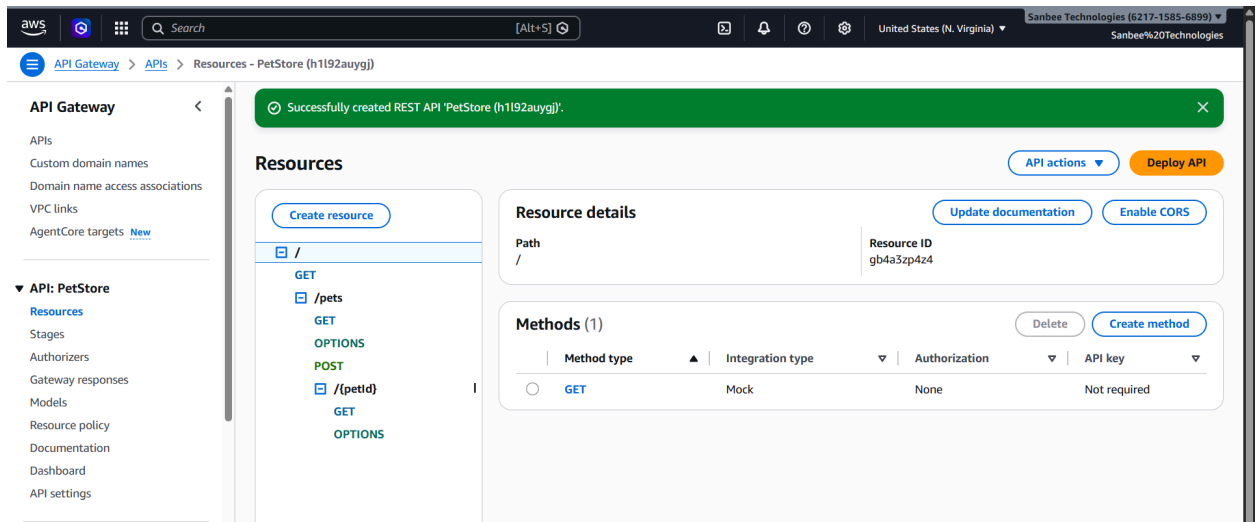


4. To view the details of a method, to modify its set-up, or to test the method invocation, choose the method name from either the method list or the resource tree. Here, we choose the POST /pets method as an illustration:

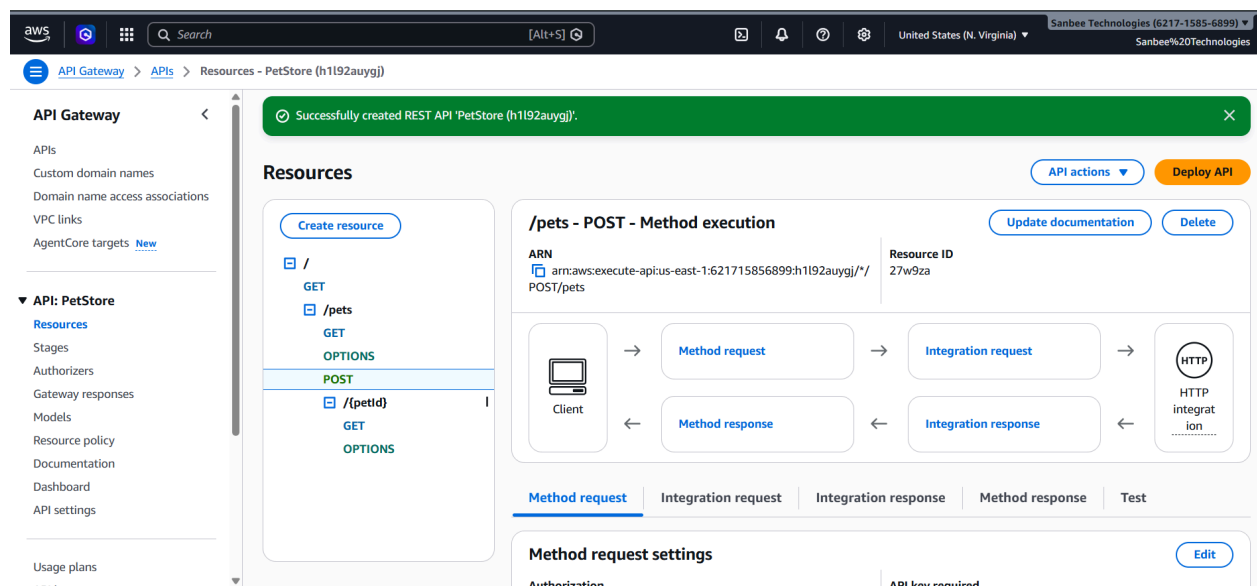


5. Select the Test tab. You might need to choose the right arrow button to show the tab. For example, to test the POST /pets method, enter the following `{"type":"dog","price":249.99}` payload into the Request body, and then choose Test.

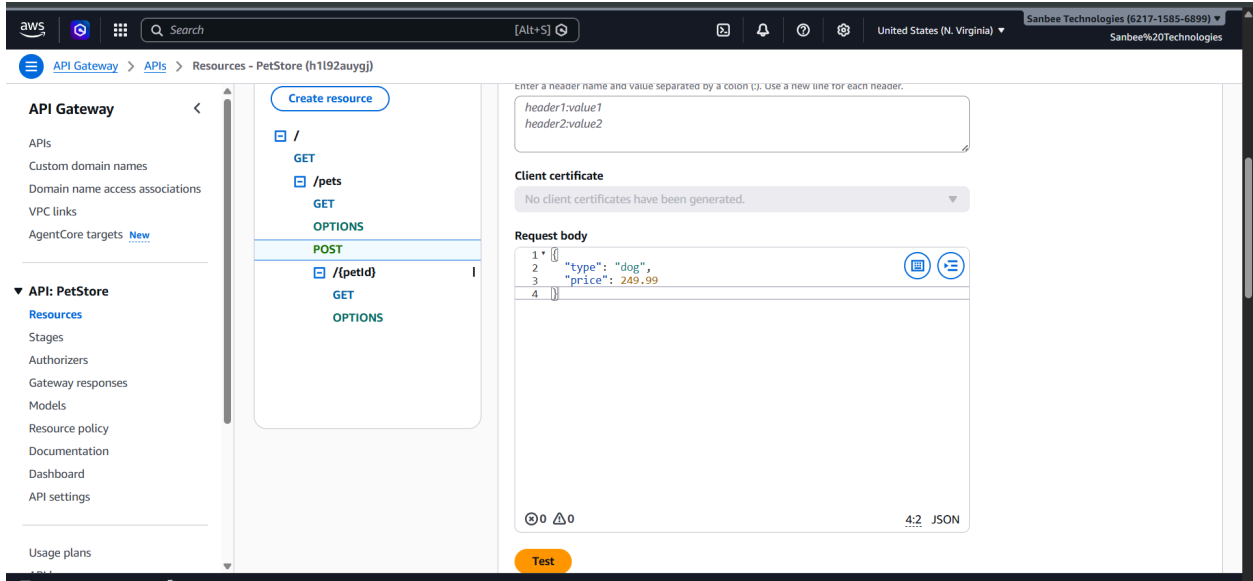

6. The results display as follows:

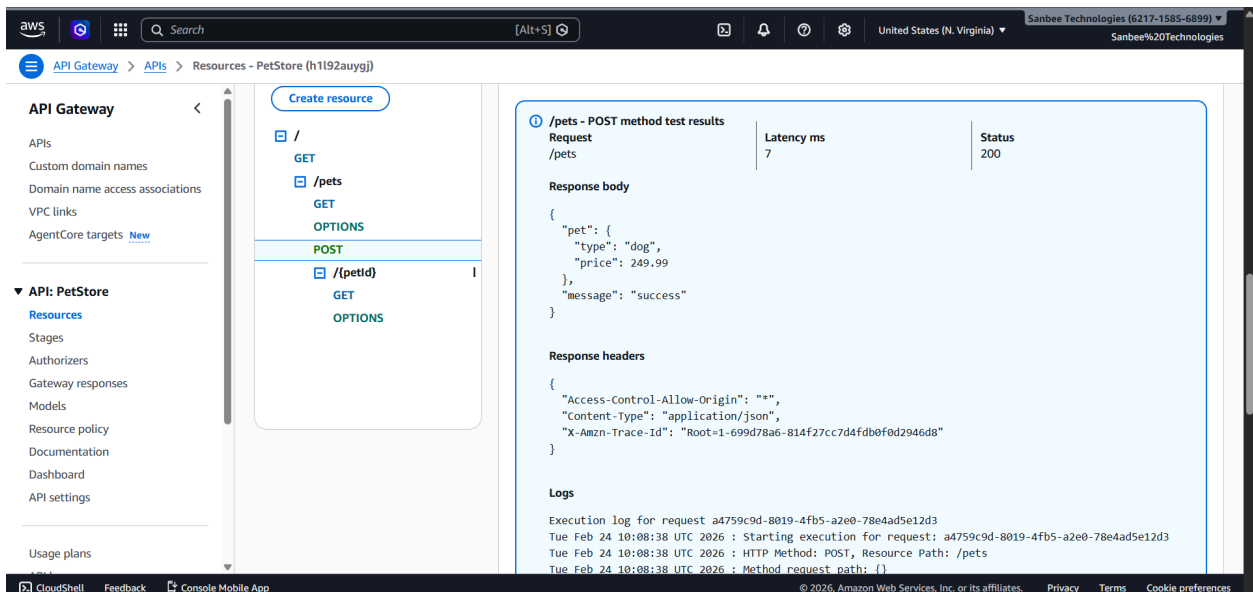

7. To deploy the sample API, choose Deploy API

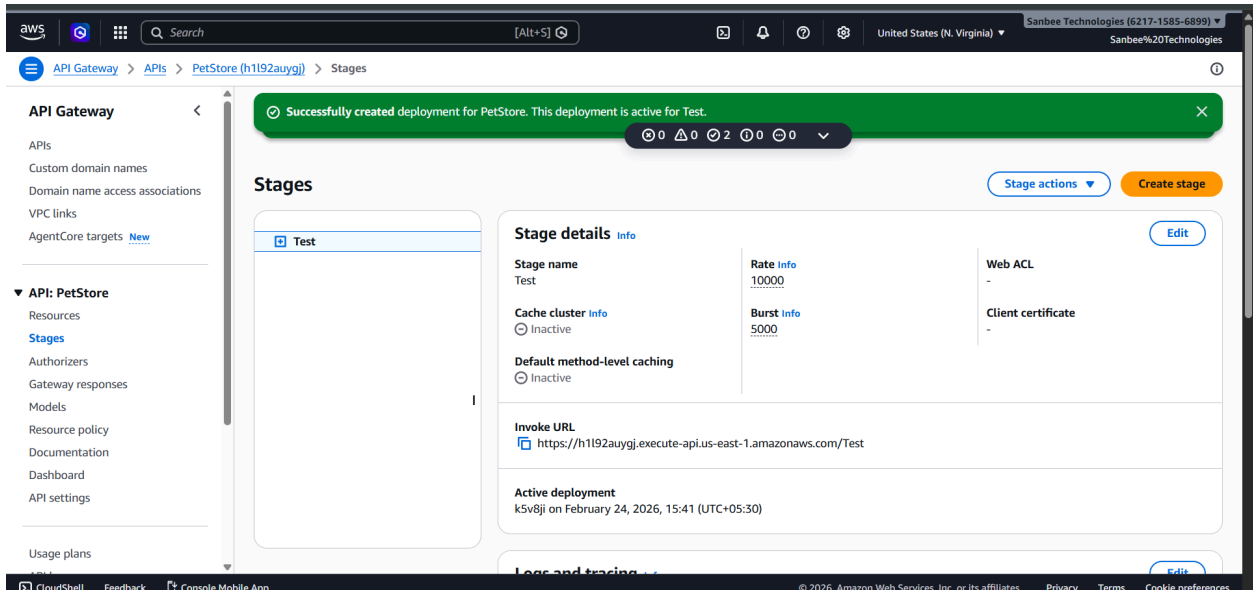

8. Ultimate Output in the browser :




Welcome to your Pet Store API

You have successfully deployed your first API. You are seeing this HTML page because the `GET` method to the root resource of your API returns this content as a Mock integration.

The Pet Store API contains the `/pets` and `/pets/{petId}` resources. By making a [GET request](#) to `/pets` you can retrieve a list of Pets in your API. If you are looking for a specific pet, for example the pet with ID 1, you can make a [GET request](#) to `/pets/1`.

You can use a REST client such as [Postman](#) to test the `POST` methods in your API to create a new pet. Use the sample body below to send the `POST` request:

```
{
  "type": "cat",
  "price": 123.11
}
```

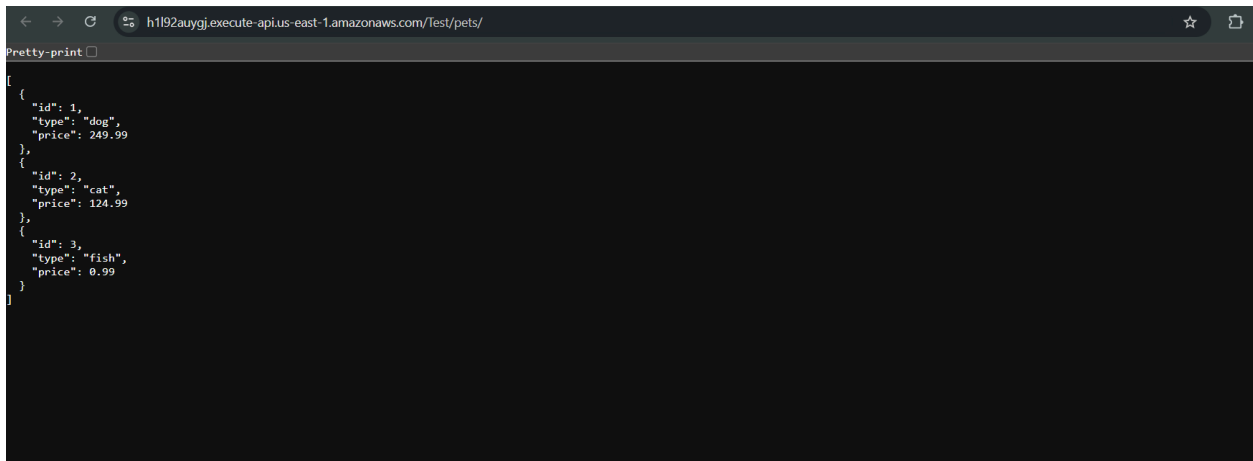

```
h1l92auygj.execute-api.us-east-1.amazonaws.com/Test/pets/1
Pretty-print ☐
{
  "id": 1,
  "type": "dog",
  "price": 249.99
}
```