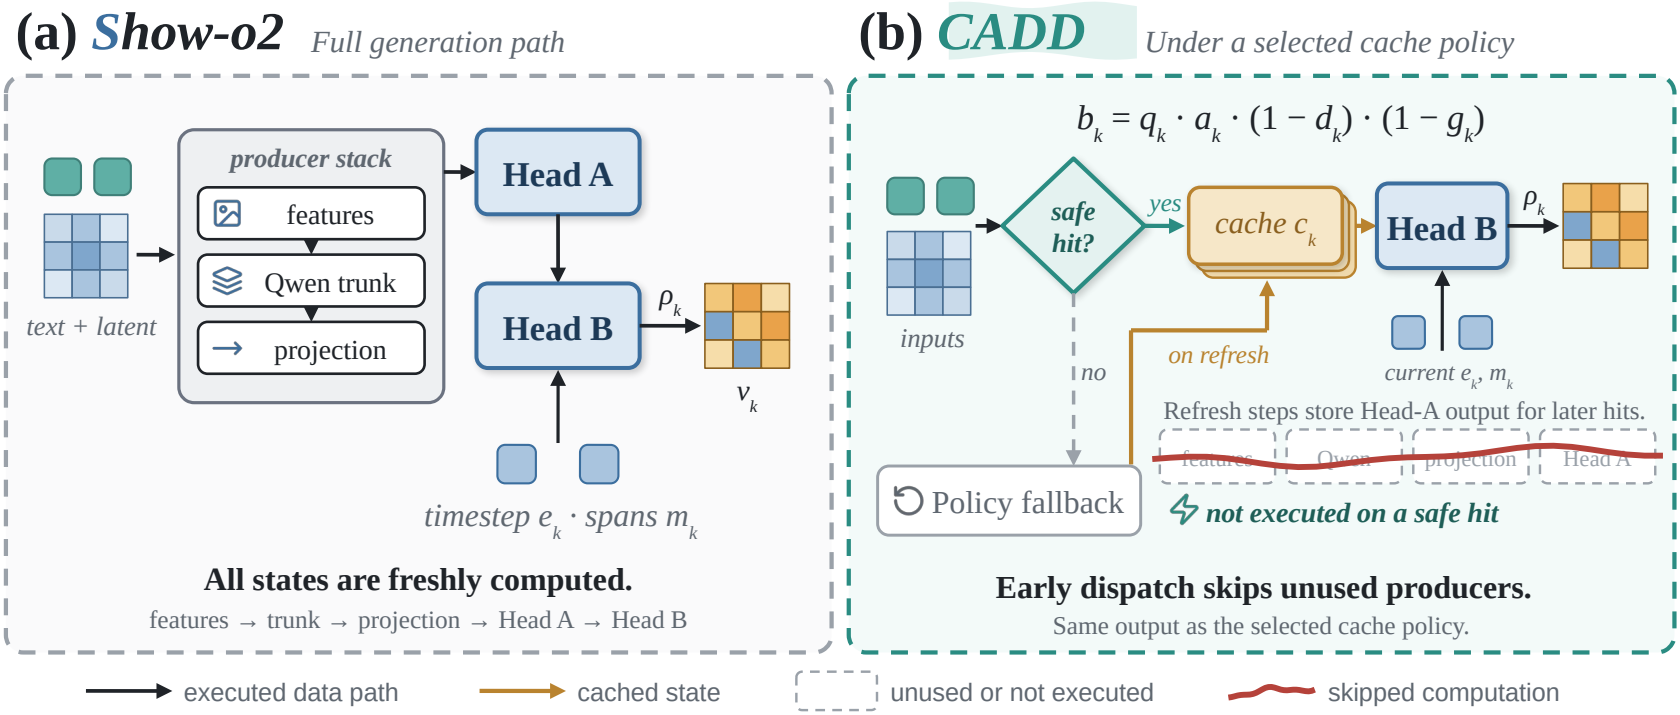

(a) Show-o2
Full generation path
producer stack
features
Qwen trunk
projection
text + latent
Head A
Head B
ρ_k
v_k
timestep e_k · spans m_k
All states are freshly computed.
features → trunk → projection → Head A → Head B
(b) CADD
Under a selected cache policy
$b_k = q_k \cdot a_k \cdot (1 - d_k) \cdot (1 - g_k)$
safe hit?
yes
no
cache c_k
Head B
ρ_k
inputs
on refresh
current e_k, m_k
Refresh steps store Head-A output for later hits.
features
Qwen
projection
Head A
Policy fallback
not executed on a safe hit
Early dispatch skips unused producers.
Same output as the selected cache policy.
executed data path
cached state
unused or not executed
skipped computation