

1. CONTENTS OF SPECTRA FILE CABINET

- A. Program cassette contains the following programs:
 1. Main program "FILE M", located at position # "002" on your tape counter.
 2. FORMAT GENERATION program "FILE G", located at position # "015" on your tape counter.
3. This instruction manual.

2. ADDITIONAL EQUIPMENT OR NEEDED

2. Blank cassette. This is needed for storing your data files so that you will have permanent record of all your entries.
- B. Printer (optional). If you would like hard copy records of all your entries, this program will support a printer.

PRELIMINARY

1. Read the booklet that accompanies the Spectraideo Data Cassette Recorder and become familiar with its use. Also read the manual that accompanied your Spectraideo Computer.
2. Hook up the recorder to your SV-318/328 via the permanently attached cable.
3. Hook up your computer to TV or monitor.
4. Insert program cassette into your Data Cassette Recorder, rewind tape completely, and set tape counter to zero. Press stop on recorder.
5. Now read this instruction manual thoroughly.


IMPORTANT

Spectra File Cabinet redefines all function keys. They will return to normal when you turn the power off and then back on. See SV-318/SV-328 manual.

The Spectra File Cabinet Program is designed to let you use your SV-318 or SV-328 as a useful information storage device for the home or office. With the Spectra File Cabinet, you can easily create mailing lists for your Christmas cards, keep a record of all your employees, or even create a file of all your favorite books and records.

SVI™
SPECTRAVIDEO

SPECTRA FILE CABINET™ PERSONAL INTEREST & BUSINESS APPLICATION PROGRAM

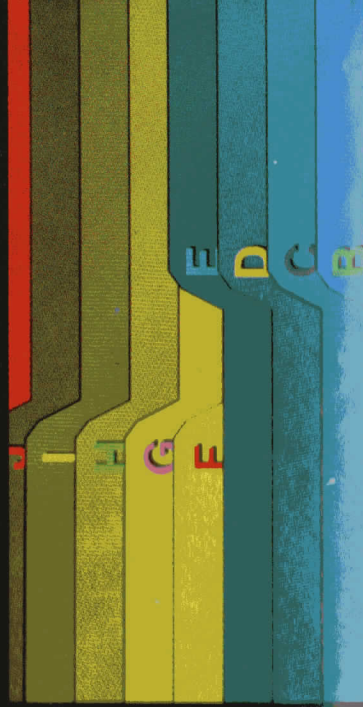

SVI™
SPECTRAVIDEO

SPECTRA FILE CABINET™ PERSONAL INTEREST & BUSINESS APPLICATION PROGRAM

Tips on Handling and Storage

1. Avoid touching the tape with your fingers; you may cause drop-outs or scratches.
2. Protect your cassette from dust and damage when not in use by keeping it in its protective plastic box.
3. The tape should be wound snugly on the cassette reels; if the tape is loose, carefully wind it on to one of the reels by gently turning one of the hubs.
4. Keep the recorder head and pinch roller clean by regular use of a good cassette head cleaner.
5. Avoid prolonged exposure of cassettes to excessive heat, sunlight and strong magnetic fields. Do not store near heating appliances, TV sets or similar equipment.
6. To preserve valuable or prized recordings, punch out and remove the erasure prevention lug on the top edge of the cassette.

Now, you can quickly and easily have access to the various information you save; no more searching through your desk for important papers. With Spectra File Cabinet, all your information is tucked safely away in one place. Spectra File Cabinet is another program from Spectraideo which will help make your day a little more organized.

GENERAL INSTRUCTIONS

The Spectra File Cabinet is designed for use with the SV-318/SV-328. All that is required is the Data Cassette Recorder.

Spectra File Cabinet consists of two separate programs. *FILEM* is the main program. It allows you to enter all the information you wish to store in your data base. *FILEG* is the format generation program. This program allows you to create or customize the structure or format of the information you wish to store in your database. Before using *FILEM*, you must create your format with *FILEG*.

USE OF "FILEG"

If you haven't used Spectra File Cabinet before, then the first place for you to start is with *FILEG*. Advance your tape to the beginning of *FILEG* on your program cassette and type CLOAD "FILEG", then press /ENTER/. Press play on your data cassette recorder after the "OK" prompt has appeared, your program will be loaded and you may then type RUN and press /ENTER/. After a brief introduction, you will see the following display on your screen:

```
0 5 0 5 0 5 0 5 0 5 0 5 0 5 0 5
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
FIELD NAME?
```

This screen represents the framework in which the Spectra File Cabinet will operate. The "FIELD NAMES" are the titles of the various different pieces of information you wish to store. For example, if you want to create a mailing list, your field names may be:

NAME:
STREET:
CITY:
STATE:
ZIPCODE:
TELEPHONE NUMBER:

With this in mind, try entering your first "field name"; remember to press ENTER when you have completed.

You will notice that the next question the computer asks you is "COLUMN". The column numbers are the numerals located at the top of the screen. When you select a "column" number, you are instructing the computer to place that desired "field name" in a certain column on the screen. Remember, the *FILEG* program will represent what your computer "file cards" will look like. The next question is "ROW". The "row" numbers are the numerals along the left side of the screen, ranging from 0-9. Like the column number, the row number tells the computer where to put a given "field name".

The next question the computer will ask is "LENGTH OF INPUT FIELD". This number represents how long the information in a given field name will be. For example, if the field name was TELEPHONE #, a suitable field length might be 10. Note that the field length is limited to 27. (NOTE: If you should make a mistake while entering a field name, simply type an incorrect field length, like 100, and the computer will return you back to the start.)

After entering your field length, you will notice that the computer will place your field name and a line representing your input length at the column and row that you specified on your screen. Remember, this screen represents the format your computer file cards will have.

Next, the computer will ask you if you wish to continue by printing "MORE(Y/N)". If you have more field names to enter, type "y" for "yes"; more field names to enter, type "y" for "yes"; if not, type "N" for "no".

When you have completed your field names and have typed "n" to the above question, the computer will tell you to prepare to save what you have just entered on a blank tape. Enter the name you wish to call your file, press play and record on your Data Cassette and press enter. When the computer is finished loading, it will tell you it is.... DONE.

If you've made it this far without any troubles, then you are ready to move on to the next part of the Spectra File Cabinet, *FILEM*.

USE OF "FILEM": DATA ENTRY AND RETRIEVAL

The second part of Spectra File Cabinet is designed as *FILEM*. This is the main program in Spectra File Cabinet. It will allow you to enter and store any type of information Data you wish on your DataCassette. This part of the program will also allow you to retrieve information Data you have previously stored away. To begin, type CLOAD "FILEM" and press enter. Then press play on your DataCassette, when you see the "OK" message appear, type RUN and press enter. After a short introduction, the computer will type:

INSERT YOUR DATA TAPE AND PREPARE IT TO PLAY...

IMPORTANT: Now place your Cassette containing your File Format (that you Made With "FILEG" in your Data Cassette Recorder, make sure your tape is rewound and set to the beginning of your format file. Now press any key and your format will be loaded. However, if you have used the system previously and stored information Data, then you should load this cassette (discussed later).

INFORMATION DATA ENTRY

You are now ready to begin entering information with Spectra File cabinet. After your format data is loaded from cassette, you will notice the screen that appears is the one you made using *FILEG*. Thus, the computer is now ready to accept your information data in the given categories you have chosen.

SPECTRAVIDEO SOFTWARE AND ACCESSORIES LIMITED 90-DAY WARRANTY

SPECTRAVIDEO warrants to the original purchaser that the SPECTRAVIDEO software is free of defects in material and workmanship for a period of 90 days from the date of purchase. SPECTRAVIDEO shall, at its option, repair or replace, at no charge, any software discovered to be defective within the warranty period upon receipt of the software, postage paid, with proof of date of purchase, at its Factory Service Center.

This warranty is limited to the electronic circuitry and mechanical parts originally provided by SPECTRAVIDEO and does not apply to the wear and tear of the warranty period. SPECTRAVIDEO shall not be held responsible for any damage that has arisen through abuse, unreasonable use, mistreatment or

neglect. This warranty is in lieu of all other express warranties and no other representation or claims of any nature shall be binding on or obligate SPECTRAVIDEO. **Any implied Warranties applicable to this software are limited to the 90 days period described above. In no event will SPECTRAVIDEO be liable for any special, incidental, or consequential damage resulting from possession, use or malfunction of this software.**

Some states do not allow limitations on how long an implied warranty lasts and/or the exclusion or limitation of incidental or consequential damages so the above limitations and/or exclusion or limitation of liability may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state:

SPECTRAVIDEO INC.
P.O. BOX 360
PLAINVIEW, NY 11803

Copyright © 1982 by Spectraideo International Ltd. All rights reserved

Published by
SPECTRAVIDEO INTERNATIONAL LTD.

Second Edition

First Printing 1983

Printed in Hong Kong

Every effort has been made to supply complete and accurate information in this manual.

Spectraideo International Ltd. reserves the right to change Technical Specifications and Characteristics

No part of this publication may be stored in a retrieval system, transmitted, or reproduced in any way, including

but not limited to photocopy, photograph, magnetic or other record, without the prior agreement and written

permission from Spectraideo International Ltd.

To begin, notice two important things that appear on the screen. First, the words REC #1 should appear in upper right hand corner. This tells you that you are presently in the first card in data stack. Also, notice that the following text appears at the bottom of the screen:

Beg/End #+1/#-1 Add/Del Sum/Srt Fnd/Sto
These codes represent the redefined operations of the ten function keys. The meaning of these ten codes will be discussed as we proceed.

To enter data and create your data base, simply fill in the blanks for the field names you have chosen. For instance, if your field name is TELEPHONE #, then type in the telephone number of the person you want in the spaces provided. Note that you do not need to press (enter) to input your information. You can use either the cursor controls (jovystick) or (enter) to move from place to place on the screen.

When you have done typing the information for your first card, press FUNCTION KEY 3 (F3). The computer will print:

PRESS F1 key to ADD before
PRESS F2 key to ADD after

This means that if you wish to type another filecard *AFTER* the one you just typed, then press FUNCTION KEY 2. However, if you wish to add another card *BEFORE* the one you just typed, then press FUNCTION KEY 1. In this way, the information you type is stored on individual filecards to be used for later recall. To recap, the following is a list of things you need to know to create a data file:

- 1) Before you can CREATE a new file, you must load the format data you saved using **FILEG**. This will provide format for inputted Information Data.
- 2) To ADD another filecard after you finish with the one you are working on, press FUNCTION KEY 3 (F3).

Also, if you want to review the data you enter, these are the things you need to know:

- 1) FUNCTION KEY 1 (F1) will print the filecard at the beginning of the data file; that is, REC #1.
- 2) FUNCTION KEY 6 (F6) will print the filecard at the end of the data file; that is, the last card you entered.

- 3) FUNCTION KEY 2 (F2) will print the filecard that immediately follows the one on the screen; that is, if you are looking at REC #4, pressing (F2) will print REC #5.
- 4) FUNCTION KEY 7 (F7) will print the filecard that lies immediately before the one on the screen.

- 5) To print the filecard that corresponds to a given record number, press the ESCAPE KEY (ESC). The computer will ask you for the desired record number and then print the corresponding filecard. If you type a record number that the computer does not have, then the current filecard will be printed by default.

OTHER FUNCTIONS

The Spectra File Cabinet also has other useful functions. Here is a description of how to utilize them.

DELETIONS: Unwanted or incorrect filecards may be quickly removed from the data file by use of FUNCTION KEY 8 (F8). To delete a filecard, simply locate the given card by use of any of the above functions. When you have the file card you want to delete on the screen, press the FUNCTION 8 (F8) key. Then, if you're sure you want to delete that card, press FUNCTION KEY 3 (F3) when the computer tells you to.

ADDING LISTS AND NUMBERS: You can add up any list of numbers in your data file by use of FUNCTION KEY 4 (F4). For example, suppose your data file consists of all the salesmen that who work for your soap company and how many bars of soap they have sold in the past year. To find out the grand total, simply press FUNCTION KEY 4 "F4". After pressing "F4", the computer will tell you to move the cursor to the field you wish to SUM up, in this case the field containing the units sold for each salesman. Then press "F4" again to sum up that field. The total will appear in the spaces for that field.

ALPHABETIZING: You can alphabetize your file, that is re-arrange your file so that it is in alphabetical order, by using FUNCTION KEY 9 (F9). To use this feature, press FUNCTION KEY 9 (F9). The computer will tell you to move the cursor (your position on the screen) to the field you wish to alphabetize your file on; that is, you may alphabetize your file in any way you desire. For example, if your file contains the names and addresses of your friends, then you can alphabetize it on the basis of their names, addresses or on any other basis you wish. Once you have moved to the desired field, press FUNCTION KEY 4 (F4) to sort. When you look back at the file, it will be arranged according to the field you sorted it on.

WORD AND NUMBER SEARCHES: The Spectra File Cabinet also allows you to search for the occurrence of a given word or number through use of FUNCTION KEY 5 (F5). When pressed, the computer will display the two types of searches it can perform. The FUNCTION KEY 1 type search will search for the **COMPLETE** match-up of the word or number you type in a specific field. The FUNCTION KEY 2 search will search for anything which contains **PART** of the word or number you type.

DATA FILE STORAGE AND RETRIEVAL

Now we come to the most important part of Spectra File Cabinet, data storage. Once you have created your data file and are satisfied with it, you can store it on cassette tape through use of FUNCTION KEY 10 (F10).

When you press FUNCTION KEY 10, the computer will tell you to place a blank cassette in your DataCassette recorder. When you have done this, press any key. Then, the computer will ask you for the name of your file. Choose a name that is descriptive; that is, make the name give some indication as to what is in the data file.

Then, press play and record on your DataCassette. The computer will automatically store your information and format data on the cassette tape. Label this tape with your file name, **IMPORTANT!** Remember, if you want to retrieve the information data you have stored on tapes instead of creating new data files, then you must load this cassette; that is, the cassette with your information data already on it, into **FILEM** after you run it.

PRINTER INTERFACE

If your computer system has a printer, then you can use Spectra File Cabinet to make hard copies of any of your data files. To gain access to the printer through this program, type the SELECT key on you SV-318 or 328 keyboard.

When you depress the SELECT key, the computer will tell you that you can print any of the fields in your data file by simply placing a number at the start of the field. Note that the order of the numbers will determine the order in which the fields are printed. After you have arranged the fields in the order you wish you can even put two fields on the same line by typing the same line # in each field), press FUNCTION KEY 1 (F1). The computer will ask you how many records you wish to print. Please note that if you do not select **ALL** ($\neq 0$), that the printing will begin from the record number indicated in the upper right hand corner of the screen. After you enter your choice, the computer will ask you how many spaces you want between records. After you make this choice, printing will begin.

After reading this instruction manual carefully, you should be fully equipped to use the many functions of Spectra File Cabinet, another program from SpectraVideo that can help organize your life, and provide you with better use of your home computer system.