

# User Guide

## SSK Cloud Connect

Date: November 23, 2020 | Version 1.0  
FINAL

---



The Solutions People



# CONTENTS

<b>1</b>	<b>INTRODUCTION .....</b>	<b>4</b>
1.1	Purpose of the Document .....	4
1.2	Prerequisite .....	4
<b>2</b>	<b>IAM USER .....</b>	<b>5</b>
2.1	Description .....	5
2.2	Creating IAM User.....	5
2.3	Listing I AM User.....	6
<b>3</b>	<b>DEVICE.....</b>	<b>7</b>
3.1	Description .....	7
3.2	Add a Device .....	7
3.3	Listing Devices .....	8
3.4	Deny Device .....	8
3.5	Allow Device.....	9
<b>4</b>	<b>GREENGRASS .....</b>	<b>10</b>
4.1	Description .....	10
4.2	Creating a Green grass Group.....	10
4.3	Listing Green grass Group .....	11
4.4	Green grass Subscription .....	11
4.5	Green grass Device.....	13
4.6	Green grass Deployment.....	14
<b>5</b>	<b>OTA UPDATES .....</b>	<b>15</b>
5.1	Description .....	15
5.2	Create a FreeRTOS OTA update job (Schedule OTA).....	15
5.3	Create Custom Job (Schedule Job).....	16
5.4	Listing OTA UPDATES.....	17
5.5	Create a Code Signing profile.....	18
<b>6</b>	<b>CERTIFICATE.....</b>	<b>19</b>
6.1	Description .....	19
6.2	Register CA .....	19
6.3	Listing Certificates.....	20
6.4	Add a Certificate .....	21
6.5	Create a Certificate (One Click) .....	22
<b>7</b>	<b>POLICY .....</b>	<b>23</b>
7.1	Description .....	23
7.2	Creating a Policy .....	23
7.3	Listing the Policy .....	24
7.4	Attach Policy .....	25
7.5	Detach Policy.....	25
<b>8</b>	<b>REFERENCES .....</b>	<b>26</b>



## 1 INTRODUCTION

### 1.1 Purpose of the Document

The SSK cloud connect guide provides an overview of the application to setup IAM User, Devices, AWS Greengrass, Certificate and Policies.

### 1.2 Prerequisite

For AWS Cloud Services descriptions and its background information, follow the [SSK Cloud Connect Installation Setup Guide v1.0 - FINAL](#)

To login SSK portal please refer section 3(step:19) from [SSK Cloud Connect Quick Start Guide v1.0 FINAL](#)

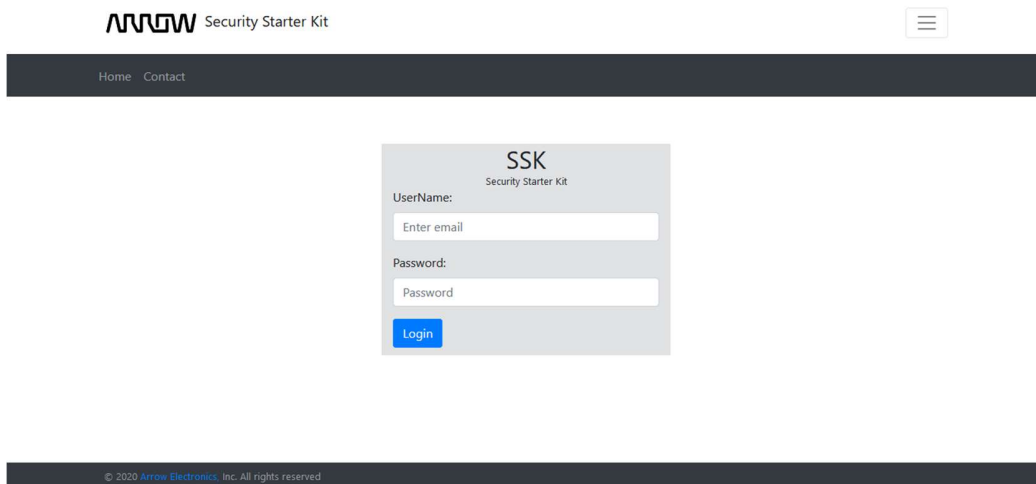


Figure 1: Login page

**Note:** AWS cloud does not support sending emails to an account tied address at the 'user' IAM level, due to that the 'Forgot Password' operation is not available.

## 2 IAM USER

### 2.1 Description

An AWS Identity and Access Management (IAM) user is an entity that you create in SSK Cloud connect to represent the person or application that uses it to interact with SSK Cloud connect. A user in SSK Cloud connect consists of a name and password.

### 2.2 Creating IAM User

An IAM user is a resource in IAM that has associated credentials and permissions. An IAM user can represent a person or an application that uses its credentials to make SSK Cloud connect requests.

The screenshot shows the 'Add User' form in the SSK Cloud Connect interface. The form is titled 'User / Add User' and includes a sidebar with navigation links: User, Device, Deny Device, Allow Device, Group, OTA Updates, Certificate, and Policy. The main form fields are: First Name (abc), Last Name (Xyz), User Name (abc@xyz.com), Email Id (abc@xyz.com), Password (masked with dots), Mobile Number (+1 999-999-9999), Permission (checkboxes for User, Tech Support, and Admin, with Tech Support and Admin selected), and Group Name (SEED\_DEV\_TEAM). At the bottom are 'Cancel' and 'Add' buttons.

Figure 2: Add I AM User

An IAM user can be described by the following:

1. **First Name**  
The first name of the user with min 4 chars.
2. **Last Name**  
The last name of the user.
3. **User Name**  
The unique name of the user with min 4 chars. The User Name is used to log in to the SSK site/system. It should be unique across your AWS account.
4. **Password**  
The password of the user. At least 16 chars with combination of one Upper case, Lower case, Number and Special character.

## 5. Email Id

The Email Id of the user. Does not need to be unique.

## 6. Mobile Number

The Mobile number of the user with min 8 chars.

## 7. Permission

- a. **User** - can access only dashboard access and demo page
- b. **Tech Support** - can manage device, group, OTA, certificate, policy
- c. **Admin** - can manage all functionality.

## 8. Group Name

Upon selection of group name, user will be added in AWS Group to manage access

## 2.3 Listing IAM User

Once you create An IAM user, you can list down an IAM user at List User page. Which is shown Here in below images.

Arrow Security Starter Kit

Home Contact Demo

User / List User

Add User ⓘ

First Name	Last Name	User Name	Created Time
Arjun	Salariya	XXXXXXXXXX	28/08/2020 07:43
Darshak	Patel	XXXXXXXXXX	06/05/2020 10:26
		XXXXXXXXXX	22/04/2020 09:14
		XXXXXXXXXX	31/07/2020 08:12
		XXXX	24/08/2020 11:32

© 2020 Arrow Electronics, Inc. All rights reserved

Figure 2: Listing IAM User

## 3 DEVICE

### 3.1 Description

AWS IoT provides a device registry that helps you manage your devices. A device is the representation of a physical device or logical entity. It can be a physical device or sensor (for example, a light bulb or a switch on a wall). It can also be a logical entity like an instance of an application or physical entity that does not connect to AWS IoT, but is related to devices that do (for example, a car that has engine sensors or a control panel).

Devices are identified by a name. Devices can also have attributes, which are name-value pairs you can use to store information about the device, such as its serial number or manufacturer. Adding your devices to the device registry allows you to manage and search for them more easily.

### 3.2 Add a Device

A device is the representation of a physical device or logical entity in the cloud. A device can be described by the following:

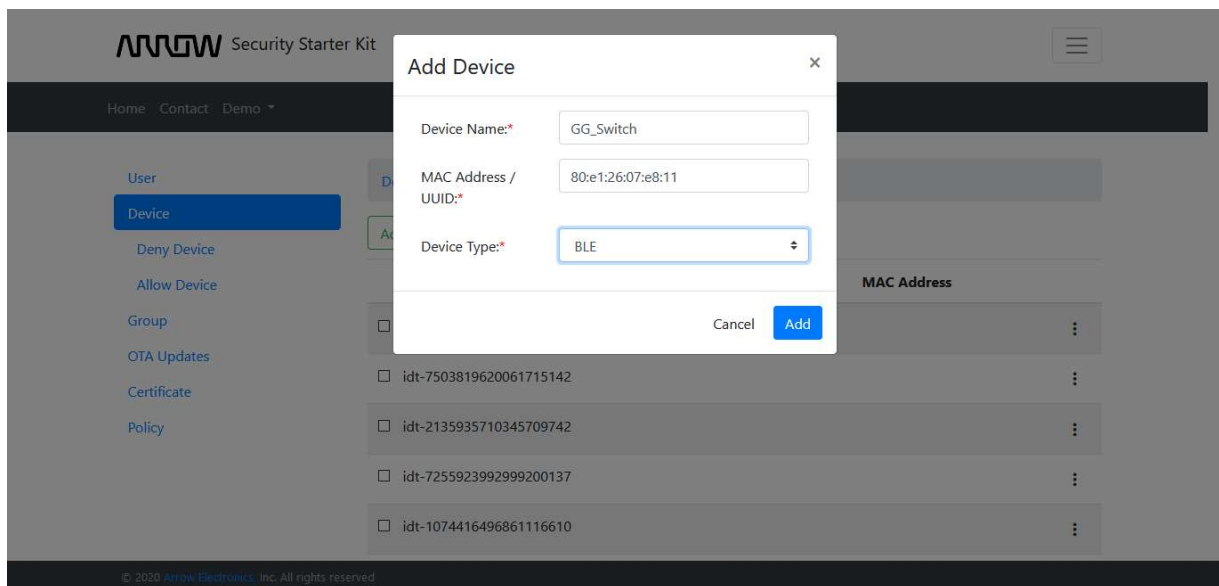


Figure 1: Add a device

1. **Device Name**  
The name of the device.
2. **MAC Address**  
The MAC Address of the device.

### 3. Device Type

Device types allow you to store description and configuration information that is common to all devices associated with the same device type. i.e. BLE, LTE-M, WIFI

### 3.3 Listing Devices

Listing of Devices can be seen in following figure with path SSK -> Device.

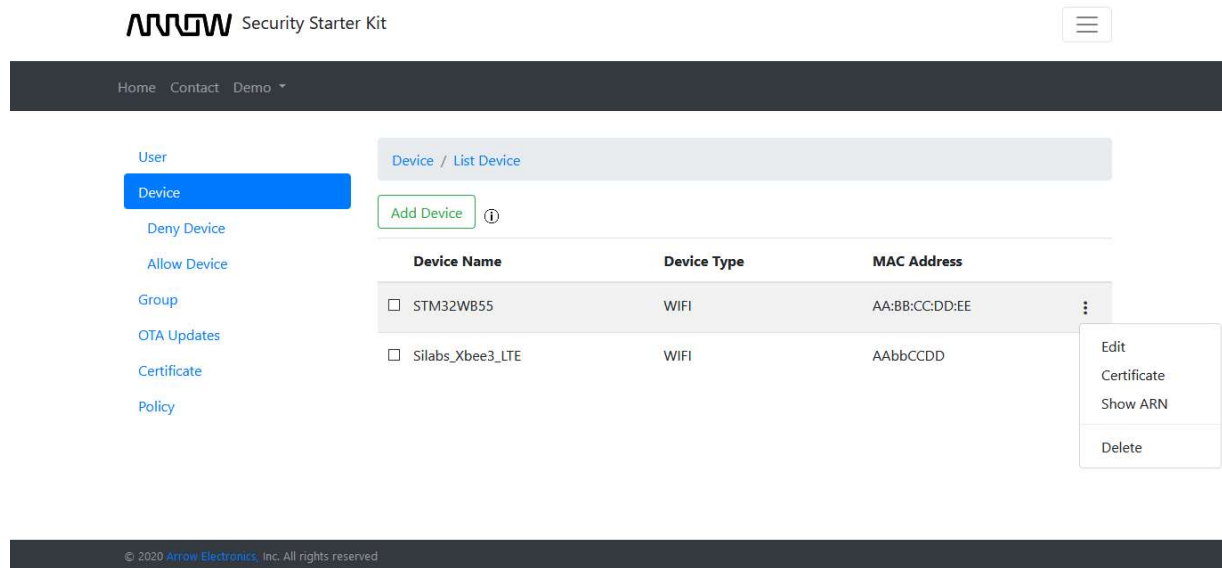


Figure 2: Listing devices

### 3.4 Deny Device

A Device which doesn't have at least one active certificate is added in the Deny Device list by MAC Address/UUID.

#### 1. Deny by Certificate

You can remove a device from Deny list by attaching a certificate to it.

#### 2. Deny by MAC Address

You can remove a device from Deny list by clicking the remove button.



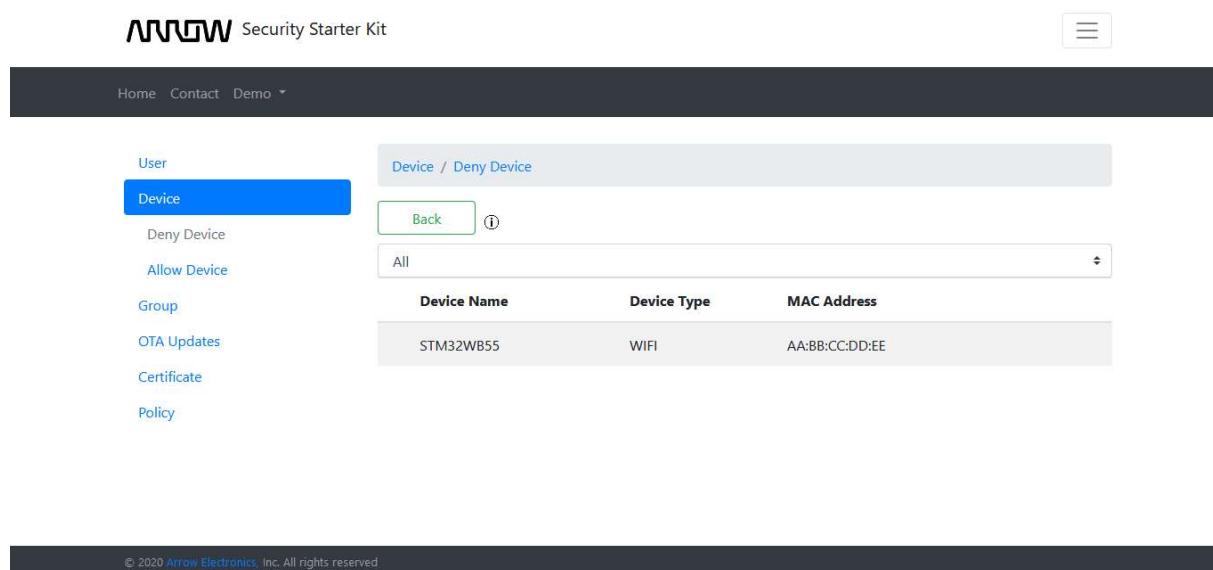


Figure 3: Listing blacklist devices

### 3.5 Allow Device

An Allowed Device is one which has at least one active certificate and is not added in the Deny Device list by MAC Address/UUID.

#### 1. Deny by Certificate

You can add device to deny list by clicking 'Deny By Certificate.'

#### 2. Deny by MAC Address

You can add device to deny list by clicking 'Deny By MAC Address/UUID'.

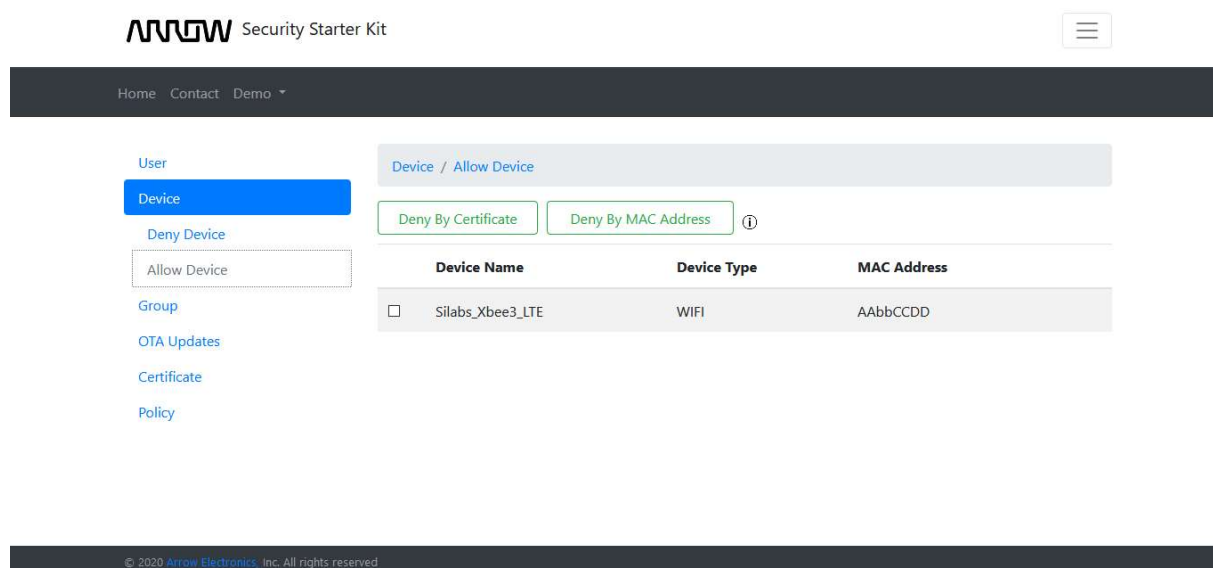


Figure 4: Listing whitelist devices

## 4 GREENGRASS

### 4.1 Description

AWS IoT Greengrass lets your devices process data on the cloud that they generate locally, while still taking advantage of AWS services when an internet connection is available.

### 4.2 Creating a Green grass Group

Setting up your Group requires you to provision a Core device in the IoT Registry, acquire a certificate for your Core, and assign an IAM role to your Group. A Group can be described by the following:

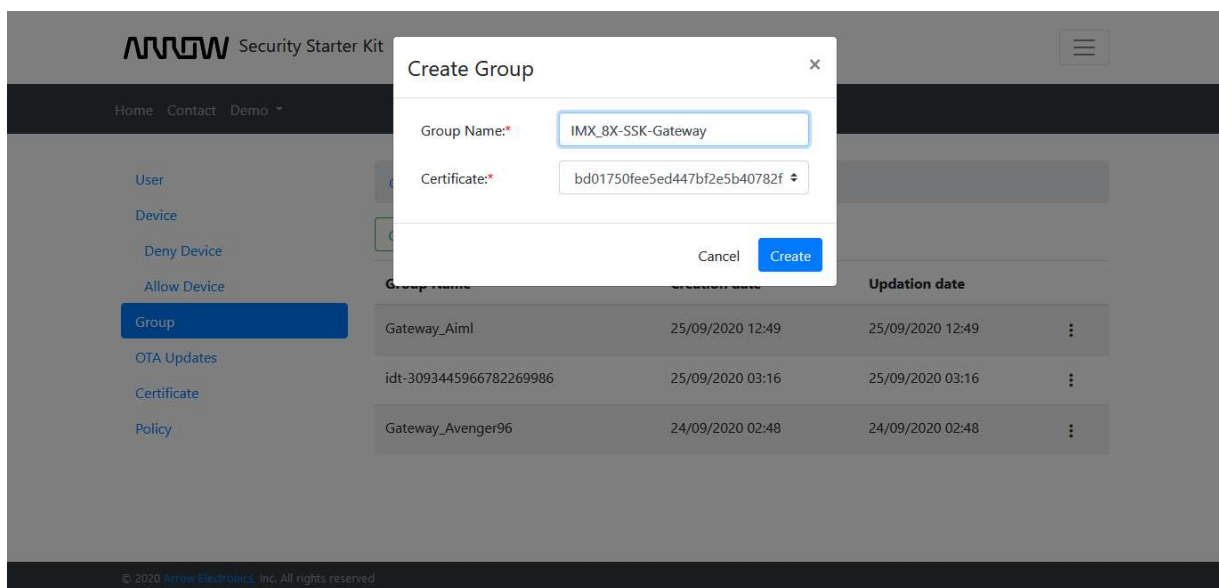


Figure 1: Create a Green grass Group

1. **Group Name**  
The name of the Green grass Group
2. **Certificate Id**  
The Certificate ID of the Green grass Core.

### 4.3 Listing Green grass Group

Listing of Greengrass group can be seen in following figure.

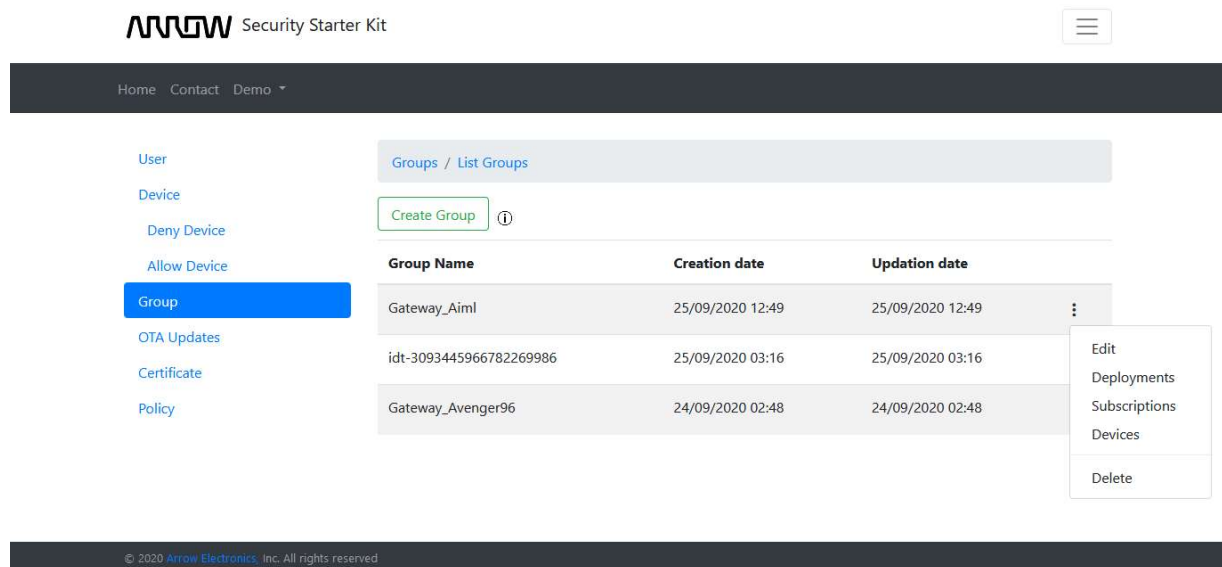


Figure 2: Listing Green grass Groups

### 4.4 Green grass Subscription

A Subscription consists of a source, target, and topic. The source is the originator of a message, and the target is the destination of a message. The first step is selecting your source and target.

#### 4.4.1 Creating a Subscription

A Subscription can be added to the group by the following figure:

1. Source

The name of the Source. Source can be Services like IoT Cloud, Local Shadow Service or Green grass devices.

2. Topic

The name of the Topic. AWS Cloud and a device can communicate on a given topic over MQTT.

3. Target

The name of the Target. Target can be Services like IoT Cloud, Local Shadow Service or Green grass devices.

Arrow Security Starter Kit

Home Contact Demo

User

Device

Deny Device

Allow Device

**Group**

OTA Updates

Certificate

Policy

Groups / Add Subscription

Source: Local Shadow Service

Topic: \$aws/things/GG\_TrafficLight/shadow/update/rejected

Target: IOT Cloud

Cancel Add

© 2020 Arrow Electronics, Inc. All rights reserved

Figure 3: Create subscription To Group

#### 4.4.2 Listing Subscriptions

A Subscription List can be seen in following figure:

Arrow Security Starter Kit

Home Contact Demo

User

Device

Deny Device

Allow Device

**Group**

OTA Updates

Certificate

Policy

Groups / List Subscription

Back Add Subscription ⓘ

	Source	Target	Topic	
1	Local Shadow Service	GG_Switch_AI	\$aws/things/GG_TrafficLight_AI/shadow/update/accepted	⋮
2	Local Shadow Service	GG_TrafficLight_AI	\$aws/things/GG_TrafficLight_AI/shadow/update/delta	⋮
3	Local Shadow Service	GG_TrafficLight_AI	\$aws/things/GG_TrafficLight_AI/shadow/update/rejected	⋮

© 2020 Arrow Electronics, Inc. All rights reserved

Figure 4: Listing subscriptions

## 4.5 Green grass Device

Greengrass Devices can be created by re-purposing an existing IoT Thing from your Registry or by creating new Registry items, and then adding them to a Greengrass Group.

### 4.5.1 Add a device

A device can be added to group by the following figure:

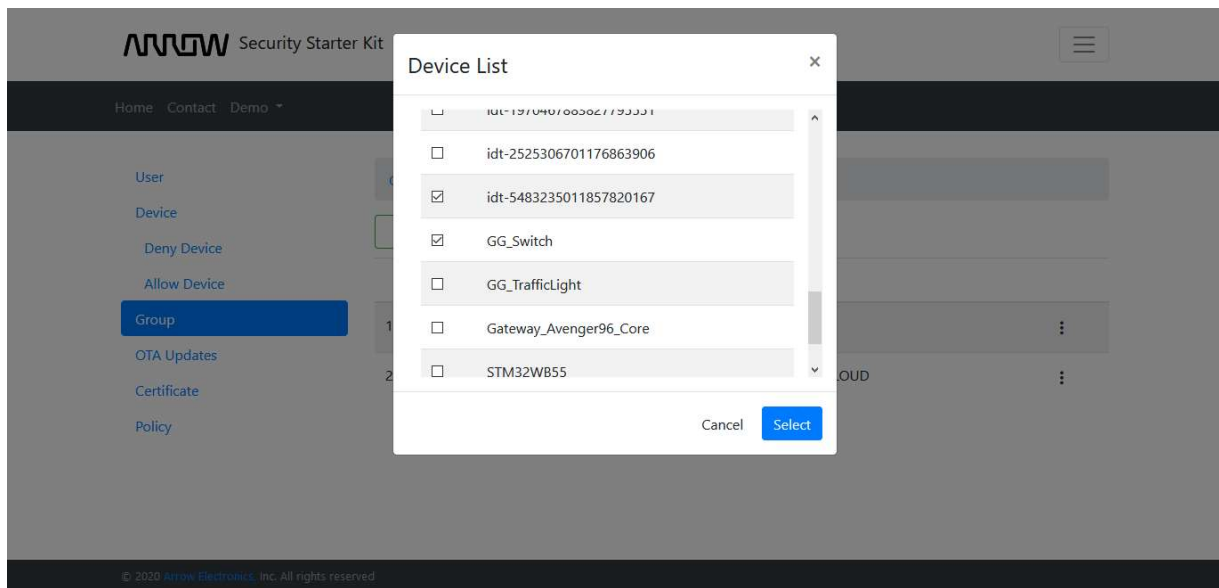


Figure 5: Add a device To Group

#### 1. Device Name

The name of the device.

## 4.5.2 Listing Devices

A Device List can be seen in following figure:

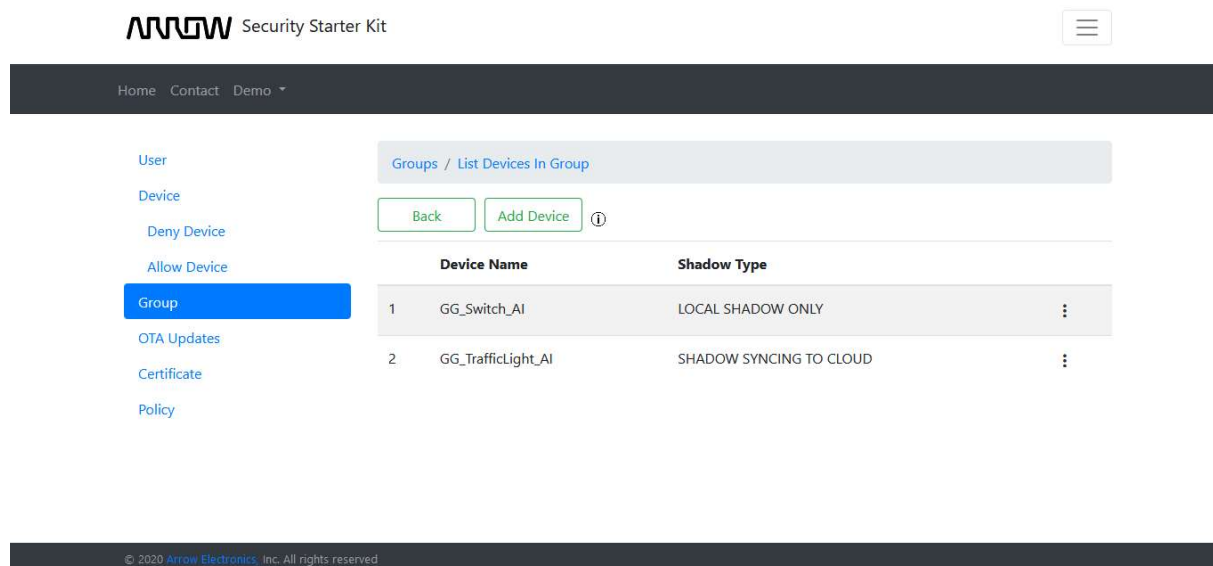


Figure 6: Listing devices

## 4.6 Green grass Deployment

A deployment of green grass group & core to device can be setup by following figure:

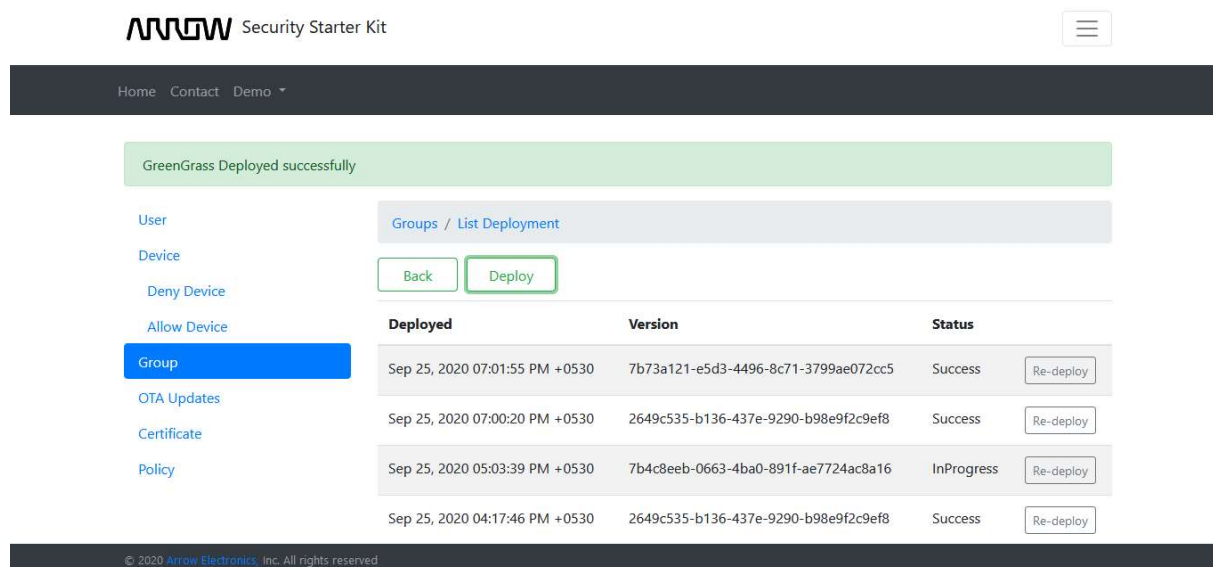


Figure 7: Deployment Greengrass

## 5 OTA UPDATES

### 5.1 Description

AWS IoT Device Management job orchestration and notification service allows you to define a set of remote operations called jobs that are sent to and executed on one or more devices connected to AWS IoT.

### 5.2 Create a FreeRTOS OTA update job (Schedule OTA)

This Over-the-air (OTA) update job will send your firmware image securely over MQTT or HTTP to FreeRTOS-based devices.

The screenshot shows the 'Schedule OTA' form in the AWS IoT Device Management console. The form is titled 'OTA Updates / Schedule OTA'. It contains the following fields and options:

- OTA Update ID:** A text input field with the value 'ota\_stm32wb55'.
- OTA Update Protocol:** A dropdown menu with the value 'MQTT'.
- OTA Update Target:** A text input field with the value 'STM32WB55' and a green 'Target' button.
- OTA Target Selection:** A dropdown menu with the value 'SNAPSHOT'.
- OTA File Name:** A text input field with the value 'aws\_demos.sfb' and a green 'List' button.
- Device Firmware Path:** A text input field with the value 'firmware.bin'.
- Code Signing Profile:** A dropdown menu with the value 'SEED\_codesign\_profile'.
- OTA Role ARN:** A dropdown menu with the value 'iamOTAUpdateRole'.

At the bottom of the form are two buttons: 'Cancel' and 'Schedule'.

Figure 1: Schedule OTA

- 1. OTA Update ID**  
A unique OTA update ID.
- 2. OTA Update Protocol**  
The protocol that you choose must be supported by your device. If you select a protocol that is not supported by your device, the firmware update will be unsuccessful.
- 3. OTA Update Target**  
Select the devices you want to include in this job.
- 4. OTA Target Selection**  
Snapshot job is sent to all targets that were selected when you created the job. After those targets complete the job (or report that they are unable to do so), the job is complete.

## 5. OTA File Name

Name of firmware.

## 6. Device Firmware Path

This is the location and name to use when storing the firmware on the FreeRTOS device during OTA update. It is an optional field since certain devices do not store the image to a filesystem and may instead write directly to internal flash memory.

## 7. Code Signing Profile

Code signing ensures that devices only run code published by trusted authors and that the code has not been altered or corrupted since it was signed. You have three options for code signing.

## 8. OTA Role ARN

A Role which grants AWS IoT access to the S3, AWS IoT jobs and AWS Code signing resources to create an OTA update job.

## 5.3 Create Custom Job (Schedule Job)

Send a request to acquire an executable job file from one of your S3 buckets to one or more devices connected to AWS IoT.

The screenshot shows the 'OTA / Schedule Custom Job' form in the AWS Security Starter Kit interface. On the left is a sidebar with navigation links: User, Device, Deny Device, Allow Device, Group, OTA Updates (highlighted), Certificate, and Policy. The main form area contains the following fields and controls:

- Job Create ID:** A text input field containing 'P2P'.
- Job Target:** A text input field containing 'STM32WB55', with a green 'Target' button to its right.
- Job Document Name:** A text input field containing 'aws\_ota\_v1.1.gbl', with a green 'List' button to its right.
- Job Target Selection:** A dropdown menu currently showing 'SNAPSHOT'.
- At the bottom of the form are two buttons: 'Cancel' and 'Schedule Job'.

The footer of the page reads: © 2020 Arrow Electronics, Inc. All rights reserved.

Figure 2: Schedule custom job

## 1. Job Create ID

A unique job Id.

## 2. Job Target

Select the devices you want to include in this job.

## 3. Job Document Name

Upload a job file that defines what your job should do.



Job documents are JSON documents and should contain any information your devices need to perform a job. For example, a job document can contain one or more URLs where the device can download an update or some other data.

#### 4. Job Target Selection

Snapshot job is sent to all targets that were selected when you created the job. After those targets complete the job (or report that they are unable to do so), the job is complete.

### 5.4 Listing OTA UPDATES

Listing of OTA jobs can be seen in following figure:

The screenshot shows a web application interface for scheduling an OTA update. On the left is a sidebar menu with options: User, Device, Deny Device, Allow Device, Group, OTA Updates (highlighted in blue), Certificate, and Policy. The main content area is titled 'OTA Updates / Schedule OTA'. It contains several form fields, each with a red asterisk indicating it is required:

- OTA Update ID: A text input field containing 'ota\_stm32wb55'.
- OTA Update Protocol: A dropdown menu with 'MQTT' selected.
- OTA Update Target: A text input field containing 'STM32WB55' and a green 'Target' button.
- OTA Target Selection: A dropdown menu with 'SNAPSHOT' selected.
- OTA File Name: A text input field containing 'aws\_demos.sfb' and a green 'List' button.
- Device Firmware Path: A text input field containing 'firmware.bin'.
- Code Signing Profile: A dropdown menu with 'SEED\_codesign\_profile' selected.
- OTA Role ARN: A dropdown menu with 'iamOTAUpdateRole' selected.

At the bottom of the form are two buttons: 'Cancel' and 'Schedule'.

© 2020 Arrow Electronics, Inc. All rights reserved.

Figure 3: Listing OTA Job

## 5.5 Create a Code Signing profile

The code signing profile contains information needed to create a code signing job. It specifies your device's hardware platform, certificate from AWS Certificate Manager, and the location of your code signing certificate path on your device.

The screenshot shows the 'Create Code Signing Profile' dialog box. The fields are as follows:

Field	Value
Profile Name*	SEED_codesign_profile
Platform ID*	Amazon FreeRTOS SHA256-ECDSA
Code Signing Certificate*	ecdsasigner.crt
Certificate Private Key*	ecdsasigner.key
Path Name*	/home/certificate/ecdsasigner.crt

Buttons: Cancel, Create

Figure 4: Create code signing profile

1. **Profile Name**  
A unique profile name.
2. **Platform ID**  
Select the platform.
3. **Code Signing Certificate**  
Upload signing certificate
4. **Certificate Private Key**  
Upload private key
5. **Path Name**  
Select the path name of certificate on device

## 6 CERTIFICATE

### 6.1 Description

A certificate is used to authenticate your device's connection to AWS IoT.

### 6.2 Register CA

To use your own X.509 certificates, you must register a CA certificate with AWS IoT. The CA certificate can then be used to sign device certificates. You can register up to ten CA certificates with the same subject field and public key per AWS account. This allows you to have more than one CA sign your device certificates.

- Step 1: Generate a key pair for the private key verification certificate
- Step 2: Copy this registration code (From Setting page at top-right corner)
- Step 3: Create a CSR with this registration code. Put the registration code in the Common Name field
- Step 4: Use the CSR that was signed with the CA private key to create a private key verification certificate
- Step 5: Upload the CA certificate (rootCA.pem)
- Step 6: Upload the verification certificate (verificationCert.crt) :

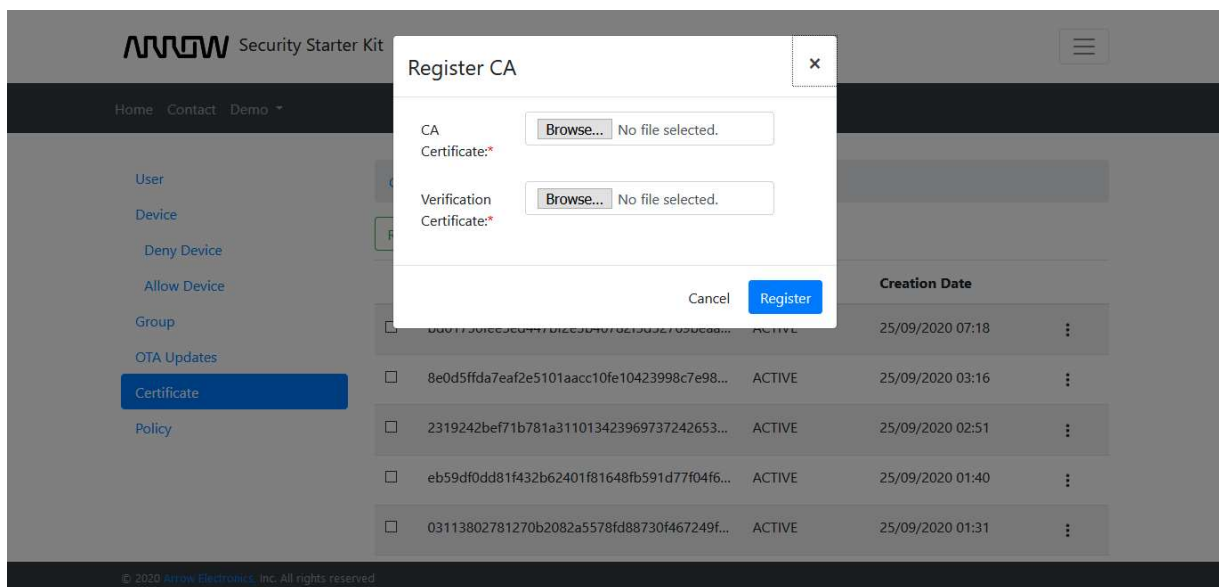


Figure 1: Register CA

1. **Root CA File**  
Select & upload root CA file.
2. **Verification Certificate File**  
Select & upload verification certificate file.

### 6.3 Listing Certificates

Listing of all registered certificates can be seen in following figure:

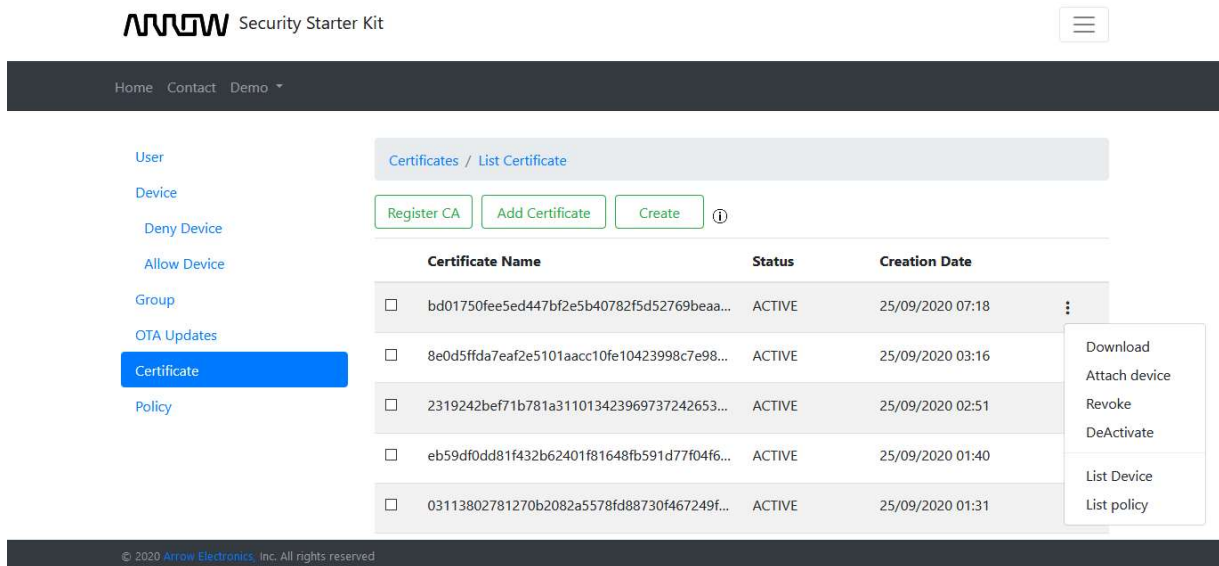


Figure 2: Listing Certificates

Certificate will be having following operations:

1. **Download**  
Download certificate file in PEM format.
2. **Attach device**  
Attach certificate to device.

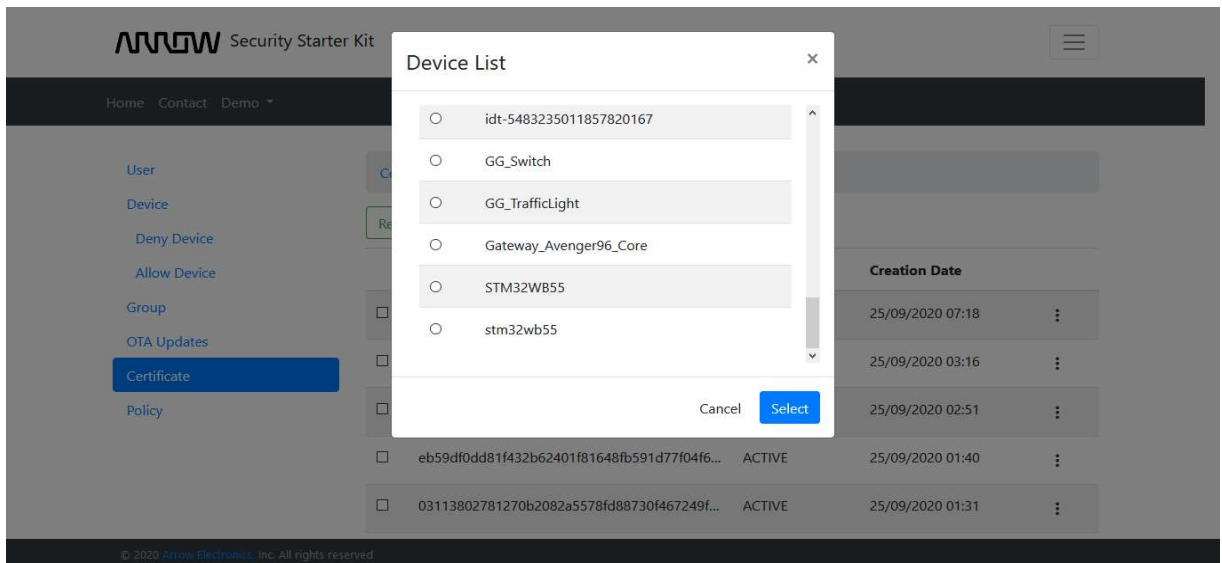


Figure 3: Attach certificate to Device

### 3. Revoke

Revokes a specific certificate. Once a certificate is revoked it cannot be reactivated, it can only be deleted.

### 4. Deactivate

Changes status to inactive. If the certificate has been revoked it cannot be made inactive.

### 5. Delete

Deletes a certificate. You cannot delete an active certificate.

### 6. List Device

Lists all devices attached to a certificate.

### 7. List Policy

Lists all policies attached to a certificate.

## 6.4 Add a Certificate

Select or register the CA certificate used to sign your device certificates. To use device certificates that are not signed by a registered CA, just select next.

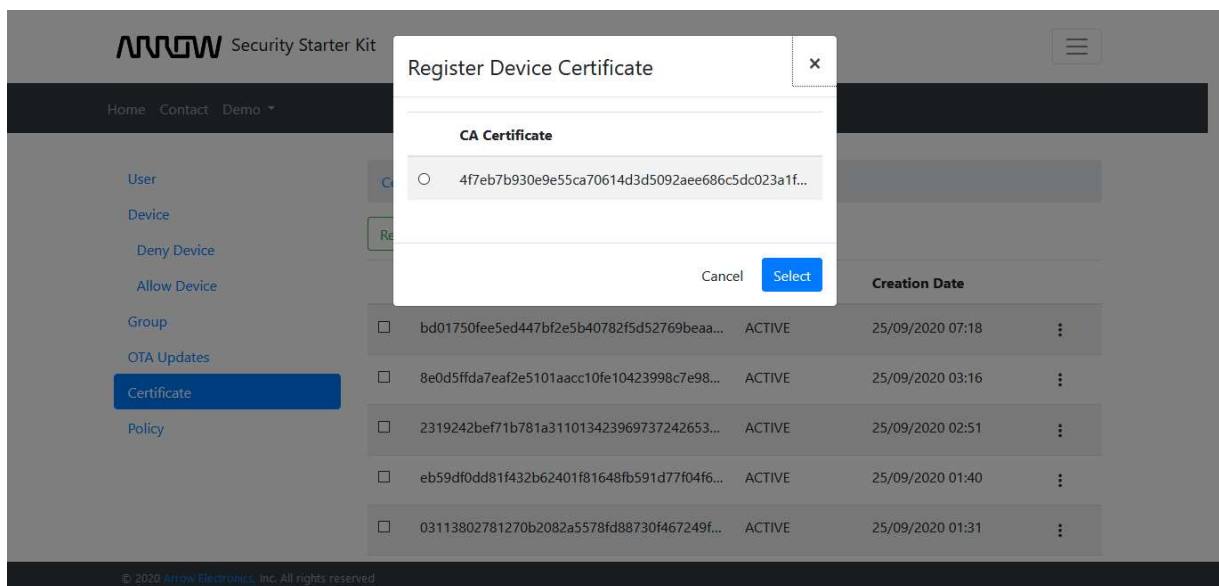


Figure 4: Add Certificate Part 1

Paste the existing certificate PEM file.

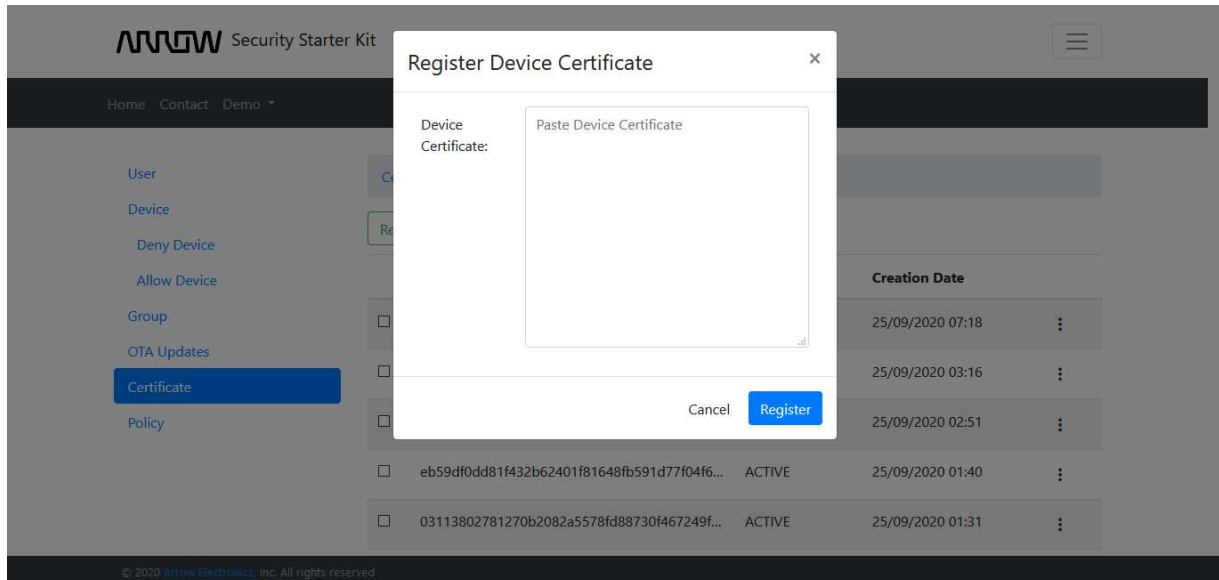


Figure 5: Add Certificate part 2

1. **Registered CA**  
Select CA ID from list of CA.
2. **Existing Certificate File**  
Paste the Certificate PEM file.

## 6.5 Create a Certificate (One Click)

This will generate a certificate, public key, and private key using AWS IoT's certificate authority.

## 7 POLICY

### 7.1 Description

AWS IoT policies grant or deny access to AWS IoT resources such as things, thing shadows, and MQTT topics. A device or user can invoke AWS IoT operations only if they are granted the appropriate permissions.

Policies give permissions to AWS IoT clients regardless of the authentication mechanism they use to connect to AWS IoT. To control which resources a device can access, attach one or more AWS IoT policies to the certificate associated with the device.

### 7.2 Creating a Policy

Create a policy to define a set of authorized actions. You can authorize actions on one or more resources (things, topics, topic filters).

The screenshot shows the 'Security Starter Kit' web application. On the left is a sidebar with navigation links: User, Device, Deny Device, Allow Device, Group, OTA Updates, Certificate, and Policy (highlighted in blue). The main content area is titled 'Policy / Edit Policy'. It contains two input fields: 'Policy Name' with the value 'STM32WB55-policy' and 'Policy Document' with a JSON policy document. The JSON document is as follows:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": "iot:*",
      "Resource": "*"
    }
  ]
}
```

At the bottom of the form are 'Cancel' and 'Update' buttons. The footer of the page reads '© 2020 Arrow Electronics, Inc. All rights reserved'.

Figure 1: Create Policy

1. **Policy Name**  
The name of the policy.
2. **Policy Document**  
Policy document defines the types of actions that can be performed by a resource. It will not allow any spaces

Policy document Description can be seen below:

Policy document has three main elements

- i. Effect – Allow/ Deny
- ii. Action
 

Action can be defined by following types:

  - a. `iot:*`
  - b. `iot:Publish`
  - c. `iot:Subscribe`
  - d. `iot:Connect`
  - e. `iot:Receive`
  - f. `iot:UpdateThingShadow`
  - g. `iot:GetThingShadow`
  - h. `iot>DeleteThingShadow`

- iii. Resource ARN

Resource could be client ID ARN, topic ARN or topic filter ARN

### 7.3 Listing the Policy

Listing of policy can be seen in following figure:

Arrow Security Starter Kit

Home Contact Demo

User

Device

Deny Device

Allow Device

Group

OTA Updates

Certificate

Policy

Policy / List Policy

Create ⓘ

Id	Policy Name
1	stm32_policy
2	seedwb55_policy
3	idt-8666616762969365292
4	idt-8576448696413354395
5	idt-854446894513549251

Edit  
Attach  
Detach  
Delete

© 2020 Arrow Electronics, Inc. All rights reserved

Figure 2: Listing Green grass Groups



## 7.4 Attach Policy

Policy can be attached to resource like Certificates, which can be seen in the following figure

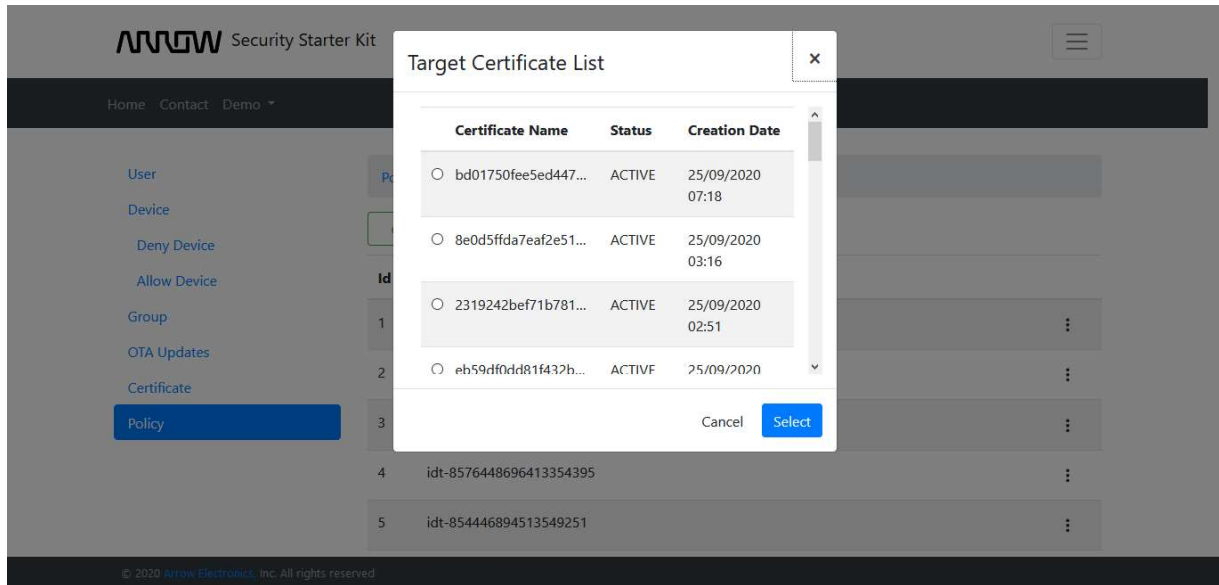


Figure 3: Attach policy to Certificate

## 7.5 Detach Policy

Detach policy from resource like Certificates, which can be seen here in the following figure:

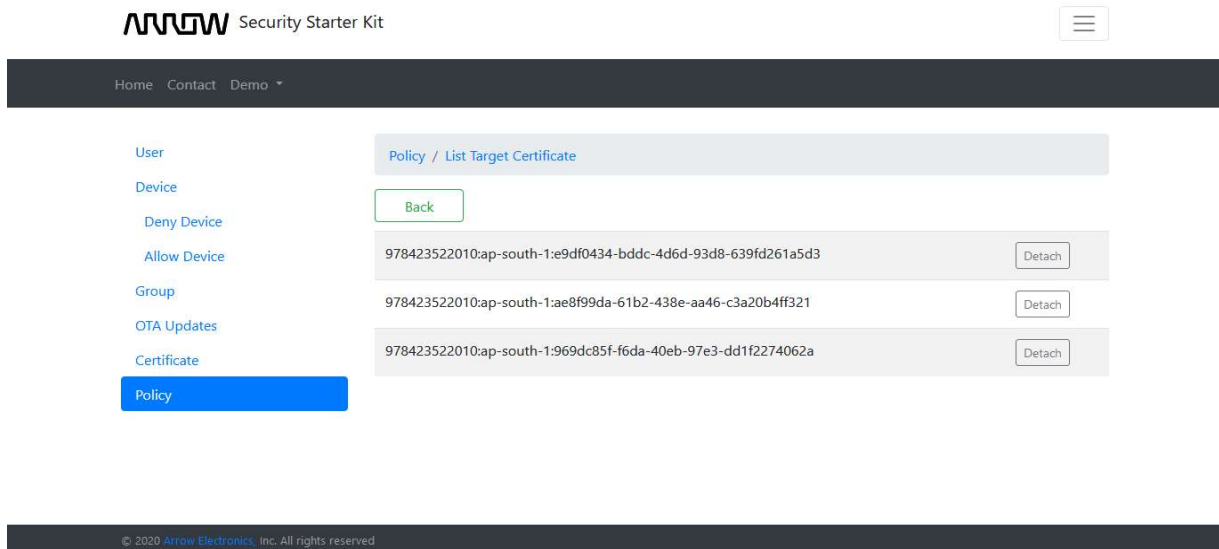


Figure 4: Detach policy from resource

## 8 REFERENCES

- [1] <https://docs.aws.amazon.com/greengrass/latest/developerguide/gg-dg.pdf>
- [2] <https://aws.amazon.com/blogs/iot/using-a-trusted-platform-module-for-endpoint-device-security-in-aws-iot-greengrass/>
- [3] <https://docs.aws.amazon.com/iot/latest/developerguide/register-CA-cert.html>
- [4] <https://aws.amazon.com/console/>