# First, install CCP.

Cody's Codex Plugin / Windows edition

### BEFORE YOU START

Windows PC
Codex desktop + CLI
Python 3 available
as the python command
Cody on the same LAN

Client must support local plugins.




ZIP CONCEPT: the package includes CCP and a ready-made local marketplace.

## 1 Extract the ZIP

Extract Cody-CCP.zip to a permanent folder. Open the CCP folder inside it; keep all included files.

## 2 Register it with Codex

Open that CCP folder in Terminal, then run:

```
codex plugin marketplace add .
```

## 3 Install and enable

Restart the desktop app. Open Plugins, select the Cody CCP source, then install Cody's Codex Plugin. Start a new Codex chat with CCP enabled.

**If Windows asks, allow Python on Private networks only.**

Setup reference: OpenAI plugin packaging guide

### NOTES

# One code. Your PC.

Pair from the PC you want Cody to remember.

## 1 On Cody

Complete Wi-Fi setup. Continue to the Connect Codex screen. Keep its six-character code visible.




Illustration / example code

## 2 In your new Codex chat

With CCP enabled, send:

**Pair my Cody using this code:**

**K7M4Q2**

EXAMPLE ONLY
Use the code on Cody.

## 3 Confirm, then wait

After pairing is confirmed, tap Let's go on Cody. Leave Cody awake for the 10-second Idle interval.

| Confirmed | → | Idle / 10 s | → | Find PC | → | Connected |
|---|---|---|---|---|---|---|
| SCREEN 13 | | SCREEN 16 | | SCREEN 14 | | SCREEN 15 |

**Only the paired PC reconnects - even on a busy LAN.**

Not connecting? Keep Codex + CCP running on the same private LAN. If the code expires, tap Retry and use the new code.

NOTES

Print A5 / 100% / two-sided / flip on long edge

Umberto Giacobbi | hello@umbertogiacobbi.biz
umbertogiacobbi.biz / 2026 / confidential

# Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

### 1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

### 2 / Saved Wi-Fi; waiting for the network

42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

### 3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

### 4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

# Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

### 41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

### Keep the gesture deliberate

Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

### PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

### BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

# CCP: current local installation

This checkout provides a local marketplace. The original ZIP leaflet remains a packaging concept.

### 1 / Register the checkout

Use this repository's .agents/plugins/marketplace.json. The catalog is Cody local plugins; the package is CCP - Cody's Codex Plugin. Keep the checkout in its current location.

### 2 / Install, enable, new chat

Open the repository installation link below in Codex desktop. Install and enable CCP, then start a new chat. Python 3 must be available as python. Codex starts the MCP script.

### 3 / Pair from Cody

At startup, choose Yes on 40; alternatively hold Cody and select Connect Codex on 41. Keep the six-character code on 12 visible. In the CCP-enabled chat, ask to pair Cody using that exact code.

### 4 / Confirm and reconnect

After authenticated completion, 13 > Let's go > 16 (10 active seconds) > 14 > 15. On a later boot with a valid saved link, go straight to authenticated search on 14. Keep Codex/CCP awake on the same LAN; screen 15 certifies CCP presence, not chat/task transport.

**Open CCP installation in Codex**

# Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

## Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap (buco di analisi iniziale), now addressed in source.

## Affected original pages and screen IDs

Original page 01 (ZIP installation concept) and page 02 (pairing entry and reconnect); screens 11-16. The original two-sided leaflet is retained.

## Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

## Preservation

All 2 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

## Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

# Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

### 04-06 / Escape the network loop

After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

### 35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

### 41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

# Errata and corrections

Revision date: 09 October 2026 / recovery correction

## Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap (buco di analisi iniziale).

## Affected pages and screens

Previous setup addendum: page 4. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

## Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

## Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.


## Preservation

All 6 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

# Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens

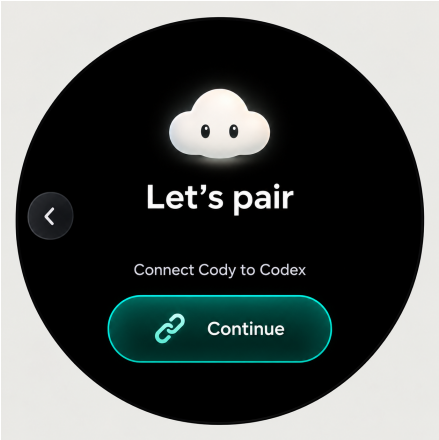


### Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

### Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

### Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

# Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

### 41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

### 40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

### Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

### Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

### Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

# Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

### Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

### Affected original material

Original page 01 (ZIP installation concept) and page 02 (pairing entry and reconnect); screens 11-16. The original two-sided leaflet is retained. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

### Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was a buco di analisi iniziale. Options now opens 10 and returns to Setup after preferences/skin.

### Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

### Preservation

All 8 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.