№10

:

2026-03-19

|

1

1.

1.1

- SMTP-

1.1

- SMTP-
- SMTP

2

2.

2.1 LMTP Dovecote

-

```
[user@server.user.net ~]$ sudo -i
[sudo] password for user:
[root@server.user.net ~]# dnf -y install telnet
Last metadata expiration check: 1:14:43 ago on Thu 12 Feb 2026 09:18:44 PM UTC.
Package telnet-1:0.17-85.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
[root@server.user.net ~]#
```

1: maillog

2.1 LMTP Dovecote

-
- (sudo -i)

```
[user@server.user.net ~]$ sudo -i
[sudo] password for user:
[root@server.user.net ~]# dnf -y install telnet
Last metadata expiration check: 1:14:43 ago on Thu 12 Feb 2026 09:18:44 PM UTC.
Package telnet-1:0.17-85.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
[root@server.user.net ~]#
```

1: maillog

2.1 LMTP Dovecote

-
- (sudo -i)
- root@server

```
[user@server.user.net ~]$ sudo -i
[sudo] password for user:
[root@server.user.net ~]# dnf -y install telnet
Last metadata expiration check: 1:14:43 ago on Thu 12 Feb 2026 09:18:44 PM UTC.
Package telnet-1:0.17-85.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
[root@server.user.net ~]#
```

1: maillog

- `tail -f /var/log/maillog`

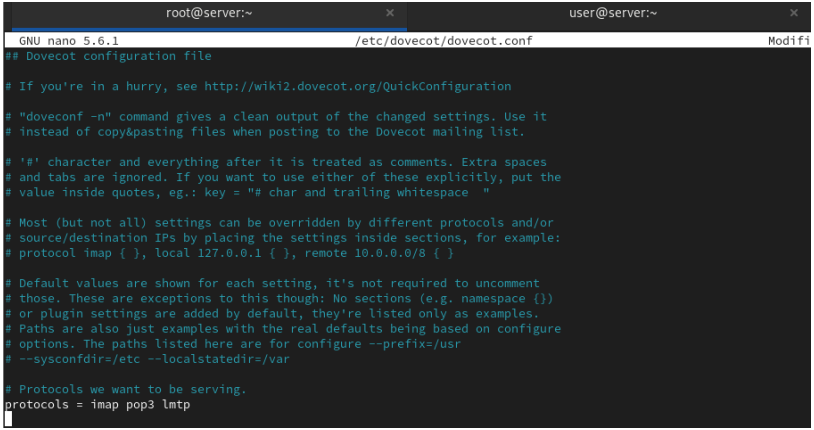

2: lmtp Dovecot

- `tail -f /var/log/maillog`
- Postfix Dovecot

root@server:~ | user@server:~

```
 GNU nano 5.6.1                    /etc/dovecot/dovecot.conf                    Modifi
## Dovecot configuration file

# If you're in a hurry, see http://wiki2.dovecot.org/QuickConfiguration

# "doveconf -n" command gives a clean output of the changed settings. Use it
# instead of copy&pasting files when posting to the Dovecot mailing list.

# '#' character and everything after it is treated as comments. Extra spaces
# and tabs are ignored. If you want to use either of these explicitly, put the
# value inside quotes, eg.: key = "# char and trailing whitespace  "

# Most (but not all) settings can be overridden by different protocols and/or
# source/destination IPs by placing the settings inside sections, for example:
# protocol imap { }, local 127.0.0.1 { }, remote 10.0.0.0/8 { }

# Default values are shown for each setting, it's not required to uncomment
# those. These are exceptions to this though: No sections (e.g. namespace {})
# or plugin settings are added by default, they're listed only as examples.
# Paths are also just examples with the real defaults being based on configure
# options. The paths listed here are for configure --prefix=/usr
# --sysconfdir=/etc --localstatedir=/var

# Protocols we want to be serving.
protocols = imap pop3 lmtp
```

2: lmtp Dovecot

- `tail -f /var/log/maillog`
- Postfix Dovecot
- `dovecot.conf` `lmtp`

```
root@server:~                                   user@server:~
 GNU nano 5.6.1                  /etc/dovecot/dovecot.conf                    Modifi
## Dovecot configuration file

# If you're in a hurry, see http://wiki2.dovecot.org/QuickConfiguration

# "doveconf -n" command gives a clean output of the changed settings. Use it
# instead of copy&pasting files when posting to the Dovecot mailing list.

# '#' character and everything after it is treated as comments. Extra spaces
# and tabs are ignored. If you want to use either of these explicitly, put the
# value inside quotes, eg.: key = "# char and trailing whitespace  "

# Most (but not all) settings can be overridden by different protocols and/or
# source/destination IPs by placing the settings inside sections, for example:
# protocol imap { }, local 127.0.0.1 { }, remote 10.0.0.0/8 { }

# Default values are shown for each setting, it's not required to uncomment
# those. These are exceptions to this though: No sections (e.g. namespace {})
# or plugin settings are added by default, they're listed only as examples.
# Paths are also just examples with the real defaults being based on configure
# options. The paths listed here are for configure --prefix=/usr
# --sysconfdir=/etc --localstatedir=/var

# Protocols we want to be serving.
protocols = imap pop3 lmtp
```

2: lmtp Dovecot

- tail -f /var/log/maillog
- Postfix Dovecot
- dovecot.conf lmtp
- protocols = imap pop3 lmtp

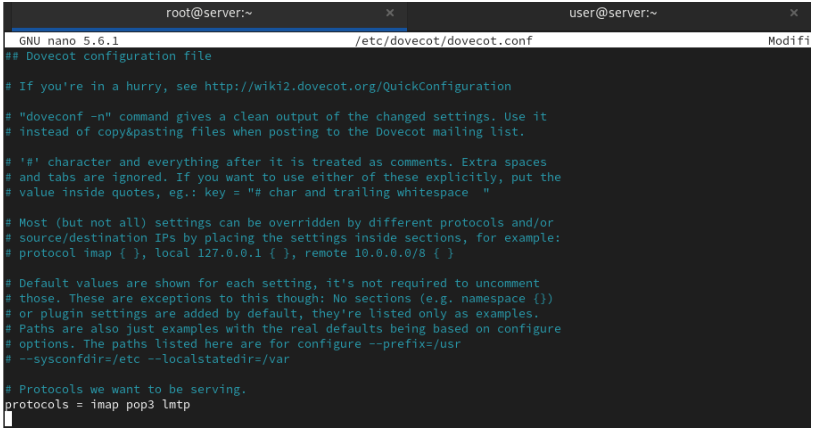

2: lmtp Dovecot

- 10-master.conf lmtp

```
root@server:~                                   user@server:~
GNU nano 5.6.1                /etc/dovecot/conf.d/10-master.conf                Modifie

service imap-login {
  inet_listener imap {
    #port = 143
  }
  inet_listener imaps {
    #port = 993
    #ssl = yes
  }

  # Number of connections to handle before starting a new process. Typically
  # the only useful values are 0 (unlimited) or 1. 1 is more secure, but 0
  # is faster. <doc/wiki/LoginProcess.txt>
  #service_count = 1

  # Number of processes to always keep waiting for more connections.
  #process_min_avail = 0

  # If you set service_count=0, you probably need to grow this.
  #vsz_limit = $default_vsz_limit
}

service pop3-login {
  inet_listener pop3 {
    #port = 110
  }
  inet_listener pop3s {
    #port = 995
    #ssl = yes
  }
}

service submission-login {
  inet_listener submission {
    #port = 587
  }
}
service lmtp {
unix_listener /var/spool/postfix/private/dovecot-lmtp {
group = postfix
```

- 10-master.conf lmtp
- unix- /var/spool/postfix/private/dovecot-lmtp

root@server:~ user@server:~

GNU nano 5.6.1 /etc/dovecot/conf.d/10-master.conf Modifie

```
service imap-login {
  inet_listener imap {
    #port = 143
  }
  inet_listener imaps {
    #port = 993
    #ssl = yes
  }

  # Number of connections to handle before starting a new process. Typically
  # the only useful values are 0 (unlimited) or 1. 1 is more secure, but 0
  # is faster. <doc/wiki/LoginProcess.txt>
  #service_count = 1

  # Number of processes to always keep waiting for more connections.
  #process_min_avail = 0

  # If you set service_count=0, you probably need to grow this.
  #vsz_limit = $default_vsz_limit
}

service pop3-login {
  inet_listener pop3 {
    #port = 110
  }
  inet_listener pop3s {
    #port = 995
    #ssl = yes
  }
}

service submission-login {
  inet_listener submission {
    #port = 587
  }
}
service lmtp {
unix_listener /var/spool/postfix/private/dovecot-lmtp {
```

- 10-master.conf lmtp
- unix- /var/spool/postfix/private/dovecot-lmtp
- : user=postfix, group=postfix, mode=0600

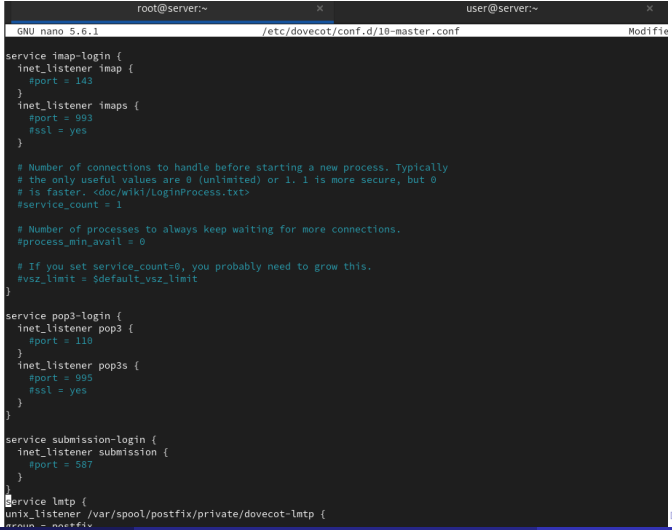

- Postfix `mailbox_transport = lmtp:unix:private/dovecot-lmtp`

```
[root@server.user.net ~]#
[root@server.user.net ~]#  postconf -e 'mailbox_transport = lmtp:unix:private/dovecot-lmtp'
[root@server.user.net ~]#
```

4: mailbox_transport Postfix

- Postfix `mailbox_transport = lmtp:unix:private/dovecot-lmtp`
- LMTP-

```
[root@server.user.net ~]#
[root@server.user.net ~]#  postconf -e 'mailbox_transport = lmtp:unix:private/dovecot-lmtp'
[root@server.user.net ~]#
```

4: mailbox_transport Postfix

- 10-auth.conf auth_username_format = %Ln

```
# Username character translations before it's looked up from databases. The
# value contains series of from -> to characters. For example "#@/@" means
# that '#' and '/' characters are translated to '@'.
#auth_username_translation =

# Username formatting before it's looked up from databases. You can use
# the standard variables here, eg. %Lu would lowercase the username, %n would
# drop away the domain if it was given, or "%n-AT-%d" would change the '@' into
# "-AT-". This translation is done after auth_username_translation changes.
auth_username_format = %Lu

# If you want to allow master users to log in by specifying the master
```

5: Dovecot

- 10-auth.conf auth_username_format = %Ln
-

```
# Username character translations before it's looked up from databases. The
# value contains series of from -> to characters. For example "#@/@" means
# that '#' and '/' characters are translated to '@'.
#auth_username_translation =

# Username formatting before it's looked up from databases. You can use
# the standard variables here, eg. %Lu would lowercase the username, %n would
# drop away the domain if it was given, or "%n-AT-%d" would change the '@' into
# "-AT-". This translation is done after auth_username_translation changes.
auth_username_format = %Lu

# If you want to allow master users to log in by specifying the master
```

5: Dovecot

- postfix dovecot

```
[root@server.user.net ~]#
[root@server.user.net ~]# systemctl restart postfix
[root@server.user.net ~]# systemctl restart dovecot
[root@server.user.net ~]#
```

6: Postfix Dovecot

- postfix dovecot
-

```
[root@server.user.net ~]#
[root@server.user.net ~]# systemctl restart postfix
[root@server.user.net ~]# systemctl restart dovecot
[root@server.user.net ~]#
```

6: Postfix Dovecot

LMTP test

```
service auth {
  # auth_socket_path points to this userdb socket by default. It's typically
  # used by dovecot-lda, doveadm, possibly imap process, etc. Users that have
  # full permissions to this socket are able to get a list of all usernames and
  # get the results of everyone's userdb lookups.
  #
  # The default 0666 mode allows anyone to connect to the socket, but the
  # userdb lookups will succeed only if the userdb returns an "uid" field that
  # matches the caller process's UID. Also if caller's uid or gid matches the
  # socket's uid or gid the lookup succeeds. Anything else causes a failure.
  #
  # To give the caller full permissions to lookup all users, set the mode to
  # something else than 0666 and Dovecot lets the kernel enforce the
  # permissions (e.g. 0777 allows everyone full permissions).
 service auth {
  unix_listener /var/spool/postfix/private/auth {
     group = postfix
     user = postfix
     mode = 0660
}
unix_listener auth-userdb {
   mode = 0600
   user = dovecot
  }
}
```

7:

- LMTP test
- SMTP

```
service auth {
  # auth_socket_path points to this userdb socket by default. It's typically
  # used by dovecot-lda, doveadm, possibly imap process, etc. Users that have
  # full permissions to this socket are able to get a list of all usernames and
  # get the results of everyone's userdb lookups.
  #
  # The default 0666 mode allows anyone to connect to the socket, but the
  # userdb lookups will succeed only if the userdb returns an "uid" field that
  # matches the caller process's UID. Also if caller's uid or gid matches the
  # socket's uid or gid the lookup succeeds. Anything else causes a failure.
  #
  # To give the caller full permissions to lookup all users, set the mode to
  # something else than 0666 and Dovecot lets the kernel enforce the
  # permissions (e.g. 0777 allows everyone full permissions).
 service auth {
  unix_listener /var/spool/postfix/private/auth {
     group = postfix
     user = postfix
     mode = 0660
}
unix_listener auth-userdb {
   mode = 0600
   user = dovecot
  }
}
```

7: