

ANSYS Electronics Desktop – Installation and Access Guide

There are two options to access ANSYS Electronics Desktop as described below:

1. Option 1: Obtaining the ANSYS Electronics Desktop Student Version

ANSYS provides a free student version of ANSYS Electronics Desktop for educational use. It can be downloaded from the ANSYS Student website:

<https://www.ansys.com/academic/students/ansys-electronics-desktop-student>

Select “Download ANSYS Electronics Desktop Student 2025R2”. Installation instructions, system requirements, and usage limitations are available on the same webpage.


Note: ANSYS Electronics Desktop 2025R2 and later versions are compatible only with Microsoft Windows 10/11 (64-bit Professional, Enterprise, or Education). Users working on macOS, Linux, or other operating systems must install Windows or use a virtual machine. Apple users should refer to Microsoft’s guidance on running Windows 11 on Apple M1/M2 devices.

Note that Pre-lab 2 tasks cannot be done with students version and you will need to access UNSW’s full version via myAccess. Hence, recommendation is to use option 2.

2. Option 2: Accessing ANSYS Electronics Desktop via UNSW myAccess


If you prefer not to install the software locally, you may access ANSYS through the UNSW myAccess virtual platform:

- Navigate to: <https://www.myaccess.unsw.edu.au/>
- Follow “Step 1” to install Citrix Receiver (installation guides are available on the site).
- Select “Step 2” to log in using your zID and UNSW password.
- For any further instructions, please check the “User guides”.

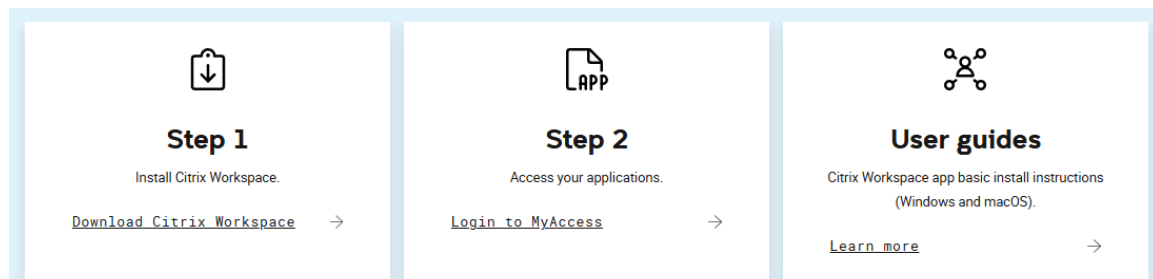

- After logging in, search for “ANSYS” and open “ANSYS Electronics Desktop 2024R2”. Ensure you launch this specific version to match the interface used in teaching materials. *


Opening the application may take several minutes as it loads via the virtual environment. If prompted by the Directory Options window, click “OK” without changing the default project directory.

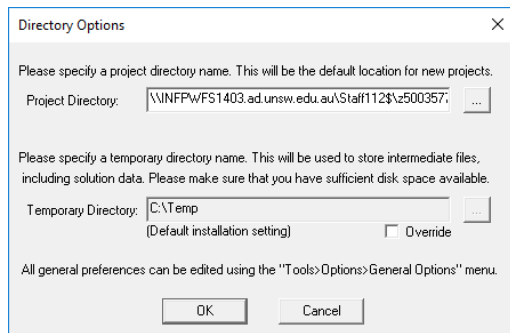

For troubleshooting:

- Refer to myAccess User Guides.
- Review the FAQ section on the myAccess website.
- If the issue persists, contact the lead demonstrator with a brief explanation and screenshot.

Always save your project files to your local computer to prevent data loss in the event of a myAccess connection drop.

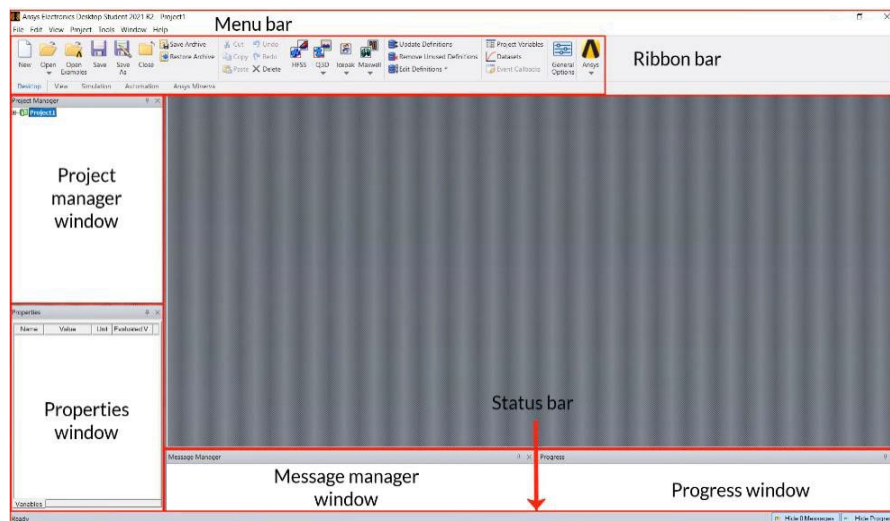

3. Initial ANSYS Electronics Desktop Settings

To configure your environment for modelling:

1. Go to Tools > Options > General Options.

2. Under Maxwell 2D:

- Under Boundary Assignment:

Enable “Use Wizards for data input when checking new boundaries”.

Enable “Duplicate boundaries/mesh operations with geometry”.

3. Under 3D Modeler:

- Under Drawing: enable “Edit properties of new primitives” and “Automatically cover closed polylines”.

- Under Display → Rendering: set “Default transparency” to 0.8.

4. For users accessing via myAccess:

- Under General → Desktop Configuration: enable “Use Electronics Pro, Premium, Enterprise product licensing”.

(This is required only for myAccess users.)

Once these settings are saved, you are ready to begin your FEA simulations.

If you encounter access or installation issues, contact the lead lab demonstrator with a brief description and screenshot.