

MINI PROJECT-2

1.Problem Statement:Which model is suitable best for Flight price Prediction Dataset

In [1]:

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

In [2]:

```
traindf=pd.read_csv(r"C:\Users\Arshad Shaik\Downloads\Data_Train1.csv")
traindf
```

Out[2]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dur:
0	IndiGo	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h
1	Air India	01/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h
2	Jet Airways	09/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	
3	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h
4	IndiGo	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h
...	
10678	Air Asia	09/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h
10679	Air India	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h
10680	Jet Airways	27/04/2019	Banglore	Delhi	BLR ? DEL	8:20	11:20	
10681	Vistara	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h
10682	Air India	09/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h

10683 rows × 11 columns

In [3]:

```
testdf=pd.read_csv(r"C:\Users\Arshad Shaik\Downloads\Test_set26.csv")
testdf
```

Out[3]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durat
0	Jet Airways	06/06/2019	Delhi	Cochin	DEL ? BOM ? COK	17:30	04:25 07 Jun	10h 5
1	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? MAA ? BLR	6:20	10:20	
2	Jet Airways	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	19:15	19:00 22 May	23h 4
3	Multiple carriers	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	8:00	21:00	
4	Air Asia	24/06/2019	Banglore	Delhi	BLR ? DEL	23:55	02:45 25 Jun	2h 5
...	
2666	Air India	06/06/2019	Kolkata	Banglore	CCU ? DEL ? BLR	20:30	20:25 07 Jun	23h 5
2667	IndiGo	27/03/2019	Kolkata	Banglore	CCU ? BLR	14:20	16:55	2h 3
2668	Jet Airways	06/03/2019	Delhi	Cochin	DEL ? BOM ? COK	21:50	04:25 07 Mar	6h 3
2669	Air India	06/03/2019	Delhi	Cochin	DEL ? BOM ? COK	4:00	19:15	15h 1
2670	Multiple carriers	15/06/2019	Delhi	Cochin	DEL ? BOM ? COK	4:55	19:15	14h 2

2671 rows × 10 columns



In [4]:

traindf.head()

Out[4]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duration
0	IndiGo	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h 50m
1	Air India	01/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h 25m
2	Jet Airways	09/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	19h
3	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h 25m
4	IndiGo	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h 45m

In [5]:

testdf.head()

Out[5]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duration
0	Jet Airways	06/06/2019	Delhi	Cochin	DEL ? BOM ? COK	17:30	04:25 07 Jun	10h 55m
1	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? MAA ? BLR	6:20	10:20	4h
2	Jet Airways	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	19:15	19:00 22 May	23h 45m
3	Multiple carriers	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	8:00	21:00	13h
4	Air Asia	24/06/2019	Banglore	Delhi	BLR ? DEL	23:55	02:45 25 Jun	2h 50m

In [6]:

```
traindf.tail()
```

Out[6]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dur:
10678	Air Asia	09/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h
10679	Air India	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h
10680	Jet Airways	27/04/2019	Banglore	Delhi	BLR ? DEL	8:20	11:20	
10681	Vistara	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h
10682	Air India	09/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h

In [7]:

```
testdf.tail()
```

Out[7]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
2666	Air India	06/06/2019	Kolkata	Banglore	CCU ? DEL ? BLR	20:30	20:25 07 Jun	23h 55
2667	IndiGo	27/03/2019	Kolkata	Banglore	CCU ? BLR	14:20	16:55	2h 35
2668	Jet Airways	06/03/2019	Delhi	Cochin	DEL ? BOM ? COK	21:50	04:25 07 Mar	6h 35
2669	Air India	06/03/2019	Delhi	Cochin	DEL ? BOM ? COK	4:00	19:15	15h 15
2670	Multiple carriers	15/06/2019	Delhi	Cochin	DEL ? BOM ? COK	4:55	19:15	14h 20

In [8]:

```
traindf.describe()
```

Out[8]:

	Price
count	10683.000000
mean	9087.064121
std	4611.359167
min	1759.000000
25%	5277.000000
50%	8372.000000
75%	12373.000000
max	79512.000000

In [9]:

```
testdf.describe()
```

Out[9]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dura
count	2671	2671	2671	2671	2671	2671	2671	2671
unique	11	40	5	6	100	199	704	1
top	Jet Airways	09/05/2019	Delhi	Cochin	DEL ? BOM ? COK	10:00	19:00	2h
freq	897	144	1145	1145	624	62	113	1

In [10]:

```
traindf.shape
```

Out[10]:

(10683, 11)

In [11]:

```
testdf.shape
```

Out[11]:

(2671, 10)

In [12]:

```
traindf.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10683 entries, 0 to 10682
Data columns (total 11 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Airline                10683 non-null  object
1   Date_of_Journey       10683 non-null  object
2   Source                 10683 non-null  object
3   Destination            10683 non-null  object
4   Route                 10682 non-null  object
5   Dep_Time               10683 non-null  object
6   Arrival_Time           10683 non-null  object
7   Duration               10683 non-null  object
8   Total_Stops            10682 non-null  object
9   Additional_Info        10683 non-null  object
10  Price                  10683 non-null  int64
dtypes: int64(1), object(10)
memory usage: 918.2+ KB
```

In [13]:

```
testdf.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 2671 entries, 0 to 2670
Data columns (total 10 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Airline                2671 non-null  object
1   Date_of_Journey       2671 non-null  object
2   Source                 2671 non-null  object
3   Destination            2671 non-null  object
4   Route                 2671 non-null  object
5   Dep_Time               2671 non-null  object
6   Arrival_Time           2671 non-null  object
7   Duration               2671 non-null  object
8   Total_Stops            2671 non-null  object
9   Additional_Info        2671 non-null  object
dtypes: object(10)
memory usage: 208.8+ KB
```

In [14]:

```
traindf.duplicated().sum()
```

Out[14]:

220

In [15]:

```
testdf.duplicated().sum()
```

Out[15]:

26

In [16]:

```
traindf.columns
```

Out[16]:

```
Index(['Airline', 'Date_of_Journey', 'Source', 'Destination', 'Route',  
      'Dep_Time', 'Arrival_Time', 'Duration', 'Total_Stops',  
      'Additional_Info', 'Price'],  
      dtype='object')
```

In [17]:

```
traindf.isnull().sum()
```

Out[17]:

```
Airline          0  
Date_of_Journey  0  
Source           0  
Destination      0  
Route           1  
Dep_Time         0  
Arrival_Time     0  
Duration         0  
Total_Stops      1  
Additional_Info   0  
Price           0  
dtype: int64
```

In [18]:

```
testdf.isnull().sum()
```

Out[18]:

```
Airline          0  
Date_of_Journey  0  
Source           0  
Destination      0  
Route           0  
Dep_Time         0  
Arrival_Time     0  
Duration         0  
Total_Stops      0  
Additional_Info   0  
dtype: int64
```


In [19]:

```
traindf.dropna(inplace=True)
```

In [20]:

```
traindf.isnull().sum()
```

Out[20]:

```
Airline          0
Date_of_Journey  0
Source           0
Destination      0
Route            0
Dep_Time         0
Arrival_Time     0
Duration         0
Total_Stops      0
Additional_Info   0
Price            0
dtype: int64
```

In [21]:

```
traindf.shape
```

Out[21]:

```
(10682, 11)
```

In [22]:

```
traindf['Airline'].value_counts()
```

Out[22]:

```
Airline
Jet Airways          3849
IndiGo               2053
Air India            1751
Multiple carriers    1196
SpiceJet             818
Vistara              479
Air Asia             319
GoAir                194
Multiple carriers Premium economy    13
Jet Airways Business           6
Vistara Premium economy        3
Trujet                       1
Name: count, dtype: int64
```

In [23]:

```
traindf['Source'].value_counts()
```

Out[23]:

```
Source
Delhi      4536
Kolkata    2871
Banglore   2197
Mumbai     697
Chennai    381
Name: count, dtype: int64
```

In [24]:

```
traindf['Destination'].value_counts()
```

Out[24]:

```
Destination
Cochin      4536
Banglore    2871
Delhi       1265
New Delhi   932
Hyderabad   697
Kolkata     381
Name: count, dtype: int64
```

In [25]:

```
traindf['Total_Stops'].value_counts()
```

Out[25]:

```
Total_Stops
1 stop      5625
non-stop    3491
2 stops     1520
3 stops      45
4 stops      1
Name: count, dtype: int64
```

In [26]:

```
airline={"Airline":{"Jet Airways":0,"IndiGo":1,"Air India":2,"Multiple carriers":3,
"SpiceJet":4,"Vistara":5,"Air Asia":6,"GoAir":7,
"Multiple carriers Premium economy":8,
"Jet Airways Business":9,"Vistara Premium economy":10,"Trujet":11}}
traindf=traindf.replace(airline)
traindf
```

Out[26]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dura
0	1	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h :
1	2	01/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h :
2	0	09/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	
3	1	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h :
4	1	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h :
...	
10678	6	09/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h :
10679	2	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h :
10680	0	27/04/2019	Banglore	Delhi	BLR ? DEL	8:20	11:20	
10681	5	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h :
10682	2	09/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h :

10682 rows × 11 columns



In [27]:

```
city={"Source":{"Delhi":0,"Kolkata":1,"Banglore":2,
"Mumbai":3,"Chennai":4}}
traindf=traindf.replace(city)
traindf
```

Out[27]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h 50
1	2	01/05/2019	1	Banglore	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h 20
2	0	09/06/2019	0	Cochin	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	1
3	1	12/05/2019	1	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h 20
4	1	01/03/2019	2	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h 40
...
10678	6	09/04/2019	1	Banglore	CCU ? BLR	19:55	22:25	2h 30
10679	2	27/04/2019	1	Banglore	CCU ? BLR	20:45	23:20	2h 30
10680	0	27/04/2019	2	Delhi	BLR ? DEL	8:20	11:20	
10681	5	01/03/2019	2	New Delhi	BLR ? DEL	11:30	14:10	2h 40
10682	2	09/05/2019	0	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 20

10682 rows × 11 columns



In [28]:

```
destination={"Destination":{"Cochin":0,"Banglore":1,"Delhi":2,
"New Delhi":3,"Hyderabad":4,"Kolkata":5}}
traindf=traindf.replace(destination)
traindf
```

Out[28]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 5i
1	2	01/05/2019	1	1	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h 2!
2	0	09/06/2019	0	0	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	1
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 2!
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 4!
...	
10678	6	09/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 3i
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 3!
10680	0	27/04/2019	2	2	BLR ? DEL	8:20	11:20	
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 4i
10682	2	09/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 2i

10682 rows × 11 columns



In [29]:

```
stops={"Total_Stops":{"non-stop":0,"1 stop":1,"2 stops":2,
"3 stops":3,"4 stops":4}}
traindf=traindf.replace(stops)
traindf
```

Out[29]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 5i
1	2	01/05/2019	1	1	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h 2i
2	0	09/06/2019	0	0	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	1
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 2i
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 4i
...	
10678	6	09/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 3i
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 3i
10680	0	27/04/2019	2	2	BLR ? DEL	8:20	11:20	
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 4i
10682	2	09/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 2i

10682 rows × 11 columns



In [30]:

```
traindf
```

Out[30]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 5t
1	2	01/05/2019	1	1	CCU ? IXR ? BBI ? BLR	5:50	13:15	7h 2t
2	0	09/06/2019	0	0	DEL ? LKO ? BOM ? COK	9:25	04:25 10 Jun	1
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 2t
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 4t
...	
10678	6	09/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 3t
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 3t
10680	0	27/04/2019	2	2	BLR ? DEL	8:20	11:20	
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 4t
10682	2	09/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 2t

10682 rows × 11 columns




In [31]:

```
#EDA
fdf=traindf[['Airline', 'Source', 'Destination', 'Total_Stops', 'Price']]
sns.heatmap(fdf.corr(),annot=True)
```

Out[31]:

<Axes: >

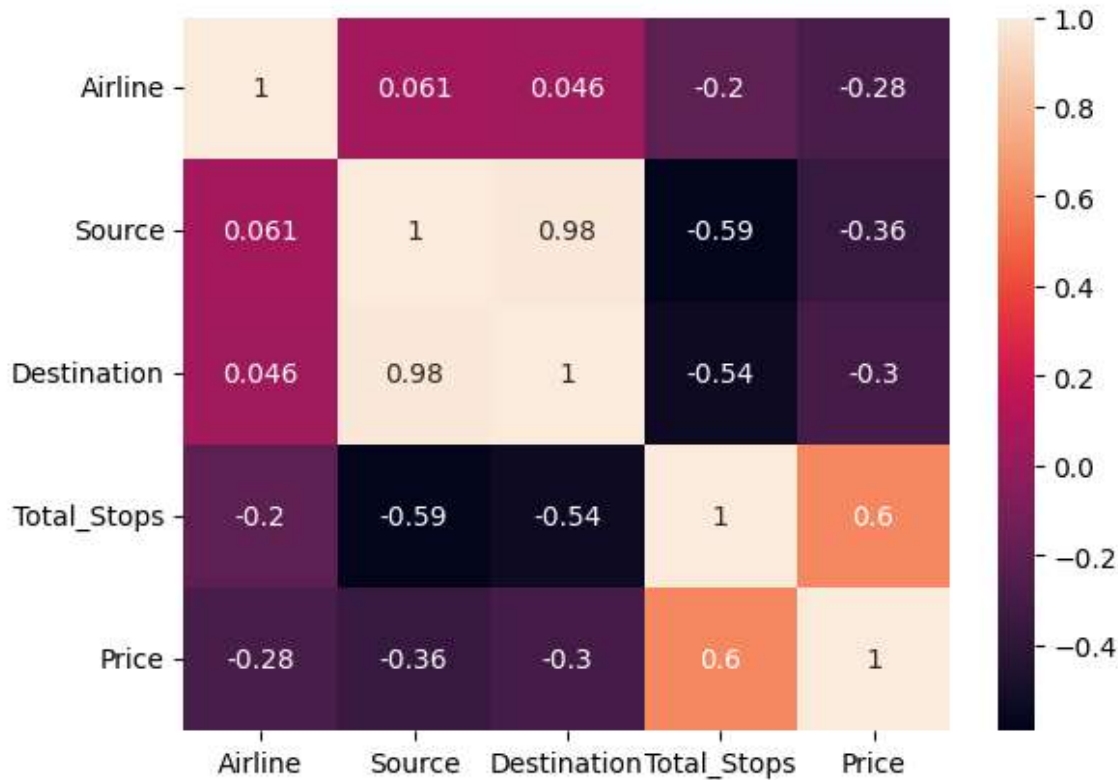

In [32]:

```
x=fdf[['Airline', 'Source', 'Destination', 'Total_Stops']]
y=fdf['Price']
```

Linear Regression

In [33]:

```
#Linear Regression
from sklearn.model_selection import train_test_split
X_train,X_test,y_train,y_test=train_test_split(x,y,test_size=0.3,random_state=100)
```


In [34]:

```
from sklearn.linear_model import LinearRegression
regr=LinearRegression()
regr.fit(X_train,y_train)
print(regr.intercept_)
coeff_df=pd.DataFrame(regr.coef_,x.columns,columns=['coefficient'])
coeff_df
```

7211.098088897486

Out[34]:

	coefficient
Airline	-418.483922
Source	-3275.073380
Destination	2505.480291
Total_Stops	3541.798053

In [35]:

```
#Linear Rgeression
score=regr.score(X_test,y_test)
print(score)
```

0.41083048909283504

In [36]:


```
predictions=regr.predict(X_test)
```

In [37]:

```
plt.scatter(y_test, predictions)
```

Out[37]:

<matplotlib.collections.PathCollection at 0x267a5915510>

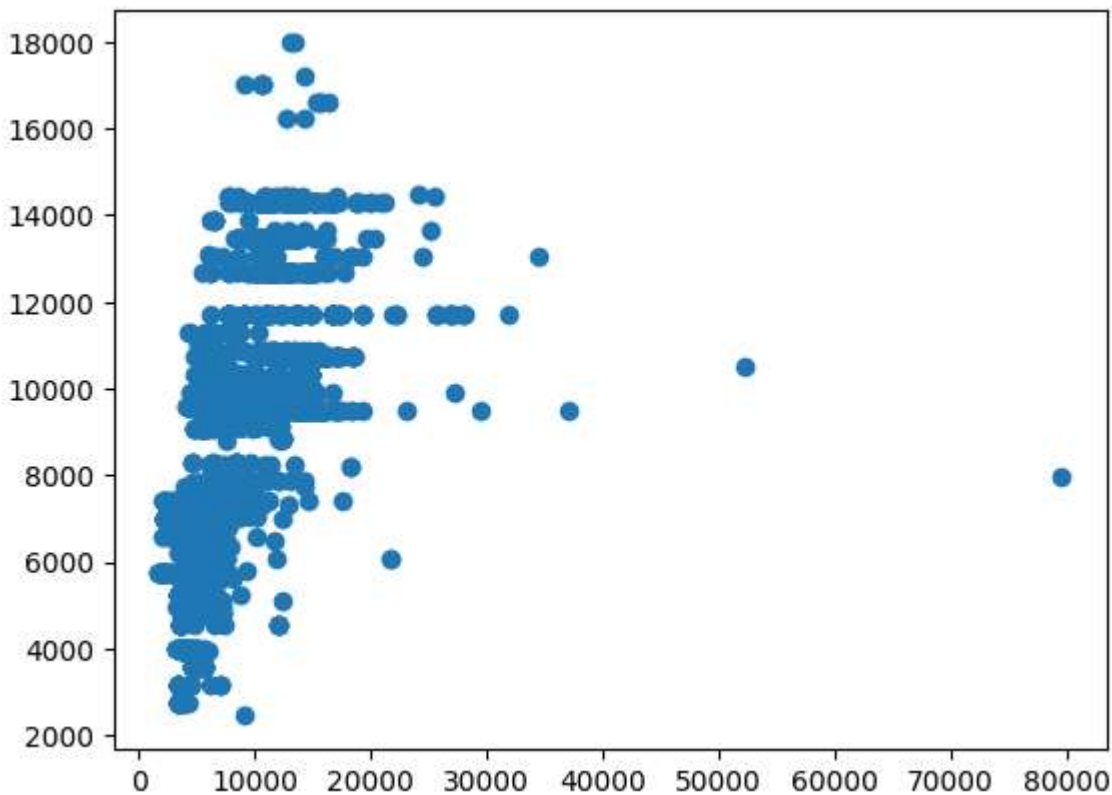

In [38]:

```
x=np.array(fdf['Price']).reshape(-1,1)
y=np.array(fdf['Total_Stops']).reshape(-1,1)
fdf.dropna(inplace=True)
```

C:\Users\Arshad Shaik\AppData\Local\Temp\ipykernel_12096\3026288769.py:3:

SettingWithCopyWarning:

A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)

```
fdf.dropna(inplace=True)
```

In [39]:

```
X_train,X_test,y_train,y_test=train_test_split(x,y,test_size=0.3)
regr.fit(X_train,y_train)
regr.fit(X_train,y_train)
```

Out[39]:


LinearRegression()

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [40]:

```
y_pred=regr.predict(X_test)
plt.scatter(X_test,y_test,color='y')
plt.plot(X_test,y_pred,color='b')
plt.show()
```

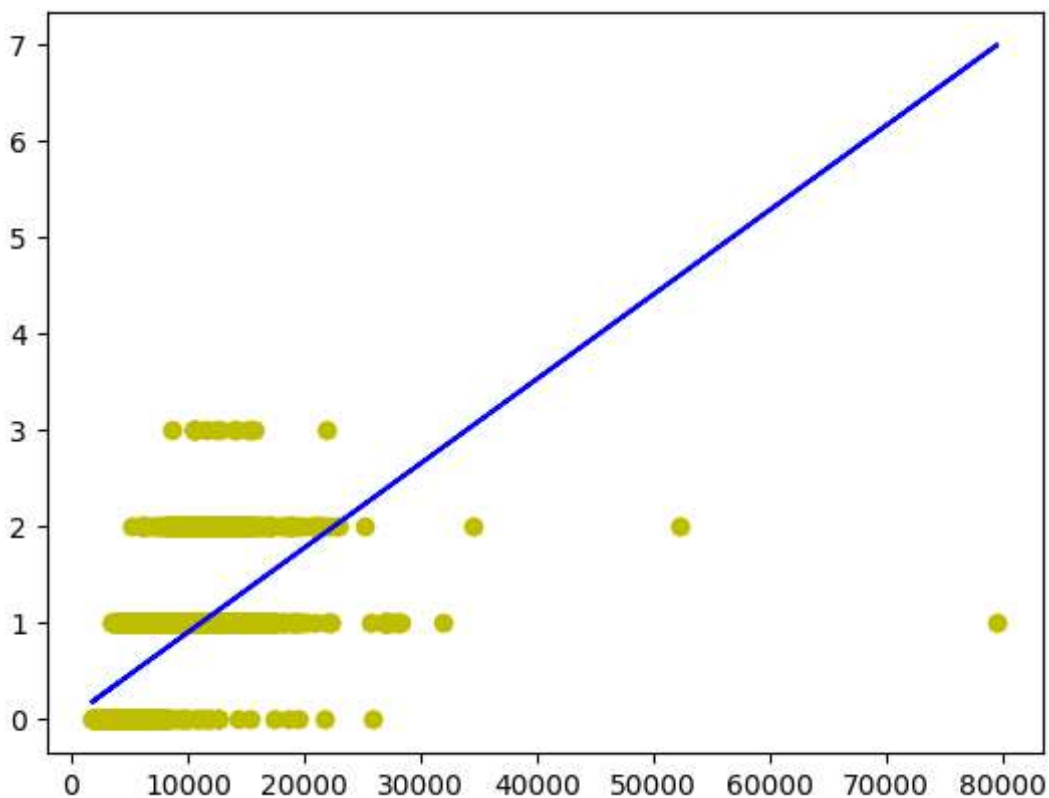

Logistic Regression

In [41]:

```
#Logistic Regression
x=np.array(fdf['Price']).reshape(-1,1)
y=np.array(fdf['Total_Stops']).reshape(-1,1)
fdf.dropna(inplace=True)
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3,random_state=1)
from sklearn.linear_model import LogisticRegression
lr=LogisticRegression(max_iter=10000)
```

C:\Users\Arshad Shaik\AppData\Local\Temp\ipykernel_12096\3604832714.py:4:
SettingWithCopyWarning:
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)
fdf.dropna(inplace=True)

In [42]:

```
lr.fit(x_train,y_train)
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\utils\validation.py:1143: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().
y = column_or_1d(y, warn=True)

Out[42]:

```
LogisticRegression(max_iter=10000)
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [43]:

```
score=lr.score(x_test,y_test)
print(score)
```

```
0.7160686427457098
```


In [44]:

```
sns.regplot(x=x,y=y,data=fd,logistic=True,ci=None)
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\statsmodels\genmod\link.py:198: RuntimeWarning: overflow encountered in exp
 t = np.exp(-z)

Out[44]:

<Axes: >

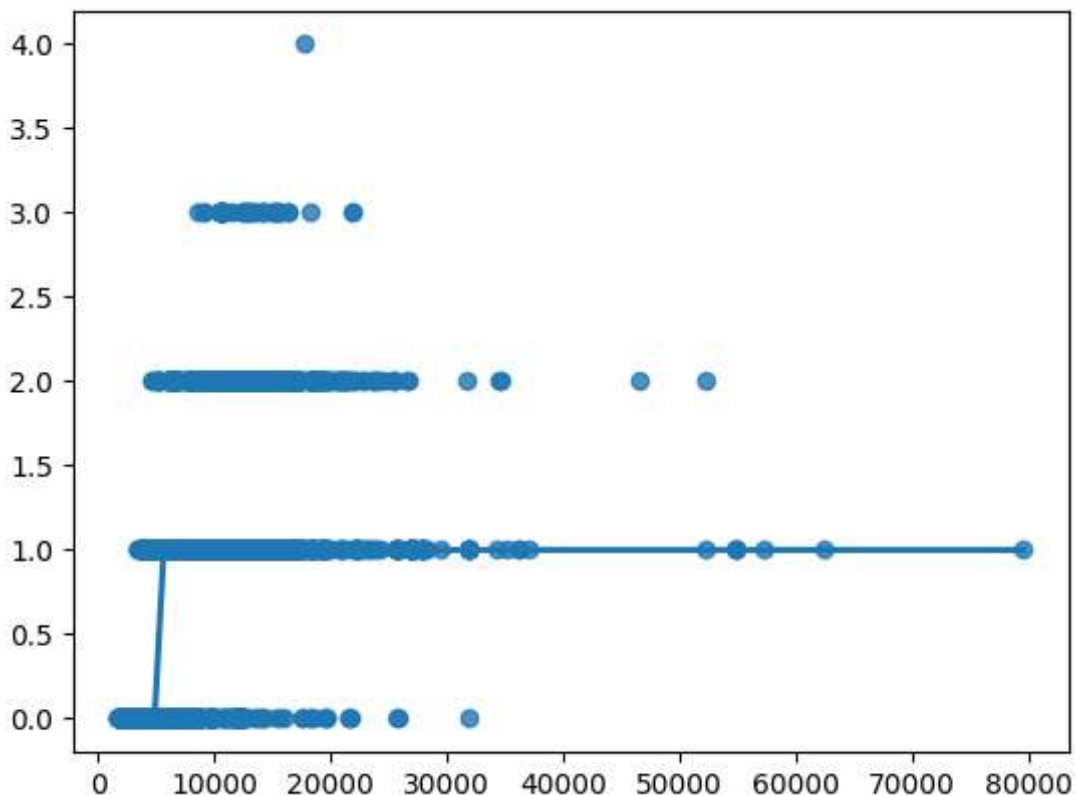

Decision Tree

In [45]:

```
#Decision tree
from sklearn.tree import DecisionTreeClassifier
clf=DecisionTreeClassifier(random_state=0)
clf.fit(x_train,y_train)
```

Out[45]:

DecisionTreeClassifier(random_state=0)

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [46]:

```
score=clf.score(x_test,y_test)
print(score)
```

0.9369734789391576

Random Classifier

In [47]:

```
#Random forest classifier
from sklearn.ensemble import RandomForestClassifier
rfc=RandomForestClassifier()
rfc.fit(X_train,y_train)
```

C:\Users\Arshad Shaik\AppData\Local\Temp\ipykernel_12096\2470359396.py:4:
DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().

```
rfc.fit(X_train,y_train)
```

Out[47]:

RandomForestClassifier()

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [48]:

```
params={'max_depth':[2,3,5,10,20],
'min_samples_leaf':[5,10,20,50,100,200],
'n_estimators':[10,25,30,50,100,200]}
```

In [49]:

```
from sklearn.model_selection import GridSearchCV
grid_search=GridSearchCV(estimator=rfc,param_grid=params,cv=2,scoring="accuracy")
```

In [50]:

```
grid_search.fit(X_train,y_train)
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\model_selection_split.py:700: UserWarning: The least populated class in y has only 1 members, which is less than n_splits=2.

```
warnings.warn(
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\model_selection_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().

```
estimator.fit(X_train, y_train, **fit_params)
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\model_selection_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().

```
estimator.fit(X_train, y_train, **fit_params)
```

C:\Users\Arshad Shaik\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\model_selection_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().

In [51]:

```
grid_search.best_score_
```

Out[51]:

```
0.5238731668896858
```

In [52]:

```
rf_best=grid_search.best_estimator_  
rf_best
```

Out[52]:


```
RandomForestClassifier(max_depth=5, min_samples_leaf=20, n_estimators=10)
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [53]:

```
from sklearn.tree import plot_tree
plt.figure(figsize=(80,40))
plot_tree(rf_best.estimators_[4],class_names=['0','1','2','3','4'],filled=True);
```

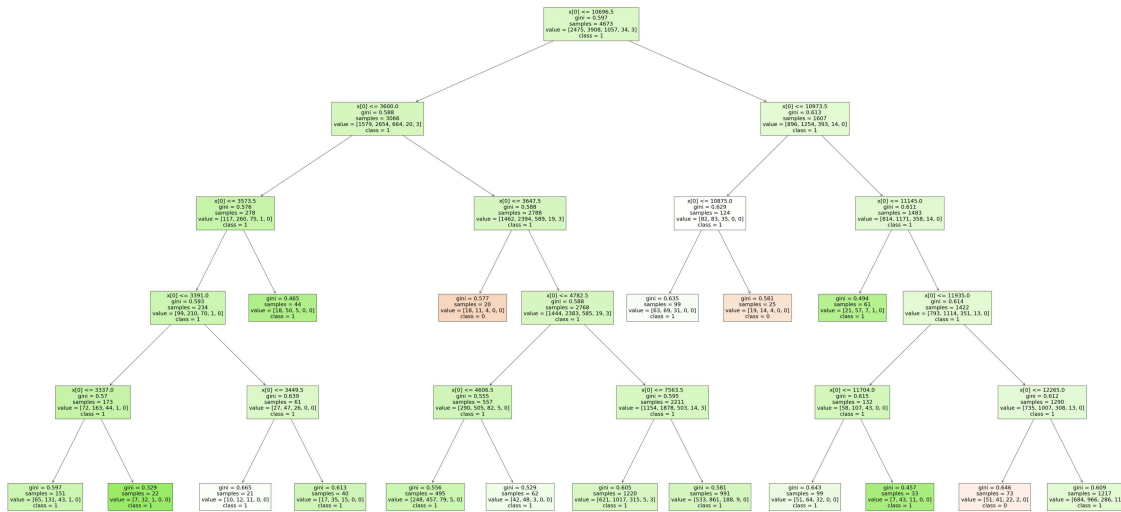

In [54]:

```
score=rfc.score(x_test,y_test)
print(score)
```

0.45865834633385333

Conclusion

For the above Dataset we use different Types of Models,For that each and every model we get different Types of Accuracies.Based on that accuracies we can conclude which model is best fit for my our Dataset

Here we get different Types of accuracies For That Different Types of Accuracies Decision Tree is get more accuracy among all the models.So,that we can Conclude that for our Model Decision Tree is Best Fit.

In []: