

# Kubernetes inter-pod container isolation

Aarni Halinen

## School of Science

Thesis submitted for examination for the degree of Master of Science in Technology.

Espoo 1.6.2023

## Thesis supervisor:

Prof. Mario Di Francesco

## Thesis advisors:

M.Sc. (Tech.) José Luis Martin

Navarro

M.Sc. (Tech.) Jacopo Bufalino

Author: Aarni Halinen		
Title: Kubernetes inter-pod container isolation		
Date: 1.6.2023	Language: English	Number of pages: 5+13
Department of Computer Science		
Professorship: Computer Science		
Supervisor: Prof. Mario Di Francesco		
Advisors: M.Sc. (Tech.) José Luis Martin Navarro, M.Sc. (Tech.) Jacopo Bufalino		
<p>Your abstract in English. Try to keep the abstract short; approximately 100 words should be enough. The abstract explains your research topic, the methods you have used, and the results you obtained. Your abstract in English. Try to keep the abstract short; approximately 100 words should be enough. The abstract explains your research topic, the methods you have used, and the results you obtained. Your abstract in English. Try to keep the abstract short; approximately 100 words should be enough. The abstract explains your research topic, the methods you have used, and the results you obtained. Your abstract in English. Try to keep the abstract short; approximately 100 words should be enough. The abstract explains your research topic, the methods you have used, and the results you obtained.</p>		
Keywords: Kubernetes, Container, Docker, Security		

## Preface

I want to thank Professor Pirjo Professori and my instructor Olli Ohjaaja for their good and poor guidance.

Otaniemi, 16.1.2015

Eddie E. A. Engineer

# Contents

<b>Abstract</b>	<b>ii</b>
<b>Preface</b>	<b>iii</b>
<b>Contents</b>	<b>iv</b>
<b>Symbols and abbreviations</b>	<b>v</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Background</b>	<b>2</b>
2.1 Principle of least priviledge, Zero trust...	2
2.2 Microservices architecture	2
2.3 Containerization and Docker	2
2.3.1 Linux containers	2
2.3.2 Linux capabilities, priviledged containers, Container breakout	3
2.3.3 Docker	3
2.4 Kubernetes system components, control plane	3
2.4.1 apiserver	3
2.4.2 etcd	3
2.4.3 scheduler	3
2.4.4 controller-manager	3
2.5 Kubernetes resources	3
2.5.1 Namespaces	3
2.5.2 Pods	3
2.5.3 Services	3
2.5.4 Admission control	3
2.6 Kubernetes network model	3
2.6.1 Container Network Interface	4
2.6.2 Network policies	4
2.6.3 Cilium and other CNI plugins	4
2.6.4 Extended Berkeley Packet Filter	5
<b>3 Research material and methods</b>	<b>7</b>
<b>4 Evaluation</b>	<b>8</b>
<b>5 Conclusion</b>	<b>9</b>
<b>References</b>	<b>10</b>
<b>A Esimerkki liitteestä</b>	<b>12</b>

# Symbols and abbreviations

## Symbols

- ↑ electron spin direction up
- ↓ electron spin direction down

## Operators

- $\nabla \times \mathbf{A}$  curl of vector in  $\mathbf{A}$

## Abbreviations

- K8s Kubernetes
- STRIDE an object-oriented analog circuit simulator and design tool

# 1 Introduction

Tämän tekstin lähteenä oleva tiedosto on opinnäytteen pohja, jota voi käyttää kandidaatintyössä, diplomityössä ja lisensiaatintyössä. Tekstin lähteenä oleva tiedosto on kirjoitettu L<sup>A</sup>T<sub>E</sub>X-tiedoston rakenteen opiskelemista ajatellen. Tiedoston kommentit sisältävät tietoa, joka on hyödyllistä opinnäytettä kirjoitettaessa.

Johdanto selvittää samat asiat kuin tiivistelmä, mutta laiveammin. Johdannossa kerrotaan yleensä seuraavat asiat

- Tutkimuksen taustaa ja tutkimusaiheen yleisluonteinen esittely
- Tutkimuksen tavoitteet
- Pääkysymys ja osaongelmat
- Tutkimuksen rajausta ja keskeiset käsitteet.

Lyhyiden opinnäytteiden johdannot ovat yleensä liian pitkiä, joten johdannon paisuttamista on vältettävä. Diplomityöhön sopii johdanto, joka on 2–4 sivua. Kandidaatintyön johdannon on oltava diplomityön johdantoa lyhyempi. Sopivasti tiivistetty johdanto ei kaipaa alaotsikoita.

## 2 Background

### 2.1 Principle of least priviledge, Zero trust...

### 2.2 Microservices architecture

### 2.3 Containerization and Docker

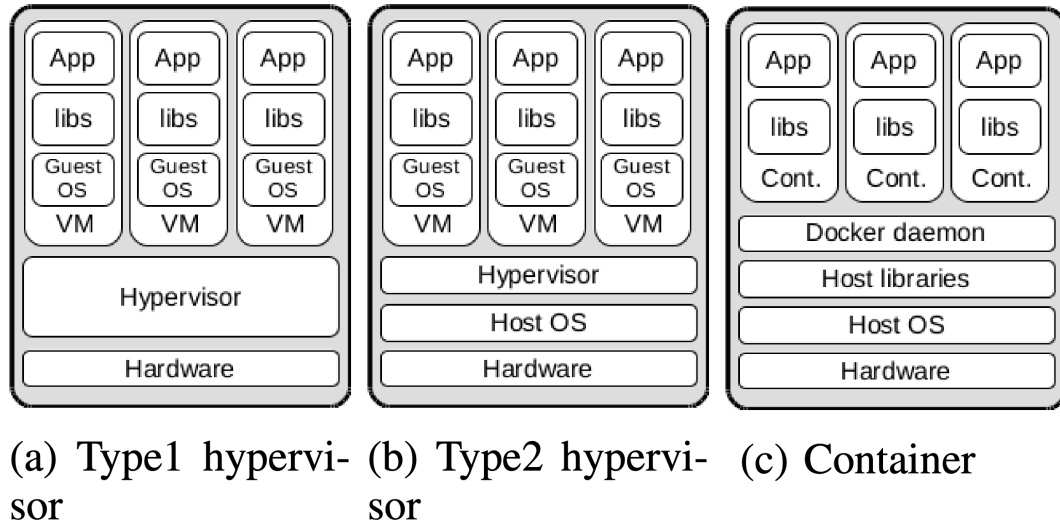


Figure 1: Virtualization models [5]

Different virtualization models are illustrated in figure 1. Whereas traditional virtualization techniques virtualize workloads on top of a hypervisor which shares hardware resources between the virtual machines, containerization is a technique where virtualization happens on an operating system level [15]. Processes executing in containers run on the host machine kernel. However, each container is isolated to its own network, process namespace and so on; two containers on the same host OS do not know that they share resources. Furthermore, containers are similarly isolated from accessing host OS resources.

BSD jails and *chroot* can be considered early forms of containerization technology, so the idea of containers is not new [5]. Recent Linux container solutions rely on two main implementations: Linux Containers (LXC) -based solution that relies on kernel features such as control groups (cgroups) and namespaces, and a custom kernel and Linux distribution called Open Virtuozzo (OpenVZ). Docker [9] is a hugely popular container runtime that is based on LXC and provides an easy-to-use API and tooling for creating and managing containers. Docker also provides containerization for other OSes as well. However, in this thesis we focus only on the Linux implementation.

#### 2.3.1 Linux containers

6 ns: mnt pid net ipc uts (hostname) user (UIDs)

control groups for resource management

### **2.3.2 Linux capabilities, privileged containers, Container breakout**

### **2.3.3 Docker**

[3]

1. Privileged container
2. CAP\_SYS\_ADMIN, mounting /proc and chroot
3. CAP\_SYS\_PTRACE, shellcode injection to running program, nc 172.17.0.1 on port running shell
4. Mounted docker socket, creating privileged containers

## **2.4 Kubernetes system components, control plane**

### **2.4.1 apiserver**

### **2.4.2 etcd**

### **2.4.3 scheduler**

### **2.4.4 controller-manager**

## **2.5 Kubernetes resources**

### **2.5.1 Namespaces**

### **2.5.2 Pods**

### **2.5.3 Services**

### **2.5.4 Admission control**

## **2.6 Kubernetes network model**

Integral part of Kubernetes cluster is how nodes and resources are networked together. Specifically, the networking model needs to address four different type of networking problems: i) intra-Pod (ie. container-to-container within same Pod) communication, ii) inter-Pod communication between Pods, iii) Service-to-Pod communication and iv) communication from external sources to Services [1]. The model also requires that each Pod is IP addressable and can communicate with other Pods without network address translation (NAT), even when Pods are scheduled on different hosts [17]. All agents on a host should also be able to communicate with Pods on the same host. The implementation of this model is not part of Kubernetes, but is handed to special plugins that implement Container Network Interface (CNI) specification.



### 2.6.1 Container Network Interface

The Container Network Interface (CNI) [6] is a networking specification, which has become de facto industry standard for container networking. It is backed by Cloud Native Computing Foundation (CNCF) [17]. CNI was first developed for the container runtime `rkt`, but it is supported by all container runtimes and there is a large number of implementations to choose from [12]. Most of the container orchestrators have adopted the specification as their networking solution. The biggest outlier is Docker Swarm, which instead implements `libnetwork` [10].

The specification has five distinct definitions: i) a format for network configuration, ii) a execution protocol between the container runtimes and the plugin binary, iii) a procedure for the runtime to interpret the configuration and execute the plugins, iv) a procedure for delegating functionality between the plugins and v) data types for plugins to return their results to the runtime [6]. The configuration is defined as a JSON file and it includes a list of plugins and their configuration. The file is consumed at plugin execution time by the runtime, and passed to the plugins. The execution protocol defines a set of operations (ADD, DEL, CHECK) for adding and removing containers from the network, while also defining a set of OS environment variables that are used as parameters by the plugins. When the runtime mutates a container network, it results in a series of ADD, DELETE or CHECK executions. These are then executed in same order as defined in the `plugins` list, or reversed order for DELETE executions. Each plugin then returns either `Success` or `Error` JSON object. The execution of a series of operations ends when it encounters the first Error response, or when all the operations have been performed.

### 2.6.2 Network policies

Since Kubernetes does not provide networking between the Pods, it has no capabilities to enforce network isolation between workloads. Thus, another key feature for CNI plugins is enforcing network traffic rules. Kubernetes provides a common resource called `NetworkPolicy` for CNI plugins to consume. The `NetworkPolicy` specification consists of a `podSelector` that specifies pods that are subject to the policy and `policyTypes` to specify Ingress and Egress rules for the traffic [2] to the target Pod. Each rule includes `to` or `from` field for selecting Pod, Namespace or IP address block in CIDR notation on the other side of the connection, and `ports` field for explicitly specifying which ports and protocols are part of the rule. The policies are additive; when multiple rules are defined for a Pod, the traffic is restricted to what is allowed by the union of the policies. Many CNI plugins also introduce Custom Resource Definitions for their own, more granular, network policy rules.

### 2.6.3 Cilium and other CNI plugins

TODO: CNI plugins, daemons and binary [18].

While all CNI plugins meet the requirements listed above, they may differ in architecture significantly. The plugins can be classified based on which OSI model network layer they operate on, which Linux kernel features they use for packet

filtering and which encapsulation and routing model they support for inter-host and intra-host communication between Pods.

In this thesis, we focus on three different CNI plugins: Cilium, Calico and Multus.

Cilium [7] is one of the most advanced and powerful CNI plugins for Kubernetes. It works by creating virtual ethernet device for each Pod and sets one side of the link into Pod's network namespace [11]. Cilium then attaches extended Berkeley Packet Filter (eBPF) programs to ingress traffic control (`tc`) hooks of these virtual ethernet devices for intercepting all incoming packets from the Pod. The packets are intercepted and processed before the network stack and thus `iptables`, reducing latency 20%-30% and even doubling the throughput of packets in some scenarios [2].

Cilium provides Custom Resource Definition `CiliumNetworkPolicy` that supports policies in layers 3-7 instead of standard L3/L4. With `CiliumClusterwideNetworkPolicy`, network rules can be applied to every namespace in the cluster, or even to nodes when using `nodeSelector`.

#### 2.6.4 Extended Berkeley Packet Filter

Berkeley Packet Filter (BPF, or nowadays often cBPF) was originally developed in early 1990s as a high-performance tool for user-space packet captures [14]. BPF works by deploying the filtering part of the application, `packet filter`, in the kernel-space as an agent. The `packet filter` is provided with a program (often denoted as BPF program) consisting of BPF instructions, which works as a set of rules for selecting which packets are of interest in the user-space application and should be copied from kernel-space to user-space. The instructions are executed in a register-based pseudo machine. Since network monitors are often interested only in subset of network traffic, this limits the number of expensive copy operations across the kernel/user-space protection boundary only to packets that are of interest in the user-space application. A notable usecase for BPF is *libpcap* library, which is used by network monitoring tool called `tcpdump`.

Later in the 2010s the Linux community realized that BPF and its ability to instrument the kernel could benefit other areas than packet filtering as well [19]. This reworked version of BPF was first merged in to Linux kernel in 2014 and is publicly called extended Berkeley Packet Filter (eBPF) to distinguish it from the original cBPF. The kernel development community continues to call the newer version BPF, but instead of the original acronym consider it a name of a technology. Similarly to the kernel community, the term BPF always refers to the eBPF in this thesis.

The eBPF programs are compiled to bytecode and loaded to kernel with `bpfc()` system call [16]. Most often programs are written in restricted C and compiled with LLVM Clang compiler to bytecode. It is also possible to use eBPF assembly instructions and `bpfc_asm` utility for converting instructions to bytecode. eBPF programs follow an event-driven architecture: a loaded eBPF program is hooked to a particular type of event and each occurrence of the event triggers the program execution.

For networking purposes, there are two eBPF hooks available for intercepting and mangling, forwarding or dropping network packets: eXpress Data Path (XDP) and Traffic Control (TC) [16]. In Cloudflares DDoS testing benchmark [4], XDP program

was capable to drop 10 million and TC program 2 million packets per second, while common `iptables` INPUT rule was able to drop less than one million packets per second.

XDP programs are attached to a network interface controller (NIC) and can handle only incoming packets [13]. The programs are called directly by the NIC driver if it has XDP support, thus executing before packets enters the network stack. This skips expensive packet parsing and memory allocation operations, and allow XDP programs to run at very high throughput. Thus, even the main networking buffer *skbuff* is not populated. Some SmartNICs even support offloading the program to the NIC's own processor from host CPU, improving host machine performance even further [8]. If the driver does not support XDP, generic XDP is used and the programs run after the packet has been parsed by the network stack.

XDP programs can read and modify contents of the packets [19]. Since the packets are not parsed the network stack, the programs have to work with raw packets and implement own parsing functionality. The program's return value determines how the packet should be processed further. With `XDP_DROP` and `XDP_PASS` return values, the packet can be dropped or passed further to the networking stack respectively. The packet can also be bounced back to the same NIC it arrived on with `XDP_TX`, usually after modifying the packet contents. `XDP_REDIRECT` is used for redirecting the packet to a different NIC, CPU or even to another socket.

TC programs are executed when both incoming and outgoing packets reach kernel traffic control function within the Linux network stack [19]. The ingress hook executes after the packet is parsed to *skbuff* but before most of the network stack. On egress the stack is traversed in reverse, thus the hook executes after most of the network stack. TC programs can read and write directly to packet in memory. Similarly to XDP programs, the return value of the program determines further processing of the packet. The packet can be passed further in the stack with `TC_ACT_OK`, dropped with `TC_ACT_SHOT`, or the modified packet can be redirected back to the start of the classification with `TC_ACT_RECLASSIFY`, among others.

### **3 Research material and methods**

Tässä osassa kuvataan käytetty tutkimusaineisto ja tutkimuksen metodologiset valinnat, sekä kerrotaan tutkimuksen toteutustapa ja käytetyt menetelmät.

## 4 Evaluation

Tässä osassa esitetään tulokset ja vastataan tutkielman alussa esitettyihin tutkimuskysymyksiin. Tieteellisen kirjoitelman arvo mitataan tässä osassa esitettyjen tulosten perusteella.

Tutkimustuloksien merkitystä on aina syytä arvioida ja tarkastella kriittisesti. Joskus tarkastelu voi olla tässä osassa, mutta se voidaan myös jättää viimeiseen osaan, jolloin viimeisen osan nimeksi tulee »Tarkastelu». Tutkimustulosten merkitystä voi arvioida myös »Johtopäätökset»-otsikon alla viimeisessä osassa.

Tässä osassa on syytä myös arvioida tutkimustulosten luotettavuutta. Jos tutkimustulosten merkitystä arvioidaan »Tarkastelu»-osassa, voi luotettavuuden arviointi olla myös siellä.

## 5 Conclusion

Opinnäytteen tekijä vastaa siitä, että opinnäyte on tässä dokumentissa ja opinnäytteen tekemistä käsittelevillä luennoilla sekä harjoituksissa annettujen ohjeiden mukainen muotoseikoiltaan, rakenteeltaan ja ulkoasultaan.

## References

- [1] The Kubernetes Authors. *Cluster Networking*. 2022. URL: <https://kubernetes.io/docs/concepts/cluster-administration/networking/> (visited on 03/09/2023).
- [2] Gerald Budigiri et al. “Network policies in kubernetes: Performance evaluation and security analysis”. In: *2021 Joint European Conference on Networks and Communications & 6G Summit (EuCNC/6G Summit)*. IEEE. 2021, pp. 407–412.
- [3] Thanh Bui. “Analysis of docker security”. In: *arXiv preprint arXiv:1501.02967* (2015).
- [4] Cloudflare. *How to drop 10 million packets per second*. 2018. URL: <https://blog.cloudflare.com/how-to-drop-10-million-packets/> (visited on 03/15/2023).
- [5] Theo Combe, Antony Martin, and Roberto Di Pietro. “To docker or not to docker: A security perspective”. In: *IEEE Cloud Computing* 3.5 (2016), pp. 54–62.
- [6] CoreOS. *CNI—The Container Network Interface*. 2023. URL: <https://github.com/containernetworking/cni/blob/v1.1.2/SPEC.md> (visited on 03/10/2023).
- [7] Cilium Developers. *Cilium*. 2023. URL: <https://cilium.io/> (visited on 03/14/2023).
- [8] Cilium developers. *Program types*. 2018. URL: <https://docs.cilium.io/en/latest/bpf/progtypes/> (visited on 03/16/2023).
- [9] Docker. *Docker overview*. 2018. URL: <https://docs.docker.com/get-started/overview/>.
- [10] Docker. *libnetwork*. 2023. URL: <https://github.com/moby/moby/tree/master/libnetwork> (visited on 03/10/2023).
- [11] The Kubernetes Networking Guide. *Cilium*. 2023. URL: <https://www.tkng.io/cni/cilium/> (visited on 03/14/2023).
- [12] Michael Hausenblas. *Container Networking*. O’Reilly Media, Incorporated, 2018.
- [13] Toke Høiland-Jørgensen et al. “The express data path: Fast programmable packet processing in the operating system kernel”. In: *Proceedings of the 14th international conference on emerging networking experiments and technologies*. 2018, pp. 54–66.
- [14] Steven McCanne and Van Jacobson. “The BSD Packet Filter: A New Architecture for User-level Packet Capture.” In: *USENIX winter*. Vol. 46. 1993.
- [15] Dirk Merkel et al. “Docker: lightweight linux containers for consistent development and deployment”. In: *Linux j* 239.2 (2014), p. 2.

- [16] Sebastiano Miano et al. “A framework for eBPF-based network functions in an era of microservices”. In: *IEEE Transactions on Network and Service Management* 18.1 (2021), pp. 133–151.
- [17] Shixiong Qi, Sameer G Kulkarni, and KK Ramakrishnan. “Assessing container network interface plugins: Functionality, performance, and scalability”. In: *IEEE Transactions on Network and Service Management* 18.1 (2020), pp. 656–671.
- [18] Shixiong Qi, Sameer G Kulkarni, and KK Ramakrishnan. “Understanding container network interface plugins: design considerations and performance”. In: *2020 IEEE International Symposium on Local and Metropolitan Area Networks (LANMAN)*. IEEE. 2020, pp. 1–6.
- [19] Marcos AM Vieira et al. “Fast packet processing with ebpf and xdp: Concepts, code, challenges, and applications”. In: *ACM Computing Surveys (CSUR)* 53.1 (2020), pp. 1–36.



## A Esimerkki liitteestä

Liitteet eivät ole opinnäytteen kannalta välttämättömiä ja opinnäytteen tekijän on kirjoittamaan ryhtyessään hyvä ajatella pärjäävänsä ilman liitteitä. Kokemattomat kirjoittajat, jotka ovat huolissaan tekstiosan pituudesta, paisuttavat turhan helposti liitteitä pitääkseen tekstiosan pituuden annetuissa rajoissa. Tällä tavalla ei synny hyvää opinnäytettä.