Ultrafast Transient-Grating Spectroscopy of GaAs

Dhruv Pisharody Ahmet Kavruk
Angelo Brade
Rheinische Friedrich–Wilhelms–Universität Bonn

Abstract

Transient-grating spectroscopy probes carrier relaxation and spatial diffusion through the decay of a photoinduced grating. This report analyzes the supplied GaAs autocorrelation, spectrum, pump–probe and transient-grating traces. Fits with nonlinear fringe calibration yield selected Gaussian pulse-intensity FWHM estimates of (112.89 ± 0.10) fs before and (93.902 ± 0.054) fs after the compressor, above the (83.87 ± 0.24) fs Gaussian transform-limit estimate. These uncertainties are propagated formal one-standard-error values, excluding calibration and model uncertainty; fit-window variation is larger. The diffusivity uncertainty below is the regression slope standard error. Biexponential fits summarize the transient traces over the selected interval, while the slow finite-wave-vector rates give an exploratory ambipolar diffusivity of $(3.71 \pm 0.70) \times 10^{-3}\,\mathrm{m^2\,s^{-1}}$. The pump–probe rate is inconsistent with the transient-grating extrapolation, limiting the physical interpretation of that estimate. The data do not directly measure hot-carrier temperature or electron–phonon coupling.

Contents

1 Introduction **2**

2 Theoretical background **2**
2.1 Transient-grating formation and carrier decay 2
2.2 Ambipolar transport 3
2.3 Pulse duration and spectral bandwidth 4
2.4 Derivation of the measured interferometric autocorrelation 5

3 Experimental setup and measurement **8**
3.1 Optical arrangement 8
3.2 Measurement data and calibration 8
3.3 Data screening and fit procedure 10
3.4 Uncertainty conventions and propagation 10

4 Results **11**
4.1 Part I: Pulse duration and spectral bandwidth 11
4.2 Part II: Hot-carrier cooling and electron–phonon coupling 15
4.3 Part III: Transient-reflectivity and transient-grating decay times 15
4.4 Part IV: Recombination, ambipolar diffusivity, and mobility 19

5 Discussion **19**

6 Conclusion **21**

A Autocorrelation calibration and residuals **21**

AI Use Disclosure **24**

1 Introduction

Ultrafast optical pulses create and probe non-equilibrium carriers in semiconductors. Their temporal relaxation and spatial transport can be studied by measuring the change in reflected or diffracted probe light after excitation. In transient-grating (TG) spectroscopy, two pump beams interfere in the sample and create a periodic carrier-density pattern. Diffusion reduces the grating amplitude, and the decay rate depends on the grating wave number.

This experiment uses GaAs and combines pulse characterization with pump–probe and TG measurements. The analysis follows the four tasks in the course tutorial: determine pulse duration and spectral bandwidth; assess whether the data can determine hot-carrier cooling and electron–phonon coupling; fit transient-reflectivity and TG decay times; and estimate recombination, ambipolar diffusivity and mobility. The report first derives the relevant models, then describes the optical arrangement and supplied data, and finally presents the results in that order. A final discussion compares the results with their assumptions and available literature.

2 Theoretical background

2.1 Transient-grating formation and carrier decay

An ultrashort pump pulse creates electron–hole pairs in GaAs. Two pump fields with equal intensity I_0 and wave vectors $\mathbf{k}_1, \mathbf{k}_2$ produce the intensity pattern

$$I(\mathbf{r}) = |E_1 + E_2|^2 \tag{1}$$

$$= |E_1|^2 + |E_2|^2 + E_1 E_2^* + E_1^* E_2 \tag{2}$$

$$= 2I_0 \left[1 + \cos\left((\mathbf{k}_1 - \mathbf{k}_2) \cdot \mathbf{r} + \phi\right)\right]. \tag{3}$$

For an angle θ between the beams, $q = |\mathbf{k}_1 - \mathbf{k}_2| = 2k \sin(\theta/2)$ and

$$\Lambda_{\mathrm{TG}} = \frac{2\pi}{q} = \frac{\lambda}{2\sin(\theta/2)}. \tag{4}$$

The two-beam interference and resulting spatial carrier modulation are illustrated in Fig. 1.

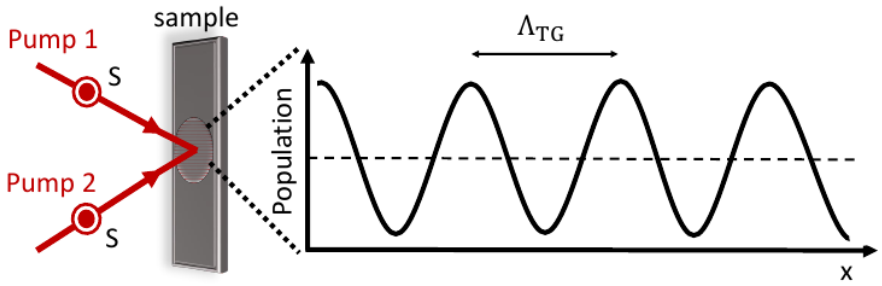


Figure 1: Two crossed pump beams create a sinusoidal excitation pattern in the sample. The grating period Λ_{TG} sets the spatial wave number $q = 2\pi/\Lambda_{\mathrm{TG}}$ used in the diffusion analysis. Reproduced from Fig. 4.5 of the course tutorial.

Write the carrier density as a uniform part plus its sinusoidal grating component,

$$n(x,t) = N_0(t) + N_q(t)\cos(qx). \tag{5}$$

Substitution into the tutorial's one-dimensional diffusion–recombination equation gives

$$\frac{\partial n(x,t)}{\partial t} = D_a \frac{\partial^2 n(x,t)}{\partial x^2} - \frac{n(x,t)}{\tau_{\mathrm{rec}}}. \tag{6}$$

Using $\partial_t n = \dot{N}_0 + \dot{N}_q \cos(qx)$ and $\partial_x^2 n = -q^2 N_q \cos(qx)$, and equating the coefficients of 1 and $\cos(qx)$, respectively,

$$\dot{N}_0 = -\frac{N_0}{\tau_{\rm rec}}, \qquad \dot{N}_q = -\left(D_a q^2 + \frac{1}{\tau_{\rm rec}}\right) N_q. \tag{7}$$

$$\int_{N_0(0)}^{N_0(t)} \frac{dN_0}{N_0} = -\int_0^t \frac{dt'}{\tau_{\rm rec}}, \qquad \int_{N_q(0)}^{N_q(t)} \frac{dN_q}{N_q} = -\int_0^t \left(D_a q^2 + \frac{1}{\tau_{\rm rec}}\right) dt'. \tag{8}$$

Evaluation yields

$$N_0(t) = N_0(0) e^{-t/\tau_{\rm rec}}, \tag{9}$$

$$N_q(t) = N_q(0) e^{-(D_a q^2 + 1/\tau_{\rm rec})t}. \tag{10}$$

For heterodyne detection with a constant local oscillator and $E_{\rm dif} = \alpha N_q$,

$$|E_{\rm LO} + E_{\rm dif}|^2 = |E_{\rm LO}|^2 + |\alpha|^2 N_q^2 + 2\,{\rm Re}(E_{\rm LO}^* \alpha) N_q, \tag{11}$$

$$S_{\rm het} \propto N_q \propto e^{-(D_a q^2 + 1/\tau_{\rm rec})t}. \tag{12}$$

Thus the heterodyne decay rate contains $D_a q^2$, with no factor of two from squaring the grating amplitude. Assuming that the reflectivity change is also linear in the corresponding population, the $q = 0$ transient-reflectivity and finite-q grating traces therefore have the forms

$$S_{\rm pop}(t) = A_{\rm pop} e^{-t/\tau_{\rm rec}} + C_{\rm pop}, \tag{13}$$

$$S_{\rm TG}(t) = A_{\rm TG} e^{-t/\tau_{\rm TG}} + C_{\rm TG}, \tag{14}$$

$$\frac{1}{\tau_{\rm TG}} = \frac{1}{\tau_{\rm rec}} + D_a q^2. \tag{15}$$

In $1/\tau_{\rm TG} = 1/\tau_{\rm rec} + D_a q^2$, the intercept is $1/\tau_{\rm rec}$ and the slope is D_a.

The provided measurement instructions request two decay components to represent faster carrier relaxation and slower processes such as grating diffusion. We therefore use the phenomenological extension

$$S(t, q) = C + A_f e^{-t/\tau_f} + A_s e^{-t/\tau_s}, \qquad 0 < \tau_f < \tau_s. \tag{16}$$

The assignments of the two fitted components are interpretations of their timescales. To estimate diffusion, the slow-component rate $1/\tau_s$ is regressed against q^2 for the finite-q TG measurements; the single-population diffusion equation above motivates this comparison, but does not by itself derive the biexponential response.

2.2 Ambipolar transport

For ambipolar transport, set the excess electron and hole densities equal, $n = h$, and equate their particle fluxes. With the drift–diffusion expressions

$$\mathbf{j}_e = -D_e \nabla n - \mu_e n \mathbf{E}, \qquad \mathbf{j}_h = -D_h \nabla n + \mu_h n \mathbf{E}, \tag{17}$$

the condition $\mathbf{j}_e = \mathbf{j}_h$ gives

$$-(D_e - D_h)\nabla n = (\mu_e + \mu_h) n \mathbf{E}, \tag{18}$$

$$\mathbf{E} = \frac{D_h - D_e}{\mu_e + \mu_h} \frac{\nabla n}{n}, \tag{19}$$

$$\mathbf{j}_e = -\left[D_e + \mu_e \frac{D_h - D_e}{\mu_e + \mu_h}\right] \nabla n \tag{20}$$

$$= -\frac{D_e \mu_h + D_h \mu_e}{\mu_e + \mu_h} \nabla n. \tag{21}$$

Comparing with Fick's law $\mathbf{j} = -D_a \nabla n$ identifies

$$D_a = \frac{D_e \mu_h + D_h \mu_e}{\mu_e + \mu_h}, \tag{22}$$

$$D_i = \frac{k_B T}{e} \mu_i \quad (i = e, h) \tag{23}$$

$$\Longrightarrow \quad D_a = \frac{2\mu_e \mu_h}{\mu_e + \mu_h} \frac{k_B T}{e} = \mu_a \frac{k_B T}{e}, \tag{24}$$

$$\mu_a = \frac{2\mu_e \mu_h}{\mu_e + \mu_h}. \tag{25}$$

The Einstein step assumes non-degenerate carriers at a common temperature. At high carrier density, many-body and degeneracy effects can change D_a [5].

2.3 Pulse duration and spectral bandwidth

For a Gaussian pulse intensity $I(t) = I_0 e^{-t^2/(2\sigma_t^2)}$, the intensity autocorrelation is

$$G(\tau) = \int_{-\infty}^{\infty} I(t) I(t-\tau)\, dt \tag{26}$$

$$= I_0^2 \int_{-\infty}^{\infty} \exp\left[-\frac{t^2 + (t-\tau)^2}{2\sigma_t^2}\right] dt \tag{27}$$

$$= I_0^2 e^{-\tau^2/(4\sigma_t^2)} \int_{-\infty}^{\infty} e^{-(t-\tau/2)^2/\sigma_t^2}\, dt \tag{28}$$

$$= I_0^2 \sqrt{\pi}\sigma_t e^{-\tau^2/(4\sigma_t^2)}. \tag{29}$$

Here $t^2 + (t-\tau)^2 = 2(t-\tau/2)^2 + \tau^2/2$ and the substitution $u = (t-\tau/2)/\sigma_t$ reduces the integral to $\sigma_t \int_{-\infty}^{\infty} e^{-u^2} du = \sqrt{\pi}\sigma_t$. The intensity half-maximum satisfies $e^{-t^2/(2\sigma_t^2)} = 1/2$, so $\Delta t_{\mathrm{pulse}} = 2\sqrt{2\ln 2}\,\sigma_t$. The autocorrelation half-maximum satisfies $e^{-\tau^2/(4\sigma_t^2)} = 1/2$, so $\Delta t_{\mathrm{AC}} = 4\sqrt{\ln 2}\,\sigma_t = \sqrt{2}\,\Delta t_{\mathrm{pulse}}$.

The Gaussian time–bandwidth product follows from the field envelope $a(t) = \sqrt{I_0} e^{-t^2/(4\sigma_t^2)}$. Set $F(\nu) = \int_{-\infty}^{\infty} a(t) e^{-i2\pi\nu t}\, dt$ and use $a'(t) = -t\, a(t)/(2\sigma_t^2)$. Differentiating and integrating by parts on the real axis gives

$$F'(\nu) = -i2\pi \int_{-\infty}^{\infty} t\, a(t) e^{-i2\pi\nu t}\, dt \tag{30}$$

$$= i4\pi\sigma_t^2 \int_{-\infty}^{\infty} a'(t) e^{-i2\pi\nu t}\, dt \tag{31}$$

$$= i4\pi\sigma_t^2 \left([a(t) e^{-i2\pi\nu t}]_{-\infty}^{\infty} + i2\pi\nu F(\nu) \right) \tag{32}$$

$$= -8\pi^2 \sigma_t^2 \nu F(\nu), \tag{33}$$

$$\int_{F(0)}^{F(\nu)} \frac{dF}{F} = -8\pi^2\sigma_t^2 \int_0^{\nu} \nu'\, d\nu', \tag{34}$$

$$F(\nu) = F(0) e^{-4\pi^2\sigma_t^2\nu^2}, \qquad F(0) = 2\sqrt{\pi}\sigma_t \sqrt{I_0}, \tag{35}$$

$$|F(\nu)|^2 = 4\pi\sigma_t^2 I_0 e^{-8\pi^2\sigma_t^2\nu^2}. \tag{36}$$

The boundary term vanishes because the Gaussian tends to zero at both limits; $F(0)$ follows by substituting $t = 2\sigma_t u$ in the Gaussian integral. At half maximum, $|F(\nu)|^2 = |F(0)|^2/2$, so

$$8\pi^2\sigma_t^2\nu^2 = \ln 2, \tag{37}$$

$$\Delta\nu = 2|\nu| = \frac{\sqrt{\ln 2}}{\sqrt{2}\pi\sigma_t}. \tag{38}$$

Combining this bandwidth with $\Delta t_{\text{pulse}} = 2\sqrt{2\ln 2}\,\sigma_t$ gives

$$\Delta t_{\text{pulse}}\Delta\nu = 2\sqrt{2\ln 2}\,\sigma_t \frac{\sqrt{\ln 2}}{\sqrt{2}\pi\sigma_t} \tag{39}$$

$$= \frac{2\ln 2}{\pi} \simeq 0.441. \tag{40}$$

From $\nu = c/\lambda$, differentiation gives $d\nu/d\lambda = -c/\lambda^2$; for a narrow spectrum centered at λ_0, $\Delta\nu \simeq (c/\lambda_0^2)\Delta\lambda$.

The optical pulse duration can be measured with a second-order autocorrelator based on second-harmonic generation (SHG). The measured intensity is a function of the relative delay between two pulse replicas. For a Gaussian pulse, the intensity autocorrelation FWHM is $\sqrt{2}$ times the pulse-intensity FWHM. The transform-limited Gaussian time-bandwidth product is $\Delta t\Delta\nu \simeq 0.441$; a larger product can indicate spectral phase/chirp, or measurement and calibration errors. A spectrometer measures wavelength, with $\Delta\nu \simeq c\Delta\lambda/\lambda_0^2$ for a narrow spectrum. This conversion and the time-bandwidth comparison assume that the fitted spectral profile is representative of the pulse spectrum and approximately Gaussian.

2.4 Derivation of the measured interferometric autocorrelation

The tutorial prints the following Eq. (4.2), with $I(t) = |E(t)|^2$. It is reproduced here before checking its numerical coefficients against the defining Eq. (4.1):

$$\begin{aligned} I_{\text{AC}}(\tau) = &\int_{-\infty}^{\infty} \left[I^2(t) + I^2(t-\tau)\right]\,\mathrm{d}t \\ &+ \int_{-\infty}^{\infty} [I(t) + I(t-\tau)]\,\mathrm{Re}\{E(t)E^*(t-\tau)\}\,\mathrm{d}t \\ &+ \int_{-\infty}^{\infty} \mathrm{Re}\left\{E^2(t)E^{*2}(t-\tau)\right\}\,\mathrm{d}t \\ &+ \int_{-\infty}^{\infty} I(t)I(t-\tau)\,\mathrm{d}t. \end{aligned} \tag{4.2}$$

The four terms are correctly identified, but their printed relative coefficients do not follow from Eq. (4.1). To expand that definition explicitly, write $a = I(t)$, $b = I(t-\tau)$, $z = E(t)E^*(t-\tau)$, and $|z|^2 = ab$. Then

$$|E(t) + E(t-\tau)|^4 = (a + b + z + z^*)^2 \tag{41}$$

$$= a^2 + b^2 + 2ab + 2(a+b)(z+z^*) + z^2 + z^{*2} + 2|z|^2 \tag{42}$$

$$= a^2 + b^2 + 4ab + 4(a+b)\,\mathrm{Re}\,z + 2\,\mathrm{Re}\,z^2. \tag{43}$$

Denoting the four integrals in the printed order by T_0, T_1, T_2, T_3, the SHG signal therefore obeys

$$I_{\text{AC}} \propto T_0 + 4T_1 + 2T_2 + 4T_3. \tag{44}$$

These relative factors cannot be absorbed into one proportionality constant. For explicit evaluation, take a Gaussian field

$$E(t) = E_0 e^{-t^2/(4\sigma^2)} e^{-i\omega_0 t}, \qquad I(t) = |E(t)|^2 = I_0 e^{-t^2/(2\sigma^2)}, \qquad I_0 = |E_0|^2. \tag{45}$$

The Gaussian integral used below is obtained by squaring it and converting to polar coordinates:

$$J = \int_{-\infty}^{\infty} e^{-u^2}\,du, \tag{46}$$

$$J^2 = \int_{-\infty}^{\infty}\int_{-\infty}^{\infty} e^{-(u^2+v^2)}\,du\,dv = \int_0^{2\pi} d\varphi \int_0^{\infty} e^{-r^2} r\,dr = 2\pi\left[-\frac{e^{-r^2}}{2}\right]_0^{\infty} = \pi, \tag{47}$$

$$J = \sqrt{\pi}. \tag{48}$$

The four integrals in Eq. (4.2) then evaluate as follows. The first, delay-independent term is

$$T_0 = \int_{-\infty}^{\infty} [I^2(t) + I^2(t-\tau)]\, dt \tag{49}$$

$$= 2I_0^2 \int_{-\infty}^{\infty} e^{-t^2/\sigma^2}\, dt = 2I_0^2\sqrt{\pi}\sigma. \tag{50}$$

For the fundamental-frequency term, first multiply each intensity by the field overlap. The carrier factor is

$$E(t)E^*(t-\tau) = I_0 e^{-[t^2+(t-\tau)^2]/(4\sigma^2)} e^{-i\omega_0\tau}. \tag{51}$$

The squares needed for the two fundamental overlap integrals are

$$3t^2 + (t-\tau)^2 = 4(t-\tau/4)^2 + 3\tau^2/4, \tag{52}$$

$$t^2 + 3(t-\tau)^2 = 4(t-3\tau/4)^2 + 3\tau^2/4. \tag{53}$$

Thus both translated Gaussian integrals equal $\sqrt{\pi}\sigma$:

$$\int_{-\infty}^{\infty} I(t)E(t)E^*(t-\tau)\, dt = I_0^2 e^{-i\omega_0\tau} \int e^{-[3t^2+(t-\tau)^2]/(4\sigma^2)}\, dt \tag{54}$$

$$= I_0^2 e^{-i\omega_0\tau} e^{-3\tau^2/(16\sigma^2)} \int e^{-(t-\tau/4)^2/\sigma^2}\, dt \tag{55}$$

$$= I_0^2\sqrt{\pi}\sigma e^{-3\tau^2/(16\sigma^2)} e^{-i\omega_0\tau}, \tag{56}$$

$$\int_{-\infty}^{\infty} I(t-\tau)E(t)E^*(t-\tau)\, dt = I_0^2\sqrt{\pi}\sigma e^{-3\tau^2/(16\sigma^2)} e^{-i\omega_0\tau}. \tag{57}$$

Taking the real part of their sum gives

$$T_1 = 2I_0^2\sqrt{\pi}\sigma e^{-3\tau^2/(16\sigma^2)} \cos(\omega_0\tau). \tag{58}$$

For the second-harmonic field-overlap term,

$$E^2(t)E^{*2}(t-\tau) = I_0^2 e^{-[t^2+(t-\tau)^2]/(2\sigma^2)} e^{-i2\omega_0\tau}, \tag{59}$$

$$T_2 = \mathrm{Re} \int_{-\infty}^{\infty} E^2(t)E^{*2}(t-\tau)\, dt \tag{60}$$

$$= I_0^2 e^{-\tau^2/(4\sigma^2)} \cos(2\omega_0\tau) \int e^{-(t-\tau/2)^2/\sigma^2}\, dt \tag{61}$$

$$= I_0^2\sqrt{\pi}\sigma e^{-\tau^2/(4\sigma^2)} \cos(2\omega_0\tau). \tag{62}$$

The final intensity-overlap term has the same Gaussian integral without the cosine:

$$T_3 = \int_{-\infty}^{\infty} I(t)I(t-\tau)\, dt \tag{63}$$

$$= I_0^2 e^{-\tau^2/(4\sigma^2)} \int e^{-(t-\tau/2)^2/\sigma^2}\, dt \tag{64}$$

$$= I_0^2\sqrt{\pi}\sigma e^{-\tau^2/(4\sigma^2)}. \tag{65}$$

With $K = I_0^2\sqrt{\pi}\sigma$, insertion into the corrected expansion gives

$$I_{\mathrm{AC}}(\tau) \propto 2K + 8Ke^{-3\tau^2/(16\sigma^2)} \cos(\omega_0\tau) + Ke^{-\tau^2/(4\sigma^2)}[4 + 2\cos(2\omega_0\tau)]. \tag{66}$$

As a normalization check, $I_{\mathrm{AC}}(0)/I_{\mathrm{AC}}(\infty) = (2+8+4+2)/2 = 8$ for identical, equally intense, unfiltered replicas. The fundamental overlap has a different Gaussian width from the intensity and second-harmonic overlaps. Applying the intensity-autocorrelation $\sqrt{2}$ deconvolution to a common envelope for all three terms would therefore give an incorrect pulse width.

Fit function and delay calibration. Let x be recorded time in milliseconds relative to an initial peak estimate, $r = x - x_0$, and u the relative optical delay in carrier cycles. To allow the vibrating mirror's speed to vary across the fit interval, use

$$u(r) = fr + b_2 r^2 + b_3 r^3, \qquad \tau(r) = \frac{\lambda_0}{c} u(r), \tag{67}$$

$$\frac{du}{dx} = f + 2b_2 r + 3b_3 r^2, \qquad \omega_0 \tau = 2\pi u. \tag{68}$$

Here f is in cycles/ms and b_2, b_3 are in cycles/ms^2 and cycles/ms^3. Successive raw-signal maxima initialize the polynomial; the final fit uses every raw sample within 2.8 ms of the initial peak. The fitted mapping is required to remain monotonic within this window. It is a local empirical calibration, not an independent measurement of mirror motion.

For a pulse-intensity standard deviation s in optical cycles, define

$$g(u) = e^{-u^2/(4s^2)}, \qquad h(u) = e^{-3u^2/(16s^2)}. \tag{69}$$

The actual fitted function is

$$\begin{aligned} S(x) = B + A_0 g(u) + h(u)[C_1 \cos(2\pi u) + D_1 \sin(2\pi u)] \\ + g(u)[C_2 \cos(4\pi u) + D_2 \sin(4\pi u)]. \end{aligned} \tag{70}$$

The sine/cosine form is equivalent to a free amplitude and phase for each harmonic, since

$$C_j \cos\theta + D_j \sin\theta = R_j \cos(\theta - \phi_j), \quad R_j = \sqrt{C_j^2 + D_j^2}, \quad \phi_j = \operatorname{atan2}(D_j, C_j). \tag{71}$$

The baseline, amplitudes, and phases remain free because the recorded voltage is not a calibrated positive SHG intensity. This relaxes the ideal amplitude ratios while preserving the derived overlap widths. The Gaussian pulse model assumes a simple carrier phase; unknown pulse chirp and detector filtering can still bias the inferred width.

The pulse width follows directly from the fitted s:

$$\sigma_t = s\lambda_0/c, \tag{72}$$

$$\Delta t_{\text{pulse}} = 2\sqrt{2\ln 2}\, s\lambda_0/c, \qquad \Delta t_{\text{AC}} = \sqrt{2}\, \Delta t_{\text{pulse}}. \tag{73}$$

The second relation for Δt_{AC} refers specifically to the intensity overlap g, not to the full interferometric trace.

Displayed envelope and its square root. For arbitrary harmonic phases a convenient positive modulation bound is

$$|S(x) - B| \le U(x), \tag{74}$$

$$U(x) = (|A_0| + R_2) g(u) + R_1 h(u), \tag{75}$$

$$Q(x) = \sqrt{U(x)/N}, \qquad Q^2(x) = U(x)/N, \tag{76}$$

$$N = \max_{\text{fit window}} |S_{\text{measured}}(x) - B|. \tag{77}$$

Figure 7 displays $Q(x)$ as requested, alongside $(S_{\text{measured}} - B)/N$. Because taking a square root changes the profile, Q is not expected to trace the raw-signal maxima. It is the square root of an autocorrelation modulation bound, not the electric-field envelope of the laser pulse. The latter would instead be

$$|E(t)| = \sqrt{I_0} e^{-t^2/(4\sigma_t^2)}, \qquad |E(t)|^2 = I_0 e^{-t^2/(2\sigma_t^2)}. \tag{78}$$

The pulse duration is obtained from the raw-signal fit parameter s, independently of this display transformation.

3 Experimental setup and measurement

3.1 Optical arrangement

The tutorial describes a Kerr-lens mode-locked Ti:sapphire femtosecond laser. Its intensity-dependent refractive index produces self-focusing that favors pulsed operation; a prism compressor compensates dispersion and reduces pulse chirp. For autocorrelation, a Michelson interferometer creates two pulse replicas with adjustable delay and a BBO crystal generates a second-harmonic signal proportional to their temporal overlap. For the sample measurement, the beam is split into pump and probe paths; two pump beams cross on the GaAs sample and make the excitation grating. Two probe beams arranged in BOXCAR geometry provide a diffracted signal and a local oscillator. Their interference gives a heterodyne term proportional to the diffracted field, improving sensitivity over direct intensity detection. The tutorial describes phase modulation of the local oscillator with a rotating coverslip and pump modulation with a chopper; a lock-in amplifier extracts the component at the chopper frequency. The overall optical layout is shown in Fig. 2; the individual Michelson autocorrelator and BOXCAR detection principle are shown in Figs. 3 and 4.

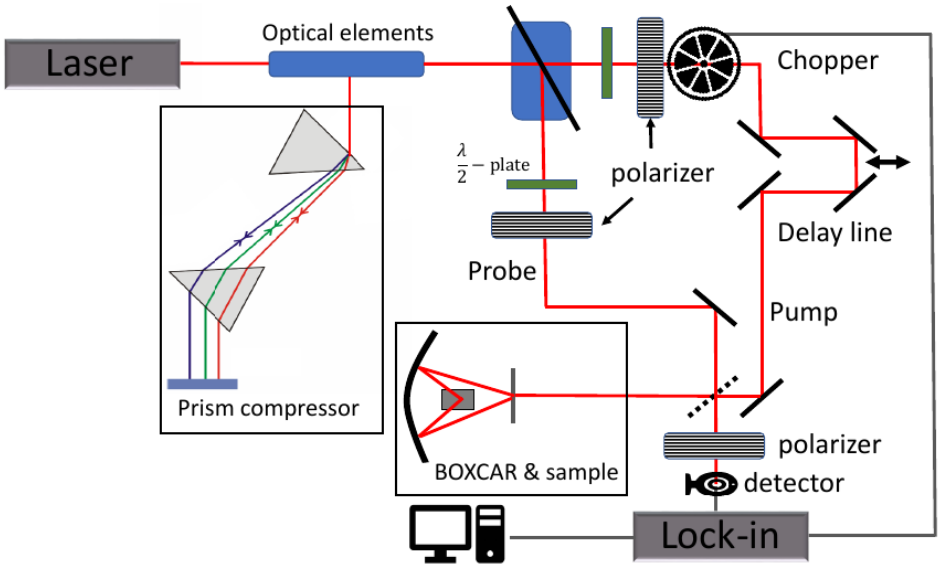


Figure 2: Tutorial schematic of the transient-reflectivity and transient-grating apparatus, including prism compressor, pump and probe paths, delay line, chopper, BOXCAR sample geometry, detector, and lock-in amplifier. Reproduced from Fig. 4.7 of the course tutorial.

3.2 Measurement data and calibration

The supplied data comprise the spectrum file `spektrum.csv`, three before-compressor traces (`vor1`–`vor3`), three after-compressor traces (`nach1`–`nach3`), and five transient files: one pump–probe trace and four TG traces. Each transient file contains delay in its first column and repeated scans in the remaining columns. The measurement instructions specify delay in picoseconds and state that the actual sample grating period is one quarter of the phase-mask period encoded in each TG filename; we therefore use $\Lambda_{\mathrm{sample}} = \Lambda_{\mathrm{mask}}/4$ and $q = 2\pi/\Lambda_{\mathrm{sample}}$. The exact incidence angles and an independent grating-period calibration were not supplied.

The before/after files are compared in Fig. 5. The `vor2` record has a fivefold shorter sampling interval and total duration. Sampling interval alone is not a reason for exclusion, since fringe calibration can accommodate it. The relevant problem is the substantial oscillation remaining

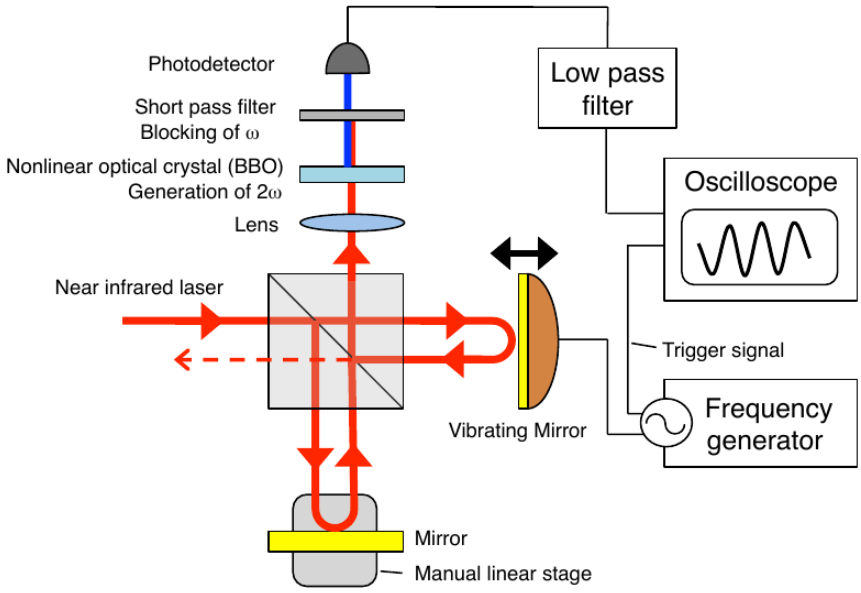


Figure 3: Michelson autocorrelator schematic: the vibrating mirror varies the relative delay between pulse replicas, and a BBO crystal generates the detected second harmonic. Reproduced from Fig. 4.1 of the course tutorial.

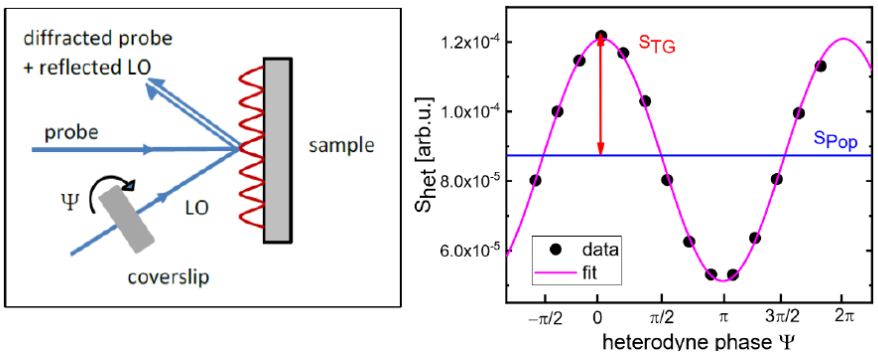


Figure 4: BOXCAR heterodyne detection of the diffracted probe and reflected local oscillator, with the measured signal illustrated as a function of heterodyne phase. Reproduced from Fig. 4.6 of the course tutorial.

at the record boundary, quantified in Part I. The other candidates are ranked by residual RMS divided by the raw-signal range in the fitted window. This chooses a representative fit for display; it does not establish which scan has the smallest physical error.

3.3 Data screening and fit procedure

The analysis was performed with the Python scripts in `analysis/`. For each TG dataset with at least eight repeats, the scan-level deviation score is the root-mean-square of each scan's difference from the pointwise median, standardized by the larger of the pointwise robust scale 1.4826 MAD and its lower-quartile floor. Scores are converted to modified scores using $z_j = 0.6745(s_j - \mathrm{median}(s))/\mathrm{MAD}(s)$; scans above 3.5 are flagged. The primary analysis excludes flagged whole scans and documents their deviations against the retained population; no individual delay points are removed. This is a statistical screen, not proof of acquisition failure, so the effect of retaining flagged scans is also calculated. The quality-screen plots and the direct scan comparison are included with the transient-decay results in Figs. 10 and 11.

The retained scans are averaged pointwise, with standard errors across repeats. The mean traces are fitted by unweighted least squares for $t \geq 0.5$ ps to the ordered biexponential model in Sec. 2.1, using each file through its last recorded delay. The standard errors are plotted but are not fit weights; each recorded delay has equal weight, despite nonuniform delay spacing. The PP record extends to 2000 ps, whereas the TG records end between 26.6 ps and 57 ps; the different windows require a sensitivity check. A 300-replicate bootstrap resamples complete retained scans within each dataset, repeats the averaging and fitting, and propagates slow rates through the finite-q regression. The resulting intervals quantify repeat-scan variability conditional on the selected traces and model. They do not include calibration or model uncertainty.

Several experimental conditions needed for full reproducibility were not recorded in the supplied files: measured sample temperature, pump and probe fluence, spot size, sample thickness and orientation, incidence angles, and detector/lock-in settings. The tutorial and `RT` filenames indicate nominal room-temperature measurements; an actual temperature reading is absent. These missing quantities also limit comparison with literature. Numerical results and sensitivity checks are saved in `analysis/results.json` and `analysis/review_checks.json`.

3.4 Uncertainty conventions and propagation

Unless identified as a confidence interval, a quoted ± value denotes one conditional standard error. Nonlinear-fit errors are obtained from the parameter covariance matrix; regression errors are ordinary least-squares standard errors. Bracketed 95% intervals for primary transient lifetimes and diffusivity are percentile intervals from resampling complete retained scans. These quantify different sources of variability and are not interchangeable. Calibration, model, trace-selection and temperature uncertainties remain unquantified and are not included in the quoted statistical errors.

For a derived quantity $y = f(\mathbf{p})$ with covariance matrix Σ, first-order propagation uses

$$u_y^2 = \nabla f^{\mathsf{T}} \Sigma \nabla f. \tag{79}$$

The full spectral covariance is retained for the peak level $A + B$, half-maximum level $A/2 + B$, frequency bandwidth, and transform-limit duration. If s is the fitted pulse width in carrier cycles, then $\Delta t \propto s\lambda_0$ and $\Delta\nu \propto \sigma_\lambda/\lambda_0^2$, so the time–bandwidth product is proportional to $s\sigma_\lambda/\lambda_0$. Its error propagation therefore includes the shared wavelength dependence rather than treating the derived duration and bandwidth as independent. Spectrum and IAC fit parameters from separate records are treated as independent. The common wavelength cancels in the before/after duration ratio. For the nominal intercept lifetime, $u_{1/b} = u_b/b^2$ is a first-order standard error, not a symmetric 95% interval.

Counts, file identifiers, theoretical constants, analysis thresholds and selected fit-window boundaries are specified inputs, not estimated physical results. Recorded axis coordinates are nominal; their instrument-calibration uncertainties are unavailable. Descriptive statistics such as residual RMS and scan scores are identified separately where their uncertainties have not been estimated. No uncertainty of zero is implied by an unavailable uncertainty. Propagation is reproduced by `analysis/report_uncertainties.py`.

4 Results

4.1 Part I: Pulse duration and spectral bandwidth

The pulse durations follow from Eq. (70) with the nonlinear fringe calibration derived above. Figure 7 shows the selected before/after traces. We retain the exclusion of `vor2`: in the last 10% of its record, the RMS signal relative to its whole-record median is 0.397 recorded units, compared with 0.0081 and 0.0058 for `vor1` and `vor3`. Together with Fig. 5, this shows that its right-hand wing remains appreciably oscillatory at the boundary. These edge RMS values are descriptive diagnostics with unquantified uncertainties. The median is a descriptive reference, not an independently measured baseline. A truncated trace could in principle be fitted, but would constrain the baseline and wings less reliably; we use the better-covered repeats instead.

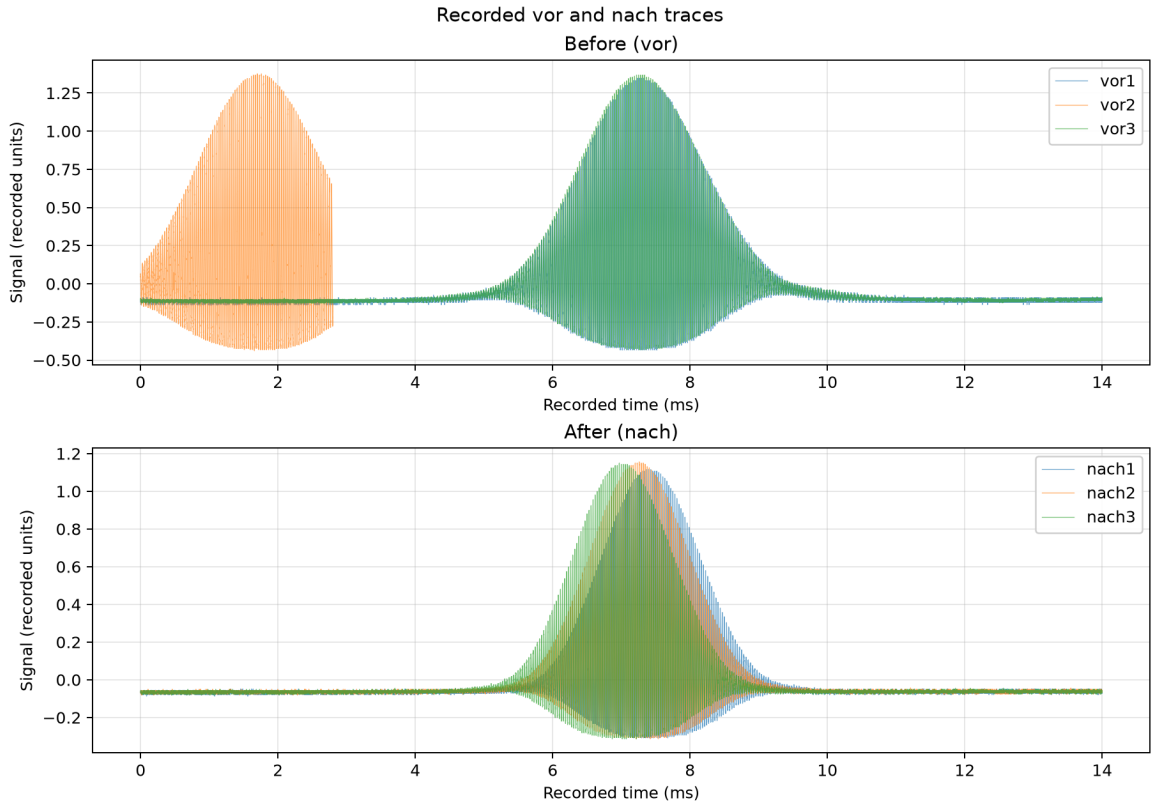


Figure 5: Recorded auxiliary traces grouped as before (vor) and after (nach). The horizontal axis uses recorded time converted to milliseconds.

The measured spectrum and Gaussian fit are shown in Fig. 6. The nominal wavelength coordinates (calibration uncertainty unavailable) span approximately 345 nm to 1041 nm. We fitted all recorded points with

$$S(\lambda) = B + A \exp\left[-\frac{(\lambda - \lambda_0)^2}{2\sigma_\lambda^2}\right]. \tag{80}$$

The peak above baseline is A and the fitted peak level is $B + A$. At half peak height above baseline, $S - B = A/2$, so

$$e^{-(\lambda-\lambda_0)^2/(2\sigma_\lambda^2)} = \frac{1}{2}, \tag{81}$$

$$|\lambda - \lambda_0| = \sqrt{2\ln 2}\,|\sigma_\lambda|, \tag{82}$$

$$\Delta\lambda_{\mathrm{FWHM}} = 2\sqrt{2\ln 2}\,|\sigma_\lambda|. \tag{83}$$

The fit gives a centre of (788.656 ± 0.013) nm, peak intensity of (13302 ± 27) a.u., and fitted half-maximum level of (7902 ± 14) a.u., with $\Delta\lambda_{\mathrm{FWHM}} = (10.916 \pm 0.032)$ nm. Propagating the full spectral covariance through $\Delta\nu \simeq c\Delta\lambda/\lambda_0^2$ gives $\Delta\nu = (5.261 \pm 0.015)$ THz and $\Delta t_{\mathrm{TL}} = (2\ln 2/\pi)/\Delta\nu = (83.87 \pm 0.24)$ fs. All quoted errors here are formal one-standard-error uncertainties, excluding calibration and model uncertainty. The median measured intensity is approximately 2501 a u ; its measurement uncertainty is unquantified because repeat spectra and an instrument-noise model are unavailable. The median is a descriptive statistic of all recorded wavelengths, not the fitted background B.

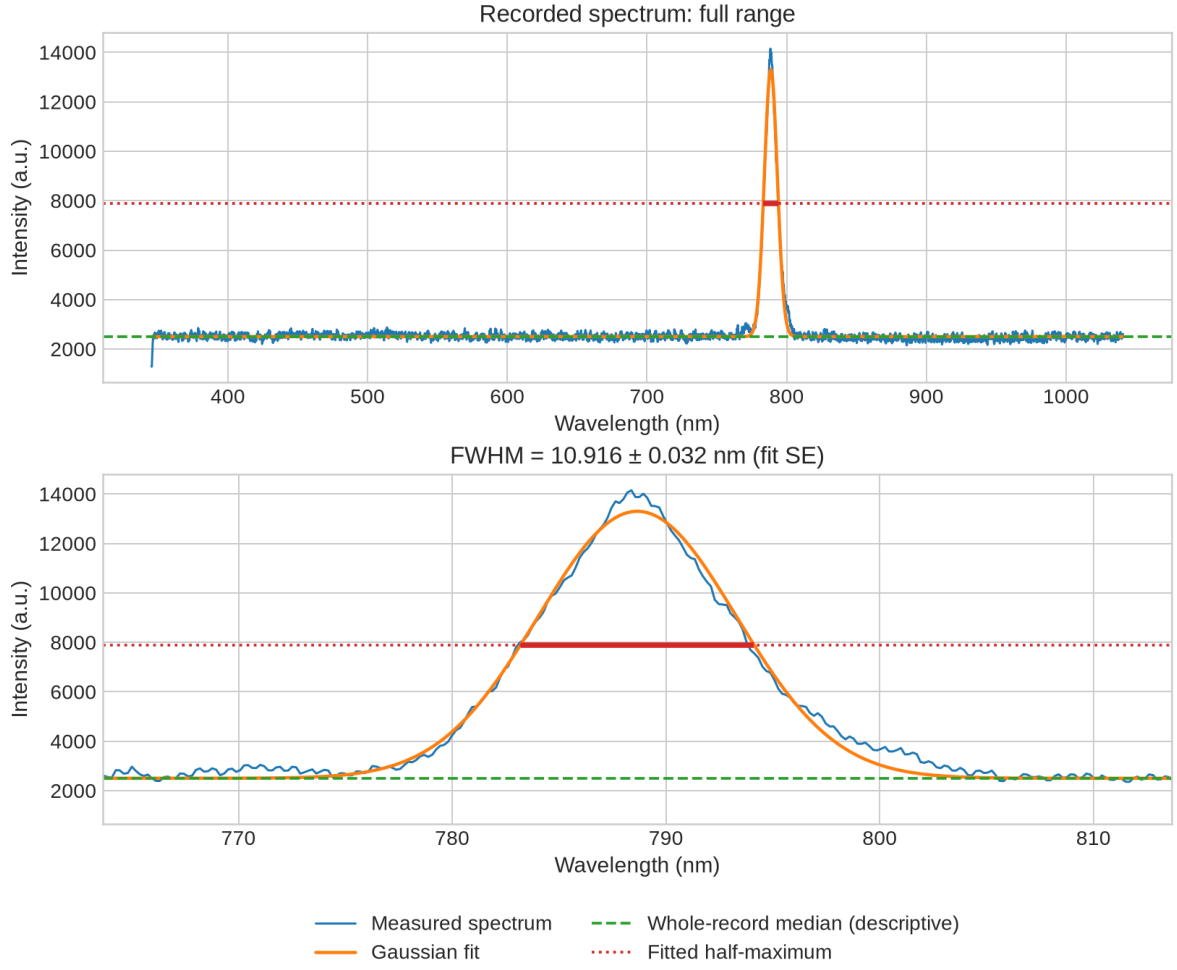


Figure 6: Measured spectrum, Gaussian fit, median level, and fitted half-maximum bandwidth. The displayed bandwidth error is a conditional fit standard error; raw-signal and wavelength-calibration uncertainties are unavailable.

The candidate results are listed in Table 1. The lowest normalized residuals select `vor3` and `nach2`, giving (112.89 ± 0.10) fs and (93.902 ± 0.054) fs. The respective time–bandwidth products are 0.5940 ± 0.0018 and 0.4941 ± 0.0015, both above the exact Gaussian-model limit $2\ln 2/\pi$.

The fitted duration decreases by $(16.823 \pm 0.089)\%$ after the compressor. These are propagated formal standard errors under independent spectrum and IAC fits, with their shared wavelength dependence retained; total model and calibration uncertainties remain unquantified. The change is consistent with compression under these assumptions. These selected-trace estimates are not averages over repeats.

Table 1: Gaussian pulse-intensity FWHM from the raw IAC fits. Errors are conditional covariance standard errors at fixed wavelength, excluding calibration and model uncertainty. Normalized RMS is residual RMS divided by the measured range; its uncertainty has not been estimated.

Trace	Pulse FWHM (fs)	Normalized RMS
vor1	113.09 ± 0.10	0.0230
vor3 (selected)	112.89 ± 0.10	0.0223
nach1	93.99 ± 0.05	0.0135
nach2 (selected)	93.90 ± 0.05	0.0134
nach3	93.95 ± 0.05	0.0135

The changing fringe spacing is visible directly in successive raw-signal maxima (Appendix A, Fig. 14): fitting the same windows with a constant scan speed and the corrected overlap functions gives (74.53 ± 0.39) fs and (71.88 ± 0.28) fs (conditional fit standard errors), with normalized residual RMS 0.107 and 0.080. The cubic calibration lowers those residuals to 0.0223 and 0.0134. These RMS values are descriptive fit diagnostics; uncertainties on the diagnostics have not been estimated. Thus a constant-speed fit can spuriously underestimate pulse duration. This correction was chosen from the observed fringe evolution and fit residuals, not by forcing agreement with the transform limit.

Varying the fit half-window from 2.0 ms to 3.2 ms changes the fitted duration from (111.65 ± 0.08) fs to (114.07 ± 0.10) fs for `vor3`, and from (92.69 ± 0.05) fs to (94.32 ± 0.05) fs for `nach2` (conditional fit standard errors at fixed wavelength). The differences quantify sensitivity to the tested window choices; they are not confidence intervals for the pulse duration. The shifts exceed the conditional covariance errors of 0.10 fs and 0.05 fs. The errors assume independent residuals and an exact model; structured residuals, detector filtering, optical chirp, wavelength calibration, and trace selection are not included. Likewise, restricting the spectral fit to windows of ± 50, ± 30, and ± 20 nm about 789 nm changes the FWHM to (10.783 ± 0.053), (10.651 ± 0.065), and (10.434 ± 0.078) nm, respectively, compared with (10.916 ± 0.032) nm for the full record (conditional fit standard errors). This background/window dependence exceeds the formal 0.03 nm covariance error. These sensitivity ranges are diagnostics, not confidence intervals. The residuals are shown in Appendix A, Fig. 13.

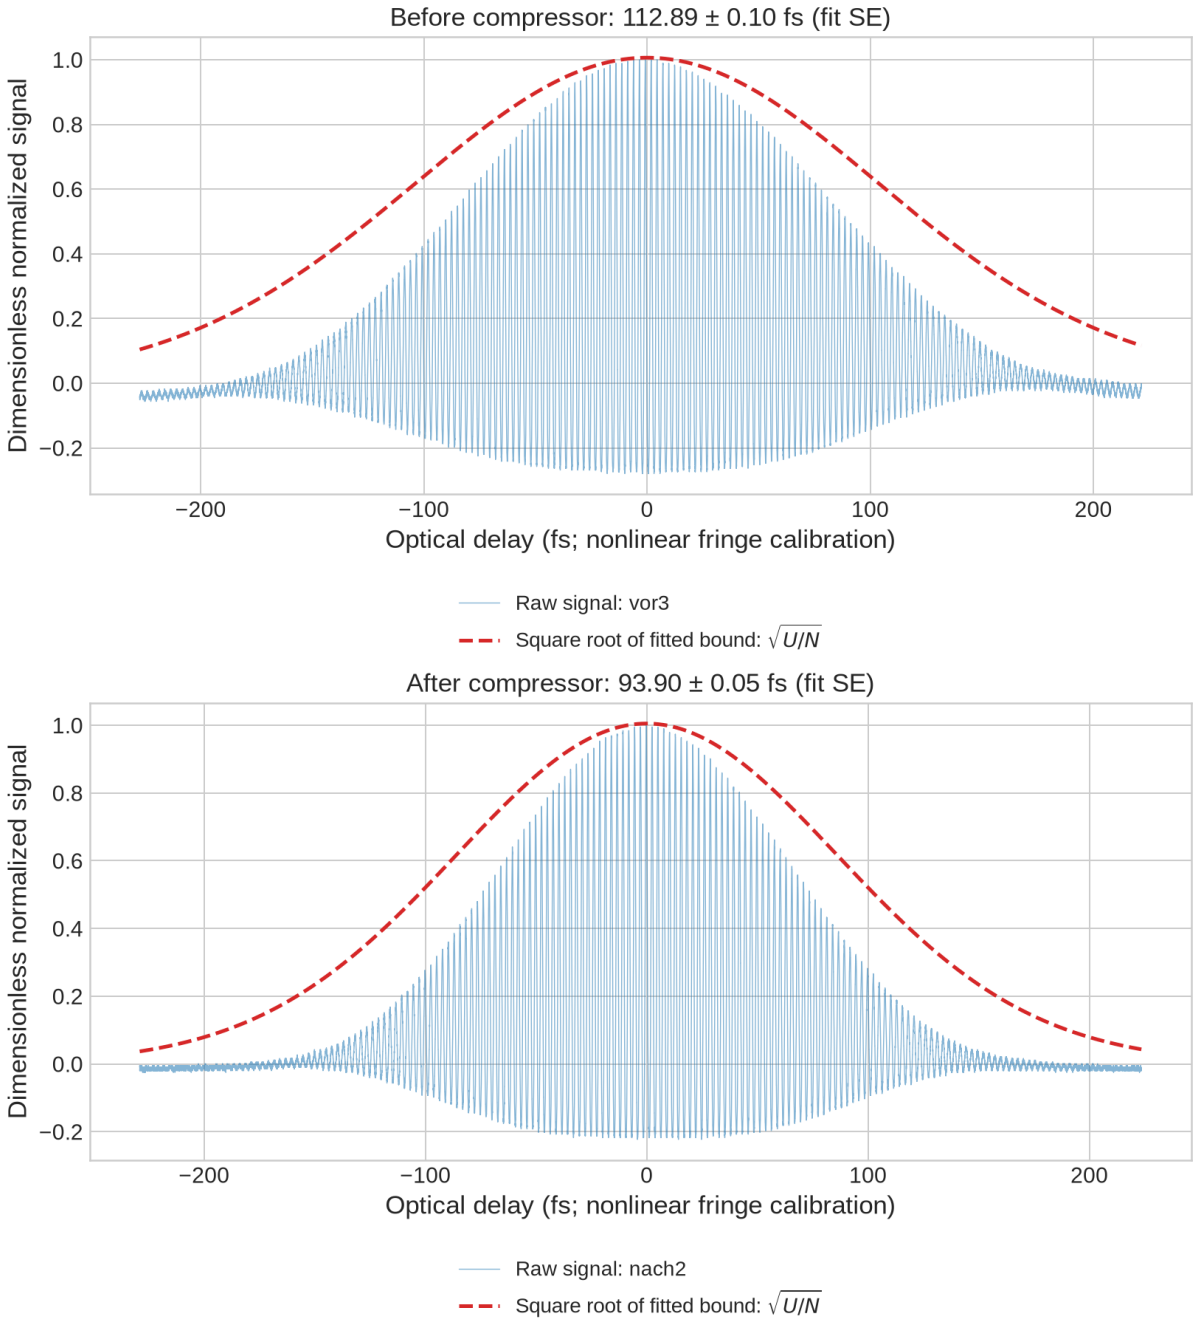


Figure 7: Selected before/after traces with nonlinear fringe calibration. The dashed curve is $Q = \sqrt{U/N}$, the square root of the fitted modulation bound; it is not the laser field or the raw-signal upper envelope. Pulse widths come from fitting the raw signal using Eq. (70); displayed errors are conditional fit standard errors at fixed wavelength, excluding calibration and model uncertainty.

4.2 Part II: Hot-carrier cooling and electron–phonon coupling

The fast pump–probe component is a candidate optical proxy for cooling, with $\tau_f = 0.717\,\mathrm{ps}$ and a conditional 95% repeat-scan interval of $[0.698, 0.743]$ ps. Identifying it as a cooling time additionally requires that the fast reflectivity change be proportional to the carrier-temperature excess, with population and optical-response effects separated. That calibration is not supplied. The 0.5 ps fit cutoff excludes the earliest thermalization, but does not by itself exclude picosecond cooling: the tutorial distinguishes roughly 100 fs carrier thermalization (tutorial estimate; uncertainty not supplied) from electron–lattice equilibration over a few picoseconds [1].

To state exactly what a coupling inference would require, assume constant volumetric heat capacities C_e, C_l and an average electron–phonon coefficient G after excitation:

$$C_e\dot{T}_e = -G(T_e - T_l), \qquad C_l\dot{T}_l = G(T_e - T_l), \tag{84}$$

$$\Delta T = T_e - T_l, \qquad \frac{d\Delta T}{dt} = -G\left(\frac{1}{C_e} + \frac{1}{C_l}\right)\Delta T, \tag{85}$$

$$\int_{\Delta T(0)}^{\Delta T(t)} \frac{d\Delta T'}{\Delta T'} = -G\left(\frac{1}{C_e} + \frac{1}{C_l}\right)\int_0^t dt', \tag{86}$$

$$\Delta T(t) = \Delta T(0)e^{-t/\tau_{\mathrm{cool}}}, \qquad G = \frac{C_eC_l}{C_e + C_l}\frac{1}{\tau_{\mathrm{cool}}}. \tag{87}$$

If $C_l \gg C_e$ and $\tau_{\mathrm{cool}} = \tau_f$, then $G/C_e \simeq 1/\tau_f = 1.394\,\mathrm{ps}^{-1}$, with a conditional bootstrap interval $[1.347, 1.432]$ ps^{-1}. This is a relaxation rate under explicit assumptions, not a measured volumetric coupling coefficient in $\mathrm{W\,m^{-3}\,K^{-1}}$. For nondegenerate electrons of fixed density n, $C_e = \partial(3nk_BT_e/2)/\partial T_e = 3nk_B/2$, but n and the relevant temperature dependence are unknown here. A numerical G is therefore not determined.

The assignment also depends on the fit window: fitting PP only through 33 ps gives $\tau_f = (0.579 \pm 0.010)$ ps, whereas starting the full-record fit at 1 ps gives (0.96 ± 0.13) ps (conditional fit standard errors). These changes exceed the repeat-scan interval. For context, Hunsche et al. report thermalization within 200 fs, while Kash et al. infer an average electron–LO-phonon scattering time near 165 fs below 10^{17} cm^{-3} [2, 4]. The quoted 200 fs is a reported upper bound and 165 fs is an approximate literature value; associated uncertainties are not supplied in the cited abstracts. Neither microscopic time is the same observable as the effective temperature-relaxation time or our reflectivity fit component.

4.3 Part III: Transient-reflectivity and transient-grating decay times

The scan screen excludes period-8 scans 4 and 10 (one-based column numbering after the delay column), with modified scores 3.51 and 5.26, as shown in Fig. 10; their direct comparison with the retained population is in Fig. 11. The retained-scan means and biexponential fits are shown in Fig. 8; Fig. 9 shows residuals normalized by the fitted-window signal range. The normalized residual RMS is 1.26% for pump–probe and 0.71–0.81% for TG; uncertainties on these descriptive diagnostics and the scan scores have not been estimated. These small global RMS values do not establish model adequacy: coherent residual structure remains, and the pump–probe plot spans a much longer time interval than the TG data. Each residual panel therefore uses its own delay range. A low RMS alone cannot establish a unique microscopic assignment. In particular, the PP signal continues to decrease after both fitted exponential terms have decayed, whereas the fitted background is constant. This systematic behaviour occurs in all repeats. We retain the PP data as evidence of model inadequacy, but do not use its fitted slow rate to constrain the common TG diffusion regression.

Table 2 gives the fitted fast and slow decay times. The data columns are averaged only after the scan screen; the table gives 95% bootstrap intervals from resampling retained scans, conditional on the selected traces and model. The sample periods use the supplied quarter-period correction, and the first column of each transient file is interpreted in ps. The tabulated

periods and wave numbers are nominal calibration values with unquantified uncertainties; $q = 0$ denotes the PP model definition.

Table 2: Biexponential fit lifetimes and 95% repeat-scan bootstrap intervals. The filename value is the nominal phase-mask period; the sample period is one quarter of that value. Period and wave-number calibration uncertainties are unavailable.

Data	$\Lambda_{\mathrm{sample}}$ (µm)	q (10^6 m^{-1})	τ_f (ps)	τ_s (ps)
Pump–probe	–	0	0.717 [0.698, 0.743]	7.878 [7.753, 8.040]
TG 5.6	1.400	4.488	1.206 [1.031, 1.445]	7.205 [6.412, 8.771]
TG 6.5	1.625	3.867	1.298 [1.157, 1.503]	9.200 [8.156, 10.960]
TG 8	2.000	3.142	1.363 [1.064, 1.983]	9.496 [7.933, 12.250]
TG 12	3.000	2.094	2.060 [1.708, 2.463]	13.283 [11.970, 15.170]

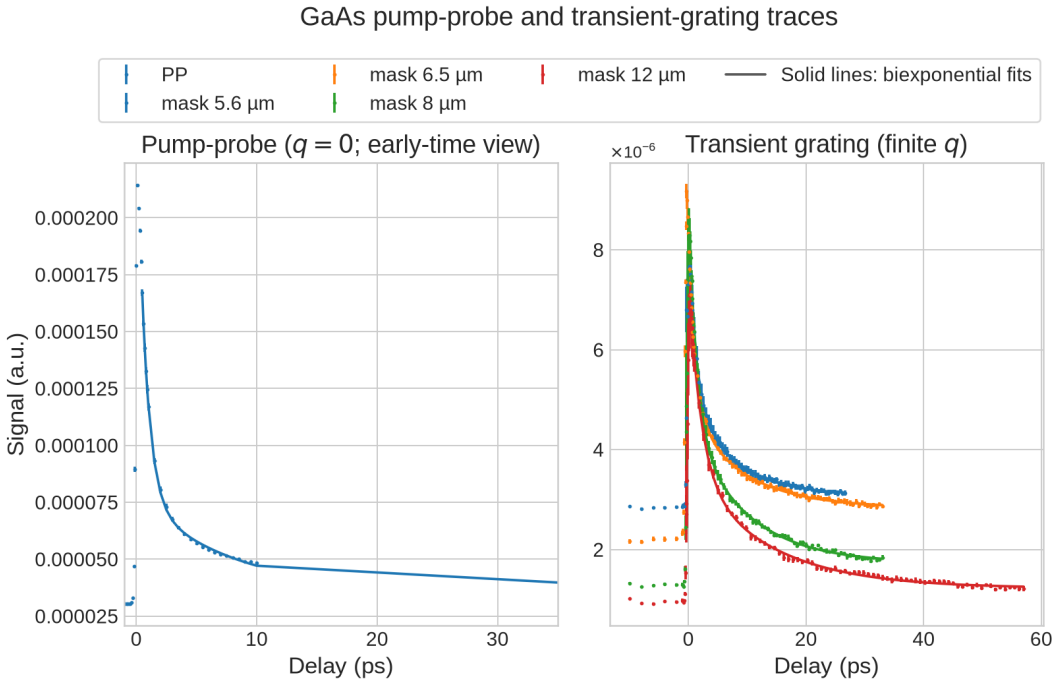


Figure 8: Mean delay traces over retained scans and matching-color biexponential fits. The PP panel displays the first 35 ps for readability; its fit uses the full record through 2000 ps. Error bars show standard errors across retained scans.

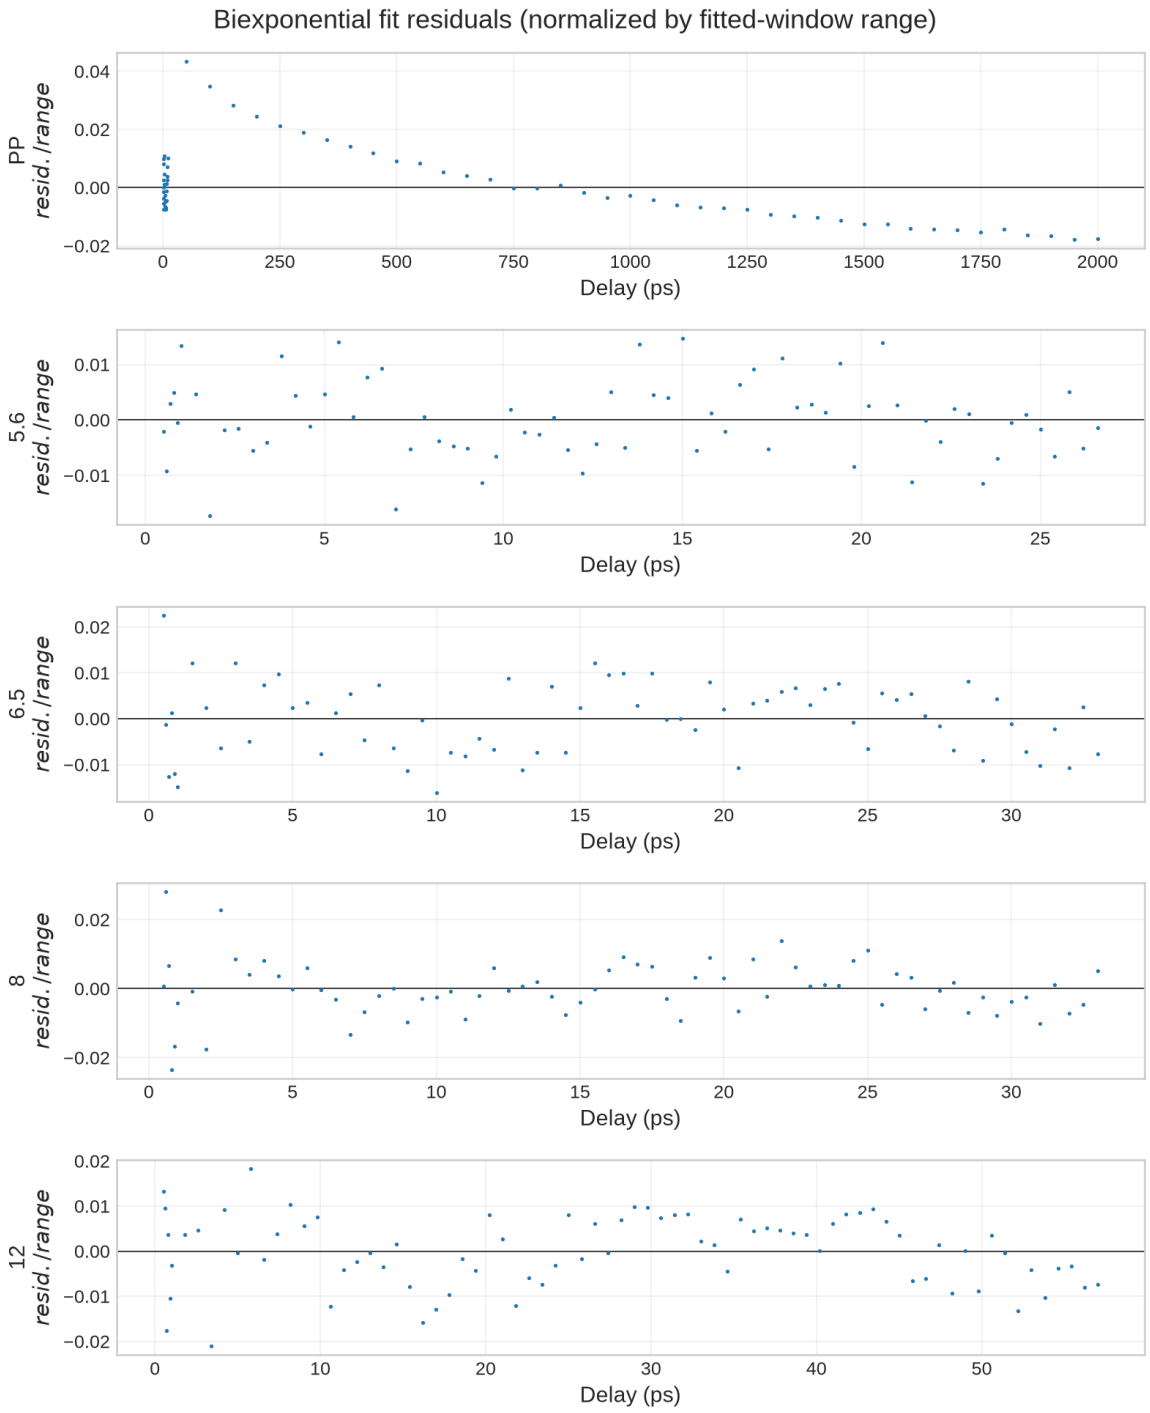


Figure 9: Biexponential fit residuals for the averaged data, normalized by the fitted-window signal range. Each panel has its own delay range, so the long PP record does not compress the TG residuals.

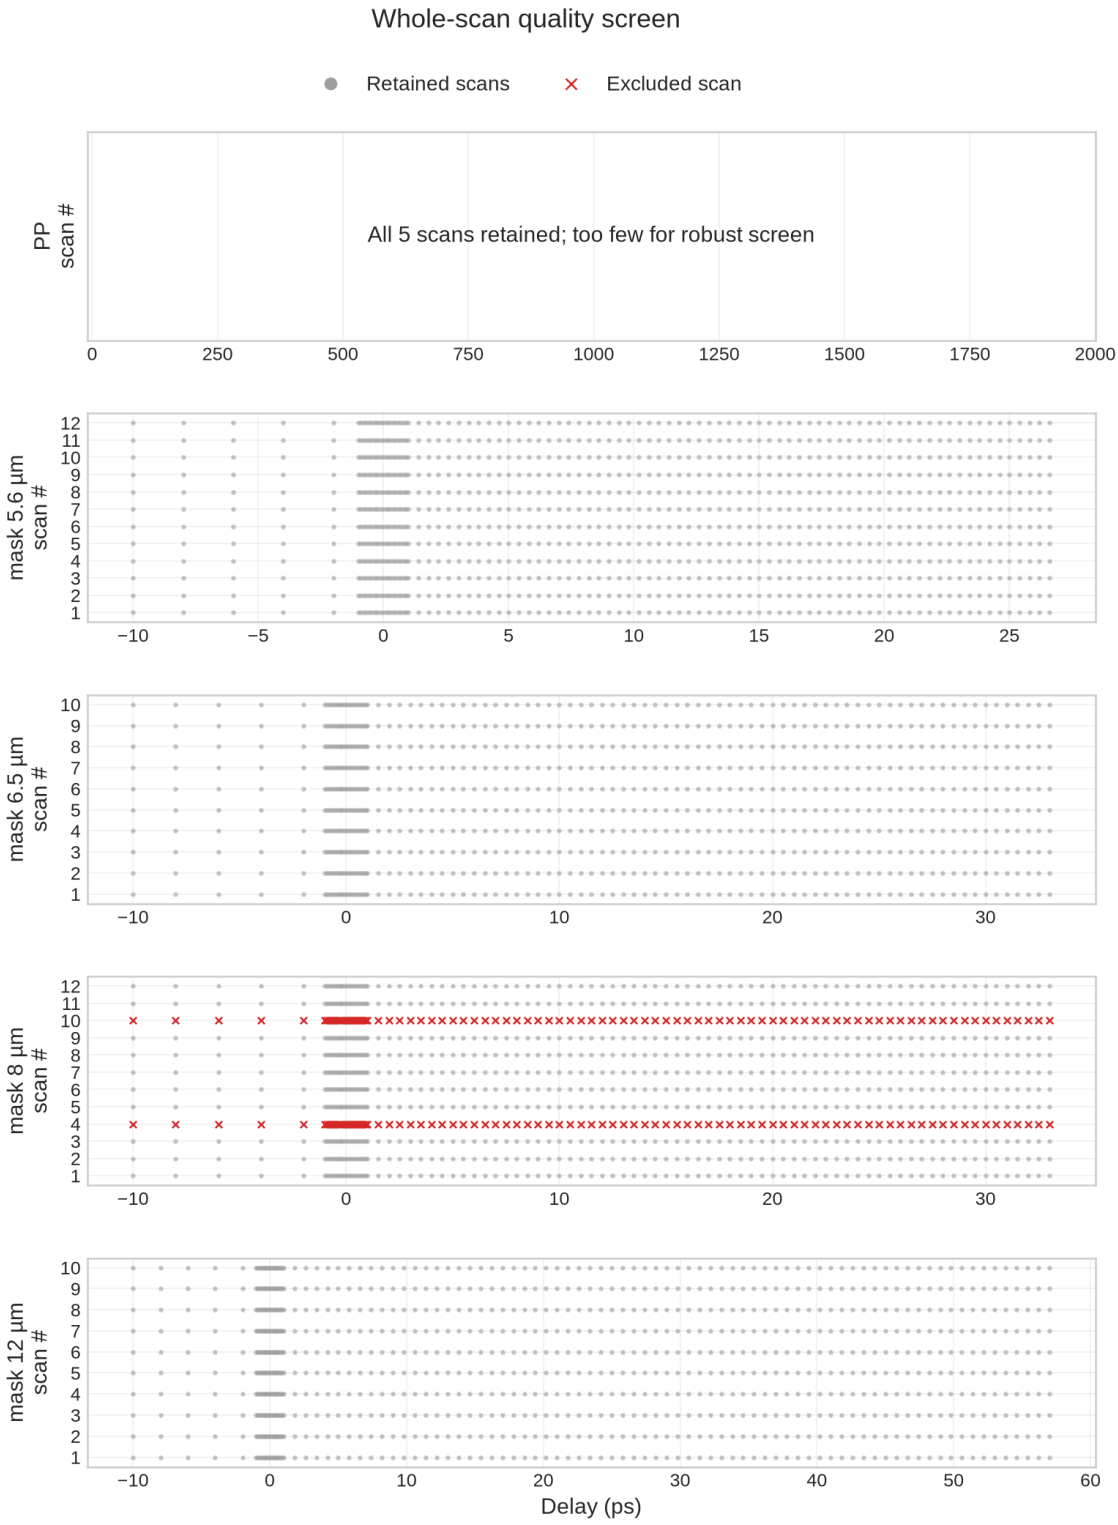


Figure 10: Whole-scan quality screen. Red crosses mark scans excluded by the robust scan-deviation criterion; all five pump–probe scans were retained because the robust rule requires at least eight repeats.

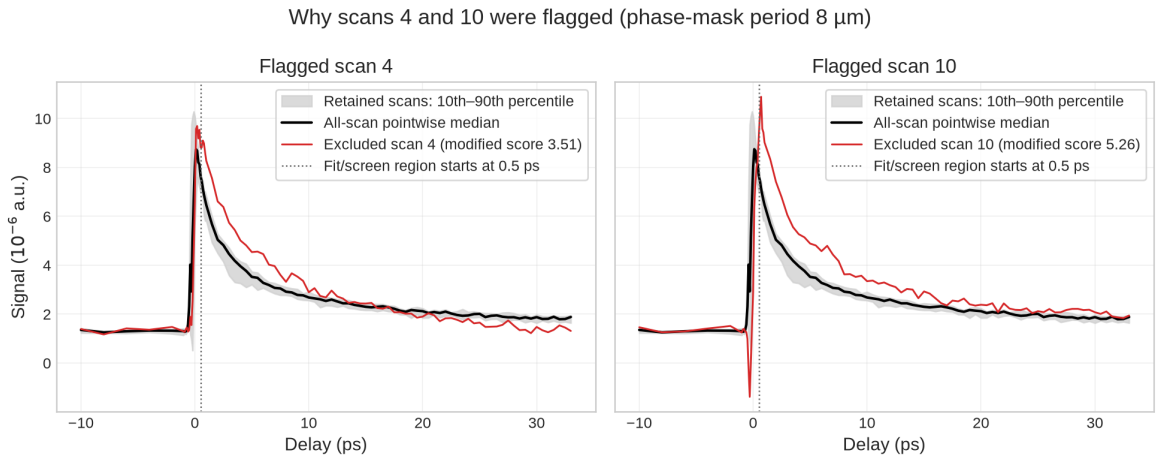


Figure 11: The two statistically flagged scans from the phase-mask-period-8 file, compared with the all-scan pointwise median and the 10th–90th percentile band of retained scans. The vertical dotted line marks the 0.5 ps fit/screen threshold. Scan 4 is borderline; scan 10 shows the larger deviation. Uncertainties on the displayed diagnostic scores have not been estimated.

The fitted lifetimes depend on the observation window. With the PP start held at 0.5 ps, its slow lifetime changes from (2.93 ± 0.11) ps when fitting through 33 ps, to (4.91 ± 0.29) ps through 57 ps, (5.33 ± 0.28) ps through 100 ps, and (7.88 ± 0.79) ps through 2000 ps (conditional covariance standard errors for this comparison). Holding the end at 2000 ps but moving the start to 2 ps gives (3.43 ± 0.19) ps and (375 ± 50) ps (conditional covariance standard errors); the two components then describe different portions of the relaxation. These covariance errors are distinct from the repeat-scan bootstrap intervals in Table 2 and do not account for systematic model mismatch. Consequently, the labels "fast" and "slow" do not identify invariant physical channels across arbitrary fit windows.

4.4 Part IV: Recombination, ambipolar diffusivity, and mobility

For the finite-q TG measurements, the slow-component rates are regressed by unweighted least squares against q^2 as motivated by the diffusion equation. The slope is $(3.71 \pm 0.70) \times 10^{-15}\,\mathrm{m^2\,ps^{-1}}$ ($R^2 = 0.934$; diagnostic uncertainty not estimated), giving a TG-only ambipolar diffusion estimate $D_a = (3.71 \pm 0.70) \times 10^{-3}\,\mathrm{m^2\,s^{-1}}$, where the stated error is the standard error of the four-point regression slope. Resampling complete retained scans gives a 95% bootstrap interval $[2.31, 4.96] \times 10^{-3}\,\mathrm{m^2\,s^{-1}}$. This interval includes repeat-scan variation but not calibration or model uncertainty. Retaining borderline scan 4 while still excluding scan 10 gives $(3.78 \pm 0.56) \times 10^{-3}\,\mathrm{m^2\,s^{-1}}$ (Fig. 12).

Retaining both flagged scans also gives $D_a = (3.78 \pm 0.57) \times 10^{-3}$ m^2/s. The diffusion slope is therefore insensitive to these two exclusions at the quoted precision. With the primary scan masks held fixed, changing the fit start to 0.2, 1.0, or 2.0 ps gives (3.85 ± 1.02), (4.36 ± 1.25), or $(3.08 \pm 0.42) \times 10^{-3}$ m^2/s, respectively; the common factor 10^{-3} applies to all three values. The uncertainties in these sensitivity regressions are one-standard-error slope estimates, conditional on each selected window and scan set. This window dependence is distinct from the conditional bootstrap uncertainty.

5 Discussion

The revised autocorrelation analysis gives pulses longer than the spectral Gaussian transform limit, with a shorter fitted duration after compression. Correcting the unequal overlap widths

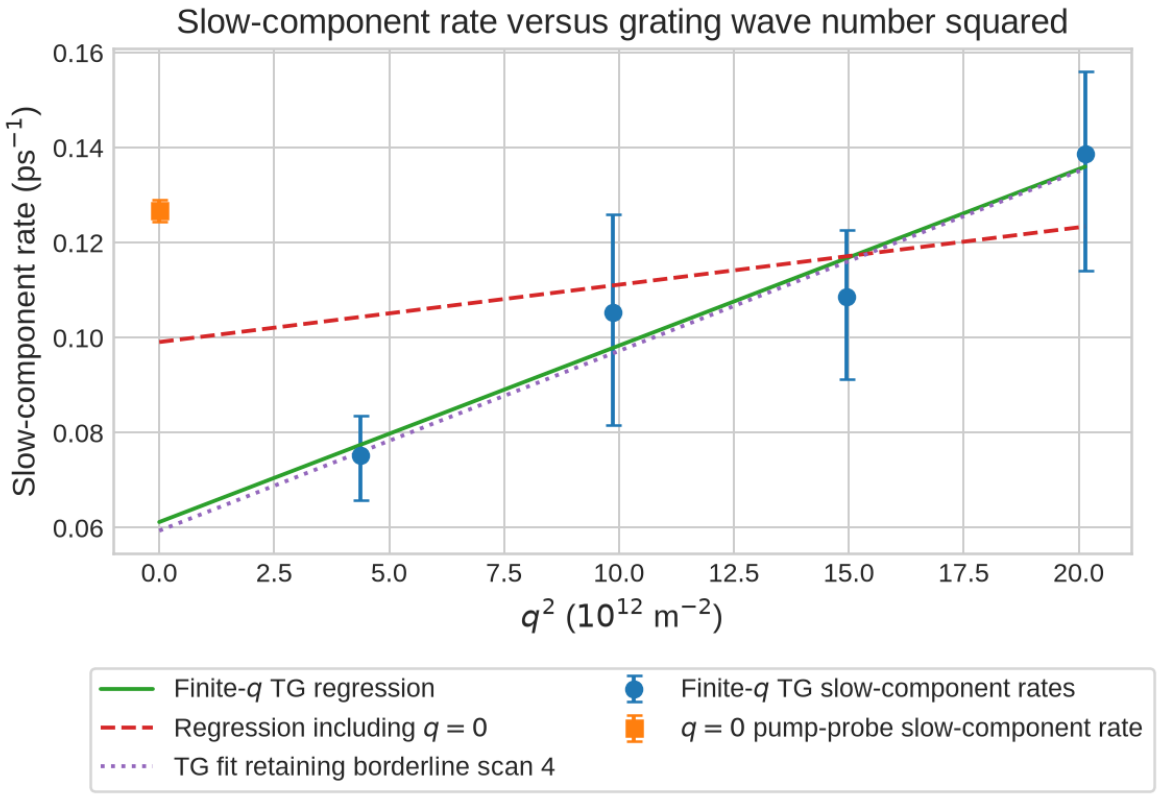


Figure 12: Slow-component rates against q^2 computed from the sample grating periods (one quarter of the phase-mask values). The finite-q line gives the TG-only diffusion estimate; including the $q = 0$ pump–probe rate gives a poor linear fit. Error bars are conditional 95% repeat-scan intervals for the rates; the dotted line shows the borderline-scan sensitivity.

and the nonuniform fringe spacing removes the earlier sub-transform-limit estimates. The square-root curve is only a visualization; its width is not used for pulse deconvolution. Residual structure and fit-window dependence remain, so the numerical durations are effective Gaussian-model estimates. An independently measured mirror trajectory and a phase-sensitive pulse measurement would help separate scan nonlinearity, pulse chirp, and detector response.

The fast PP lifetime can be quoted as a conditional cooling proxy, but the data do not establish the required proportionality between reflectivity and carrier temperature. Carrier thermalization, phonon scattering, energy cooling, and recombination are distinct processes. The cutoff at 0.5 ps limits the earliest dynamics; the stronger reason for caution is the missing response calibration and the observed dependence on fit interval.

The main transport result is the finite-q TG slope shown in Fig. 12. The fit yields

$$D_a = (3.71 \pm 0.70) \times 10^{-3}\,\mathrm{m^2\,s^{-1}} \quad = (37.1 \pm 7.0)\,\mathrm{cm^2\,s^{-1}}.$$

The repeat-scan bootstrap interval is $[2.31, 4.96] \times 10^{-3}\,\mathrm{m^2\,s^{-1}}$. A bulk-GaAs pump–probe study reports an ambipolar diffusivity near $20\,\mathrm{cm^2\,s^{-1}}$ at room temperature (approximate literature value; uncertainty not specified in the cited abstract), so the present estimate is of the same order [3]. This is not a controlled like-for-like comparison because our carrier density, fluence and measured sample temperature are unavailable; density-dependent effects can also change GaAs diffusivity [5].

The finite-q regression intercept corresponds to a nominal recombination time of (16.3 ± 2.5) ps (first-order propagation of the regression intercept standard error). The pump–probe slow lifetime is 7.878 ps with a conditional 95% repeat-scan interval $[7.753, 8.040]$ ps. Equivalently,

its rate is 0.1269 ps^{-1} with a 95% interval $[0.1244, 0.1290]$ ps^{-1}, compared with the TG intercept (0.0612 ± 0.0095) ps^{-1} (regression standard error); including the $q = 0$ point reduces the linear-fit R^2 to 0.161 (diagnostic uncertainty not estimated). This disagreement is the central limitation of the pump–probe comparison: the $q = 0$ reflectivity signal and finite-q diffracted signal may weight different relaxation channels, while the simple rate law assumes one common population and one recombination intercept. Thus the TG-only slope is an exploratory estimate, and the intercept should not be reported as a measured recombination lifetime.

Using $\mu_a = eD_a/(k_B T)$ at an assumed $T = 300\,\mathrm{K}$ gives a conditional mobility of $(1.44 \pm 0.27) \times 10^3\,\mathrm{cm}^2\,\mathrm{V}^{-1}\,\mathrm{s}^{-1}$. The mobility uncertainty propagates only the regression slope error at fixed assumed temperature; the corresponding 95% repeat-scan interval is $[0.89, 1.92] \times 10^3$ $\mathrm{cm}^2/(\mathrm{V\,s})$. The nominal condition is room temperature, but the actual sample temperature and its uncertainty were not logged, and the Einstein conversion assumes non-degenerate carriers in thermal equilibrium at a common temperature. Therefore this mobility is conditional on assumptions rather than a direct measurement. Across the analysis, the main unresolved uncertainties are the delay and grating-period calibrations, the fit interval and biexponential model, limited grating-period sampling, scan-selection sensitivity, and missing acquisition metadata.

6 Conclusion

The reviewed analysis gives Gaussian pulse-intensity durations of (112.89 ± 0.10) fs before and (93.902 ± 0.054) fs after compression, compared with a (83.87 ± 0.24) fs transform-limit estimate from the spectrum. The quoted pulse and transform-limit errors are formal standard errors; total calibration and model uncertainties remain unquantified. Correct overlap widths and nonlinear fringe calibration are essential to these results. Fit-window effects exceed formal pulse-fit errors. The transient data yield reproducible effective decay constants for a specified window, but do not uniquely identify microscopic cooling or recombination. A cooling proxy of 0.717 ps (95% repeat-scan interval $[0.698, 0.743]$ ps) is conditional on a temperature-sensitive optical response; a volumetric electron–phonon coefficient cannot be obtained without additional heat-capacity and excitation information. The finite-q TG slope remains an exploratory $D_a = (3.71 \pm 0.70) \times 10^{-3}$ m^2/s, with conditional mobility $(1.44 \pm 0.27) \times 10^3$ $\mathrm{cm}^2/(\mathrm{V\,s})$ at an assumed 300 K (temperature uncertainty unavailable). The diffusion and mobility errors are regression standard errors and exclude calibration uncertainty. The PP/TG intercept mismatch and measured fit-window sensitivity prevent a firm common recombination-lifetime assignment.

A Autocorrelation calibration and residuals

Figure 13 documents the residual structure of the selected raw-signal fits. The pulse-width analysis in Part I uses these residuals to assess the calibration and fit quality; the square-root overlay alone is not a goodness-of-fit diagnostic.

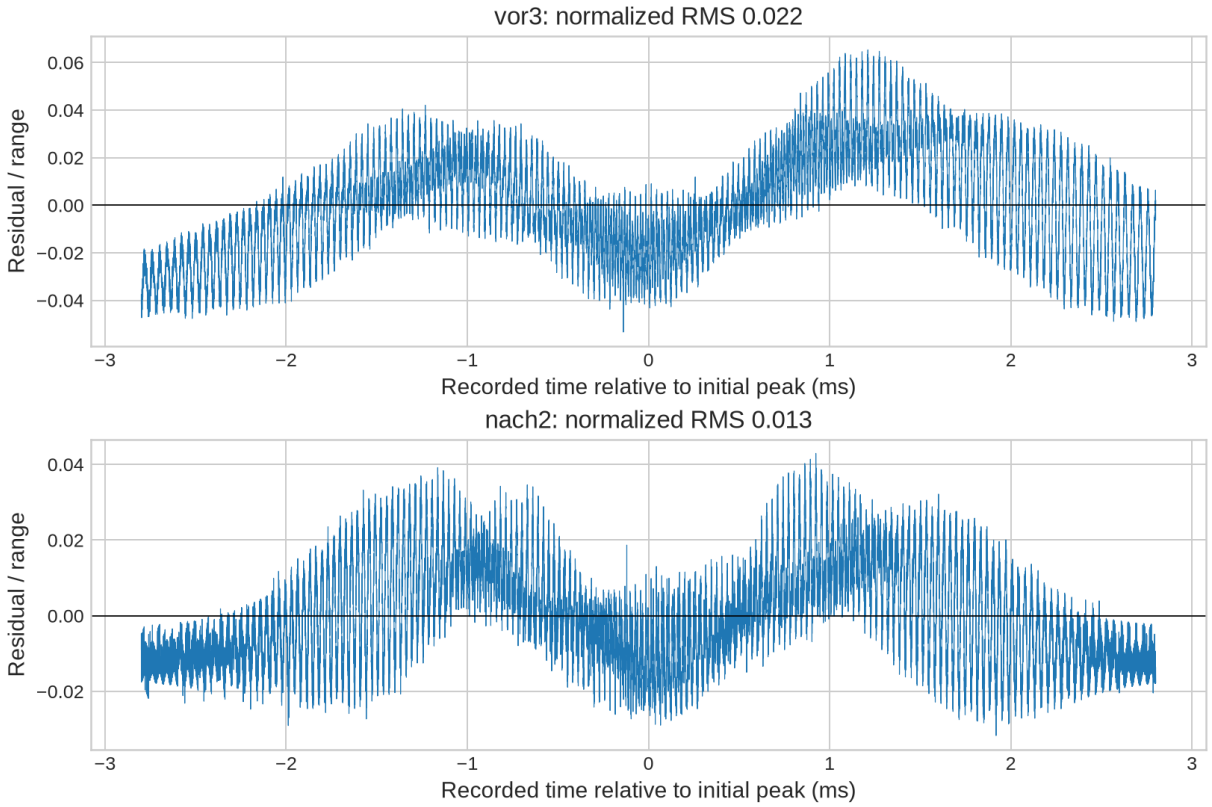


Figure 13: Selected autocorrelation fit residuals, normalized by the measured range in the fitted interval. Structured residuals remain after nonlinear fringe calibration and indicate that covariance errors alone understate uncertainty. Uncertainties on the displayed RMS diagnostics have not been estimated.

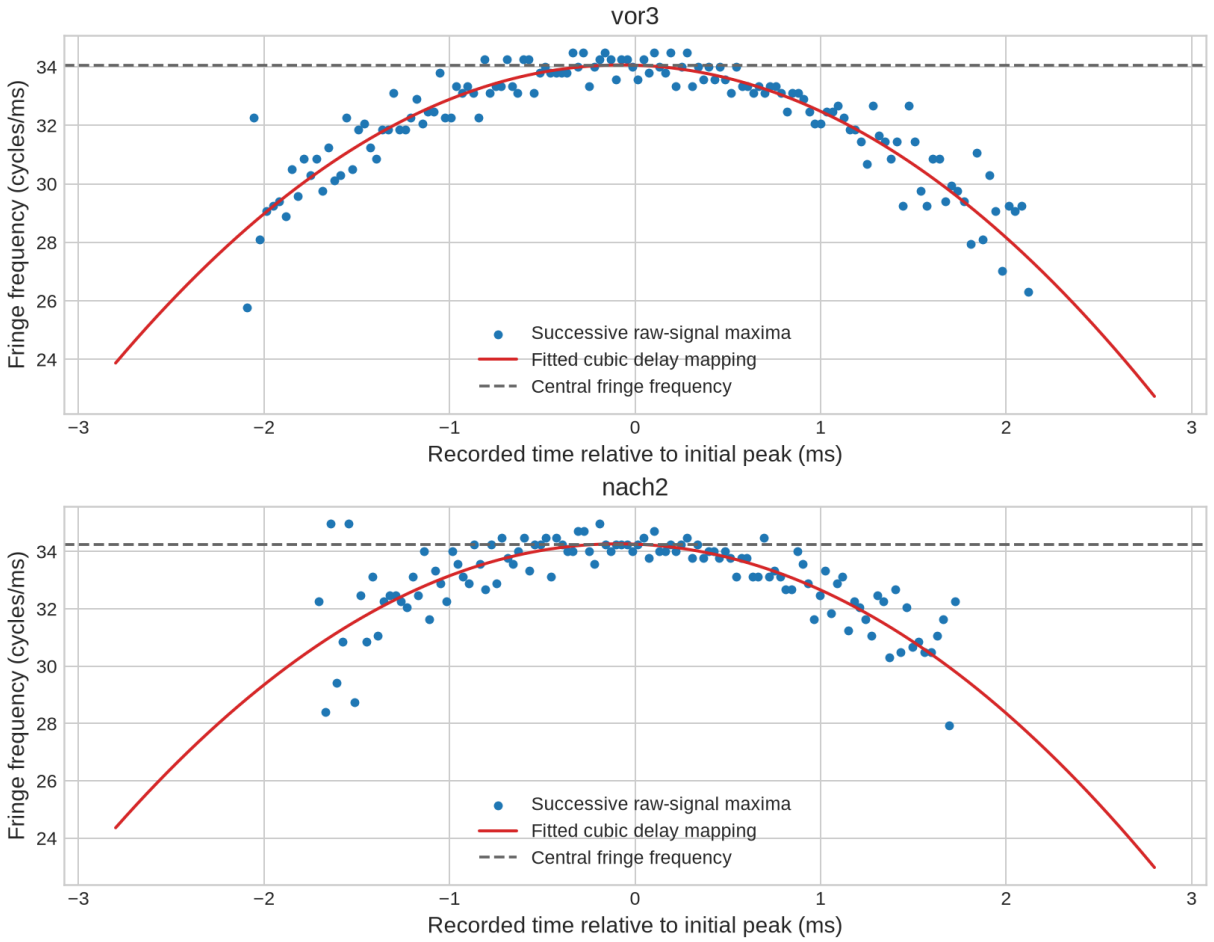


Figure 14: Measured fringe frequency from successive raw-signal maxima, compared with the derivative of the fitted cubic delay mapping. The visibly varying frequency contradicts the constant-speed approximation across the full pulse overlap. Pointwise frequency uncertainties are unquantified; this is a calibration diagnostic.

References

[1] Institute of Physics II, University of Cologne, *M2.10: Ultrafast Transient Grating Spectroscopy*, practical-course tutorial, version December 2019, especially Eqs. (4.2)–(4.14) and Secs. 5–6.

[2] S. Hunsche, H. Heesel, A. Ewertz, H. Kurz, and J. H. Collet, "Spectral-hole burning and carrier thermalization in GaAs at room temperature," *Physical Review B* **48**, 17818 (1993), doi:10.1103/PhysRevB.48.17818.

[3] B. A. Ruzicka, L. K. Werake, H. Samassekou, and H. Zhao, "Ambipolar diffusion of photo-excited carriers in bulk GaAs," *Applied Physics Letters* **97**, 262119 (2010), doi:10.1063/1.3533664; arXiv:1102.1366.

[4] J. A. Kash, J. C. Tsang, and J. M. Hvam, "Subpicosecond Time-Resolved Raman Spectroscopy of LO Phonons in GaAs," *Physical Review Letters* **54**, 2151 (1985), doi:10.1103/PhysRevLett.54.2151.

[5] J. F. Young and H. M. van Driel, "Ambipolar diffusion of high-density electrons and holes in Ge, Si, and GaAs: Many-body effects," *Physical Review B* **26**, 2147 (1982), doi:10.1103/PhysRevB.26.2147.

AI Use Disclosure

Generative AI (OpenAI Codex) assisted with Python analysis, plotting, mathematical derivations, literature checks, and drafting and revising this report. Calculations and figures were generated from the supplied experimental files. AI assistance does not replace independent scientific review; responsibility for the submitted analysis and conclusions remains with the authors.