

Consistent Partial Least Squares: A cSEM tutorial

Jason J. Berger, Florian Schubert

September 18, 2022

Abstract

This tutorial article provides a comprehensive, step-by-step illustration of consistent partial least squares (PLSc) using the **cSEM** package in R. PLSc is a variant of partial least squares path modeling, a composite-based approach to structural equation modeling, that produces consistent parameter estimates for latent variable models. In particular, PLSc corrects construct correlations for attenuation using Dijkstra-Henseler's composite reliability coefficient ϱ_A . Building on the employee retention example introduced by Cheah, Sarstedt, Hair, and Ringle (2026), we demonstrate how to install and load **cSEM**, specify the model using **lavaan**-style syntax, estimate the PLSc-SEM model, evaluate measurement model quality (internal consistency reliability, convergent validity, and discriminant validity), and assess the structural model (collinearity, effect sizes, model fit, and path coefficients with bootstrap inference). We further contrast the PLSc-SEM results with standard PLS-SEM estimates and discuss practical considerations for using PLSc-SEM in empirical research.

Keywords: measurement error, bias correction, partial least squares structural equation modeling (PLS-SEM), factor score regression

Introduction

Structural equation modeling (SEM) is a versatile multivariate analysis framework used in the behavioral, social, medical, and management sciences to study complex relationships between constructs and their relations with observed variables (e.g., Kline, 2023; Marcoulides & Schumacker, 1996). To estimate structural equation models, various approaches have been proposed, including maximum-likelihood (Jöreskog, 1970), weighted least squares (Browne, 1974), factor score regression (Devlieger & Rosseel, 2017; Skrandal & Laake, 2001) and (integrated) generalized structured component analysis (Hwang et al., 2021; Hwang & Takane, 2004)

A composite-based estimator to SEM that gained popularity over the last decades in various fields of social sciences (Cook & Forzani, 2023), including marketing (Sarstedt et al., 2022), information systems research (Benitez, Henseler, Castillo, & Schuberth, 2020; Evermann & Rönkkö, 2023), human resource management (Ringle, Sarstedt, Mitchell, & Gudergan, 2020), and tourism research (Müller, Schuberth, & Henseler, 2018), is partial least squares path modeling (PLS-PM, Wold, 1982), also known as partial least squares structural equation modeling (PLS-SEM, Hair, Ringle, & Sarstedt, 2011). PLS-PM is a two-step estimation procedure (Schuberth, Zaza, & Henseler, 2023). In the first step, construct scores are obtained by the partial least squares algorithm. Subsequently, these construct scores are used to estimate the model parameters. Although PLS-PM is computationally efficient, it is known that in its original form to produce inconsistent estimates for models involving latent variables due to attenuation bias (e.g., Dijkstra, 1985; Hui & Wold, 1982; Rönkkö & Evermann, 2013; Schuberth, Rosseel, et al., 2023).

To address this limitation, consistent partial least squares (PLSc, Dijkstra, 2013; Dijkstra & Henseler, 2015a, 2015b; Dijkstra & Schermelleh-Engel, 2014) was introduced. PLSc is based on PLS-PM, but applies a correction for attenuation to obtain consistent estimates of reflective measurement models and path coefficient between latent variables. Additionally, PLSc has been extended to deal with ordinal variables (Schuberth, Henseler, & Dijkstra, 2018), randomly occurring outliers (Schamberger, Schuberth, Henseler, & Dijkstra, 2020) and multicollinearity issues (Jung & Park, 2018).

To apply PLS-PM and PLSc, various implementations have been developed (Venturini, Mehmetoglu, & Latan, 2023). They can be distinguished into: (i) proprietary software and (ii) open-source software. Proprietary software for conducting PLS-PM and PLSc includes SmartPLS (Ringle, Wende, & Becker, 2024), WarpPLS (Kock, 2025) and ADANCO (Henseler, 2025). On the other hand, open-source software alternatives include implementations in the statistical programming environment R (R Core Team, 2025) such as matrixpls (Rönkkö, 2022), SEMinR (Ray, Danks, & Calero Valdez, 2026), cSEM (Rademaker & Schuberth, 2020) and plsmpm (Sanchez, Trinchera, Russolillo, & Bertrand, 2025). Similarly, it includes implementations in python (Python Software Foundation, 2024) such as plsmpm (Humble, 2024). While proprietary software such as SmartPLS often shows high ease of use (Cheah, Magno, & Cassia, 2024), they conflict with the open science principles (?). For example, their codebase is not openly accessible of transparency (Morin et al., 2012), reproducibility (Ince, Hatton, & Graham-Cumming, 2012), and accessibility/inclusiveness (). Open-source software overcomes these limitations (Barba, 2022). Therefore, this tutorial presents the R package cSEM as a full-fledged open-source alternative to SmartPLS to apply PLS-PM and PLSc.

Barba (2022)

(Chuah et al., 2021)

The remainder of the tutorial is structured as follows. Section Section Section

1 cSEM R package Illustration

1.1 First steps in R

This section illustrates how to apply PLSc using the cSEM package, starting from the very first steps. It assumes no prior experience with R; readers already familiar with R and RStudio may skip directly to Section 1.2.

To use the cSEM package, users first need to install R and an integrated development environment (IDE) such as RStudio. For the installation, we refer to the official guides for R (<https://cran.r-project.org>) and RStudio (<https://posit.co/download/rstudio-desktop>).

When RStudio is opened for the first time, it displays four panes (Figure 1). The two most important ones are the *script editor* (upper left), where code is written and saved, and the *Console* (lower left), where the code is executed and results are printed. The *Environment* pane (upper right) lists the objects currently loaded into memory, and the fourth pane (lower right) provides access to files, plots, and help pages.

Although code can be typed directly into the console, it is good practice to work in a script, since a script can be saved, shared, and re-run, which is essential for reproducible analyses. To create a new script, click **File** → **New File** → **R Script**. The typical workflow is to write code in the editor and run the selected line(s) with **Ctrl + Enter**. Any line beginning with **#** is treated as a comment: it documents what the code does and is ignored when the code runs.

```
# This is a comment and is not executed.  
1 + 1 # Code is executed; the result is printed in the Console.  
  
[1] 2
```

Before cSEM can be used, it must be installed. The cSEM package is available on CRAN, so the most recent stable version can be installed with:

```
install.packages("cSEM")
```

Installation only needs to be done once per machine (rerun this line to update the package later). Moreover, development versions can be installed from GitHub: <https://github.com/FloSchuberth/cSEM>. After installation, the package must be loaded at the start of every new R session before its functions become available:

```
library(cSEM)
```

```
Attache Paket: 'cSEM'  
Das folgende Objekt ist maskiert 'package:stats':  
  predict  
Das folgende Objekt ist maskiert 'package:grDevices':  
  savePlot
```

With cSEM installed and loaded, we can now import the data and specify the model, as described in the following sections.

1.2 Model and Data

The cSEM package (Rademaker & Schuberth, 2020) offers a variety of composite-based approaches to SEM including PLS-PM and PLSc. To illustrate the application of PLSc using

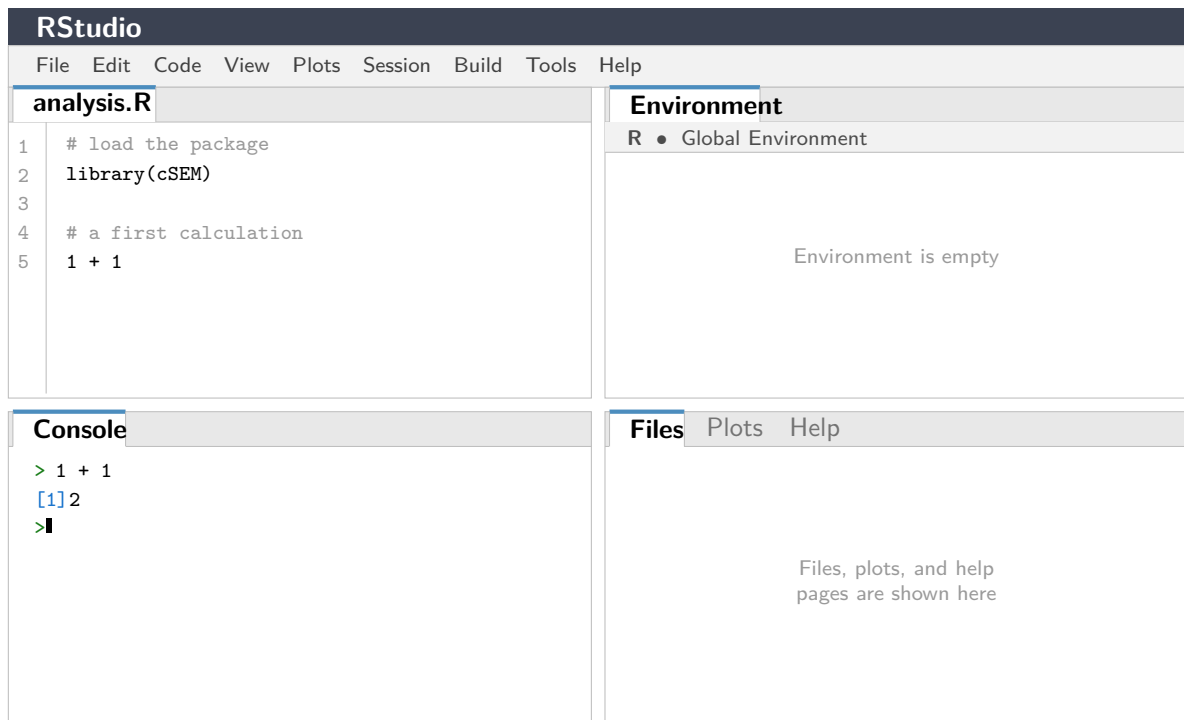


Figure 1: The four panes of the RStudio interface: the script editor (upper left), the *Console* (lower left), the *Environment* pane (upper right), and the files/plots/help pane (lower right).

cSEM, we use the data and model used in Cheah et al. (2026) to demonstrate SmartPLS. Similarly, we compare the results to those of the maximum-likelihood estimation as implemented in the R package lavaan (Rosseel, 2012; Rosseel, Jorgensen, & De Wilde, 2025).

Following Cheah et al. (2026), our illustration draws on the employee retention model introduced by Hair, Black, Babin, and Anderson (2019, Chapter 13). The model explains the effects of organizational commitment (OC) and job satisfaction (JS) on employees' staying intentions (SI), with work environment perceptions (EP) and attitudes toward coworkers (AC) as exogenous antecedent constructs. Five constructs are reflectively measured by a total of 21 indicators. A detailed description of the indicators can be found in Cheah et al. (2026). The model is presented in Figure 2.

The dataset used for model estimation is publicly available from the SmartPLS website: <https://www.smartpls.com/documentation/sample-projects/employee-retention>. The synthetic dataset comprises $N = 400$ observations from HBAT Industries and was generated to satisfy the assumptions of factor-based SEM, including multivariate normality. For this tutorial, we assume the data have been downloaded as a CSV file. After downloading the dataset, it needs to be loaded into the R Environment. The Employee Retention Model is stored as an CSV File using ';' as the separator, thus it can be loaded into R using following command:

```
# Import dataset
HBAT_SEM <- read.csv("data/HBAT_SEM.csv", sep=";")

# Select relevant variables
HBAT_SEM_rel <- HBAT_SEM[, c("AC1", "AC2", "AC3", "AC4",
                             "EP1", "EP2", "EP3", "EP4",
                             "JS1", "JS2", "JS3", "JS4", "JS5",
                             "OC1", "OC2", "OC3", "OC4",
                             "SI1", "SI2", "SI3", "SI4")]
```

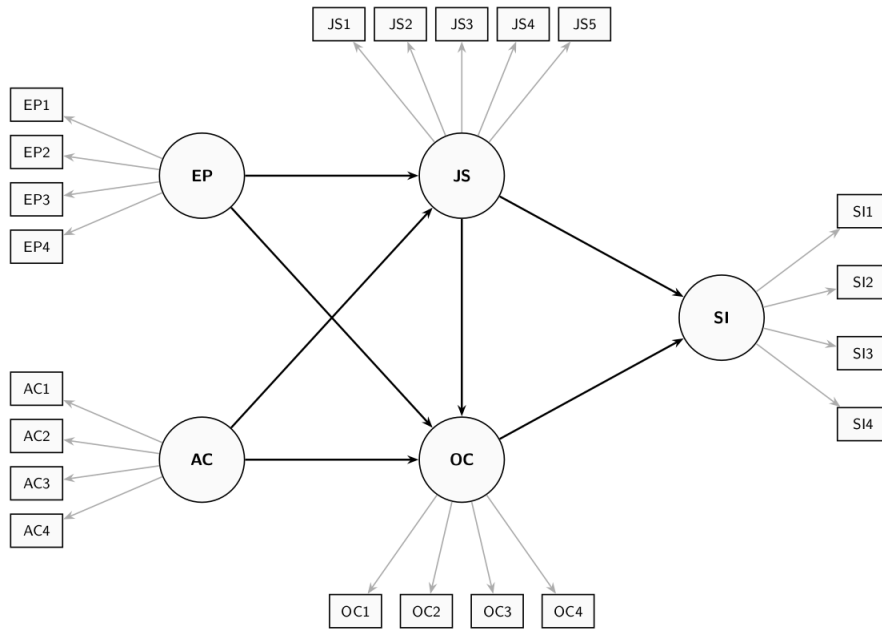


Figure 2: Employee Retention Model

```
# show dimensions of the relevant dataset
dim(HBAT_SEM_rel)

[1] 400 21
```

When using their own data, users must ensure it is stored as a data frame or a matrix before passing it to `cSEM` functions; if necessary, the data can be converted with `as.data.frame()` or `as.matrix()`.

1.3 Model specification

In `cSEM`, models are specified using the `lavaan` package (Rosseel, Jorgensen, & De Wilde, 2025) model syntax. The `lavaan` package does not need to be installed to use the syntax. In particular, the `=~` and the `<~` operators are used to define the relations between the constructs and their indicators. Specifically, the `=~` operator is used to specify reflective measurement models, while the `<~` is used to specify composite models (see Lord, Novick, & Birnbaum, 2008, for an explanation of reflective and composite models). In addition, the `~` operator is used to specify the relations among constructs. In case, an observed variable should be directly accounted for in the structural model, it must be specified as a single indicator construct, as common in PLS-PM (). The `cSEM` specification of the retention model illustrated in Figure 2 is as follows:

```
model <- "
  # Measurement model
  AC =~ AC1 + AC2 + AC3 + AC4
  EP =~ EP1 + EP2 + EP3 + EP4
  JS =~ JS1 + JS2 + JS3 + JS4 + JS5
  OC =~ OC1 + OC2 + OC3 + OC4
  SI =~ SI1 + SI2 + SI3 + SI4

  # Structural model
```

```

JS ~ EP + AC
OC ~ EP + AC + JS
SI ~ JS + OC
"

```

1.4 PLS-SEM Estimation

The central function is `csem()`. The minimal input required for the `csem` function is a dataset and a model. In addition, the `csem` function shows various arguments that can be used to adjust the PLS algorithm. These arguments include:

- .data** A data frame or matrix containing the observed indicator variables.
- .model** A model string written in `lavaan` syntax, with `=~` for measurement relations and `~` for structural (regression) relations.
- .approach_weights** The weighting scheme for computing composite scores. Set to "PLS-PM" for PLS-based estimation (the default).
- .disattenuate** Logical. When set to `TRUE`, `cSEM` applies the PLS-SEM correction for attenuation, yielding consistent estimates under the common factor model. This is the key switch that distinguishes PLS-SEM from standard PLS-SEM.
- .PLS_weight_scheme_inner** The inner weighting scheme; options include "path" (default), "centroid", and "factorial".

To ultimately estimate the model using PLS-SEM, we call `csem()` with `.disattenuate = TRUE`. This single argument activates the consistent correction that distinguishes PLS-SEM from standard PLS-SEM:

```

# PLS-SEM estimation
res_plsc <- csem(
  .data           = HBAT_SEM_rel,
  .model          = model,
  .approach_weights = "PLS-PM",
  .disattenuate   = TRUE,
  .PLS_weight_scheme_inner = "path"
)

Error:
! The following error occurred while processing the data:
Data set contains missing values in rows: '1', '344'
Remove NAs or use imputation methods to replace them.

# Verify convergence
verify(res_plsc)

Error:
! Objekt 'res_plsc' nicht gefunden

```

The `verify()` function checks whether the PLS algorithm converged, whether all construct reliability estimates (ρ_A) are positive (a necessary condition for the PLS-SEM correction), and whether the model-implied indicator correlation matrix is admissible. If all checks pass, the estimation can be considered successful.

To obtain a comprehensive overview of all results, including loadings, path coefficients, reliability measures, and R^2 values, use:

```
# Full results summary
summary_res <- summarize(res_plsc)

Error:
! Objekt 'res_plsc' nicht gefunden

print(summary_res)

Error:
! Objekt 'summary_res' nicht gefunden

# For a more compact overview
summary_res$Estimates$Loading_estimates

Error:
! Objekt 'summary_res' nicht gefunden

summary_res$Estimates$Path_estimates

Error:
! Objekt 'summary_res' nicht gefunden
```

For comparison, standard PLS-SEM (without the consistency correction) can be obtained by setting `.disattenuate = FALSE`:

```
# Standard PLS-SEM (without correction)
res_pls <- csem(
  .data          = HBAT_SEM_rel,
  .model         = model,
  .approach_weights = "PLS-PM",
  .disattenuate  = FALSE
)

Error:
! The following error occurred while processing the data:
Data set contains missing values in rows: '1', '344'
Remove NAs or use imputation methods to replace them.
```

1.5 Measurement Model Assessment

Following the guidelines described in Hair, Hult, Ringle, and Sarstedt (2017, Chapter 4) and Sarstedt, Ringle, and Hair (n.d.), we assess the reflective measurement model in terms of internal consistency reliability, convergent validity, and discriminant validity. The `assess()` function in `cSEM` provides all relevant quality criteria:

```
# Compute all quality criteria
quality <- assess(res_plsc)

Error:
! Objekt 'res_plsc' nicht gefunden
```



```

# Internal consistency reliability
quality$Cronbachs_alpha      # Cronbach's alpha

Error:
! Objekt 'quality' nicht gefunden

quality$RhoA                  # Dijkstra-Henseler rho_A

Error:
! Objekt 'quality' nicht gefunden

quality$RhoC                  # Composite reliability (Joreskog rho_C)

Error:
! Objekt 'quality' nicht gefunden

# Convergent validity
quality$AVE                   # Average variance extracted

Error:
! Objekt 'quality' nicht gefunden

# Indicator loadings
summary_res$Estimates$Loading_estimates

Error:
! Objekt 'summary_res' nicht gefunden

```

The results in Table ?? indicate that all constructs meet the commonly accepted thresholds. All Cronbach's α and ρ_A values exceed 0.70, and all AVE values exceed 0.50, supporting internal consistency reliability and convergent validity. While some outer loadings (e.g., OC1 = 0.427) fall below the recommended threshold of 0.708, these indicators are retained because the corresponding constructs exhibit adequate reliability and AVE, and their retention preserves content validity (?).

1.5.1 Discriminant Validity: The HTMT Criterion

Discriminant validity is assessed using the heterotrait-monotrait ratio of correlations (HTMT; Henseler, Ringle, & Sarstedt, 2015). In cSEM, HTMT values are available via `assess()`:

```

# HTMT values
quality$HTMT

Error:
! Objekt 'quality' nicht gefunden

# Bootstrap confidence intervals for HTMT
res_plsc_boot <- csem(
  .data          = hbat_sub,
  .model         = model,
  .approach_weights = "PLS-PM",
  .disattenuate  = TRUE,
  .resample_method = "bootstrap",
  .R             = 10000,
  .seed         = 42
)

```

```

Error:
! Objekt 'hbat_sub' nicht gefunden

# Extract HTMT inference
htmt_infer <- infer(res_plsc_boot)

Error:
! Objekt 'res_plsc_boot' nicht gefunden

# The infer() output includes CIs for all quality criteria
# including HTMT values

```

Table 1: HTMT criterion results.

Construct	AC	EP	JS	OC
EP	0.257 [0.163; 0.347]			
JS	0.066 [0.032; 0.075]	0.244 [0.164; 0.326]		
OC	0.275 [0.195; 0.355]	0.495 [0.405; 0.580]	0.209 [0.118; 0.297]	
SI	0.310 [0.222; 0.395]	0.569 [0.471; 0.656]	0.232 [0.154; 0.313]	0.501 [0.410; 0.586]

Note. Values in brackets: 90% percentile bootstrap confidence intervals (10,000 subsamples).

The HTMT results in Table 1 confirm discriminant validity: none of the upper bounds of the 90% bootstrap confidence intervals exceed the conservative threshold of 0.85 (Franke & Sarstedt, 2019; Henseler et al., 2015). These findings are identical to those reported by Cheah et al. (2026, Table 2), confirming that the cSEM results replicate the SmartPLS output.

1.6 Structural Model Assessment

1.6.1 Collinearity Assessment

Before interpreting the structural model, we check for collinearity among predictor constructs by examining variance inflation factors (VIF). In cSEM, VIF values are available through the `assess()` function:

```

# VIF values for structural model
quality$VIF

Error:
! Objekt 'quality' nicht gefunden

```

All VIF values should be below the critical threshold of three (?), indicating that multi-collinearity is not a concern.

1.6.2 Path Coefficients and Bootstrap Inference

To evaluate the statistical significance of the structural relationships, we rely on bootstrap confidence intervals. The bootstrap estimation was already conducted above. Path coefficients and their confidence intervals are extracted as follows:

```

# Extract path coefficient estimates
summarize(res_plsc)$Estimates$Path_estimates

```

```
Error:
! Objekt 'res_plsc' nicht gefunden

# Bootstrap inference for path coefficients
boot_infer <- infer(res_plsc_boot)

Error:
! Objekt 'res_plsc_boot' nicht gefunden

# Percentile bootstrap confidence intervals (95%)
boot_infer$Path_estimates$CI_percentile

Error:
! Objekt 'boot_infer' nicht gefunden
```

Table 2: Structural model assessment results.

Relationship	Path coeff.	SD	<i>t</i> value	<i>p</i> value	95% CI	VIF	f^2
AC → JS	−0.002	0.058	0.043	.966	[−0.119; 0.106]	1.055	0.000
AC → OC	0.172	0.048	3.619	.000	[0.078; 0.264]	1.055	0.039
EP → JS	0.245	0.053	4.641	.000	[0.136; 0.343]	1.055	0.060
EP → OC	0.430	0.059	7.272	.000	[0.309; 0.540]	1.101	0.227
JS → OC	0.095	0.052	1.820	.069	[−0.011; 0.194]	1.047	0.012
JS → SI	0.132	0.046	2.833	.005	[0.043; 0.225]	1.035	0.023
OC → SI	0.490	0.051	9.520	.000	[0.386; 0.587]	1.035	0.321

Note. CI = 95% percentile bootstrap confidence interval (10,000 subsamples). Results replicate Cheah et al. (2026, Table 3).

The structural model results in Table 2 are consistent with those reported by Cheah et al. (2026, Table 3). Based on the 95% percentile bootstrap confidence intervals, all structural relationships are statistically significant except for the paths from AC to JS ($\beta = -0.002$, $p = .966$) and from JS to OC ($\beta = 0.095$, $p = .069$). Environment perceptions (EP) exert the strongest positive effect on organizational commitment ($\beta = 0.430$), which in turn is the dominant predictor of staying intentions ($\beta = 0.490$).

1.6.3 Effect Sizes

Cohen's f^2 effect sizes quantify the substantive impact of each predictor. In cSEM:

```
# Effect sizes
quality$F2

Error:
! Objekt 'quality' nicht gefunden
```

The paths EP → OC ($f^2 = 0.227$) and OC → SI ($f^2 = 0.321$) show medium to large effects, while the remaining significant paths exhibit small effects. The AC → JS relationship has a trivial effect size of essentially zero.

1.6.4 Model Fit Assessment

Following Schubert, Rosseel, et al. (2023), we assess model fit using the `testOMF()` function, which implements a bootstrap-based test comparing the empirical and model-implied correlation matrices:

```

# Overall model fit test
fit_test <- testOMF(
  res_plsc,
  .R = 10000,
  .seed = 42,
  .handle_inadmissibles = "replace"
)

Error:
! Objekt 'res_plsc' nicht gefunden

# Print results
fit_test

Error:
! Objekt 'fit_test' nicht gefunden

# The output includes:
# - SRMR and its bootstrap-based critical value
# - dULS (squared Euclidean distance) and critical value
# - dG (geodesic distance) and critical value

```

Table 3: Model fit statistics for PLS-SEM estimation.

	Saturated model	Estimated model
SRMR	0.044	0.071
d_{ULS}	0.438; UB _{95%} : 0.636	1.155; UB _{95%} : 0.641
d_{G}	0.303; UB _{95%} : 0.953	0.330; UB _{95%} : 0.870

Note. UB_{95%} = 95th percentile of the bootstrap distribution (10,000 subsamples).

Consistent with Cheah et al. (2026, Table 4), the SRMR of 0.071 falls below the conventional 0.08 threshold (Hu & Bentler, 1999), supporting adequate model fit. The bootstrap-based test yields mixed results: d_{ULS} exceeds its critical value (rejecting fit), while d_{G} falls below its critical value (supporting fit). Overall, the model exhibits a satisfactory level of fit.

2 Comparison with CB-SEM via lavaan

A key advantage of working in R is the seamless ability to compare PLS-SEM results with those from CB-SEM using the *lavaan* package (Rosseel, 2012). This allows researchers to conduct the multimethod estimation strategy advocated by Cheah et al. (2026) and Sarstedt et al. (2024) entirely within one script:

```

# CB-SEM via lavaan
library(lavaan)

This is lavaan 0.6-21
lavaan is FREE software! Please report any bugs.

lavaan_model <- "
  # Measurement model
  AC =~ AC1 + AC2 + AC3 + AC4

```

```

EP =~ EP1 + EP2 + EP3 + EP4
JS =~ JS1 + JS2 + JS3 + JS4 + JS5
OC =~ OC1 + OC2 + OC3 + OC4
SI =~ SI1 + SI2 + SI3 + SI4

# Structural model
JS ~ EP + AC
OC ~ EP + AC + JS
SI ~ JS + OC
"

fit_cbsem <- sem(lavaan_model, data = hbat_sub)

Error:
! Objekt 'hbat_sub' nicht gefunden

summary(fit_cbsem, fit.measures = TRUE, standardized = TRUE)

Error in 'h()':
! Fehler bei der Auswertung des Argumentes 'object' bei der Methodenauswahl für Funktion
'summary': Objekt 'fit_cbsem' nicht gefunden

# Extract standardized path coefficients
parameterEstimates(fit_cbsem, standardized = TRUE) |>
  subset(op == "~", select = c(lhs, op, rhs, est, std.all, pvalue))

Error:
! Objekt 'fit_cbsem' nicht gefunden

```

The lavaan model specification is identical to the cSEM specification, making side-by-side comparison straightforward. We can extract and compare the structural path coefficients:

```

# Compare structural path coefficients
# PLSc-SEM
plsc_paths <- summarize(res_plsc)$Estimates$Path_estimates

Error:
! Objekt 'res_plsc' nicht gefunden

# CB-SEM
cbsem_paths <- parameterEstimates(fit_cbsem, standardized = TRUE)

Error:
! Objekt 'fit_cbsem' nicht gefunden

cbsem_struct <- cbsem_paths[cbsem_paths$op == "~",
  c("lhs", "rhs", "std.all")]

Error:
! Objekt 'cbsem_paths' nicht gefunden

# Model fit comparison
fitMeasures(fit_cbsem, c("chisq", "df", "pvalue", "rmsea",
  "rmsea.ci.lower", "rmsea.ci.upper",
  "srmr", "cfi", "tli", "nfi"))

Error in 'h()':
! Fehler bei der Auswertung des Argumentes 'object' bei der Methodenauswahl für Funktion
'fitMeasures': Objekt 'fit_cbsem' nicht gefunden

```

In line with the findings of Cheah et al. (2026, Figure 4), the CB-SEM and PLSc-SEM path coefficient estimates closely correspond. The CB-SEM model fit indices (RMSEA = 0.038, SRMR = 0.060, CFI = 0.976) confirm good model fit, supporting the conclusions drawn from the PLSc-SEM analysis.

3 Comparing PLSc-SEM with Standard PLS-SEM

An instructive exercise is to compare PLSc-SEM with standard PLS-SEM to see the effect of the consistency correction. In `cSEM`, this is achieved simply by toggling `.disattenuate`:

```
# Standard PLS-SEM (no correction)
res_pls <- csem(
  .data          = hbat_sub,
  .model         = model,
  .approach_weights = "PLS-PM",
  .disattenuate  = FALSE
)

Error:
! Objekt 'hbat_sub' nicht gefunden

# Side-by-side comparison
plsc_est <- summarize(res_plsc)$Estimates$Path_estimates

Error:
! Objekt 'res_plsc' nicht gefunden

pls_est <- summarize(res_pls)$Estimates$Path_estimates

Error:
! Objekt 'res_pls' nicht gefunden

comparison <- merge(
  plsc_est[, c("Name", "Estimate")],
  pls_est[, c("Name", "Estimate")],
  by = "Name", suffixes = c("_PLSc", "_PLS")
)

Error:
! Objekt 'plsc_est' nicht gefunden

print(comparison)

Error:
! Objekt 'comparison' nicht gefunden
```

As expected from the methodological literature (Dijkstra & Henseler, 2015a), the standard PLS-SEM path coefficients are attenuated (biased toward zero) relative to the PLSc-SEM estimates. The attenuation is most visible for paths involving constructs with lower reliability (e.g., OC, which has a relatively low loading for OC1). The PLSc correction recovers the consistent estimates that would be expected under the common factor model.

4 A Compact Reproducible Workflow

For convenience, we present a compact, self-contained R script that reproduces the complete PLSc-SEM analysis. This script can serve as a template for researchers applying PLSc-SEM with cSEM to their own datasets:

```
# =====
# PLSc-SEM Analysis with cSEM: Compact Reproducible Script
# =====

# 1. Setup ----
library(cSEM)

hbat <- read.csv("HBAT_Employee_Retention.csv", sep = ";")

Warning in file(file, "rt"): kann Datei 'HBAT_Employee_Retention.csv' nicht Ã¶ffnen:
No such file or directory
Error in 'file()':
! kann Verbindung nicht Ã¶ffnen

vars <- c(paste0("AC", 1:4), paste0("EP", 1:4),
          paste0("JS", 1:5), paste0("OC", 1:4),
          paste0("SI", 1:4))
dat <- hbat[, vars]

Error:
! Objekt 'hbat' nicht gefunden

# 2. Model specification ----
model <- "
  AC =~ AC1 + AC2 + AC3 + AC4
  EP =~ EP1 + EP2 + EP3 + EP4
  JS =~ JS1 + JS2 + JS3 + JS4 + JS5
  OC =~ OC1 + OC2 + OC3 + OC4
  SI =~ SI1 + SI2 + SI3 + SI4
  JS ~ EP + AC
  OC ~ EP + AC + JS
  SI ~ JS + OC
"

# 3. PLSc-SEM estimation ----
res <- csem(dat, model,
            .approach_weights = "PLS-PM",
            .disattenuate = TRUE)

Error:
! Objekt 'dat' nicht gefunden

verify(res)

Error:
! Objekt 'res' nicht gefunden

# 4. Assessment ----
q <- assess(res)
```

```

Error:
! Objekt 'res' nicht gefunden

q$Cronbachs_alpha; q$RhoA; q$RhoC; q$AVE

Error in 'q$Cronbachs_alpha':
! Objekt des Typs 'closure' ist nicht indizierbar

q$HTMT; q$VIF; q$F2

Error in 'q$HTMT':
! Objekt des Typs 'closure' ist nicht indizierbar

# 5. Bootstrap inference ----
res_boot <- csem(dat, model,
  .approach_weights = "PLS-PM",
  .disattenuate = TRUE,
  .resample_method = "bootstrap",
  .R = 10000, .seed = 42)

Error:
! Objekt 'dat' nicht gefunden

infer(res_boot)

Error:
! Objekt 'res_boot' nicht gefunden

# 6. Model fit ----
testOMF(res, .R = 10000, .seed = 42,
  .handle_inadmissibles = "replace")

Error:
! Objekt 'res' nicht gefunden

```

5 Concluding Remarks

This tutorial has demonstrated how to conduct a complete PLS-SEM analysis using the **cSEM** package in R, replicating the employee retention model analysis presented by Cheah et al. (2026) using SmartPLS 4. The results obtained via **cSEM** are identical to those reported in the SmartPLS-based tutorial, confirming that both software implementations produce consistent estimates.

The **cSEM** package offers several advantages for researchers seeking a script-based, open-source approach to PLS-SEM. First, the use of R scripts ensures full reproducibility: every step from data import to final inference is documented in executable code that can be shared, reviewed, and re-run. Second, working within the R ecosystem provides seamless integration with CB-SEM via **lavaan**, enabling the multimethod estimation strategy advocated by Cheah et al. (2026) and Sarstedt et al. (2024) within a single analytical pipeline. Third, **cSEM** provides a rich set of postestimation tools—including **testOMF()** for model fit, **predict()** for out-of-sample prediction, and **testMICOM()** for measurement invariance—that support a comprehensive model evaluation workflow.

Several practical considerations warrant mention. Like SmartPLS, **cSEM** allows toggling between standard PLS-SEM and PLS-SEM with a single argument (**.disattenuate**), mak-

ing it straightforward to assess the impact of the consistency correction. Furthermore, **cSEM** supports additional weighting approaches beyond PLS-PM, including generalized structured component analysis (GSCA) weights and various regression-based approaches, offering flexibility for sensitivity analyses.

However, users should be aware of certain limitations. The PLSc correction requires that all ρ_A estimates are positive and that the resulting corrected correlation matrix is positive definite. The `verify()` function checks these conditions, but researchers should inspect warning messages carefully, especially with small samples or weakly measured constructs. As Cheah et al. (2026) note, the attenuation correction in PLSc-SEM alters the original PLS-SEM path coefficients, which means that predictive assessment methods such as PLS_{predict} (Shmueli et al., 2019) are not directly applicable in the PLSc framework.

We hope this tutorial serves as a practical guide for researchers who wish to leverage the strengths of PLSc-SEM within an open-source, reproducible analytical framework. Coupled with the SmartPLS-based tutorial by Cheah et al. (2026), researchers now have comprehensive guidance for conducting PLSc-SEM analyses across both GUI-based and script-based software environments.

References

- Barba, L. A. (2022). Defining the role of open source software in research reproducibility. *Computer*, 55(8), 40–48. doi: 10.1109/mc.2022.3177133
- Benitez, J., Henseler, J., Castillo, A., & Schuberth, F. (2020). How to perform and report an impactful analysis using partial least squares: Guidelines for confirmatory and explanatory IS research. *Information & Management*, 2(57), 103168. doi: 10.1016/j.im.2019.05.003
- Browne, M. W. (1974). Generalized least squares estimators in the analysis of covariance structures. *South African Statistical Journal*, 8(1), 1–24. doi: 10.1002/j.2333-8504.1973.tb00197.x
- Cheah, J.-H., Magno, F., & Cassia, F. (2024). Reviewing the SmartPLS 4 software: the latest features and enhancements. *Journal of Marketing Analytics*, 12, 97–102. doi: 10.1057/s41270-023-00266-y
- Cheah, J.-H., Sarstedt, M., Hair, J. F., & Ringle, C. M. (2026). Consistent partial least squares structural equation modeling using smartpls. *Structural Equation Modeling: A Multidisciplinary Journal*, 1–14. doi: 10.1080/10705511.2026.2633754
- Chuah, F., Memon, M. A., Thurasamy, R., Cheah, J.-H., Ting, H., & Cham, T. H. (2021, aug). PLS-SEM using R: An introduction to cSEM and SEMinR. *Journal of Applied Structural Equation Modeling*, 5(2), 1–35. doi: 10.47263/jasem.5(2)01
- Cook, R. D., & Forzani, L. (2023). On the role of partial least squares in path analysis for the social sciences. *Journal of Business Research*, 167, 114132. doi: 10.1016/j.jbusres.2023.114132
- Devlieger, I., & Rosseel, Y. (2017). Factor score path analysis. *Methodology*, 13, 31–38.
- Dijkstra, T. K. (1985). *Latent variables in linear stochastic models: Reflections on "maximum likelihood" and "partial least squares" methods* (Vol. 1). Amsterdam: Sociometric Research Foundation.
- Dijkstra, T. K. (2013). *A note on how to make pls consistent* (Tech. Rep.). working paper, University of Groningen, Groningen, The Netherlands. Retrieved from <http://www.rug.nl/staff/tkdijkstra/how-to-make-pls-consistent.pdf>
- Dijkstra, T. K., & Henseler, J. (2015a). Consistent and asymptotically normal PLS estimators for linear structural equations. *Computational Statistics & Data Analysis*, 81, 10–23. doi: 10.1016/j.csda.2014.07.008
- Dijkstra, T. K., & Henseler, J. (2015b). Consistent partial least squares path modeling. *MIS Quarterly*, 39(2), 297–316. doi: 10.25300/MISQ/2015/39.2.02
- Dijkstra, T. K., & Schermelleh-Engel, K. (2014). Consistent partial least squares for nonlinear structural equation models. *Psychometrika*, 79(4), 585–604. doi: 10.1007/s11336-013-9370-0
- Evermann, J., & Rönkkö, M. (2023). Recent developments in PLS. *Communications of the Association for Information Systems*, 52, 663–667. doi: 10.17705/1CAIS.05229
- Franke, G., & Sarstedt, M. (2019). Heuristics versus statistics in discriminant validity testing: a comparison of four procedures. *Internet Research*, 29(3), 430–447. doi: 10.1108/IntR-12-2017-0515
- Hair, J. F., Black, W. C., Babin, B. J., & Anderson, R. E. (2019). *Multivariate data analysis* (8th ed.). Cengage.
- Hair, J. F., Hult, G. T. M., Ringle, C. M., & Sarstedt, M. (2017). *A primer on partial least squares structural equation modeling (PLS-SEM)* (Second edition ed.). SAGE.
- Hair, J. F., Ringle, C. M., & Sarstedt, M. (2011). PLS-SEM: Indeed a silver bullet. *Journal of Marketing Theory and Practice*, 19(2), 139–152. doi: 10.2753/MTP1069-6679190202
- Henseler, J. (2025). Adanco 2.4 [Computer software manual]. Enschede.
- Henseler, J., Ringle, C. M., & Sarstedt, M. (2015). A new criterion for assessing discrimi-

- nant validity in variance-based structural equation modeling. *Journal of the Academy of Marketing Science*, 43(1), 115–135. doi: 10.1007/s11747-014-0403-8
- Hu, L.-t., & Bentler, P. M. (1999). Cutoff criteria for fit indexes in covariance structure analysis: Conventional criteria versus new alternatives. *Structural Equation Modeling: A Multidisciplinary Journal*, 6(1), 1–55. doi: 10.1080/10705519909540118
- Hui, B. S., & Wold, H. (1982). Consistency and consistency at large of partial least squares estimates. In K. G. Jöreskog & H. Wold (Eds.), *Systems under indirect observation: Causality, structure, prediction part ii* (pp. 119–130). Amsterdam: North-Holland.
- Humble, J. (2024). plspm: A library implementing partial least squares path modeling [Computer software manual]. Retrieved from <https://plspm.readthedocs.io/> (Python package version 0.5.7)
- Hwang, H., Cho, G., Jung, K., Falk, C., Flake, J., Jin, M. J., & Lee, S. H. (2021). An approach to structural equation modeling with both factors and components: Integrated generalized structured component analysis. *Psychological Methods*, 26(3), 273–294. doi: 10.1037/met0000336
- Hwang, H., & Takane, Y. (2004). Generalized structured component analysis. *Psychometrika*, 69(1), 81–99. doi: 10.1007/BF02295841
- Ince, D. C., Hatton, L., & Graham-Cumming, J. (2012). The case for open computer programs. *Nature*, 482(7386), 485–488. doi: 10.1038/nature10836
- Jöreskog, K. G. (1970). A general method for estimating a linear structural equation system. *ETS Research Bulletin Series*, 1970(2), i–41. doi: 10.1002/j.2333-8504.1970.tb00783.x
- Jung, S., & Park, J. (2018). Consistent partial least squares path modeling via regularization. *Frontiers in Psychology*, 9. doi: 10.3389/fpsyg.2018.00174
- Kline, R. B. (2023). *Principles and practice of structural equation modeling* (5th ed.). New York: The Guilford Press.
- Kock, N. (2025). *WarpPLS user manual: Version 8.0*. Laredo, TX: ScriptWarp Systems.
- Lord, F. M., Novick, M. R., & Birnbaum, A. (Eds.). (2008). *Statistical theories of mental test scores*. Information Age Pub.
- Marcoulides, G. A., & Schumacker, R. E. (Eds.). (1996). *Advanced structural equation modeling: Issues and techniques*. New York: Psychology Press.
- Morin, A., Urban, J., Adams, P. D., Foster, I., Sali, A., Baker, D., & Sliz, P. (2012). Shining light into black boxes. *Science*, 336(6078), 159–160. doi: 10.1126/science.1218263
- Müller, T., Schuberth, F., & Henseler, J. (2018). PLS path modeling - a confirmatory approach to study tourism technology and tourist behavior. *Journal of Hospitality and Tourism Technology*, 9(3), 249–266. doi: 10.1108/JHTT-09-2017-0106
- Python Software Foundation. (2024). Python language reference, version 3.12 [Computer software manual]. Retrieved from <https://www.python.org>
- R Core Team. (2025). R: A language and environment for statistical computing [Computer software manual]. Vienna, Austria. Retrieved from <https://www.R-project.org/>
- Rademaker, M. E., & Schuberth, F. (2020). csem: Composite-based structural equation modeling [Computer software manual]. Retrieved from <https://floschuberth.github.io/cSEM/> (Package version: 0.6.1.9000)
- Ray, S., Danks, N. P., & Calero Valdez, A. (2026). seminr: Building and estimating structural equation models [Computer software manual]. Retrieved from <https://CRAN.R-project.org/package=seminr> (R package version 2.4.2) doi: 10.32614/CRAN.package.seminr
- Ringle, C. M., Sarstedt, M., Mitchell, R., & Gudergan, S. P. (2020, jan). Partial least squares structural equation modeling in HRM research. *The International Journal of Human Resource Management*, 31(12), 1617–1643. doi: 10.1080/09585192.2017.1416655
- Ringle, C. M., Wende, S., & Becker, J.-M. (2024). *SmartPLS 4*. Boenningstedt: SmartPLS GmbH. Retrieved from <https://www.smartpls.com>

- Rönkkö, M. (2022). matrixpls: Matrix-based partial least squares estimation [Computer software manual]. Retrieved from <https://github.com/mronkko/matrixpls> (R package version 1.0.15)
- Rönkkö, M., & Evermann, J. (2013). A critical examination of common beliefs about partial least squares path modeling. *Organizational Research Methods*, 16(13), 425–448. doi: 10.1177/1094428112474693
- Rosseel, Y. (2012). lavaan: An R package for structural equation modeling. *Journal of Statistical Software*, 48(2), 1–36. doi: 10.18637/jss.v048.i02
- Rosseel, Y., Jorgensen, T. D., & De Wilde, L. (2025). lavaan: Latent variable analysis [Computer software manual]. Retrieved from <https://CRAN.R-project.org/package=lavaan> (R package version 0.6-20) doi: 10.32614/CRAN.package.lavaan
- Rosseel, Y., Jorgensen, T. D., & De Wilde, L. (2025). lavaan: Latent variable analysis. (R package version 0.6-21) doi: 10.32614/CRAN.package.lavaan
- Sanchez, G., Trinchera, L., Russolillo, G., & Bertrand, F. (2025). Partial least squares path model (PLS-PM, Frederic) [Computer software manual]. Retrieved from <https://CRAN.R-project.org/package=plspm> (R package version 0.6.0) doi: 10.32614/CRAN.package.plspm
- Sarstedt, M., Adler, S. J., Ringle, C. M., Cho, G., Diamantopoulos, A., Hwang, H., & Liengaard, B. D. (2024). Same model, same data, but different outcomes: Evaluating the impact of method choices in structural equation modeling. *Journal of Product Innovation Management*, 41(6), 1100–1117. doi: 10.1111/jpim.12738
- Sarstedt, M., Hair, J. F., Pick, M., Liengard, B. D., Radomir, L., & Ringle, C. M. (2022). Progress in partial least squares structural equation modeling use in marketing research in the last decade. *Psychology & Marketing*, 39, 1035–1064. doi: 10.1002/mar.21640
- Sarstedt, M., Ringle, C. M., & Hair, J. F. (n.d.). Partial least squares structural equation modeling. In *Handbook of market research* (pp. 587–632). Springer, Cham. Retrieved 2026-06-17, from https://link.springer.com/rwe/10.1007/978-3-319-57413-4_15 doi: 10.1007/978-3-319-57413-4_15
- Schamberger, T., Schuberth, F., Henseler, J., & Dijkstra, T. K. (2020). Robust partial least squares path modeling. *Behaviormetrika*, 47, 307–334. doi: 10.1007/s41237-019-00088-2
- Schuberth, F., Henseler, J., & Dijkstra, T. K. (2018). Partial least squares path modeling using ordinal categorical indicators. *Quality & Quantity*, 52(1), 9–35. doi: 10.1007/s11135-016-0401-7
- Schuberth, F., Rosseel, Y., Rönkkö, M., Trinchera, L., Kline, R. B., & Henseler, J. (2023). Structural parameters under partial least squares and covariance-based structural equation modeling: A comment on Yuan and Deng (2021). *Structural Equation Modeling: A Multidisciplinary Journal*, 30(3), 339–345. doi: 10.1080/10705511.2022.2134140
- Schuberth, F., Zaza, S., & Henseler, J. (2023). Partial least squares is an estimator for structural equation models: A comment on Evermann and Rönkkö (2021). *Communications of the Association for Information Systems*, 52, 711–729. doi: 10.17705/1CAIS.05232
- Shmueli, G., Sarstedt, M., Hair, J. F., Cheah, J.-H., Ting, H., Vaithilingam, S., & Ringle, C. M. (2019). Predictive model assessment in PLS-SEM: guidelines for using PLSpredict. *European Journal of Marketing*, 53(11), 2322–2347. doi: 10.1108/EJM-02-2019-0189
- Skrondal, A., & Laake, P. (2001). Regression among factor scores. *Psychometrika*, 66(4), 563–575. doi: 10.1007/BF02296196
- Venturini, S., Mehmetoglu, M., & Latan, H. (2023). Software packages for a partial least squares structural equation modeling: An updated review. In *Partial least squares path modeling* (pp. 113–152). Springer International Publishing. doi: 10.1007/978-3-031-37772-3_5
- Wold, H. (1982). Soft modeling: The basic design and some extensions. In K. G. Jöreskog & H. Wold (Eds.), *Systems under indirect observation: Causality, structure, prediction part*

ii (pp. 1–54). Amsterdam: North-Holland.