


Practical 9

Q Configure Web Server and FTP Server in CISCO packet tracer.



1)web server

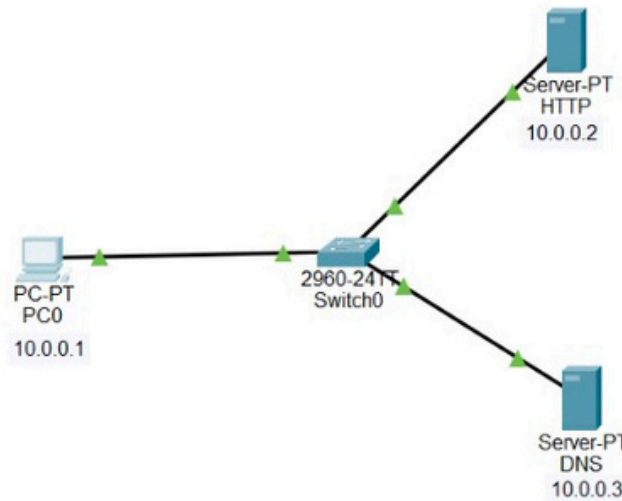

step 1: Place all devices as shown in figure.


step 2: connect device and HTTP & DNS server with switch.

step 3: Assign IP addresses to device and HTTP & DNS server.

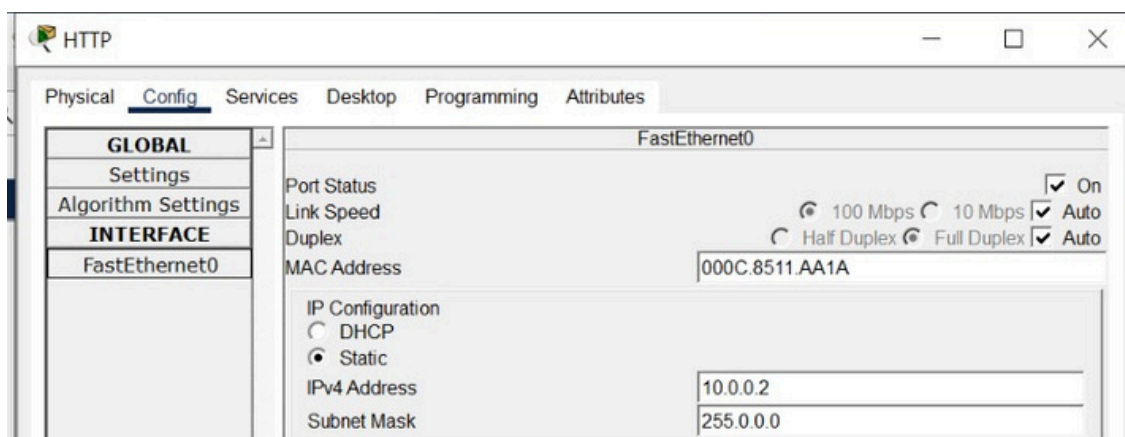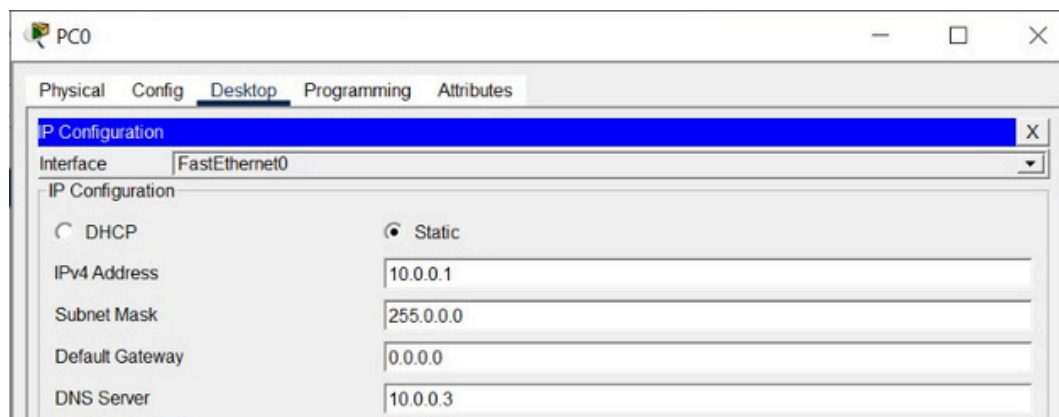

Step 4: Configure the DNS Service

1. On the DNS Server (10.0.0.3):
2. Go to the Services tab and select DNS.
3. Set the DNS Service to On.
4. In the Name field, enter a domain (e.g., www.dns.com).
5. In the Address field, enter the HTTP Server's IP: 10.0.0.2.
6. Click Add.

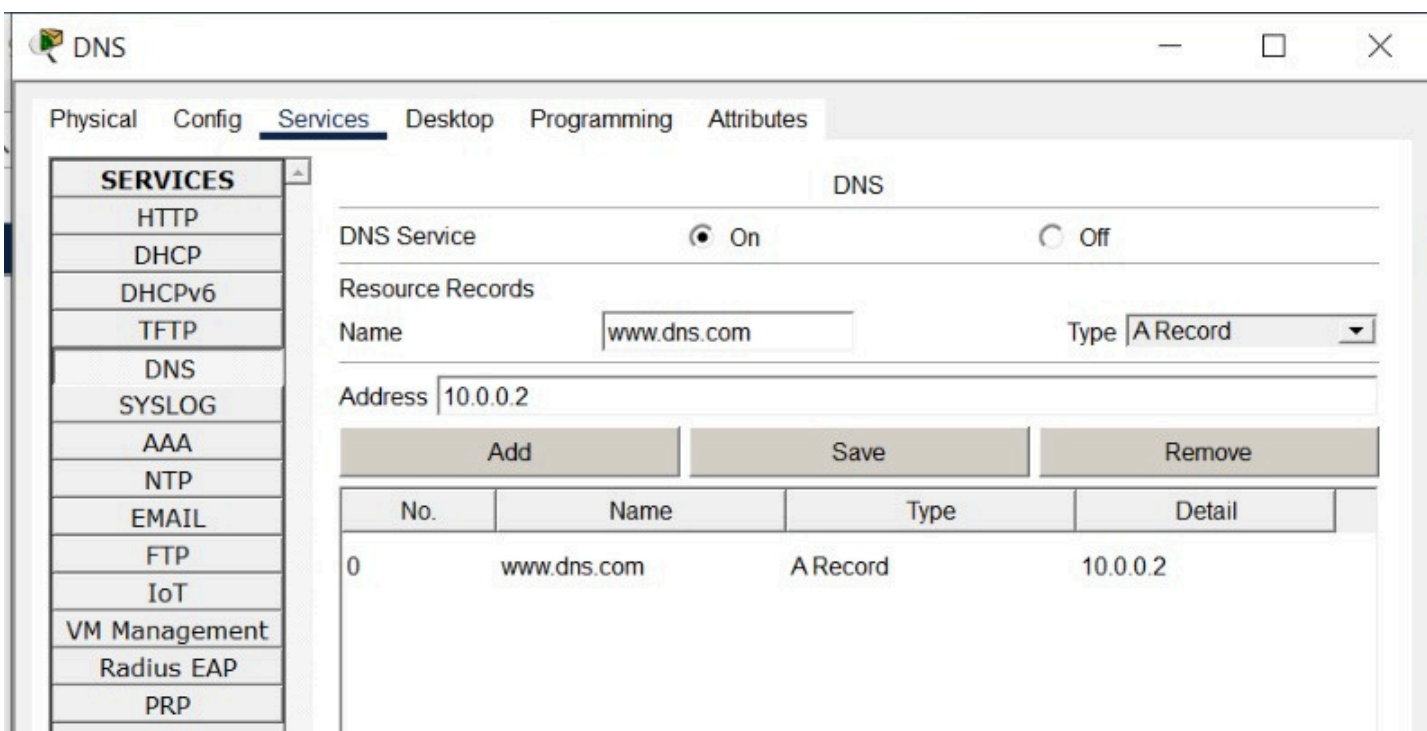

DNS

Physical Config **Services** Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS**
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP
- PRP

DNS

DNS Service ☒ On ☐ Off

Resource Records

Name Type


Address

No.	Name	Type	Detail
0	www.dns.com	A Record	10.0.0.2

Step 5: Verification:-


A. Testing via IP Address

- Open PC0 > Desktop tab > Web Browser.
- Type http://10.0.0.2 and press Go.
- If you see the "Cisco Packet Tracer" welcome page your Web Server is working.

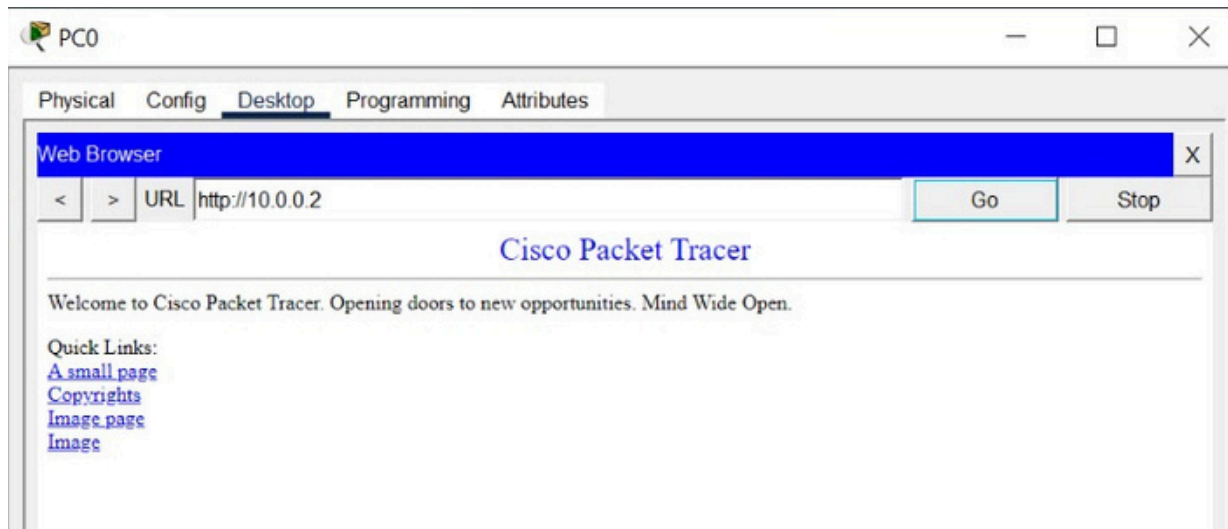


B. Testing via Domain Name (DNS)

- In the same browser on PC0, type `http://www.dns.com` and press Go.
- If the page loads , your DNS-to-Web-Server resolution is successful.

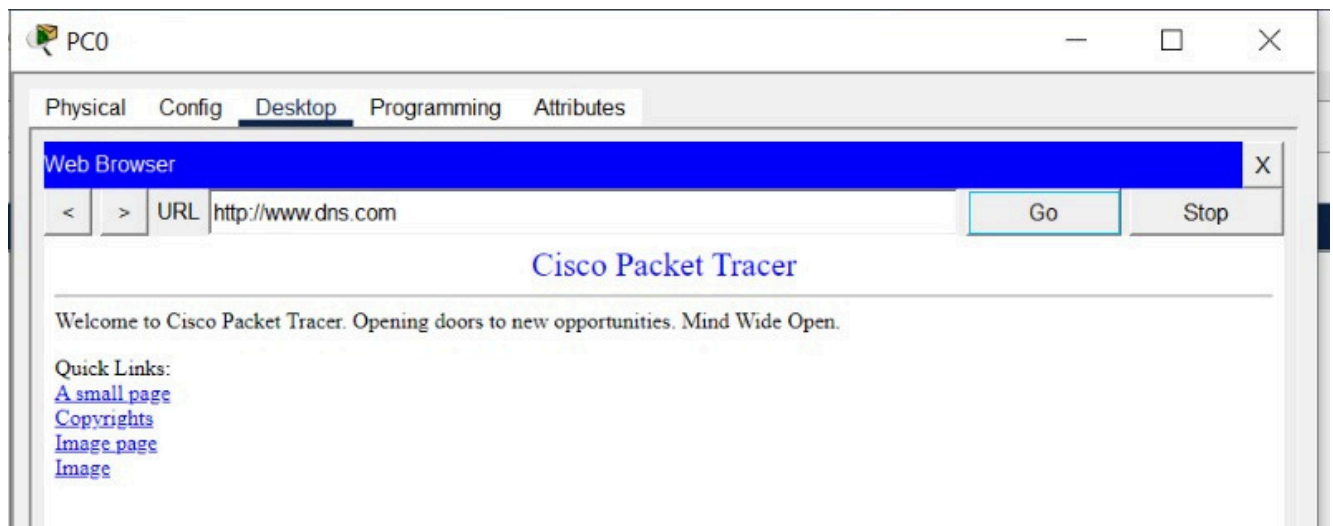


2)FTP SERVER

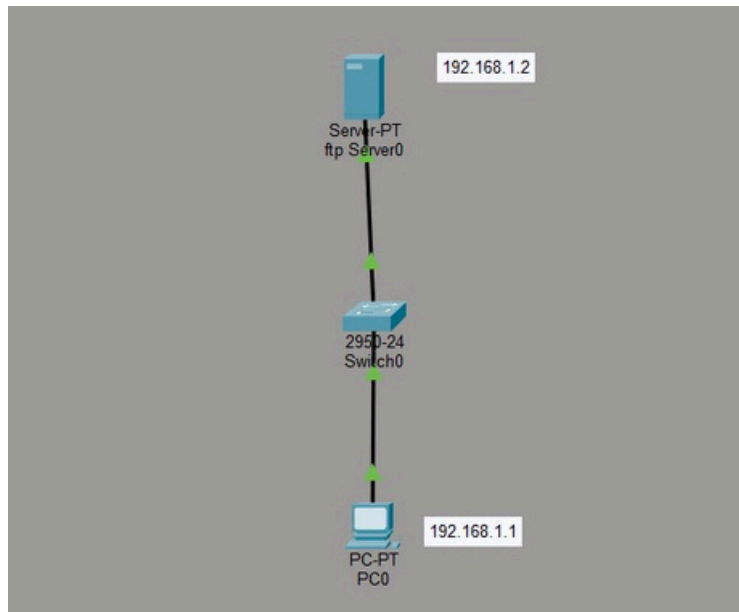


step 1:Place all devices as shown in figure.

step 2: connect device and FTP server with switch.

step 3: Assign IP addresses to device and FTP server.

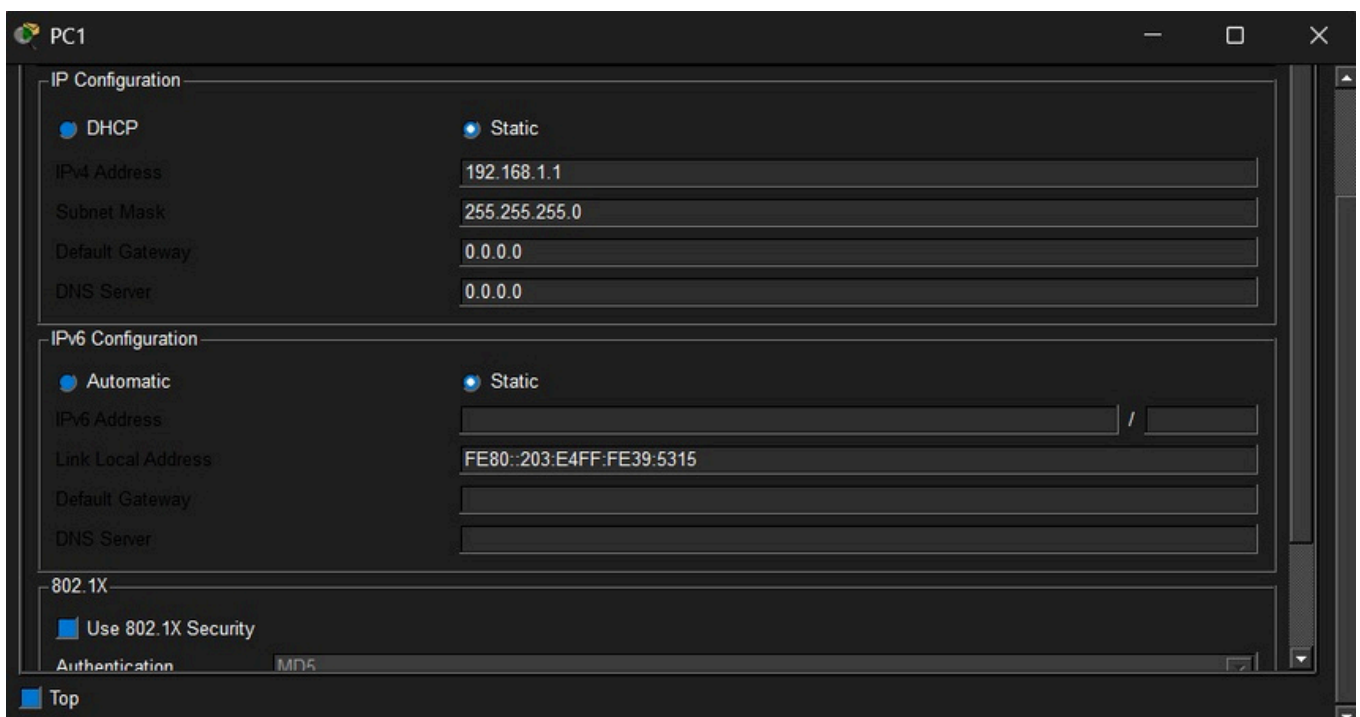

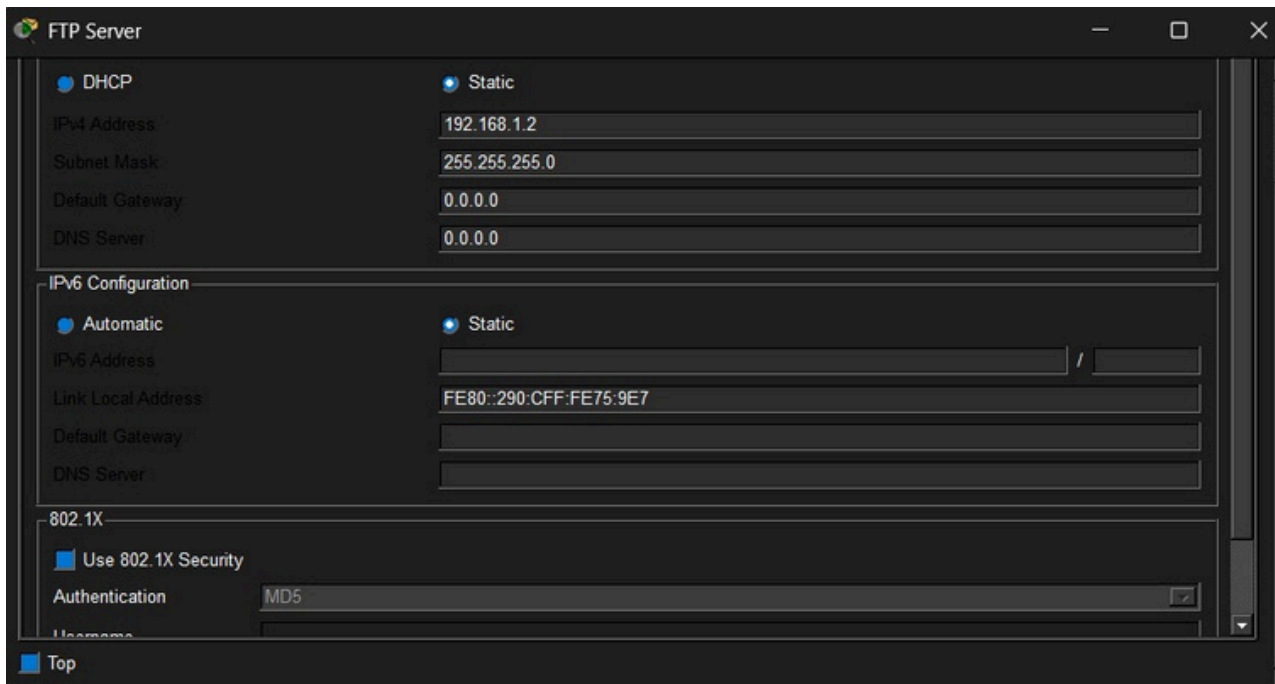

FTP protocol:-

FTP is a protocol used to transfer files between a client and a server over a network.

Step 3: Enable FTP Service and Create Users


Click on the Server, then go to the Services tab.

Select FTP from the left sidebar.

Ensure the Service is toggled to On.

Create a User :

- Username: dcn
- Password: dcn
- Permissions: Check all boxes (R, W, D, N, L) for full access.
- Click Add.

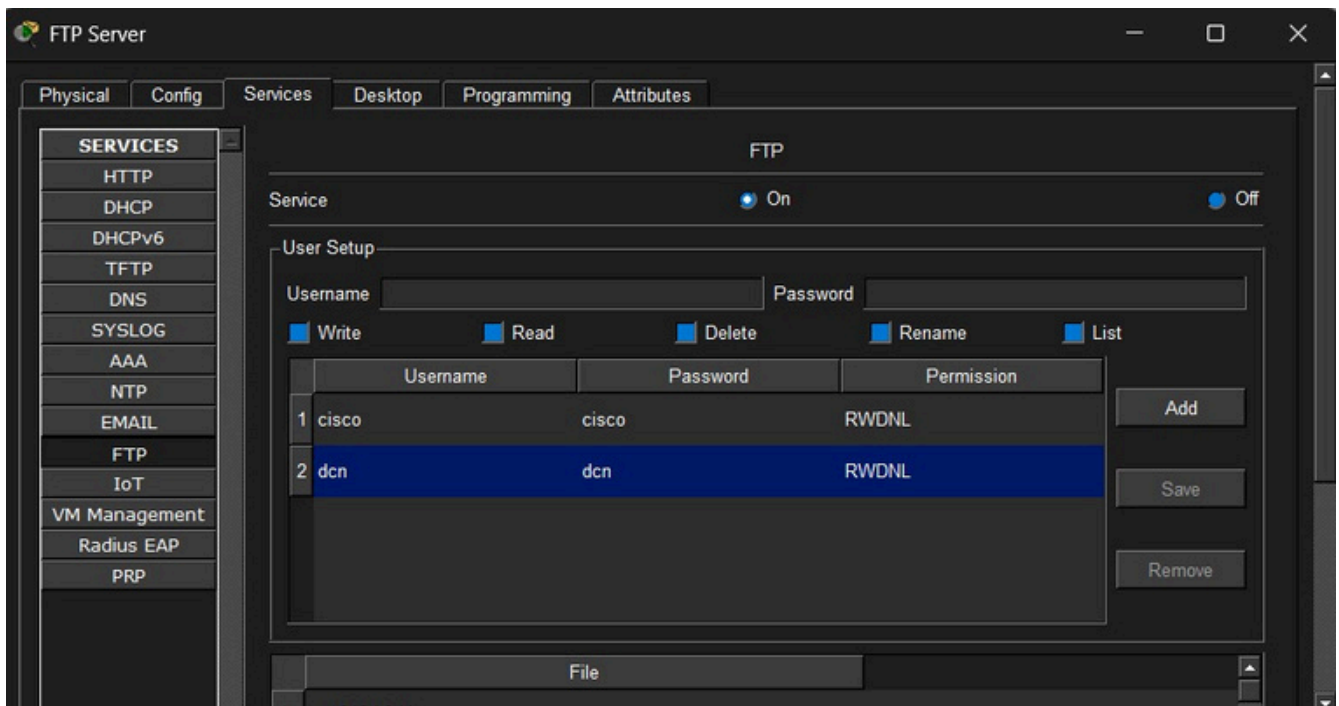


Step 4:-Create a Local File on the PC

Before putting a file on the server create file on PC:

- Open the PC > Desktop > Text Editor.

Write some text ,save file with extension

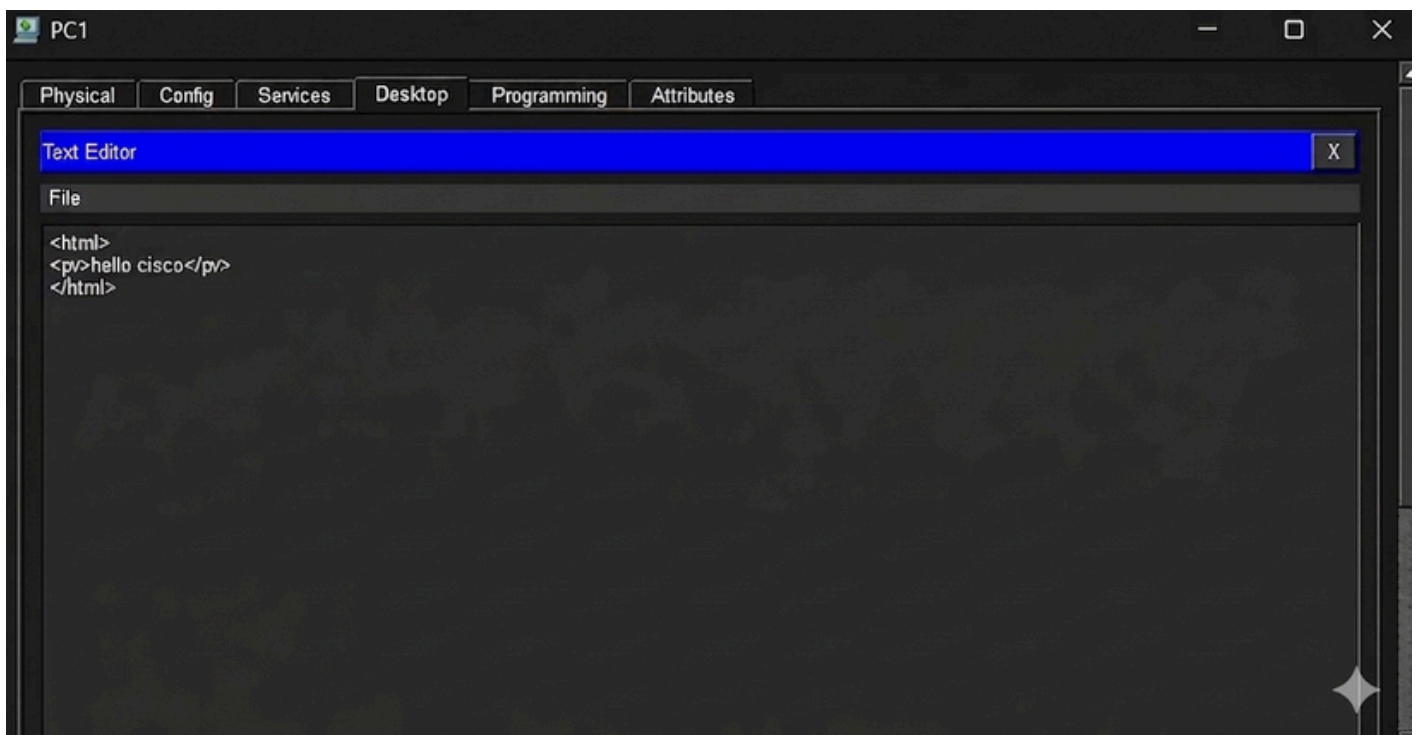

Step 5: Transfer the File :-

Open the Command Prompt on the PC and run these commands

Connect: ftp 192.168.1.2

Login: Enter username dcn and password dcn.

Upload File: put pv.html

You should see "File transfer in progress... Transfer complete".

Verify: Type dir to see the list of files on the server and confirm pv.html is there.

Exit: Type quit or exit.

```
C:\>ftp 192.168.1.2
Trying to connect...192.168.1.2
Connected to 192.168.1.2
220- Welcome to PT Ftp server
Username:dcn
331- Username ok, need password
Password:***
230- Logged in
(passive mode On)
ftp>dir

Listing /ftp directory from 192.168.1.2:
 0 : asa842-k8.bin                      5571584
 1 : asa923-k8.bin                      30468096
 2 : c1841-advipservicesk9-mz.124-15.T1.bin 33591768
 3 : c1841-ipbase-mz.123-14.T7.bin      13832032
 4 : c1841-ipbasek9-mz.124-12.bin       16599160
 5 : c1900-universalk9-mz.SPA.155-3.M4a.bin 33591768
 6 : c2600-advipservicesk9-mz.124-15.T1.bin 33591768
 7 : c2600-i-mz.122-28.bin              5571584
 8 : c2600-ipbasek9-mz.124-8.bin        13169700
 9 : c2800nm-advipservicesk9-mz.124-15.T1.bin 50938004
10 : c2800nm-advipservicesk9-mz.151-4.M4.bin 33591768
11 : c2800nm-ipbase-mz.123-14.T7.bin    5571584
12 : c2800nm-ipbasek9-mz.124-8.bin      15522644
13 : c2900-universalk9-mz.SPA.155-3.M4a.bin 33591768
14 : c2950-i6q4l2-mz.121-22.EA4.bin    3058048
15 : c2950-i6q4l2-mz.121-22.EA8.bin    3117390
16 : c2960-lanbase-mz.122-25.FX.bin     4414921
17 : c2960-lanbase-mz.122-25.SEE1.bin   4670455
18 : c2960-lanbasek9-mz.150-2.SE4.bin   4670455
19 : c3560-advipservicesk9-mz.122-37.SE1.bin 8662192
20 : c3560-advipservicesk9-mz.122-46.SE.bin 10713279
21 : c800-universalk9-mz.SPA.152-4.M4.bin 33591768
22 : c800-universalk9-mz.SPA.154-3.M6a.bin 83029236
23 : cat3k_caa-universalk9.16.03.02.SPA.bin 505532849
24 : cgr1000-universalk9-mz.SPA.154-2.CG 159487552
25 : cgr1000-universalk9-mz.SPA.156-3.CG 184530138
26 : ie9k_iosxe.17.09.04.SPA.bin       596133776
27 : ir800-universalk9-bundle.SPA.156-3.M.bin 160968869
28 : ir800-universalk9-mz.SPA.155-3.M   61750062
29 : ir800-universalk9-mz.SPA.156-3.M   63753767
30 : ir800_yocto-1.7.2.tar              2877440
31 : ir800_yocto-1.7.2_python-2.7.3.tar 6912000
32 : ir8340-mono-universalk9_iot.17.08.01a.SPA.pkg 685645824
33 : pp.html                             33
34 : pt1000-i-mz.122-28.bin              5571584
35 : pt3000-i6q4l2-mz.121-22.EA4.bin    3117390
```

```
ftp>put pv.html

Writing file pv.html to 192.168.1.2:
File transfer in progress...

[Transfer complete - 35 bytes]

35 bytes copied in 0.022 secs (1590 bytes/sec)
ftp>dir

Listing /ftp directory from 192.168.1.2:
0   : asa842-k8.bin                               5571584
1   : asa923-k8.bin                               30468096
2   : c1841-advipservicesk9-mz.124-15.T1.bin      33591768
3   : c1841-ipbase-mz.123-14.T7.bin                13832032
4   : c1841-ipbasek9-mz.124-12.bin                16599160
5   : c1900-universalk9-mz.SPA.155-3.M4a.bin      33591768
6   : c2600-advipservicesk9-mz.124-15.T1.bin      33591768
7   : c2600-i-mz.122-28.bin                       5571584
8   : c2600-ipbasek9-mz.124-8.bin                 13169700
9   : c2800nm-advipservicesk9-mz.124-15.T1.bin    50938004
10  : c2800nm-advipservicesk9-mz.151-4.M4.bin     33591768
11  : c2800nm-ipbase-mz.123-14.T7.bin             5571584
12  : c2800nm-ipbasek9-mz.124-8.bin               15522644
13  : c2900-universalk9-mz.SPA.155-3.M4a.bin      33591768
14  : c2950-i6q412-mz.121-22.EA4.bin             3058048
15  : c2950-i6q412-mz.121-22.EA8.bin             3117390
16  : c2960-lanbase-mz.122-25.FX.bin              4414921
17  : c2960-lanbase-mz.122-25.SEE1.bin            4670455
18  : c2960-lanbasek9-mz.150-2.SE4.bin            4670455
19  : c3560-advipservicesk9-mz.122-37.SE1.bin     8662192
20  : c3560-advipservicesk9-mz.122-46.SE.bin      10713279
21  : c800-universalk9-mz.SPA.152-4.M4.bin        33591768
22  : c800-universalk9-mz.SPA.154-3.M6a.bin       83029236
23  : cat3k_caa-universalk9.16.03.02.SPA.bin      505532849
24  : cgr1000-universalk9-mz.SPA.154-2.CG         159487552
25  : cgr1000-universalk9-mz.SPA.156-3.CG         184530138
26  : ie9k_iosxe.17.09.04.SPA.bin                596133776
27  : ir800-universalk9-bundle.SPA.156-3.M.bin    160968869
28  : ir800-universalk9-mz.SPA.155-3.M            61750062
29  : ir800-universalk9-mz.SPA.156-3.M            63753767
30  : ir800_yocto-1.7.2.tar                       2877440
31  : ir800_yocto-1.7.2_python-2.7.3.tar         6912000
32  : ir8340-mono-universalk9_iot.17.08.01a.SPA.pkg 685645824
33  : pp.html                                      33
34  : pt1000-i-mz.122-28.bin                       5571584
35  : pt3000-i6q412-mz.121-22.EA4.bin            3117390
36  : pv.html                                      35

ftp>exit
dir

Volume in drive C has no label.
Volume Serial Number is 5E12-4AF3
Directory of C:\

1/1/1970    5:30 PM           33      pp.html
1/1/1970    5:30 PM           35      pv.html
```