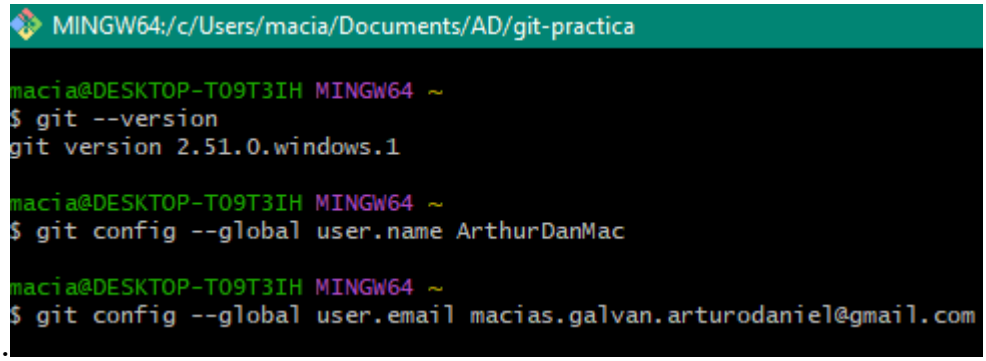
Práctica de Git en la consola

1.


2,3,4

```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD
$ mkdir git-practica

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD
$ cd git-practica

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica
$ git init
Initialized empty Git repository in C:/Users/macia/Documents/AD/git-practica/.gi
t/

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ echo "#Proyecto de practica con Git" > README.md

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git add README.md
warning: in the working copy of 'README.md', LF will be replaced by CRLF the nex
t time Git touches it

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git commit -m "Primer commit: agregar README"
[master (root-commit) e11d81d] Primer commit: agregar README
 1 file changed, 1 insertion(+)
 create mode 100644 README.md

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git status
On branch master
nothing to commit, working tree clean

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git log --oneline --graph
* e11d81d (HEAD -> master) Primer commit: agregar README

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
```

5.

```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ echo "print ('Hola Git')" > app.py

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next t
ime Git touches it

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git commit -m "Agregar archivo app.py con saludo"
[master c2706a0] Agregar archivo app.py con saludo
 1 file changed, 1 insertion(+)
 create mode 100644 app.py

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ echo "print ('Modificado')" >> app.py

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   app.py

no changes added to commit (use "git add" and/or "git commit -a")

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next t
ime Git touches it

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git commit -m "Modifiar app.py para imprimir mensaje nuevo"
[master 8e17c28] Modifiar app.py para imprimir mensaje nuevo
 1 file changed, 1 insertion(+)
```

6.

```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git checkout -- app.py

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git reset app.py
```

7.

```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git branch nueva-funcionalidad

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git checkout nueva-funcionalidad
Switched to branch 'nueva-funcionalidad'

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (nueva-funcionalidad)
$ echo "print ('Nueva funcionalidad')" >> app.py

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (nueva-funcionalidad)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next time Git touche
s it

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (nueva-funcionalidad)
$ git commit -m "Agregar nueva funcionalidad en app.py"
[nueva-funcionalidad 013cc14] Agregar nueva funcionalidad en app.py
 1 file changed, 1 insertion(+)
```

8.


```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (nueva-funcionalidad)
$ git checkout master
Switched to branch 'master'

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git merge nueva-funcionalidad
Updating 8e17c28..013cc14
Fast-forward
 app.py | 1 +
 1 file changed, 1 insertion(+)
```

9.
```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git remote add origin https://github.com/ArthurDanMac/git-practica.git

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (master)
$ git branch -M main

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (main)
$ git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 12, done.
Counting objects: 100% (12/12), done.
Delta compression using up to 8 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (12/12), 1.18 KiB | 401.00 KiB/s, done.
Total 12 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/ArthurDanMac/git-practica.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

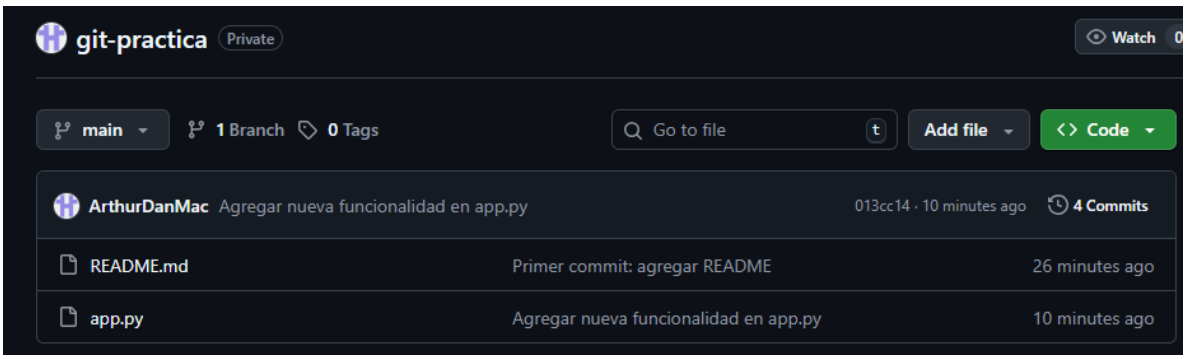

10.
```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (main)
$ git pull origin main
From https://github.com/ArthurDanMac/git-practica
 * branch            main       -> FETCH_HEAD
Already up to date.

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-practica (main)
$ git push origin main
Everything up-to-date
```

Ejercicio Guiado de Git

1.
```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD
$ mkdir git-conflictos

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD
$ cd git-conflictos

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos
$ git init
Initialized empty Git repository in C:/Users/macia/Documents/AD/git-conflictos/.git/

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ echo "print('Hola desde main')" > app.py

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next time Git touche
s it

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git commit -m "Commit inicial con app.py"
[master (root-commit) 16da4b0] Commit inicial con app.py
 1 file changed, 1 insertion(+)
 create mode 100644 app.py
```

2.
```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git checkout -b feature-a
Switched to a new branch 'feature-a'

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-a)
$ echo "print('Cambio desde feature A')" >> app.py

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-a)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next time Git touche
s it

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-a)
$ git commit -m "Feature A: agregar mensaje en app.py"
[feature-a 338584e] Feature A: agregar mensaje en app.py
 1 file changed, 1 insertion(+)
```

3.
```
macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-a)
$ git checkout master
Switched to branch 'master'

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git checkout -b feature-b
Switched to a new branch 'feature-b'

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-b)
$ echo "print('Cambio desde feature B')" >> app.py

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-b)
$ git add app.py
warning: in the working copy of 'app.py', LF will be replaced by CRLF the next time Git touche
s it

macia@DESKTOP-TO9T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-b)
$ git commit -m "Feature B: agregar mensaje en app.py"
[feature-b cfdc3a6] Feature B: agregar mensaje en app.py
 1 file changed, 1 insertion(+)
```

4.
```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (feature-b)
$ git checkout master
Switched to branch 'master'

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git merge feature-a
Updating 16da4b0..338584e
Fast-forward
 app.py | 1 +
 1 file changed, 1 insertion(+)

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git merge feature-b
Auto-merging app.py
CONFLICT (content): Merge conflict in app.py
Automatic merge failed; fix conflicts and then commit the result.
```

5.
```
1  print('Hola desde main')
2  <<<<<<< HEAD
3  print('Cambio desde feature A')
4  =======
5  print('Cambio desde feature B')
6  >>>>>>> feature-b
7
```

```
1  print('Hola desde main')
2  print('Cambio desde feature A y B')
3
```

```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (master|MERGING)
$ git add app.py

macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (master|MERGING)
$ git commit -m "Resolver el conflicto entre feature A y feature B"
[master 4c7fa93] Resolver el conflicto entre feature A y feature B
```

6.
```
macia@DESKTOP-T09T3IH MINGW64 ~/Documents/AD/git-conflictos (master)
$ git log --oneline --graph --all
*   4c7fa93 (HEAD -> master) Resolver el conflicto entre feature A y feature B
|\
| * cfdc3a6 (feature-b) Feature B: agregar mensaje en app.py
* | 338584e (feature-a) Feature A: agregar mensaje en app.py
|/
* 16da4b0 Commit inicial con app.py
```