

## Counting Sort

**Counting sort** is a sorting technique based on keys between a specific range. It works by counting the number of objects having distinct key values (kind of hashing). Then doing some arithmetic to calculate the position of each object in the output sequence. **2.2**

Let us understand it with the help of an example.

For simplicity, consider the data in the range 0 to 9.

Input data: 1, 4, 1, 2, 7, 5, 2

1) Take a count array to store the count of each unique object.

Index:     0  1  2  3  4  5  6  7  8  9

Count:     0  2  2  0  1  1  0  1  0  0

2) Modify the count array such that each element at each index stores the sum of previous counts.

Index:     0  1  2  3  4  5  6  7  8  9

Count:     0  2  4  4  5  6  6  7  7  7

The modified count array indicates the position of each object in the output sequence.

3) Output each object from the input sequence followed by decreasing its count by 1.

Process the input data: 1, 4, 1, 2, 7, 5, 2. Position of 1 is 2.

Put data 1 at index 2 in output. Decrease count by 1 to place next data 1 at an index 1 smaller than this index.

**Recommended: Please solve it on “PRACTICE” first, before moving on to the solution.**

Following is C implementation of counting sort.

## C/C++

```
// C Program for counting sort
#include <stdio.h>
#include <string.h>
#define RANGE 255

// The main function that sort the given string arr[] in
// alphabetical order
void countSort(char arr[])
{
    // The output character array that will have sorted arr
    char output[strlen(arr)];

    // Create a count array to store count of individual
    // characters and initialize count array as 0
    int count[RANGE + 1], i;
    memset(count, 0, sizeof(count));

    // Store count of each character
    for(i = 0; arr[i]; ++i)
        ++count[arr[i]];

    // Change count[i] so that count[i] now contains actual
    // position of this character in output array
    for (i = 1; i <= RANGE; ++i)
        count[i] += count[i-1];

    // Build the output character array
    for (i = 0; arr[i]; ++i)
    {
        output[count[arr[i]]-1] = arr[i];
        --count[arr[i]];
    }

    // Copy the output array to arr, so that arr now
    // contains sorted characters
    for (i = 0; arr[i]; ++i)
        arr[i] = output[i];
}

// Driver program to test above function
int main()
{
    char arr[] = "geeksforgeeks";//"applepp";

    countSort(arr);

    printf("Sorted character array is %sn", arr);
    return 0;
}
```

[Run on IDE](#)

## Java

```
// Java implementation of Counting Sort
class CountingSort
{
    void sort(char arr[])
    {
        int n = arr.length;

        // The output character array that will have sorted arr
```

```

char output[] = new char[n];

// Create a count array to store count of inidividul
// characters and initialize count array as 0
int count[] = new int[256];
for (int i=0; i<256; ++i)
    count[i] = 0;

// store count of each character
for (int i=0; i<n; ++i)
    ++count[arr[i]];

// Change count[i] so that count[i] now contains actual
// position of this character in output array
for (int i=1; i<=255; ++i)
    count[i] += count[i-1];

// Build the output character array
for (int i = 0; i<n; ++i)
{
    output[count[arr[i]]-1] = arr[i];
    --count[arr[i]];
}

// Copy the output array to arr, so that arr now
// contains sorted characters
for (int i = 0; i<n; ++i)
    arr[i] = output[i];
}

// Driver method
public static void main(String args[])
{
    CountingSort ob = new CountingSort();
    char arr[] = {'g', 'e', 'e', 'k', 's', 'f', 'o',
                  'r', 'g', 'e', 'e', 'k', 's' };

    ob.sort(arr);

    System.out.print("Sorted character array is ");
    for (int i=0; i<arr.length; ++i)
        System.out.print(arr[i]);
}
}
/*This code is contributed by Rajat Mishra */

```

[Run on IDE](#)

## Python

```

# Python program for counting sort

# The main function that sort the given string arr[] in
# alphabetical order
def countSort(arr):

    # The output character array that will have sorted arr
    output = [0 for i in range(256)]

    # Create a count array to store count of inidividul
    # characters and initialize count array as 0
    count = [0 for i in range(256)]

    # For storing the resulting answer since the
    # string is immutable

```

```
ans = [" " for _ in arr]

# Store count of each character
for i in arr:
    count[ord(i)] += 1

# Change count[i] so that count[i] now contains actual
# position of this character in output array
for i in range(256):
    count[i] += count[i-1]

# Build the output character array
for i in range(len(arr)):
    output[count[ord(arr[i])]-1] = arr[i]
    count[ord(arr[i])] -= 1

# Copy the output array to arr, so that arr now
# contains sorted characters
for i in range(len(arr)):
    ans[i] = output[i]
return ans

# Driver program to test above function
arr = "geeksforgeeks"
ans = countSort(arr)
print "Sorted character array is %s" %("".join(ans))

# This code is contributed by Nikhil Kumar Singh
```

[Run on IDE](#)

Output:

```
Sorted character array is eeefggkkorss
```

**Time Complexity:**  $O(n+k)$  where  $n$  is the number of elements in input array and  $k$  is the range of input.

**Auxiliary Space:**  $O(n+k)$

**Points to be noted:**

1. Counting sort is efficient if the range of input data is not significantly greater than the number of objects to be sorted. Consider the situation where the input sequence is between range 1 to 10K and the data is 10, 5, 10K, 5K.
2. It is not a comparison based sorting. Its running time complexity is  $O(n)$  with space proportional to the range of data.
3. It is often used as a sub-routine to another sorting algorithm like radix sort.
4. Counting sort uses a partial hashing to count the occurrence of the data object in  $O(1)$ .
5. Counting sort can be extended to work for negative inputs also.

**Exercise:**

1. Modify above code to sort the input data in the range from  $M$  to  $N$ .
2. Modify above code to sort negative input data.

3. Is counting sort stable and online?
4. Thoughts on parallelizing the counting sort algorithm.

## Counting Sort | GeeksforGeeks



### Snapshots:

For simplicity, consider data in range of 0 to 9



Index :	0	1	2	3	4	5	6	7	8	9
	0	0	0	0	0	0	0	0	0	0

Count each element in the given array and place the count at the appropriate index.

For simplicity, consider data in range of 0 to 9

1	4	1	2	7	5	2
---	---	---	---	---	---	---



Index : 0 1 2 3 4 5 6 7 8 9

0	2	0	0	1	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---

For simplicity, consider data in range of 0 to 9


1	4	1	2	7	5	2
---	---	---	---	---	---	---

Index : 0 1 2 3 4 5 6 7 8 9


0	2	2	0	1	1	0	1	0	0
---	---	---	---	---	---	---	---	---	---

Modify the count array by adding the previous counts.


For simplicity, consider data in range of 0 to 9

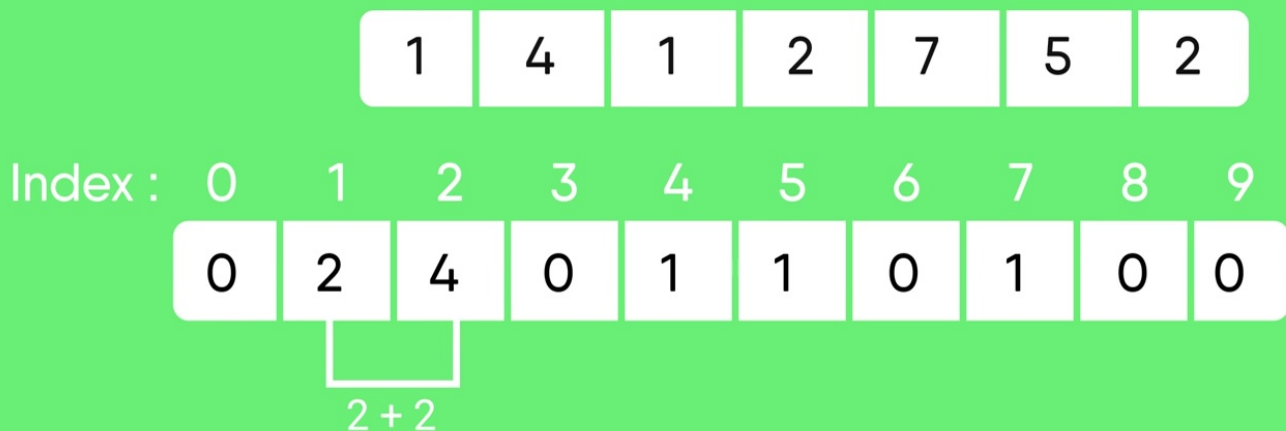

For simplicity, consider data in range of 0 to 9

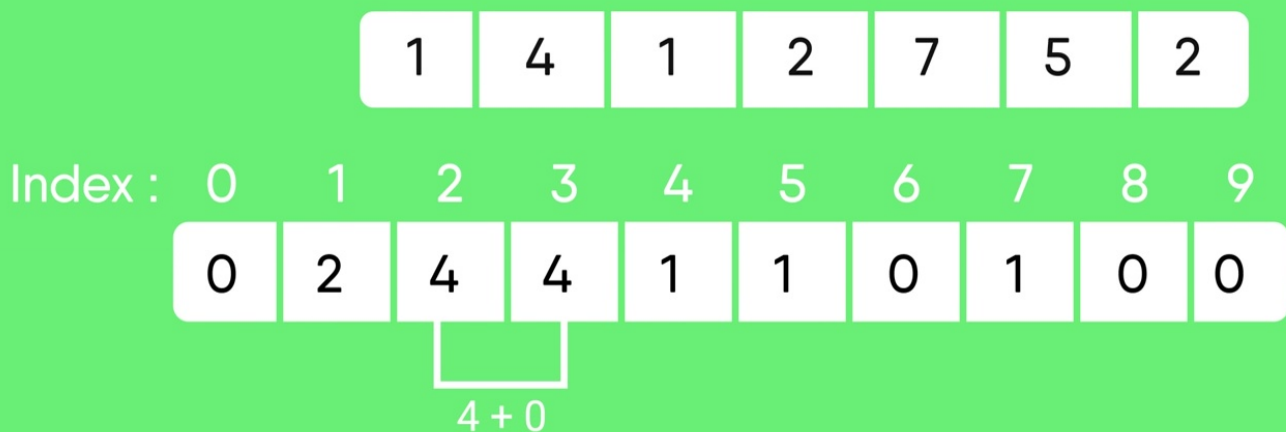

For simplicity, consider data in range of 0 to 9

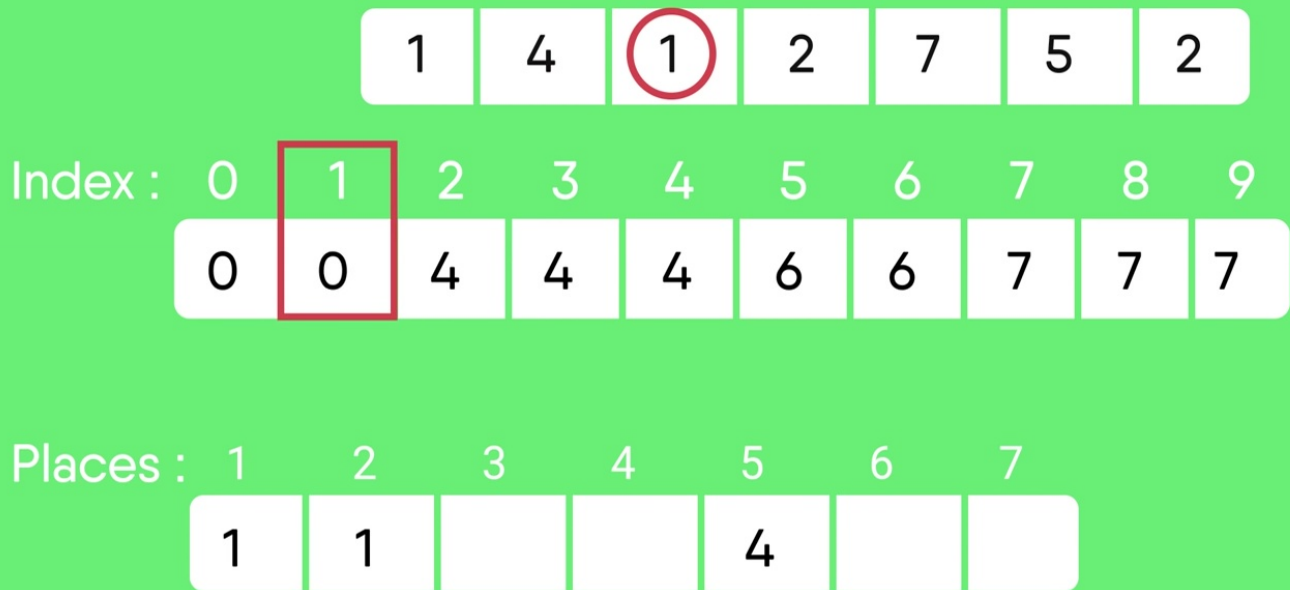

For simplicity, consider data in range of 0 to 9



## Quiz on Counting Sort

## Coding Practice for Sorting

Other Sorting Algorithms on GeeksforGeeks/GeeksQuiz

Selection Sort, Bubble Sort, Insertion Sort, Merge Sort, Heap Sort, QuickSort, Radix Sort, Counting



[Sort](#), [Bucket Sort](#), [ShellSort](#), [Comb Sort](#), [PegionHole Sorting](#)

This article is compiled by [Aashish Barnwal](#). Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

## GATE CS Corner    Company Wise Coding Practice

Sorting

Please write to us at [contribute@geeksforgeeks.org](mailto:contribute@geeksforgeeks.org) to report any issue with the above content.

### Recommended Posts:

[Radix Sort](#)

[Bucket Sort](#)

[QuickSort](#)

[Heap Sort](#)

[Stability in sorting algorithms](#)

[Maximize the sum of  \$arr\[i\]\*i\$](#)

[Pairs with Difference less than K](#)

[Sort a Rotated Sorted Array](#)

[Circle Sort](#)

[Stable Selection Sort](#)

([Login](#) to Rate)

**2.2** Average Difficulty : **2.2/5.0**  
Based on **91** vote(s)

Add to TODO List

Mark as DONE

Basic

Easy

Medium

Hard

Expert

Writing code in comment? Please use [ide.geeksforgeeks.org](http://ide.geeksforgeeks.org), generate link and share the link here.

Load Comments

Share this post!

@geeksforgeeks, Some rights reserved

Contact Us!

About Us!

Careers!

Privacy Policy











