

Iniciar el docckerfile

```
josef@kyogre:~/Documents/Tareas_de_clase/Entornos/docker/tarea7Lab5$ ls
Dockerfile  feedback  'Laboratorio 5. Operaciones con volúmenes-1p.docx'  package.json  pages  public  server.js  temp
josef@kyogre:~/Documents/Tareas_de_clase/Entornos/docker/tarea7Lab5$ docker build -t node_chichotito .
[+] Building 0.1s (10/10) FINISHED
=> [internal] load build definition from Dockerfile
=> => transferring dockerfile: 154B
=> [internal] load .dockerignore
=> => transferring context: 2B
=> [internal] load metadata for docker.io/library/node:latest
=> [1/5] FROM docker.io/library/node:latest
=> [internal] load build context
=> => transferring context: 2.75kB
=> CACHED [2/5] WORKDIR /app
=> CACHED [3/5] COPY package.json
=> CACHED [4/5] RUN npm install
=> [5/5] COPY
=> exporting to image
=> => exporting layers
=> => writing image sha256:754df5da8d55c62e19253c221a95b24e8db4ee41ce05559154363f315a25b313
=> => naming to docker.io/library/node_chichotito

What's Next?
View a summary of image vulnerabilities and recommendations -> docker scout quickview
josef@kyogre:~/Documents/Tareas_de_clase/Entornos/docker/tarea7Lab5$
```

Iniciar la imagen recién creada

```
josef@kyogre:~/Documents/Tareas_de_clase/Entornos/docker/tarea7Lab5$ docker images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
node_chichotito     latest             754df5da8d55       2 minutes ago      1.11GB
node                latest             b866e35a0dc4       3 days ago         1.1GB
nginx               latest             a6bd71f48f68       2 weeks ago        187MB
mongo               latest             ee3b4d1239f1       8 weeks ago        748MB
ubuntu              latest             e4c58958181a       2 months ago       77.8MB
josef@kyogre:~/Documents/Tareas_de_clase/Entornos/docker/tarea7Lab5$ docker run -i -p 3000:80 node_chichotito
```

A la hora de buscar localhost:3000/...

← → ↻

localhost:3000

☆

MySite

Your Feedback

Title

paraguay

Document Text


mi nombre es jose

Save

Internamente hemos creado un documento txt llamado paraguay

```
joselito@kyogre:~$ docker exec -it 67ba8d6f7b41 bash
root@67ba8d6f7b41:/app# ls
Dockerfile  'Laboratorio 5. Operaciones con volúmenes-1p.docx'  feedback  node_modules  package-lock.json  package.json  pages  public  server.js  temp
root@67ba8d6f7b41:/app# cd feedback/
root@67ba8d6f7b41:/app/feedback# ls
paraguay.txt
root@67ba8d6f7b41:/app/feedback# cat paraguay.txt
mi nombre es jose
root@67ba8d6f7b41:/app/feedback#
```

Si ahora en el localhost añadimos /feedback/paraguay.txt...

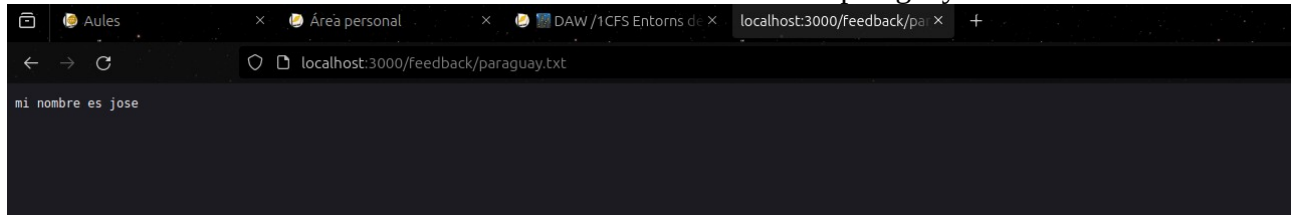

The screenshot shows a web browser window with the address bar displaying 'localhost:3000/feedback/paraguay.txt'. The page content is 'mi nombre es jose'. The browser's tab bar shows several open tabs: 'Aules', 'Àrea personal', 'DAW /1CFS Entorns de', and 'localhost:3000/feedback/paraguay.txt'. The browser interface includes back, forward, and refresh buttons, as well as a search icon.